




Elektrobit



UDACITY

# Technical Safety Concept Lane Assistance

Document Version: [Version]

Template Version 1.0, Released on 2017-06-21



# Document history

[Instructions: Fill in the date, version and description fields. You can fill out the Editor field with your name if you want to do so. Keep track of your editing as if this were a real world project.]

For example, if this were your first draft or first submission, you might say version 1.0. If this is a second submission attempt, then you'd add a second line with a new date and version 2.0]

Date	Version	Editor	Description
2018-3-17	1.0	Mike Ni	First Attempt

# Table of Contents

[Instructions: We have provided a table of contents. If the table of contents is not showing up correctly in your word processor of choice, please update it. The table of contents should show each section of the document and page numbers or links. Most word processors can do this for you. In Google Docs, you can use headings for each section and then go to Insert > Table of Contents. Microsoft Word has similar capabilities]

[Document history](#)

[Table of Contents](#)

[Purpose of the Technical Safety Concept](#)

[Inputs to the Technical Safety Concept](#)

[Functional Safety Requirements](#)

[Refined System Architecture from Functional Safety Concept](#)

[Functional overview of architecture elements](#)

## [Technical Safety Concept](#)

### [Technical Safety Requirements](#)

### [Refinement of the System Architecture](#)

### [Allocation of Technical Safety Requirements to Architecture Elements](#)

### [Warning and Degradation Concept](#)

## Purpose of the Technical Safety Concept

[Instructions: Answer what is the purpose of a technical safety concept?]

The technical safety concept is more concrete, looking at the safety requirements of sensors, control unit, and actuators.

## Inputs to the Technical Safety Concept


### Functional Safety Requirements

[Instructions: Provide the functional safety requirements derived in the functional safety concept ]

ID	Functional Safety Requirement	A S I L	Fault Tolerant Time Interval	Safe State
Functional Safety Requirement 01-01	The lane keeping item shall ensure that the lane departure oscillating torque amplitude is below Max_Torque_Amplitude		50ms	turning the system off
Functional Safety Requirement 01-02	The lane keeping item shall ensure that the lane departure oscillating torque frequency is below Max_Torque_Frequency		50ms	turning the system off
Functional Safety Requirement 02-01	The lane keeping item shall ensure that the lane keeping assistance torque is applied for only Max_Duration		500ms	turning the system off

## Refined System Architecture from Functional Safety Concept

[Instructions: Provide the refined system architecture from the functional safety concept]

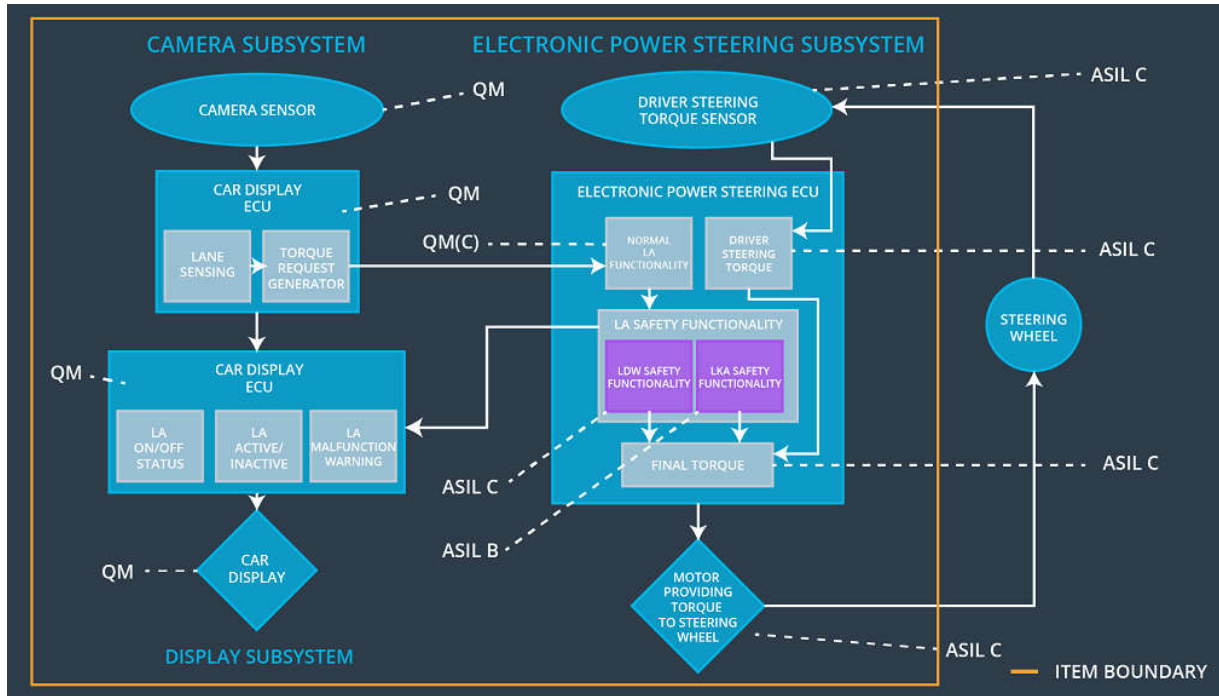

## Functional overview of architecture elements

[Instructions: Provide a description for each functional safety element; what is each element's purpose in the lane assistance item? ]

Element	Description
Camera Sensor	Detect lane of road.
Camera Sensor ECU - Lane Sensing	Percept where is lane of road.
Camera Sensor ECU - Torque request generator	Calculate reasonable turning torque.
Car Display	Display warning information.
Car Display ECU - Lane Assistance On/Off Status	Control a light that tells the driver if the lane keeping item is on or off.
Car Display ECU - Lane Assistant Active/Inactive	Control a light telling the driver that the lane departure warning is activated

Car Display ECU - Lane Assistance malfunction warning	Control a light telling the driver that the lane assistant system has malfunction.
Driver Steering Torque Sensor	Detect how much of the real motor torque
Electronic Power Steering (EPS) ECU - Driver Steering Torque	Calculate how much turning torque that come from the driver's hand.
EPS ECU - Normal Lane Assistance Functionality	Receive the vibrational torque request from the camera subsystem. Calculate the primary LDW_Torque_Request.
EPS ECU - Lane Departure Warning Safety Functionality	This is where we will limit the amplitude and frequency to be lower than max torque amplitude and max torque frequency.
EPS ECU - Lane Keeping Assistant Safety Functionality	Make sure the time of adding extra steering torque is not too long.
EPS ECU - Final Torque	Add these torque requests together to output a final torque to the motor that moves the steering wheel.
Motor	The actuator that execute the torque command.

## Technical Safety Concept

### Technical Safety Requirements

[Instructions: Fill in the technical safety requirements for the lane departure warning first functional safety requirement. We have provided the associated functional safety requirement in the first table below. Hint: The technical safety requirements were discussed in the lesson videos. The architecture allocation column should contain element names such as LDW Safety block, Data Transmission Integrity Check, etc. Allocating the technical safety requirements to the "EPS ECU" does not provide enough detail for a technical safety concept.]

#### Lane Departure Warning (LDW) Requirements:

Functional Safety Requirement 01-01 with its associated system elements  
(derived in the functional safety concept)

ID	Functional Safety Requirement	Electronic Power	Camera ECU	Car Display ECU
----	-------------------------------	------------------	------------	-----------------

		Steering ECU		
Functional Safety Requirement 01-01	The lane keeping item shall ensure that the lane departure oscillating torque amplitude is below Max_Torque_Amplitude	X		

Technical Safety Requirements related to Functional Safety Requirement 01-01 are:

ID	Technical Safety Requirement	ASIL	Fault Tolerant Time Interval	Architecture Allocation	Safe State
Technical Safety Requirement 01	The LDW safety component shall ensure that the amplitude of the 'LDW_Torque_Request' sent to the 'Final electronic power steering Torque' component is below 'Max_Torque_Amplitude.	C	50ms	LDW Safety	turning the system off
Technical Safety Requirement 02	As soon as the LDW function deactivates the LDW feature, the 'LDW Safety' software block shall send a signal to the car display ECU to turn on a warning light.	C	50ms	LDW Safety	turning the system off
Technical Safety Requirement 03	As soon as a failure is detected by the LDW function, it shall deactivate the LDW feature and the 'LDW_Torque_Request' shall be set to zero.	C	50ms	LDW Safety	turning the system off
Technical Safety Requirement 04	The validity and integrity of the data transmission for 'LDW_Torque_Request' signal shall be ensured.	C	50ms	LDW Safety	turning the system off
Technical Safety Requirement 05	Memory test shall be conducted at start up of the EPS ECU to check for any faults in memory.	A	ignition cycle	LDW Safety	turning the system off

[Instructions: Fill in the technical safety requirements for the lane departure warning second functional safety requirement. We have provided the associated functional safety requirement in the table below. Hint:. Most of the technical safety requirements will be the same. At least one technical safety requirement will have to be slightly modified because we are talking about frequency instead of amplitude. These requirements were not given in the lessons]

Functional Safety Requirement 01-2 with its associated system elements  
(derived in the functional safety concept)

ID	Functional Safety Requirement	Electronic Power Steering ECU	Camera ECU	Car Display ECU
Functional Safety Requirement 01-02	The lane keeping item shall ensure that the lane departure oscillating torque frequency is below Max_Torque_Frequency	X		

Technical Safety Requirements related to Functional Safety Requirement 01-02 are:

ID	Technical Safety Requirement	A S I L	Fault Tolerant Time Interval	Architecture Allocation	Safe State
Technical Safety Requirement 01	The LDW safety component shall ensure that the frequency of the 'LDW_Torque_Request' sent to the 'Final electronic power steering Torque' component is below 'Max_Torque_Frequency.	C	50ms	LDW Safety	turning the system off
Technical Safety Requirement 02	As soon as the LDW function deactivates the LDW feature, the 'LDW Safety' software block shall send a signal to the car display	C	50ms	LDW Safety	turning the system off

	ECU to turn on a warning light.				
Technical Safety Requirement 03	As soon as a failure is detected by the LDW function, it shall deactivate the LDW feature and the 'LDW_Torque_Request' shall be set to zero.	C	50ms	LDW Safety	turning the system off
Technical Safety Requirement 04	The validity and integrity of the data transmission for 'LDW_Torque_Request' signal shall be ensured.	C	50ms	LDW Safety	turning the system off
Technical Safety Requirement 05	Memory test shall be conducted at start up of the EPS ECU to check for any faults in memory.	A	ignition cycle	LDW Safety	turning the system off

#### **Lane Departure Warning (LDW) Verification and Validation Acceptance Criteria:**

[OPTIONAL: For each technical safety requirement, identify both the verification and validation acceptance criteria. “Validation” asks whether or not you chose the appropriate parameters. “Verification” involves testing to make sure the vehicle behaves as expected when the parameter value is crossed. There is not necessarily one right answer. Look at your verification and validation acceptance criteria from the functional safety concept for inspiration.]

#### **Lane Keeping Assistance (LKA) Requirements:**

[Instructions: Fill in the technical safety requirements for the lane keeping assistance functional safety requirement 02-01. We have provided the associated functional safety requirement in the table below. Hint:. You can reuse the technical safety requirements from functional safety requirement 01-01. But you need to change the language because we are now looking at a different system. The ASIL and Fault Tolerant Time Interval are different as well.]

Functional Safety Requirement 02-1 with its associated system elements  
(derived in the functional safety concept)



ID	Functional Safety Requirement	Electronic Power Steering ECU	Camera ECU	Car Display ECU
Functional Safety Requirement 02-01	The lane keeping item shall ensure that the lane keeping assistance torque is applied for only Max_Duration	X		

Technical Safety Requirements related to Functional Safety Requirement 02-01 are:


ID	Technical Safety Requirement	ASIL	Fault Tolerant Time Interval	Allocation to Architecture	Safe State
Technical Safety Requirement 01	The LDW safety component shall ensure that the duration of the 'LDW_Torque_Request' sent to the 'Final electronic power steering Torque' component is below 'Max_Torque_Duration.	C	500ms	LDW Safety	turning the system off
Technical Safety Requirement 02	As soon as the LDW function deactivates the LDW feature, the 'LDW Safety' software block shall send a signal to the car display ECU to turn on a warning light.	C	500ms	LDW Safety	turning the system off
Technical Safety Requirement 03	As soon as a failure is detected by the LDW function, it shall deactivate the LDW feature and the 'LDW_Torque_Request' shall be set to zero.	C	500ms	LDW Safety	turning the system off
Technical Safety Requirement 04	The validity and integrity of the data transmission for 'LDW_Torque_Request' signal shall be ensured.	C	500ms	LDW Safety	turning the system off
Technical Safety Requirement	Memory test shall be conducted at start up of the EPS ECU to check for any faults in memory.	A	ignition cycle	LDW Safety	turning the system off

## Lane Keeping Assistance (LKA) Verification and Validation Acceptance Criteria:

[OPTIONAL: For each technical safety requirement, identify both the verification and validation acceptance criteria. “Validation” asks whether or not you chose the appropriate parameters. “Verification” involves testing to make sure the vehicle behaves as expected when the parameter value is crossed. There is not necessarily one right answer. Look at your verification and validation acceptance criteria from the functional safety concept for inspiration.]

## Refinement of the System Architecture

[Instructions: Include the refined system architecture. Hint: The refined system architecture should include the system architecture from the end of the technical safety lesson, including all of the ASIL labels.]

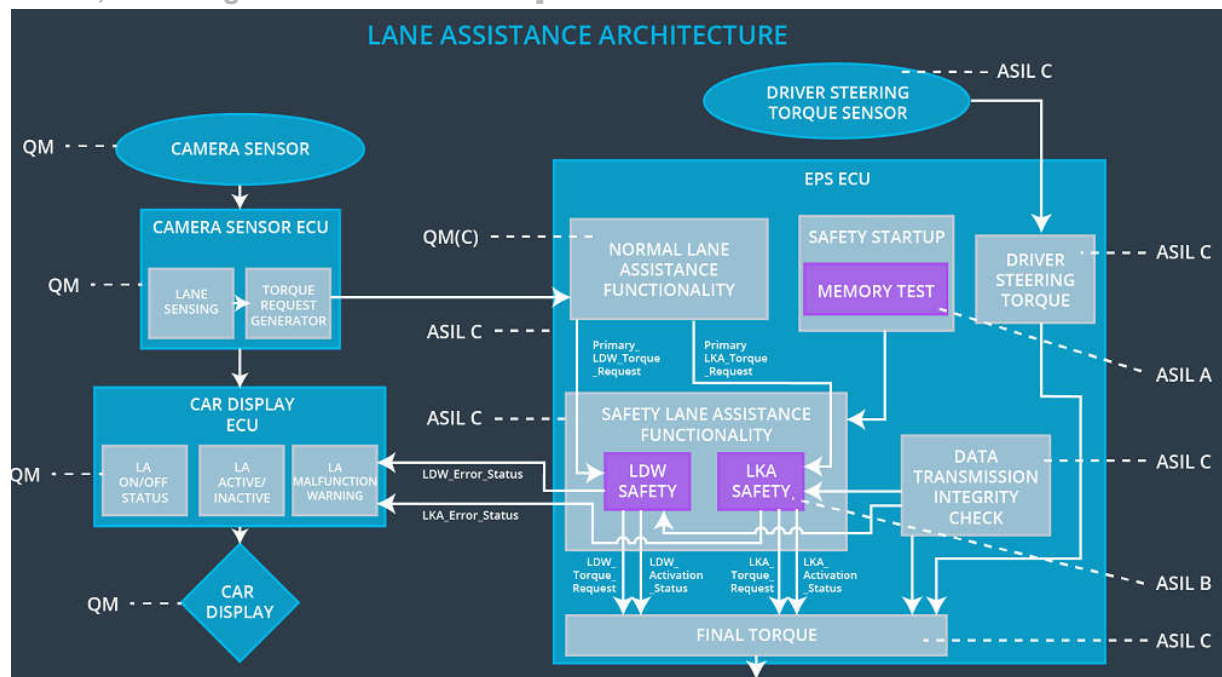

## Allocation of Technical Safety Requirements to Architecture Elements

[Instructions: We already included the allocation as part of the technical requirement tables. Here you can state that for this particular item, all technical safety requirements are allocated to the Electronic Power Steering ECU]

All technical requirements are allocated to the Electronic Power Steering ECU.

## Warning and Degradation Concept

[Instructions: We've already identified that for any system malfunction, the lane assistance functions will be turned off and the driver will receive a warning light indication. The technical safety requirements have not changed how functionality will be degraded or what the warning will be.

So in this case, the warning and degradation concept is the same for the technical safety requirements as for the functional safety requirements. You can copy the functional safety warning and degradation concept here.

Oftentimes, a technical safety analysis will lead to a more detailed warning and degradation concept. ]

ID	Degradation Mode	Trigger for Degradation Mode	Safe State invoked?	Driver Warning
WDC-01	turn off the functionality	Malfunction_01 Malfunction_02	Yes	A warning light will turn on.
WDC-02	turn off the functionality	Malfunction_03	Yes	A warning light will turn on.