

Serial Printout on USB:

Status: eye= default_normal, mood= sleepy, approx 81 FPS

+


Message for [esp/S3-EYE-091/command] arrived = L:(3)->I0C

DeviceControll Set: c 0 3 0 0

Mode-0: Sleepy Bkl-3: 1 1 Eyes-0: ON ON

Status: eye= default_normal, mood= sleepy, approx 80 FPS

MQTT example:

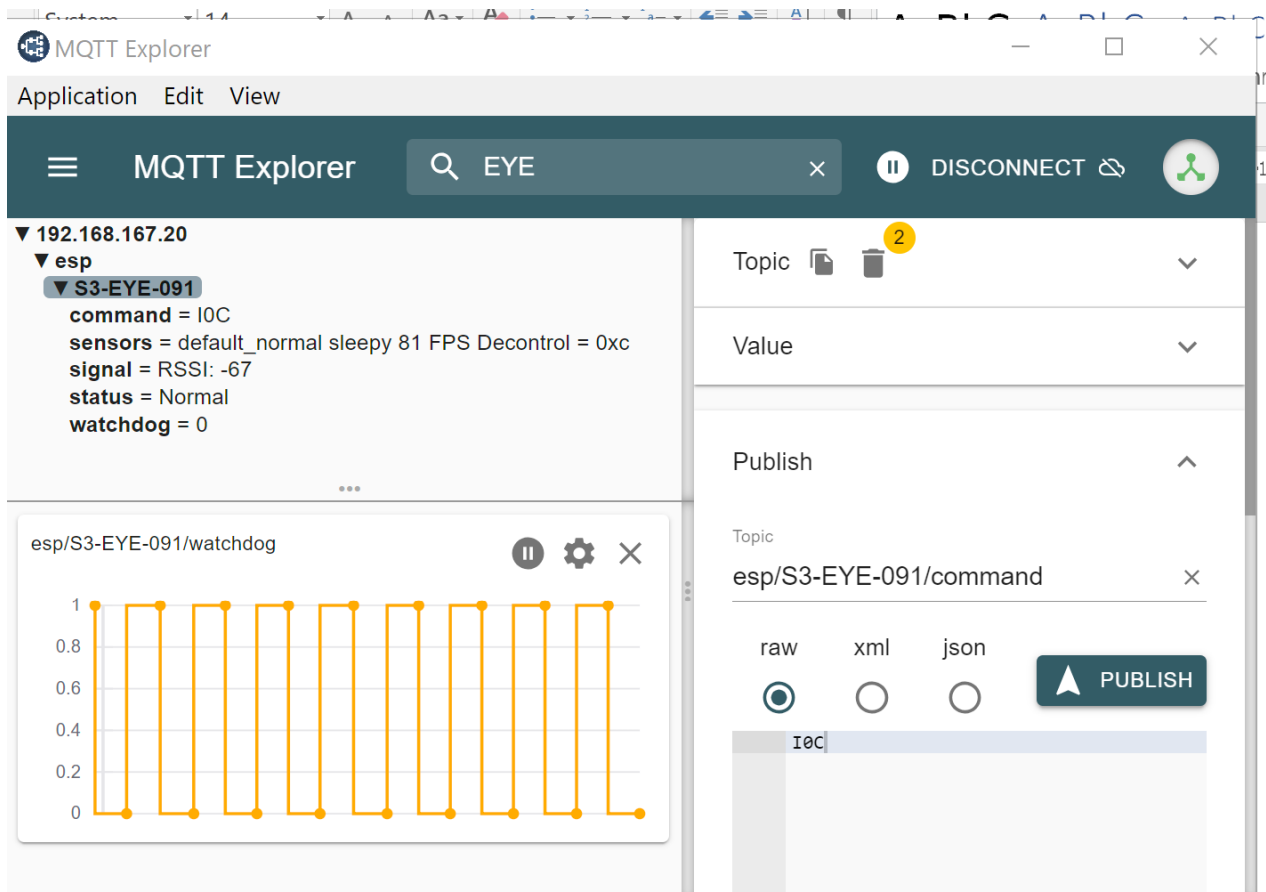

MQTT command decoding is made via (ca 500)

```
void callback(char* topic, uint8_t* payload, unsigned int length) {
```

Three mixed behavior changes 1: Mode / 2. Backlight / 3. Close Eye
From (594) via MQTT command **Ixx**. **xx** is a two letter hex witch
defines 4x 2 Bits. From low to high: First two change mode. Second
Backlight. Third closes Eyes.

Command **?** requests the device status.

Command **U xx** is low use in this device, it changes mqtt timings.

Command **X** restarts the device.