


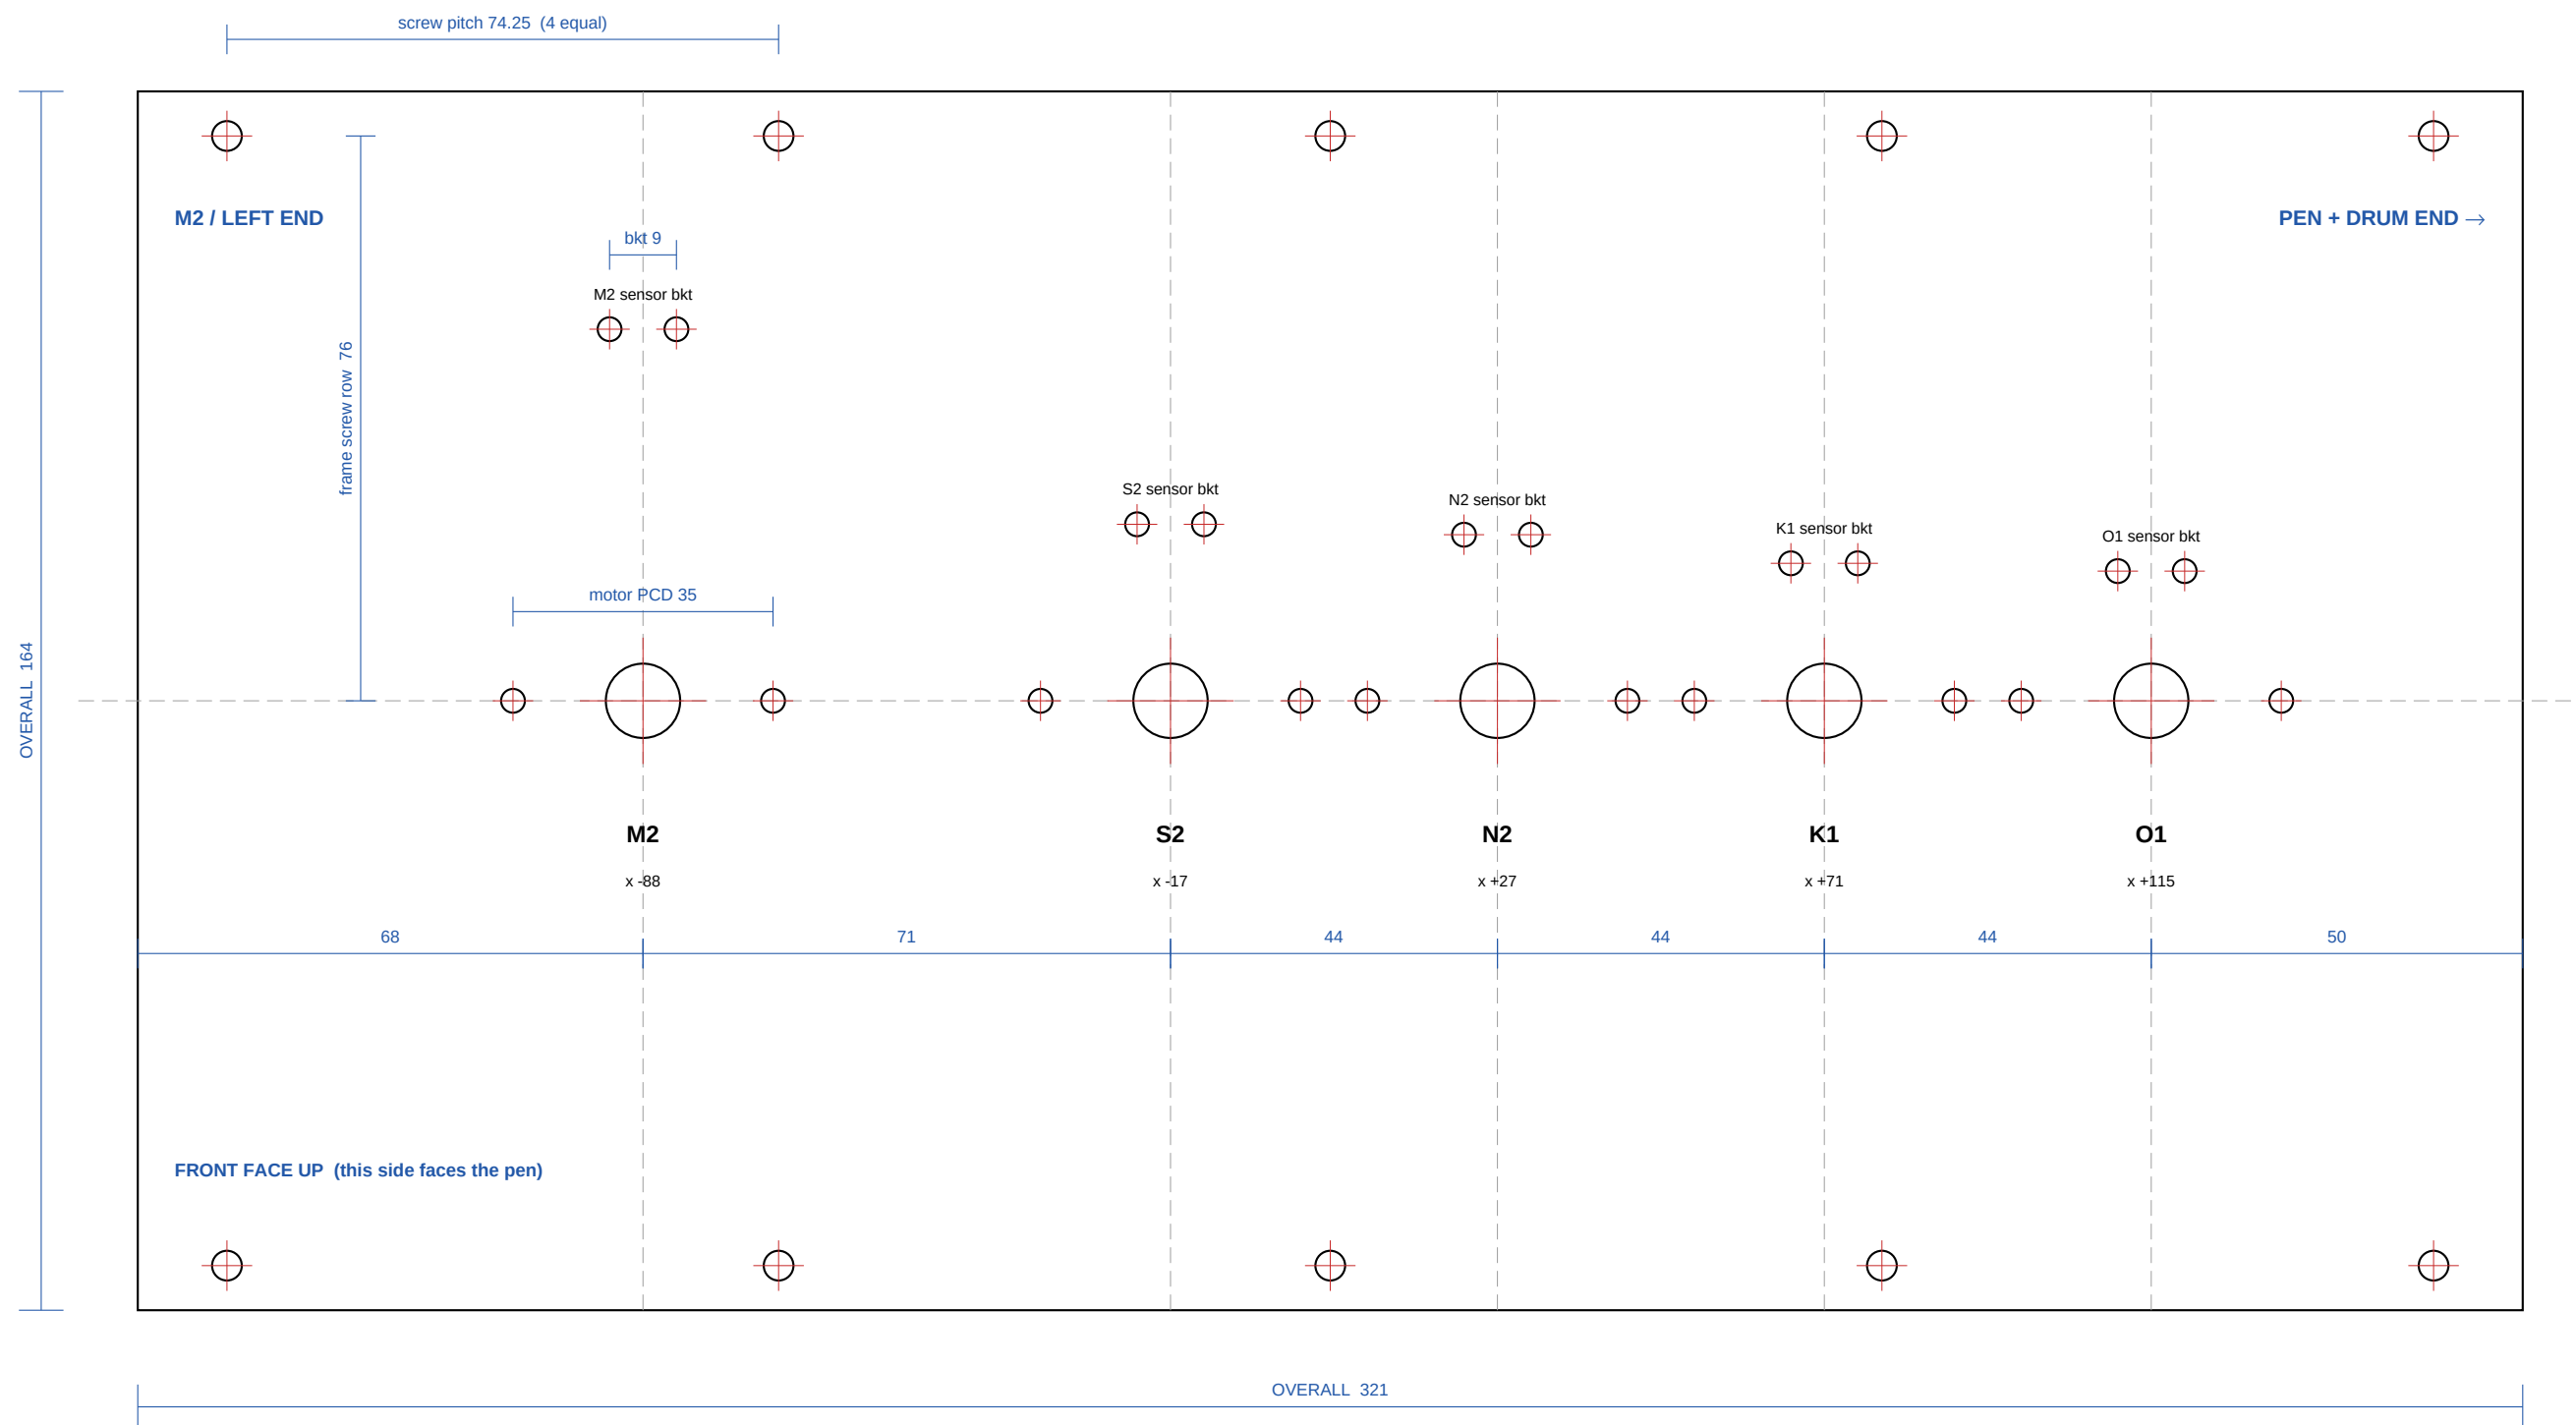

TIDE MACHINE — FACEPLATE

Material 1.5 mm sheet, aluminium or mild steel. 321 × 164 mm. Deburr both faces; no finish required.

Origin (0, 0) is the M2 motor shaft. y = 0 is the crank centreline, shared by all five stations.


Holes 5 × Ø10.0 shaft clearance 10 × Ø3.2 motor M3 (35 PCD, on y = 0)

10 × Ø3.2 sensor-bracket M3 10 × Ø4.0 frame screw, #6 clearance, on y = ±76

Asymmetric the station pattern is not centred — a mirrored plate is scrap. M2 end on the left, front face up.

PRINT AT 100% / ACTUAL SIZE. Any "fit to page" or "shrink to printable area" destroys the 1:1 scale.

Sheet 1 of 2 — A3 landscape, 420 × 297. Sheet 2 is the hole schedule.



FACEPLATE — HOLE SCHEDULE

Ordinates in mm from the M2 shaft centre, 35 holes. For hand-marking, or for checking the DXF opened right.

X	Y	Ø	purpose	X	Y	Ø	purpose
-88.00	+0.00	10.0	M2 shaft clearance	-70.50	+0.00	3.2	M2 motor M3
-17.00	+0.00	10.0	S2 shaft clearance	-34.50	+0.00	3.2	S2 motor M3
+27.00	+0.00	10.0	N2 shaft clearance	-21.50	+23.75	3.2	S2 sensor bracket M3
+71.00	+0.00	10.0	K1 shaft clearance	-12.50	+23.75	3.2	S2 sensor bracket M3
+115.00	+0.00	10.0	O1 shaft clearance	+0.50	+0.00	3.2	S2 motor M3
-144.00	-76.00	4.0	frame screw #6	+9.50	+0.00	3.2	N2 motor M3
-144.00	+76.00	4.0	frame screw #6	+22.50	+22.35	3.2	N2 sensor bracket M3
-69.75	-76.00	4.0	frame screw #6	+31.50	+22.35	3.2	N2 sensor bracket M3
-69.75	+76.00	4.0	frame screw #6	+44.50	+0.00	3.2	N2 motor M3
+4.50	-76.00	4.0	frame screw #6	+53.50	+0.00	3.2	K1 motor M3
+4.50	+76.00	4.0	frame screw #6	+66.50	+18.50	3.2	K1 sensor bracket M3
+78.75	-76.00	4.0	frame screw #6	+75.50	+18.50	3.2	K1 sensor bracket M3
+78.75	+76.00	4.0	frame screw #6	+88.50	+0.00	3.2	K1 motor M3
+153.00	-76.00	4.0	frame screw #6	+97.50	+0.00	3.2	O1 motor M3
+153.00	+76.00	4.0	frame screw #6	+110.50	+17.45	3.2	O1 sensor bracket M3
-105.50	+0.00	3.2	M2 motor M3	+119.50	+17.45	3.2	O1 sensor bracket M3
-92.50	+50.00	3.2	M2 sensor bracket M3	+132.50	+0.00	3.2	O1 motor M3
-83.50	+50.00	3.2	M2 sensor bracket M3				

Tally

- 20 × Ø3.2 mm
- 10 × Ø4.0 mm
- 5 × Ø10.0 mm

Laser sanity check against 1.5 mm stock

- smallest hole 3.2 mm ≥ t (1.5)
- thinnest hole-to-edge wall 4.0 mm ≥ t
- geometry all closed: 1 outline + 35 circles, nothing else
- faceplate_CUT.dxf carries exactly this and no text