山克®



NEW **M II Smart Micro-Module**

Data Centre

Modular data centre

Micro-module product range

With the rapid growth of cloud computing and the mobile internet, traditional data centres face long construction periods, high up-front investment, poor efficiency at low load, difficult expansion at high load and inefficient management — they struggle to keep up with fast-growing business demand.

The SKE modular data centre solution uses an efficient modular design that integrates every data centre subsystem — cabinets, power supply and distribution, cooling, structured cabling and management. It delivers a new kind of data centre that deploys fast, saves energy, takes little space and expands flexibly, meeting cloud-era needs for efficiency, reliability, agility and intelligent management.



IDM single cabinet



IDM single row



IDM2 dual row

Overview

Depending on the site, the SKE modular data centre can use a dual-row cabinet layout with a contained cold (or hot) aisle. In either layout, all subsystems — cabinets, power distribution, cabling, security, environment monitoring and management — can be integrated to the customer's requirements, giving a data centre that deploys fast, saves energy, takes little space and expands flexibly.

Where it fits

Single-module solution: for small and medium data centres under 60 kVA total and under 50 m². Suited to SMEs and branch offices of large enterprises.

Multi-module solution: replicate the dual-row layout to build a large data centre quickly and flexibly. For IDCs, large enterprises, financial centres, government, defence, supercomputing, education and healthcare.

Advantages

Energy efficient:

- Efficient power distribution and cooling close to the heat source lower the module PUE;
- Separated cold and hot air removes wasted airflow and local hot spots;
- Integrated management coordinates all parts and raises their efficiency;

Fast deployment:

- Standard parts, minimal site engineering, delivered as a whole;
- Grows with the business — expand quickly when needed;

Simple and reliable:

- Data centre infrastructure as a product — less dependence on site work, higher reliability;
- Factory-tested as a product for higher quality assurance;
- Adapts to a wide range of site conditions.

Modular data centre

IDM single-cabinet module

All-in-one cabinet — single-cabinet design



Features


- No equipment room needed — fits almost any site;
- Power on and use — deployed in 3 hours;
- All-in-one smart design: cooling, cabinet, power and monitoring integrated;
- Unattended operation 24/7, 365 days a year;
- Lower operating cost — over 30% less energy;
- At least 25U of space for IT equipment;
- For sites without a dedicated room and IT loads up to 10 kW — e.g. branch offices of enterprises and banks.

Overview

The all-in-one cabinet (also called a smart cabinet) is a highly integrated enclosure for IT equipment that suits many scenarios. It integrates power supply, control and monitoring, keeps constant temperature and humidity in any environment, and provides access control, door-status monitoring and remote centralised management.

Advantages

- Construction: true plug-and-play, deployed fast.
- Cooling: a rack-mount air conditioner, isolated from the room around it.
- Appearance: air conditioner, UPS and distribution built in; glass door with ambient lighting to see equipment status.

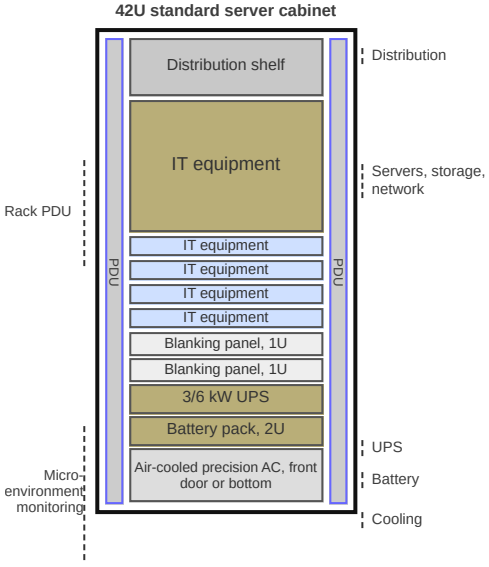

System	Item	Unit	Qty	Key specification
Cooling	Air conditioner	pc	1	Rack-mount precision AC, split air-cooled DC inverter; 3.5 / 5 kW (5U), 7.5 kW (8U) or 12.5 kW (10U).
	AC mounting kit	set	1	Matching AC mounting kit
	Emergency ventilation	set	1	Emergency fan (starts automatically at high temperature)
Cabinets	Cabinet	pc	1	Size 600 (W) × 1200 (D) × 2000 (H) mm; fully enclosed (cold aisle), tempered-glass front door, sheet-steel rear door
	Blanking panel kit	set	1	1U with brush + 1U×2 + 2U×3 + 5U×3
	Accessories	pair	1	Shelves and L-rails for 19" cabinets
Power supply & distribution	Rack-mount UPS	pc	1	3–10 kVA rack-mount high-frequency online UPS
	UPS monitoring card	pc	1	RS485 / RS232 interface, for 3–10 kVA UPS
	Backup batteries	set	1	Rack-mount battery pack or external battery bank
	Rack-mount distribution unit	pc	1	UPS input/output distribution, 3U; maintenance bypass and extra output ports
	Rack PDU	set	1	2 per cabinet, side-mounted left and right, with industrial connector; outlets GB 10 A / 16 A, C13 or C19 as required
	Power cables	set	1	Standard distribution cables
	Temperature & humidity	set	1	Remote temperature & humidity sensor
Monitoring	Smoke detection	set	1	Remote smoke detector
	Door contacts	set	1	One each on front and rear doors, detects open/closed; electronic lock optional
	Water leak detection	set	1	Locating or non-locating leak detection, self-powered
	AC monitoring	set	1	Operating status of the rack-mount AC
	Distribution monitoring	set	1	Power data of the in-cabinet distribution unit
	UPS monitoring	set	1	UPS operating data

Specifications are for reference only; the final confirmed specification applies to delivery.

Modular data centre

IDM single-row micro-module



IDM single-row micro-module

Features


- Highly integrated: cooling, power distribution, cabinets and monitoring in one;
- Standard parts and modular architecture for fast, on-demand deployment;
- Cold- or hot-aisle containment separates cold and hot air and removes hot spots;
- Close-coupled cooling and efficient power: module PUE below 1.5;
- Runs stably over a wide voltage range, adjustable supply/return air temperatures and a wide load range;
- 2 to 10 cabinets, as you choose.

Applications

Mainly for small data rooms with a 10–60 kW load and under 50 m² — SMEs and branch offices of large enterprises. Several modules can be combined into a large data centre for government, education, healthcare, finance and telecom.

Cold & hot aisle containment

Both the cold and the hot aisle are enclosed: you get the high cooling utilisation of cold-aisle containment and the higher AC efficiency of hot-aisle containment — the most energy-saving option. The IDM single-row module uses variable-capacity air conditioners with load tracking that adjust cooling and airflow to the actual heat load, saving even more. As a self-contained micro-module it places few demands on the room around it, and with fully enclosed aisles it suits most applications.

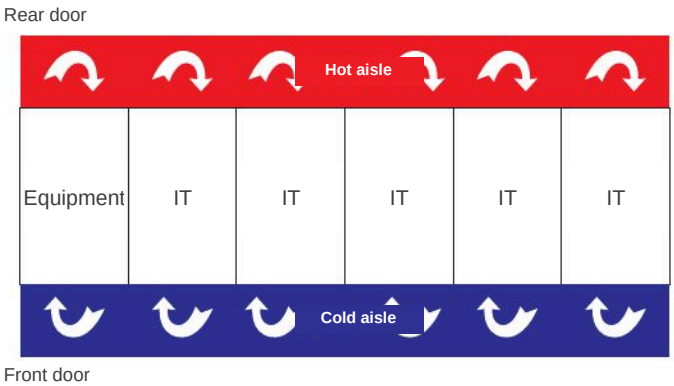

System	Item	Unit	Qty	Key specification
Cooling	In-row air conditioner	pc	1	From 12.5 kW upward in free steps; indoor unit 300 (W) × 1200 (D) × 2000 (H) mm, placed next to the racks, rear return / front supply;
	Rack-mount air conditioner	pc	1	3.5, 5, 7.5 or 12.5 kW, 5U to 10U high; several units can be fitted for redundancy.
	AC mounting kit	set	1	Matching mounting kit for 3.5 / 5 / 7.5 / 12.5 kW
	Emergency ventilation	set	1	Emergency fan, starts automatically at high temperature
Cabinets	Glass-door cabinets	pc	2~10	600 (W) × 1200/1400 (D) × 2000 (H) mm; fully enclosed (cold and hot aisle): tempered-glass doors front and rear; semi-enclosed (cold aisle): glass front door, perforated rear door.
	Blanking panel kit	set	1	1U with brush + 1U×2 + 2U×3 + 5U×3
	Airflow sealing kit	set	1	Side, top and bottom sealing for cold/hot-aisle containment
	Accessories	pair	1	Shelves and L-rails for 19" cabinets
Power supply & distribution	Modular UPS	pc	1	20–150 kVA
	Rack-mount UPS	pc	1	5–20 kVA rack-mount UPS
	UPS monitoring card	pc	1	RS232 / RS485 / SNMP card
	Batteries	set	1	Rack-mount battery pack or external batteries
	Rack-mount distribution unit	set	1	ABB / Schneider switchgear; optional smart metering of the main and branch circuits, reported to the monitoring system; installed in the same cabinet as the UPS
	Rack PDU	set	1	2 per cabinet, side-mounted left and right, with industrial connector; outlets GB 10 A / 16 A, C13 or C19 as required
	Power cables	set	1	Standard distribution cables
Monitoring	Temperature & humidity	set	1	Remote temperature & humidity sensor
	Smoke detection	set	1	Remote smoke detector
	Water leak detection	set	1	Locating or non-locating leak detection, self-powered
	UPS & battery monitoring	set	1	UPS operating data plus battery voltage, current and internal resistance
	Distribution monitoring	set	1	Power data in the distribution cabinet and at each cabinet
	AC monitoring	set	1	Operating status of the module air conditioners
Fire suppression	Fire-detection-tube suppression	set	1	FM-200 (HFC-227ea) with fire-detection tube, for fully enclosed row modules

Specifications are for reference only; the final confirmed specification applies to delivery.

Modular data centre

IDM2 dual-row micro-module

IDM2 micro-module — design



IDM2 dual-row micro-module

Features

- All-in-one smart design: cabinets, cooling, power distribution, monitoring and security integrated;
- Modular deployment, highly scalable, short build time;
- Better use of floor space, lower construction cost;
- Pod-level solutions tailored to each cabinet group for the best cooling;
- Enclosed aisle with automatic roof opening — safer and more reliable;
- Suits large data centres built from several modules.

Technical highlights


- Flexible: modular design (fixed roof panels, end doors, frame members) makes future expansion and maintenance easy;
- Smart: the movable roof panels are linked to the fire system; the power & environment monitoring system watches every point in the aisle locally and remotely;
- Safe: aisle doors and windows in tempered glass; cold-aisle parts are flame-retardant or non-combustible;
- Convenient: sliding or swing doors, automatic or manual, easy for moving equipment;
- Energy saving: complete separation of cold and hot air greatly improves cooling utilisation;
- Customisable: tailored solutions for complex or unusual sites.

System	Item	Unit	Qty	Key specification
Cooling	In-row air conditioner	set	1	12.5–60 kW air-cooled, up to 60 kW chilled water; looks like a server cabinet, 300 or 600 mm wide
	AC mounting kit	pc	1	Matching AC mounting kit
	AC mounting kit	set	1	Mounting kit for 3.5 / 5 / 7.5 / 12.5 kW
Cabinets	Cabinets	set	6-N	600 (W) × 1200 (D) × 2000 (H) mm; single perforated front door, double perforated rear doors
	Blanking panel kit	set	1	1U with brush + 1U×2 + 2U×3 + 5U×3
	Accessories	pair	1	Shelves and L-rails for 19" cabinets
UPS	Modular UPS	pc	1	Server-cabinet style, 20–600 kVA system, 20–60 kVA modules
	UPS monitoring card	pc	1	RS485 / RS232, for SKMK series modular UPS
	Batteries	set	1	12 V 65–200 Ah or 2 V 100–3000 Ah, with matching battery cabinets or racks
Distribution cabinets	Standard distribution cabinet	set	1	Three-phase meter, ABB / Schneider switches, main-circuit metering
	Precision distribution cabinet	set	1	Smart metering module, ABB / Schneider switches; meters the main and every branch circuit and reports to the monitoring system
	Rack PDU	set	1	2 per cabinet, side-mounted left and right, with industrial connector; outlets GB 10 A / 16 A, C13 or C19 as required
Monitoring	Temperature & humidity	set	1	Remote temperature & humidity sensor
	Smoke detection	set	1	Remote smoke detector
	Access control	set	1	One each on the front and rear aisle doors
	Water leak detection	set	1	Locating or non-locating leak detection, self-powered
	Fire system monitoring	set	1	Alarm status of the room gas suppression system
	Video surveillance	set	1	Cameras inside and outside the aisle
	AC monitoring	set	1	Operating status of the module air conditioners
	Distribution monitoring	set	1	Power data in the distribution cabinet and at each cabinet
	Audible & visual alarm	set	1	Local audible and visual alarm
	UPS & battery monitoring	set	1	UPS operating data plus battery voltage, current and internal resistance
Cold-aisle containment	Aisle doors	set	1	Manual or powered sliding or swing doors, tempered glass or steel
	Roof panels	set	1	Aluminium-alloy frame with laminated tempered glass
	Roof panel actuators	set	1	Open automatically on fire alarm
	Airflow sealing kit	set	1	Front, side, top and bottom sealing for aisle containment
	M-type cable tray	set	1	Power and data cable trays with fittings, mounted on the cabinet tops
	LED scrolling display	set	1	Scrolling text set from the app
	Motion-sensor lighting	set	1	Sensor-switched LED tubes at the front and rear doors


Specifications are for reference only; the final confirmed specification applies to delivery.

Modular data centre


Quality modular components



Flip-up roof panel



H-type cable trough

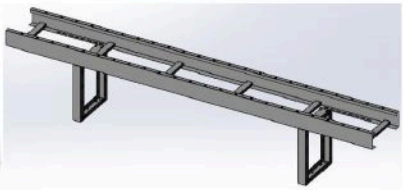

Cable ladder




Cabinet base

- Built-in lighting with an LED strip on each side.
- Three channels for power, data and fibre; the number and width of channels can be changed.
- Sectional ladder that carries cables across the two rows.
- Bolt-together base frame: easy to ship, no welding, quick to install on site.

Micro-module — quality parts



Roof support panel



Trim panel




Micro-module controller

- The roof support panel has built-in ambient lighting and is interchangeable with the trim panel at the end of the row.
- The controller handles end doors, lighting power, roof panels and ambient lights, links to the fire system and opens the roof with one key.

Cabinet — design

High-end server cabinet series in high-strength cold-rolled steel, with a welded frame of folded uprights

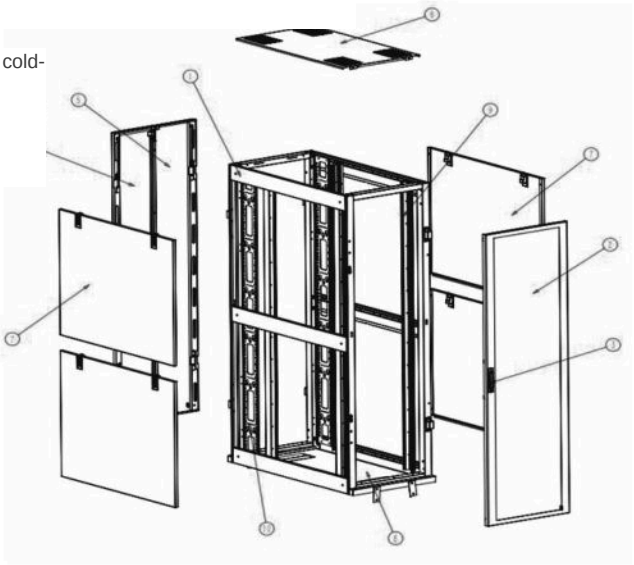


① 2.0 mm frame steel, fully welded
② Front door
③ Mechanical lock
④ Right rear door
⑤ Left rear door
⑥ Top cover
⑦ Side panel
⑧ Base plate
⑨ Upright
⑩ Vertical cable manager

Cabinet quality

Even welds without cracks, undercut, notches or burn-through; no slag, pores, overlap or pits; ground after welding, surface roughness to industry standards.

Smooth, even coating with no runs or bare spots. Metal parts without burrs or rust; no sharp edges that could injure.

Standard colour matt black RAL 9005, no glare under lighting. Other colours on request.



Flat doors and side panels without twist, distortion or rattle; evenly perforated doors.

Degreased, pickled, phosphated, rinsed in pure water and powder-coated: no peeling, resistant to acids, alkalis, solvents, corrosion and sweat, 100% adhesion, impact-resistant, IP20.

Cabinet, accessories, coating, labels and trim are flame-retardant or non-combustible.

Exterior coating complies with EU RoHS and national non-toxic coating standards.

High-hardness electrostatic powder coating to anti-static and BS 6497 requirements, 70–130 µm thick, high-temperature cured: smooth, even, no bare spots, runs, blisters, cracks or orange peel; burr-free metal parts; anti-static.


Application scenario 1


Micro-module data centre solution


IDM2 is configured to the room's reliability level, power density per cabinet, cooling method and power distribution, giving each user the best solution:

Cold-aisle containment:

Cabinets stand face to face and the cold aisle between their fronts is enclosed. Cooling is used efficiently: outside the aisle is the warm side, so the room itself needs no cooling and no cold air is wasted. Especially suited to data centres built in phases.

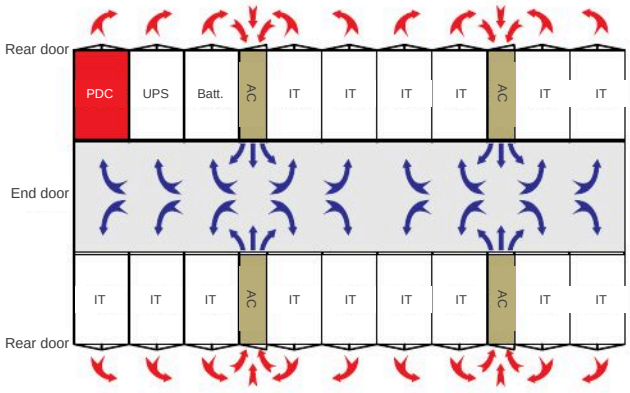

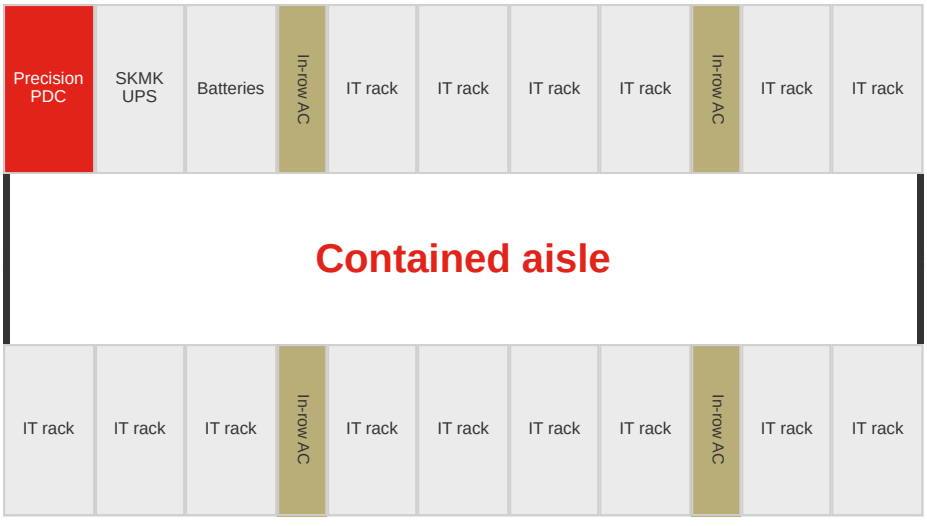

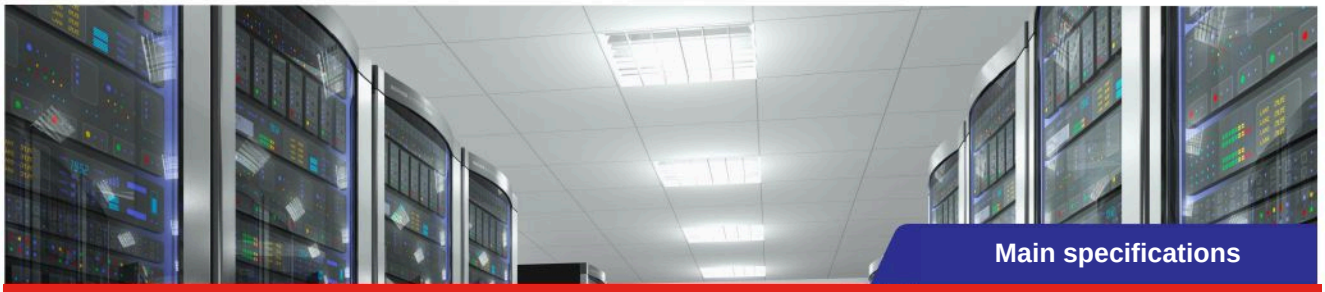

Main specifications

Category	Item	Specification	
UPS	Type	**SKMK modular UPS or integrated power cabinet**	
Distribution cabinet	Rated input	3-phase 380 V AC, 50/60 Hz	
	Function	Single or dual bus, smart metering of main and branch circuits, isolation transformer optional	
	Size	600 × 1200 × 2000 mm (W × D × H)	
Cabinet	Static load	2600 kg	
	Door perforation	85%	
	Size	600 × 1200 × 2000 mm (W × D × H), 42U	
Precision AC	Model SK-LAJ	12	25
	Sensible kW	12.5	25.4
	Airflow m³/h	3000	5200
	Function	Constant temperature & humidity (cooling-only + electric heating optional)	
	Refrigerant	R410A	
	Cooling	Row-level (air-cooled, water-cooled, chilled water)	
	Air supply	Rear return, front supply / side return, side supply	
	Containment	Sealed aisle	
Monitoring	Environment	Temperature/humidity, smoke, access control, cameras, etc.	
	Power equipment	UPS, precision AC, distribution cabinets	
Cold aisle	Installation	On a level floor or on a support frame under a raised floor	
	Power system	380/400/415 V AC, 50/60 Hz, 3Ph+N+PE	
	IT cabinets	≤ 48	
	Dimensions	Dual-row sealed cold/hot aisle (L × W × H): L × 3600 × 2450 mm, L ≤ 15 m	
Cabling	Safety	Power, data and fibre physically separated in cable troughs	

Specifications are for reference only; the final confirmed specification applies to delivery.

Key technical features:


- Meets class B/C equipment-room requirements of Chinese standard GB 50174-2017;
- High energy efficiency: PUE can be below 1.5;
- Highly integrated all-in-one solution: cabinets, power supply and distribution, cooling and monitoring;
- Comprehensive smart monitoring down to voltage, current, power, energy, temperature and humidity at each IT cabinet;
- Automatic alarms for a truly unattended room;
- Invest as you grow, expand module by module;
- Factory prefabricated to standard, quick site assembly, controlled quality;
- UPS: line-frequency, high-frequency tower or high-frequency modular;
- Supports under-floor supply air conditioning (air-cooled, water-cooled, chilled water);
- 3–15 kW per IT cabinet;
- Up to 48 cabinets in total.

Application scenario 2

Micro-module data centre solution



Application scenario 2

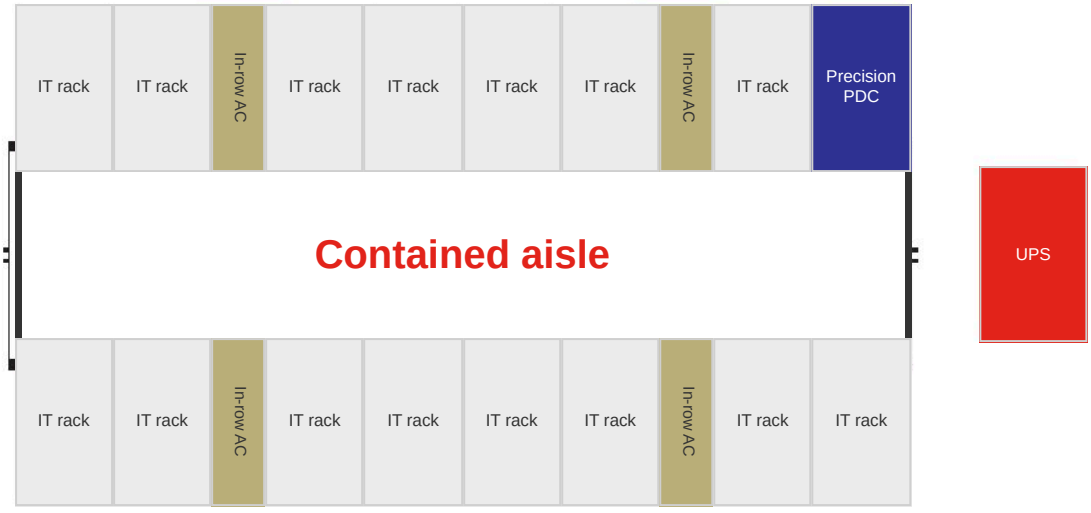



Main specifications

Category	Item	Specification			
UPS	Type	**SKMK modular UPS or integrated power cabinet**			
Distribution cabinet	Rated input	3-phase 380 V AC, 50/60 Hz			
	Function	Single or dual bus, smart metering of main and branch circuits, isolation transformer optional			
	Size	600 × 1200 × 2000 mm (W × D × H)			
Cabinet	Static load	2600 kg			
	Door perforation	85%			
	Size	600 × 1200 × 2000 mm (W × D × H), 42U			
Precision AC	Model SK-LAJ	30	40	50	60
	Sensible kW	31	41	50.2	60.2
	Airflow m³/h	6800	9000	10500	13200
	Function	Constant temperature & humidity (cooling-only + electric heating optional)			
	Refrigerant	R410A			
	Cooling	Row-level (air-cooled, water-cooled, chilled water)			
	Air supply	Rear return, front supply			
	Containment	Sealed aisle			
Monitoring	Environment	Temperature/humidity, smoke, access control, cameras, etc.			
	Power equipment	UPS, precision AC, distribution cabinets			
Cold aisle	Installation	On a level floor or on a support frame under a raised floor			
	Power system	380/400/415 V AC, 50/60 Hz, 3Ph+N+PE			
	IT cabinets	≤ 48			
	Dimensions	Dual-row sealed cold/hot aisle (L × W × H): L × 3600 × 2450 mm, L ≤ 15 m			
Cabling	Safety	Power, data and fibre physically separated in cable troughs			

Specifications are for reference only; the final confirmed specification applies to delivery.

Key technical features:


- Meets class B/C equipment-room requirements of Chinese standard GB 50174-2017;
- High energy efficiency: PUE can be below 1.5;
- Highly integrated all-in-one solution: cabinets, power supply and distribution, cooling and monitoring;
- Comprehensive smart monitoring down to voltage, current, power, energy, temperature and humidity at each IT cabinet;
- Automatic alarms for a truly unattended room;
- Invest as you grow, expand module by module;
- Factory prefabricated to standard, quick site assembly, controlled quality;
- UPS: line-frequency, high-frequency tower or high-frequency modular;
- Supports under-floor supply air conditioning (air-cooled, water-cooled, chilled water);
- 3–15 kW per IT cabinet;
- Up to 48 cabinets in total.

Application scenario 3

Micro-module data centre solution



Application scenario 3

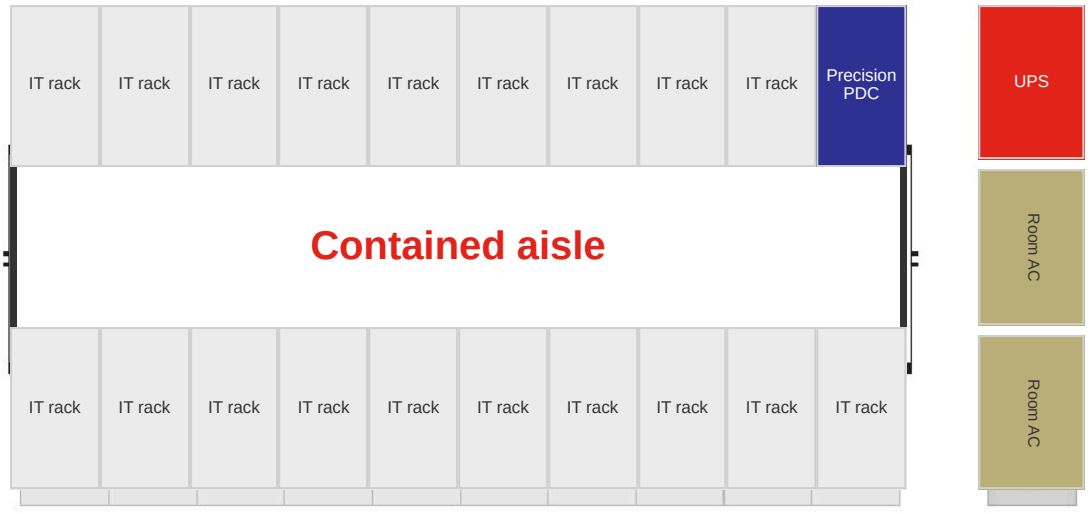



Main specifications

Category	Item	Specification									
UPS	Type	**High-frequency tower UPS**									
Distribution cabinet	Rated input	3-phase 380 V AC, 50/60 Hz									
	Function	Single or dual bus, smart metering of main and branch circuits, isolation transformer optional									
	Size	600 × 1200 × 2000 mm (W × D × H)									
Cabinet	Static load	2600 kg									
	Door perforation	85%									
	Size	600 × 1200 × 2000 mm (W × D × H), 42U									
Precision AC	Model SK-FAJ	8	12	17	20	25	30	35	40	50	60
	Sensible kW	6.9	12.5	15.7	18.2	25.4	27.6	35.2	41	50.2	60.2
	Airflow m³/h	2400	3000	5300	5700	5200	9200	7800	9000	10500	13200
	Function	Constant temperature & humidity (cooling-only + electric heating optional)									
	Refrigerant	R410A									
	Cooling	Row-level (air-cooled, water-cooled, chilled water)									
	Air supply	Top-front supply	Top-front supply / bottom supply								
	Containment	Sealed aisle									
Monitoring	Environment	Temperature/humidity, smoke, access control, cameras, etc.									
	Power equipment	UPS, precision AC, distribution cabinets									
Cold aisle	Installation	On a level floor or on a support frame under a raised floor									
	Power system	380/400/415 V AC, 50/60 Hz, 3Ph+N+PE									
	IT cabinets	≤ 48									
	Dimensions	Dual-row sealed cold/hot aisle (L × W × H): L × 3600 × 2450 mm, L ≤ 15 m									
Cabling	Safety	Power, data and fibre physically separated in cable troughs									


Specifications are for reference only; the final confirmed specification applies to delivery.

Key technical features:

- Meets class B/C equipment-room requirements of Chinese standard GB 50174-2017;
- High energy efficiency: PUE can be below 1.5;
- Highly integrated all-in-one solution: cabinets, power supply and distribution, cooling and monitoring;
- Comprehensive smart monitoring down to voltage, current, power, energy, temperature and humidity at each IT cabinet;
- Automatic alarms for a truly unattended room;
- Invest as you grow, expand module by module;
- Factory prefabricated to standard, quick site assembly, controlled quality;
- UPS: line-frequency, high-frequency tower or high-frequency modular;
- Supports under-floor supply air conditioning (air-cooled, water-cooled, chilled water);
- 3–15 kW per IT cabinet;
- Up to 48 cabinets in total.

Power distribution system

Low-voltage power chain for small and medium data centres

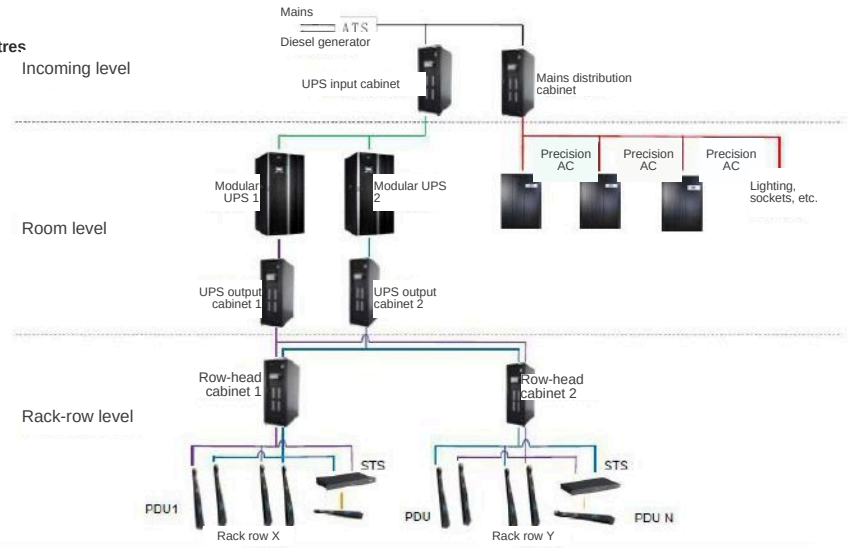

PDU — overview





Overview:

A PDU (power distribution unit) distributes power to rack-mounted equipment. Many series with different functions, mounting options and socket combinations provide the right rack power distribution for any power environment.

Features:

- Flexible — several input options and freely combined output modules
- Compact — saves space and makes better use of the room
- Quality — continuously improved, standardised and automated production
- Reliable — aluminium-alloy housing, flame-retardant PC sockets, phosphor-bronze contacts

Smart PDU — overview

Overview

The SKE smart PDU is a new generation of intelligent power distribution for data centre network cabinets. Using Ethernet, RS485 and other proven links, it upgrades a conventional PDU so that power to end equipment can be monitored, switched and managed remotely.

Operating conditions

- Operating temperature: −5 to +60 °C
- Operating humidity: ≤ 90% (40 ± 2 °C), max. 95% RH, non-condensing
- Altitude: 2000 m
- Storage temperature: −40 to +70 °C
- Storage humidity: ≤ 95% (40 ± 2 °C)





Capabilities

Remote monitoring
- Total load current (A)
- Voltage (V)
- Total power (kW)
- Frequency (Hz)
- Branch currents (A)
- Temperature, humidity, smoke, water, etc. (sensor modules ordered separately)

Remote control
- Main power on/off
- Branch on/off
- Sequenced branch on/off
- Scheduled branch on/off

Thresholds
- Max. total current
- Voltage high/low
- Max. branch current
- Temperature high/low

Alarms
- Power over limit
- Temperature/humidity out of range
- Smoke
- Water leak



Precision distribution cabinet — overview

The precision distribution cabinet is a smart distribution cabinet at the energy end-point of the data centre that collects all energy data. The SKE cabinet supplies high-accuracy measurements to the end-point energy monitoring system, shows power quality in real time on its display and uploads it digitally to the monitoring system — for real-time supervision and effective management of the whole distribution system. It helps optimise the data centre, strengthen energy management, raise rack efficiency and build a fully green IDC. Typical users are telecom, finance, government and IT data centres and industrial enterprises: it distributes, protects, meters and manages power to servers and other critical equipment where uninterrupted supply is essential.

Precision distribution cabinet — functions

- Monitors total input voltage, current, frequency, power and energy
- Monitors voltage, current, frequency, power and energy of every circuit
- Detects the position of every switch
- Preset load-capacity, overload and overvoltage alarms per circuit

Functions

- 7" colour touch screen for harmonics, energy management, history and load curves
- Audible/visual alarm and remote monitoring interface
- Surge and lightning protection (optional), overcurrent protection; local LCD and panel controls for real-time checks
- Smart monitoring, compatible with all common room monitoring systems.



Power distribution module — overview

Overview:
In the all-in-one cabinet, the distribution module forms the power system together with the UPS, batteries and PDUs. It manages all power distribution, includes class C surge protection and switches one input to several outputs — simple to operate. It feeds the PDUs, lighting and air conditioner, powering the main equipment directly as well as the emergency fan (if the system or the air conditioner fails, the fan exhausts hot air to give service staff time).

Features:

(1) Modular
Fully modular, split design: the solution is laid out flexibly for the application and feeder requirements.

(2) Configurable
Configured to the actual needs; several distribution units can be combined for system integration.

(3) Easy to use and install
Highly integrated with compact modules, giving a neat, flexible cabinet layout that is easy to install.

Intelligent monitoring & management system



All-in-one cabinet




Micro-module




Equipment room

All-in-one cabinet monitoring — network

Notes: 1. Smart cabinet lock with card or PIN (optional);
2. Video by camera + DVR/NVR (optional);
3. Rack U-position and PDU monitoring are optional.

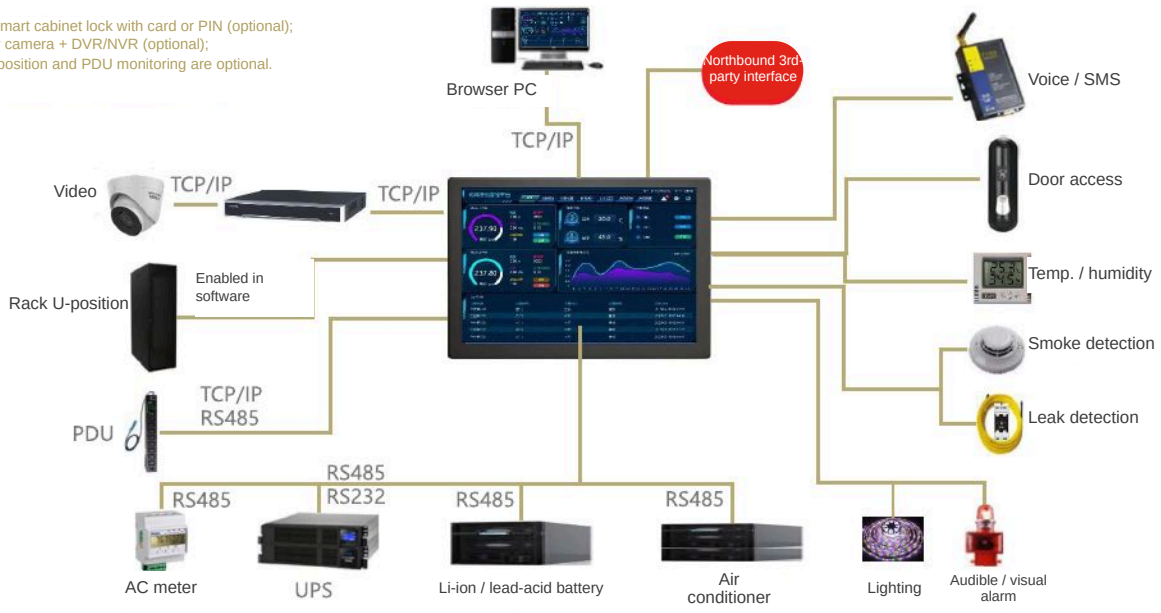

All-in-one cabinet monitoring — architecture

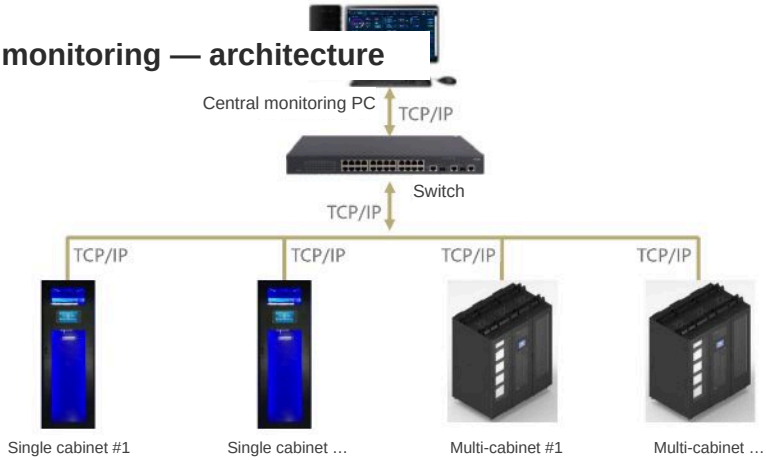

All-in-one cabinet monitoring — features



- 0U: built in, takes no rack space, neat
- True-colour capacitive screen, rich clear display
- Responsive touch with swipe gestures
- Swipe, pattern or PIN unlock
- Dedicated integrated system, fast response
- One unit manages many smart devices plus door, smoke and water sensors
- Front camera for snapshots and face recognition (optional)
- Built-in web interface, easy to manage
- Northbound interface for networking many units
- Rack U-position management without extra hardware
- Alarm-triggered actions
- SMS, voice and e-mail alarms

All-in-one cabinet monitoring — screens









Micro-module monitoring

Power & environment monitoring system

Micro-module monitoring — network

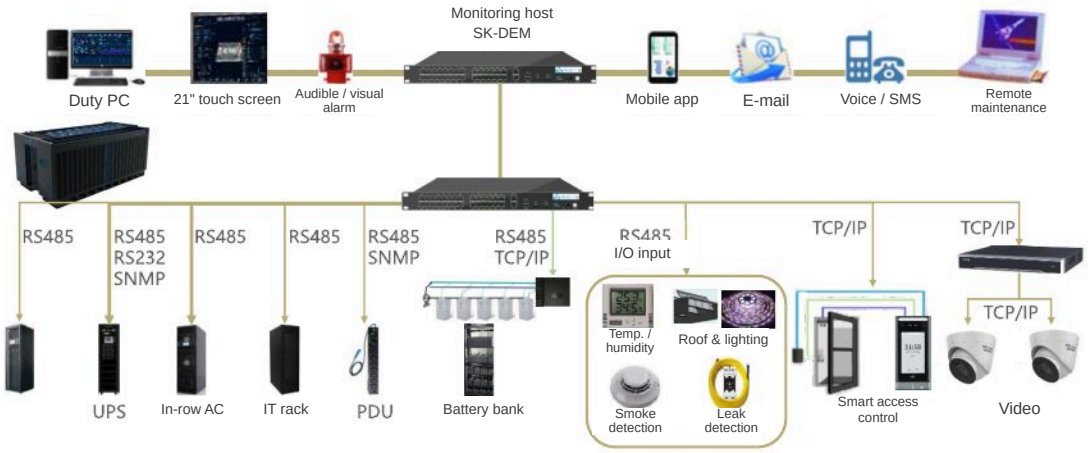

Micro-module monitoring — features



All-round, integrated monitoring: Power distribution, environment, security, fire, video and access control are combined into one micro-module monitoring system covering everything.

Highly integrated, neat: High-resolution touch screen with RS485, RS232, DI, DO and LAN ports. Data acquisition, processing, alarms and display in one; industrial-grade hardware and software, stable, good-looking and easy to install.

Complete management functions: Real-time monitoring, energy-efficiency analysis and alarm filtering, plus data, user-rights and configuration management, logs, curves and reports — managed locally without a host PC.

Open standard interfaces: Standard third-party interfaces upload data over the network to a central platform, compatible with other vendors' systems for unified monitoring.

Micro-module monitoring V3.0

The web platform shows the overall health of the cold aisle, equipment performance, faults and alarms in real time, greatly reducing day-to-day management work. Configuration is easy through the platform, so installation and commissioning need far less specialist IT staff.





Micro-module monitoring V3.0 — 3D view




Micro-module monitoring

Power & environment monitoring system

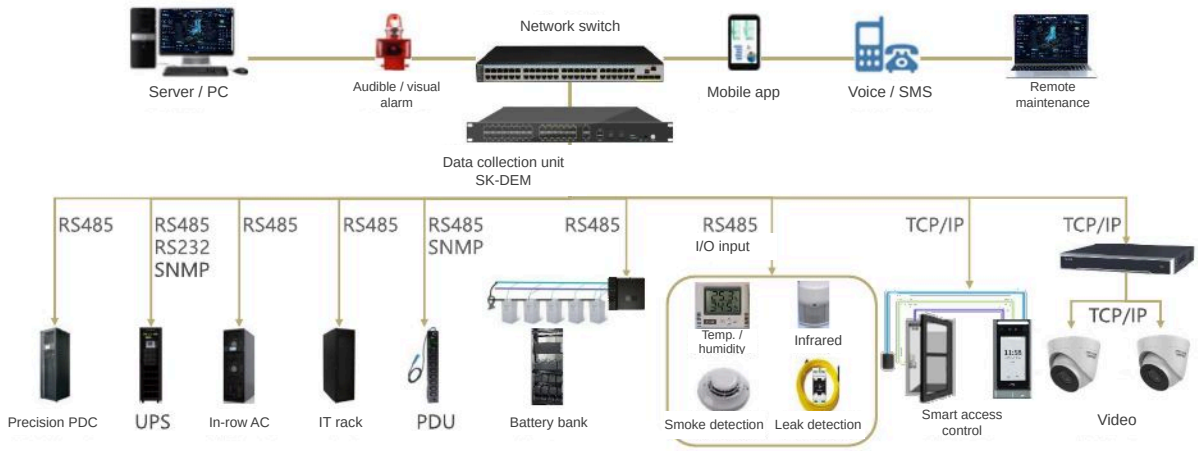

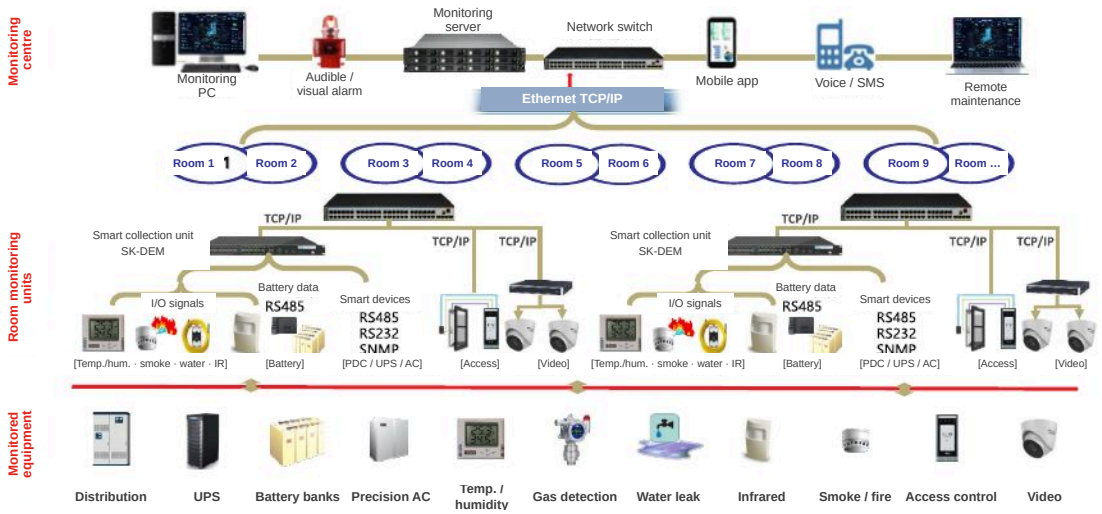

Room monitoring — DCIM

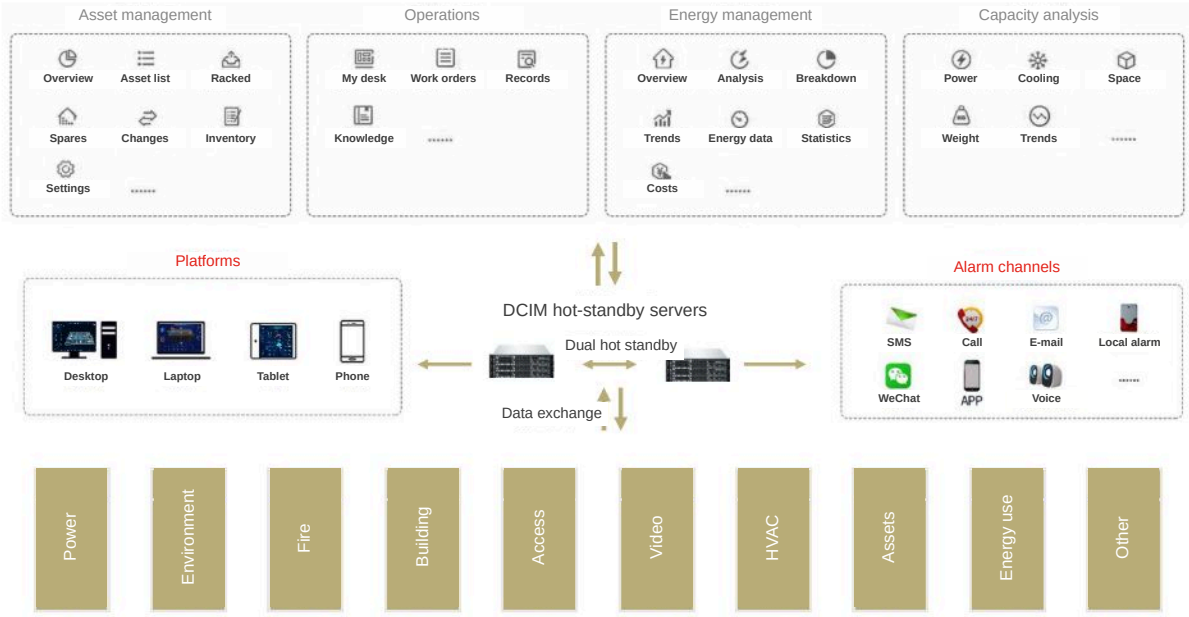

Room monitoring — DCIM



山克®

Shenzhen Smartkey Power Co., Ltd.

HQ: 24/F, Block 1B, Dingfa Dongfu Plaza, Guangming Ave., Guangming District, Shenzhen, China
Tel: +86 755 2319 4274
Web: www.ups-china.com