

FK SUPPLY CO. LLC

MARINE CONSTRUCTION PRODUCTS · BAYVILLE, NJ

VER 1.0 DRAFT — 07/2026

PILE GASKET

Zippered fabric bottom-seal gasket for pile encapsulation forms

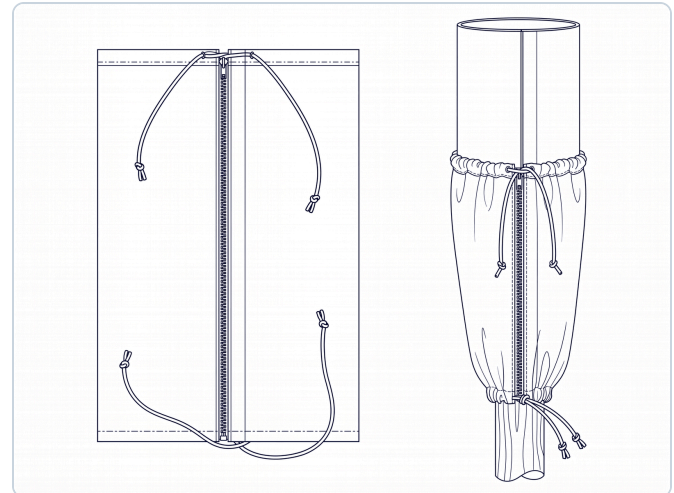
Also known as: pile jacket bottom seal · piling jacket seal · bottom bag · grout containment gasket

DESCRIPTION

The FK Pile Gasket is a made-to-order waterproof fabric gasket that seals the base of a pile encapsulation form ("pile jacket") during underwater concrete placement — keeping fill material in the form and out of the waterway. It replaces improvised bottom seals (stuffed foam, pleated plastic "diaper" skirts, banding, and bolted clamps) with a one-piece unit a diver zips around the pile and cinches tight. Designed by a working commercial diver who installs pile jackets for a living.

FEATURES

- One-piece bottom seal — zip on, cinch two drawstrings, done
- Reduces installation time and diver bottom time
- Contains grout/concrete at the form base — reduces wasted fill and waterway spill
- Full-length Lenzip® #10 locking zipper — installs around the pile, no threading over the top
- Captive zipper slider — zipper stops keep the slider on the chain, so it can't be run off the end during closure
- Dual drawstring cinch channels (top and bottom hems) — 1/4" solid braid nylon cords
- Non-corrosive, lightweight, waterproof PVC-backed fabric
- For timber, steel, and concrete piles; round or square profiles
- Made to order in the USA (Bayville, NJ) — built to your pile dimensions

PRODUCT DIAGRAM

FLAT — as manufactured

INSTALLED AT JACKET BASE

Size = **Circumference (C)** × **Height (H)**. Full-length center zipper; 1/4" solid braid nylon drawstrings exit beside the zipper in the top and bottom hem channels.

PILE PROFILES

ROUND



SQUARE

Round and square pile profiles supported — size by perimeter.

PROPERTY SPECIFICATIONS

PROPERTY	VALUE
SHELL FABRIC — OTTERTEX® WATERPROOF CANVAS	
Fiber / construction	600 denier, 100% polyester
Coating	PVC waterproof backing
Weight / thickness	390 g/m ² (≈ 11.5 oz/yd ²) · 0.55 mm
Resistance	Waterproof; mold/mildew-, UV-, abrasion- and tear-resistant (per fabric manufacturer)
HARDWARE & CONSTRUCTION	
Closure	Lenzip® #10 locking zipper, full vertical length; captive slider with zipper stops
Cinching	Dual 1/4" solid braid nylon drawstrings in folded hem channels, top & bottom; tied off with surgeon's knots
Stitching	High-tensile bonded polyester thread, UV- and saltwater-resistant
Seams	Double-stitched; bar-tack reinforced at zipper ends and drawstring exits
Color	White (standard)

Fabric properties as published by the fabric manufacturer (Ottertext®). Values are typical, not minimums, and are provided as a general guide.

APPLICATION

DRAFT

1. **Verify size.** Confirm gasket circumference and height against the pile and the jacket base elevation before the dive.
2. **Prepare the pile.** At the gasket elevation, remove marine growth and loose material per project specifications.
3. **Wrap and zip.** Open the gasket, wrap it around the pile at the base of the encapsulation form, and close the full-length zipper. The locking slider and zipper stops hold it closed under load.
4. **Cinch the bottom.** Draw the bottom drawstring tight against the pile and tie off.
5. **Seal to the form.** Cinch the top drawstring over the base of the pile jacket and tie off, closing the jacket-to-pile transition.
6. **Fill the form.** Place concrete/grout per project specification at a controlled rate, hose extended to the lowest point of the form. Do not free-drop fill through water.

Installation sequence shown is typical; conform to project drawings and specifications. Steps 3–5 are performed by the dive crew.

SIZING & ORDERING

- **Size = pile circumference (round) or perimeter (square) × height.** Example: 51" C × 36" H.
- Made to order; no stocked sizes.
- Billable square footage rounds up to the nearest half foot.
- **Quoted per order.** Request a quote on all orders — confirm quantity and sizes. Volume pricing available on larger orders.
- Lead time 4–6 weeks depending on quantities. Ships nationwide or pickup, Bayville, NJ.

AS MANUFACTURED



Center zipper, dual drawstring hem channels, 1/4" solid braid nylon cords



Field install: Pile Gasket sealing the base of a fiberglass pile jacket at the waterline