FACULTE DES SCIENCES TECHNOLOGIE.

(FST)

TROISIEME ANNEE

Rapport du travail de laboratoire n°3

Cours : Reseau1

Etudiant : Mikëlo GONTRAND.

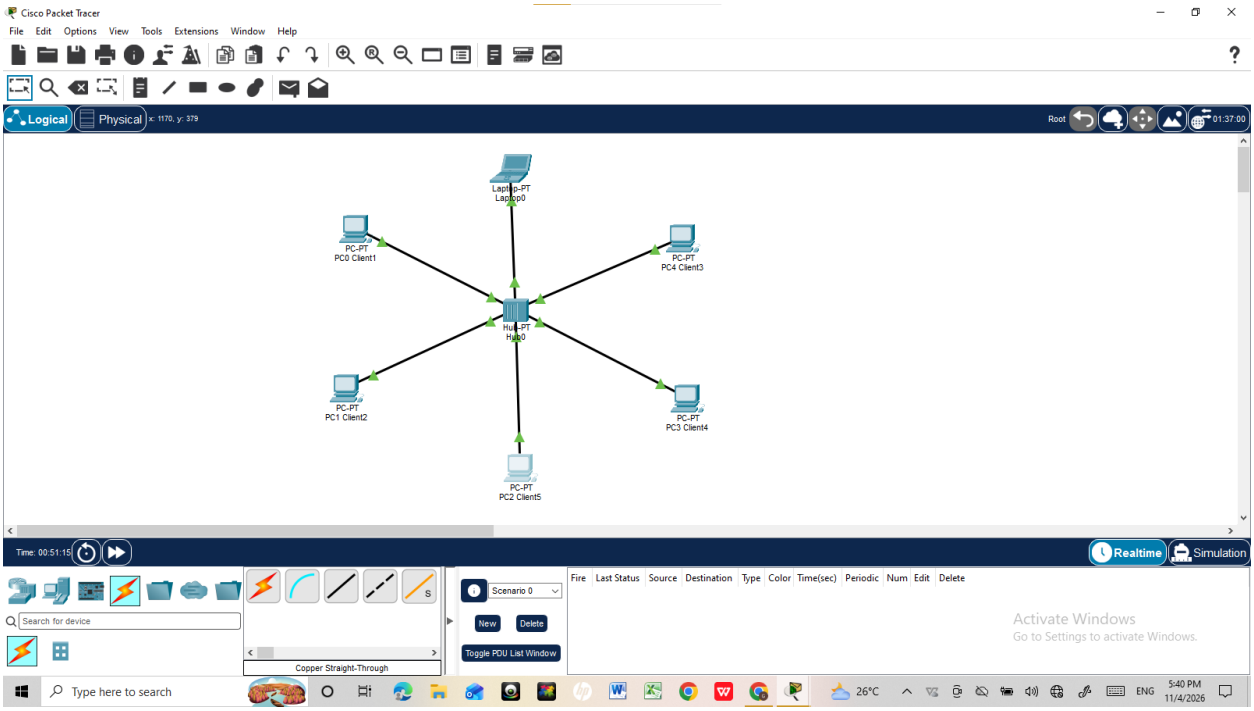
Professeur : Mr Ismaël SAINT AMOUR.

Le 8 Novembre 2026.

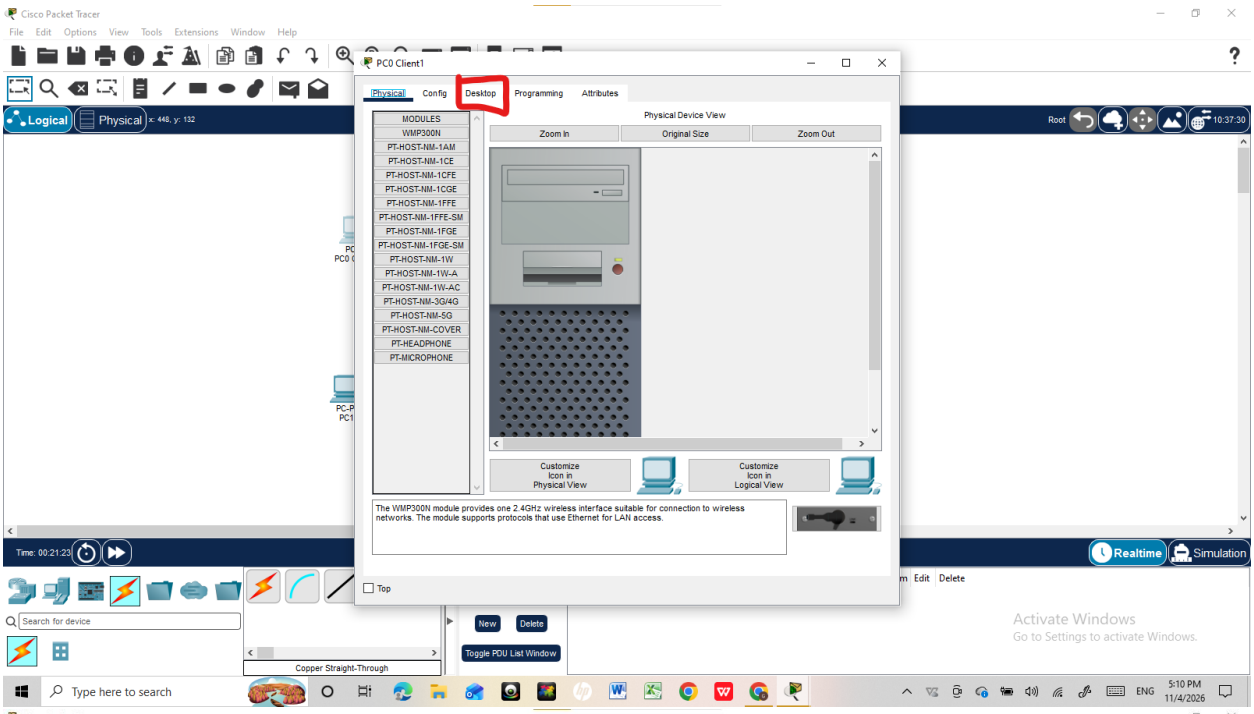
L’objectif de ce TD est de :

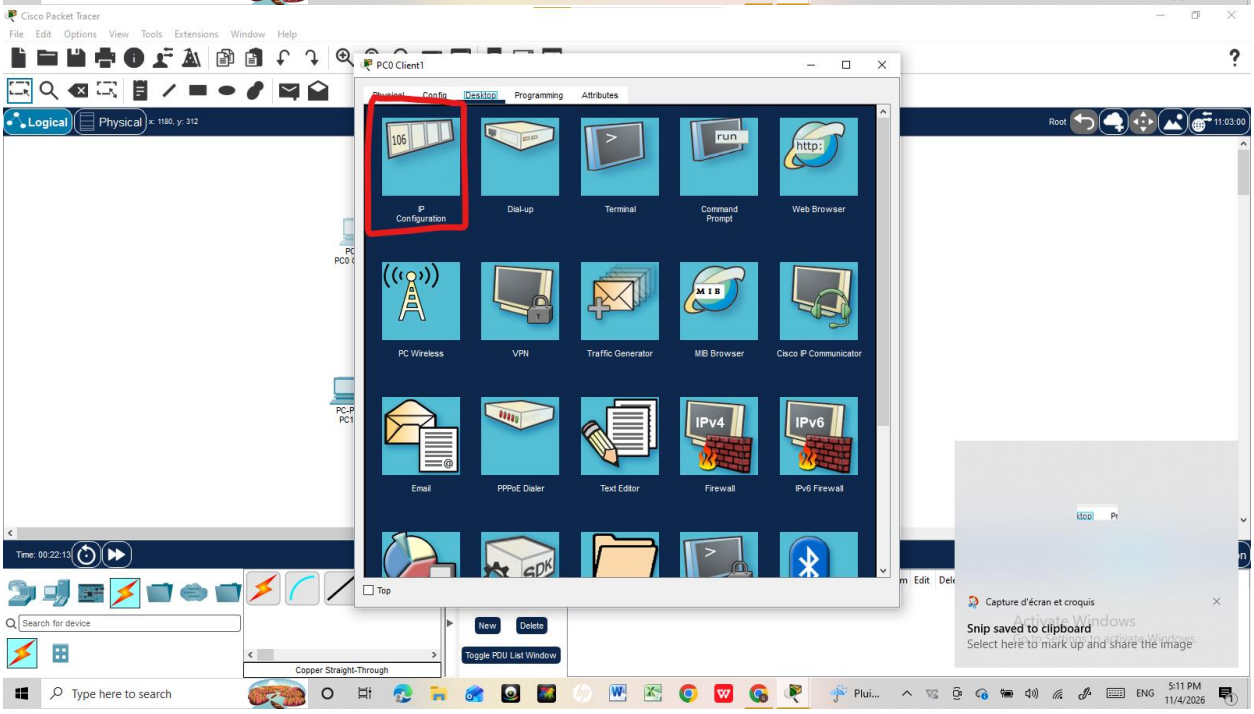
- **Savoir attribuer des adresses IP valides aux machines.**
- **Comprendre l’adressage IPv4 et IPv6.**
- **Configurer des adresses IP sur des hôtes et routeurs dans Cisco Packet Tracer.**
- **Vérifier la connectivité avec les commandes ping IPv4 et ping IPv6.**

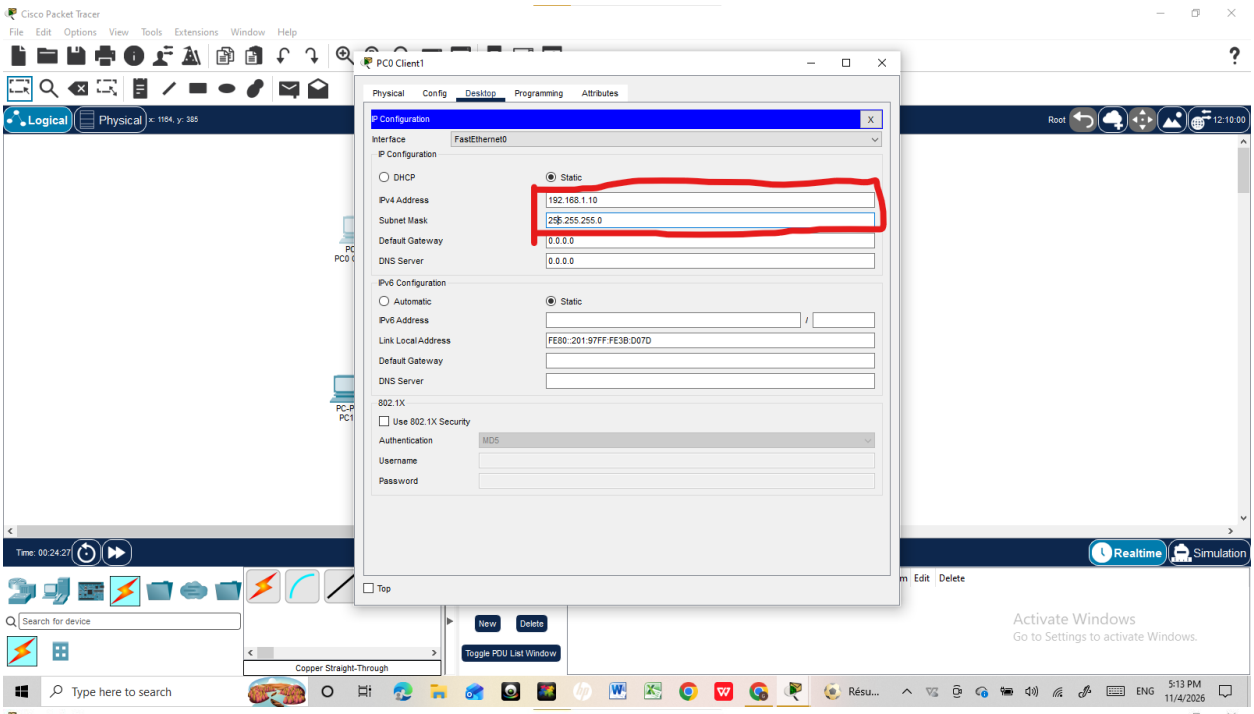
Configuration IPv4 de l’exercice #1 pour chaque client de 1 à 5.

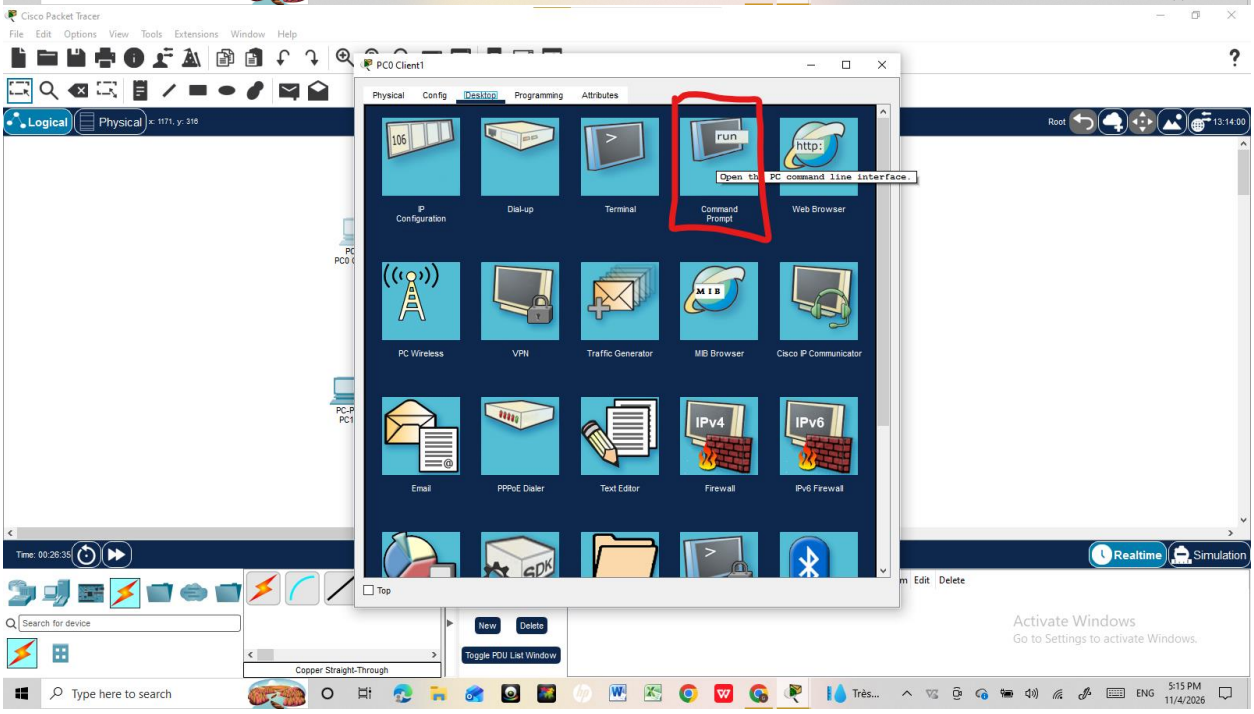


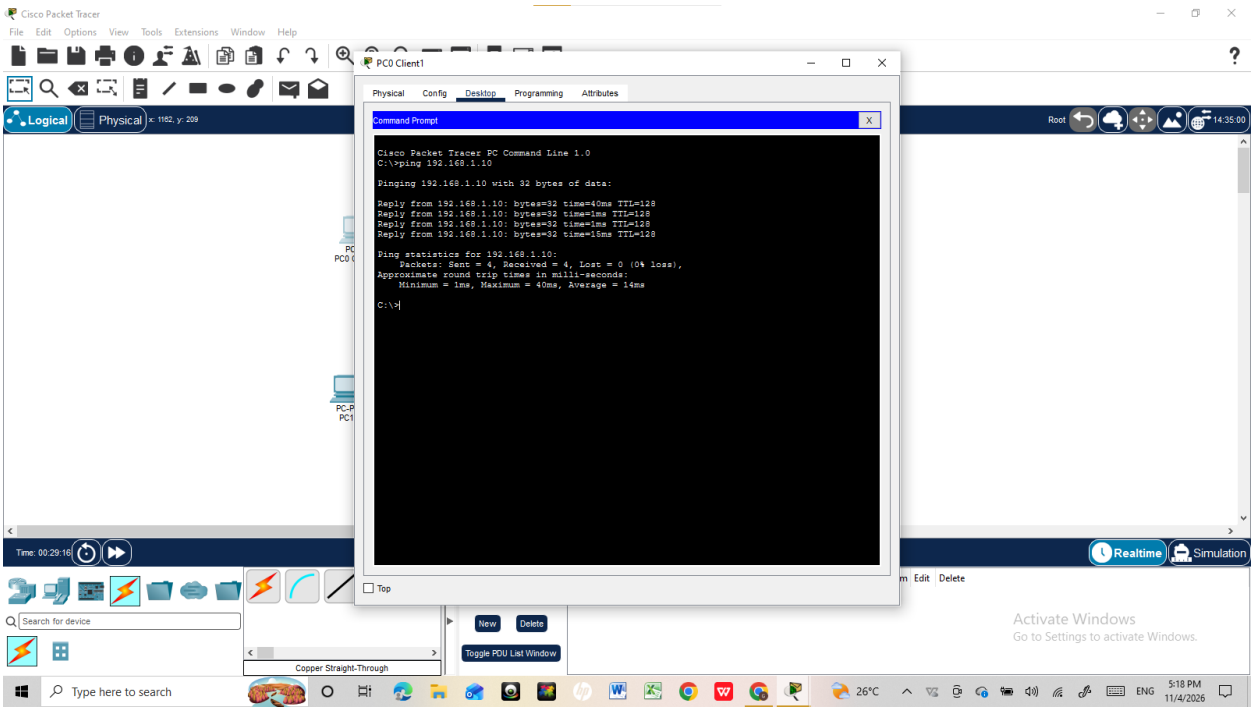
Client1


Cisco Packet Tracer
PC0 Client1
Physical
Config
Desktop
Programming
Attributes
Physical Device View
Zoom In
Original Size
Zoom Out
MODULES
WMP300N
PT-HOST-NM-1AM
PT-HOST-NM-1CE
PT-HOST-NM-1CFE
PT-HOST-NM-1CGE
PT-HOST-NM-1FFE
PT-HOST-NM-1FFE-SM
PT-HOST-NM-1FGE
PT-HOST-NM-1FGE-SM
PT-HOST-NM-1W
PT-HOST-NM-1W-A
PT-HOST-NM-1W-AC
PT-HOST-NM-3G/4G
PT-HOST-NM-5G
PT-HOST-NM-COVER
PT-HEADPHONE
PT-MICROPHONE
Customize Icon in Physical View
Customize Icon in Logical View
The WMP300N module provides one 2.4GHz wireless interface suitable for connection to wireless networks. The module supports protocols that use Ethernet for LAN access.
Top
Logical
Physical
Root
Realtime
Simulation
Edit
Delete
New
Delete
Toggle PDU List Window
Copper Straight-Through
Search for device
Type here to search
Activate Windows
Go to Settings to activate Windows.
ENG
5:10 PM
11/4/2026

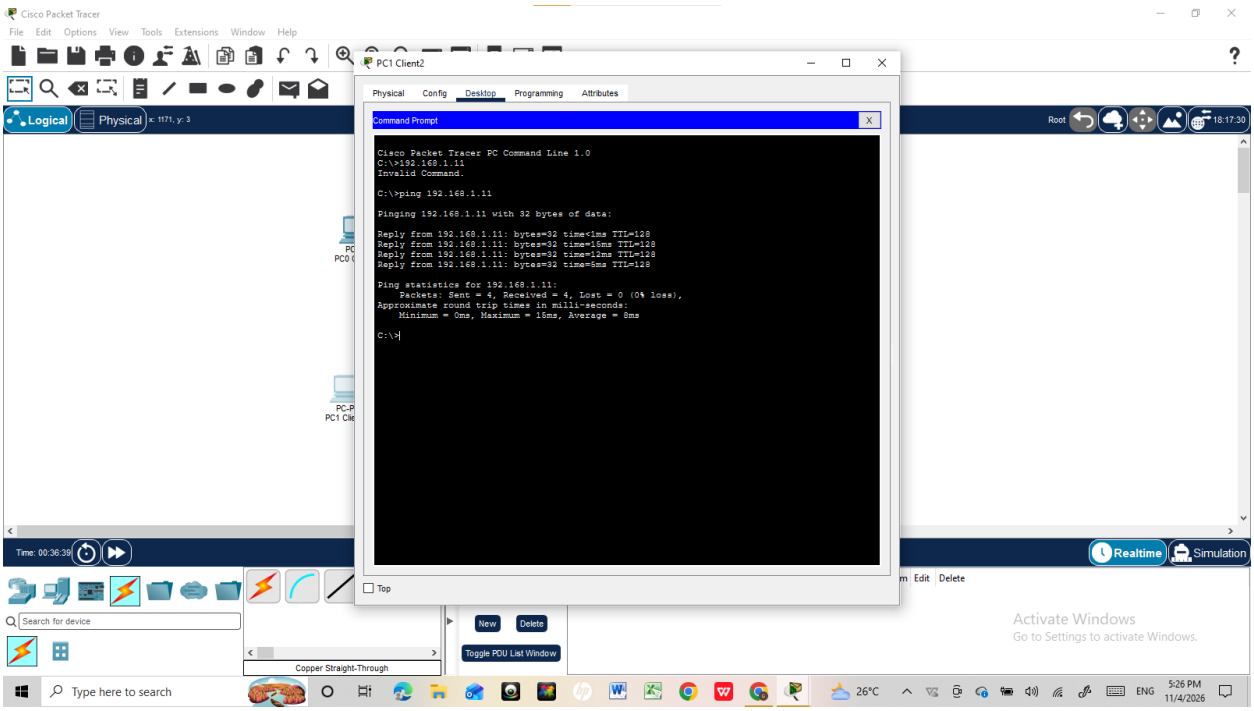

Cisco Packet Tracer
PC0 Client1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Dial-up
Terminal
Command Prompt
Web Browser
PC Wireless
VPN
Traffic Generator
MIB Browser
Cisco IP Communicator
Email
PPPoE Dialer
Text Editor
Firewall
IPv6 Firewall
Top
Logical
Physical
Root
Realtime
Simulation
Edit
New
Delete
Toggle PDU List Window
Copper Straight-Through
Search for device
Type here to search
Capture d'écran et croquis
Snip saved to clipboard
Select here to mark up and share the image
ENG
5:11 PM
11/4/2026


Cisco Packet Tracer
PC0 Client1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
DHCP
Static
IPv4 Address
192.168.1.10
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::201:97FF:FE3B:D07D
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top
Logical
Physical
Root
Realtime
Simulation
Time: 00:24:27
Search for device
Copper Straight-Through
New
Delete
Toggle PDU List Window
Edit
Delete
Activate Windows
Go to Settings to activate Windows.
Type here to search
ENG
5:13 PM
11/4/2026

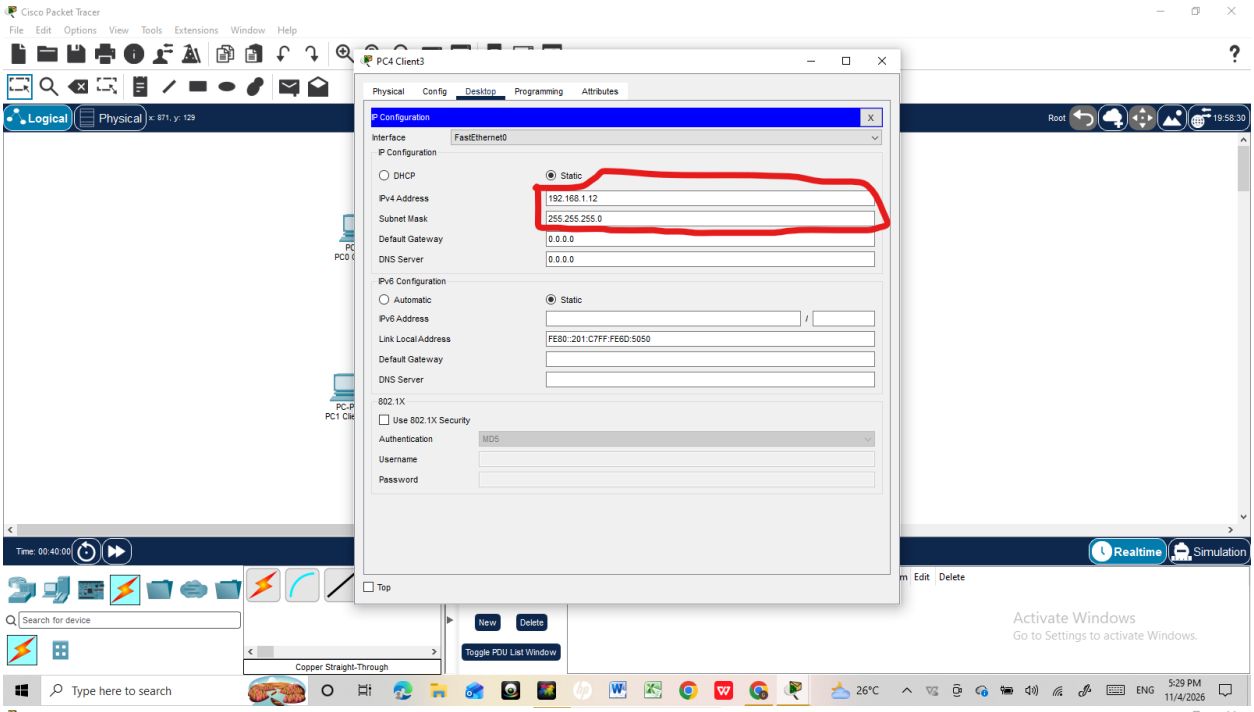

Cisco Packet Tracer
PC0 Client1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Dial-up
Terminal
Command Prompt
Web Browser
PC Wireless
VPN
Traffic Generator
MIB Browser
Cisco IP Communicator
Email
PPPoE Dialer
Text Editor
Firewall
IPv6 Firewall
PC command line interface.
Top
Logical
Physical
Root
Realtime
Simulation
Time: 00:26:35
Search for device
Copper Straight-Through
New
Delete
Toggle PDU List Window
Edit
Delete
Activate Windows
Go to Settings to activate Windows.
Type here to search
ENG
5:15 PM
11/4/2026

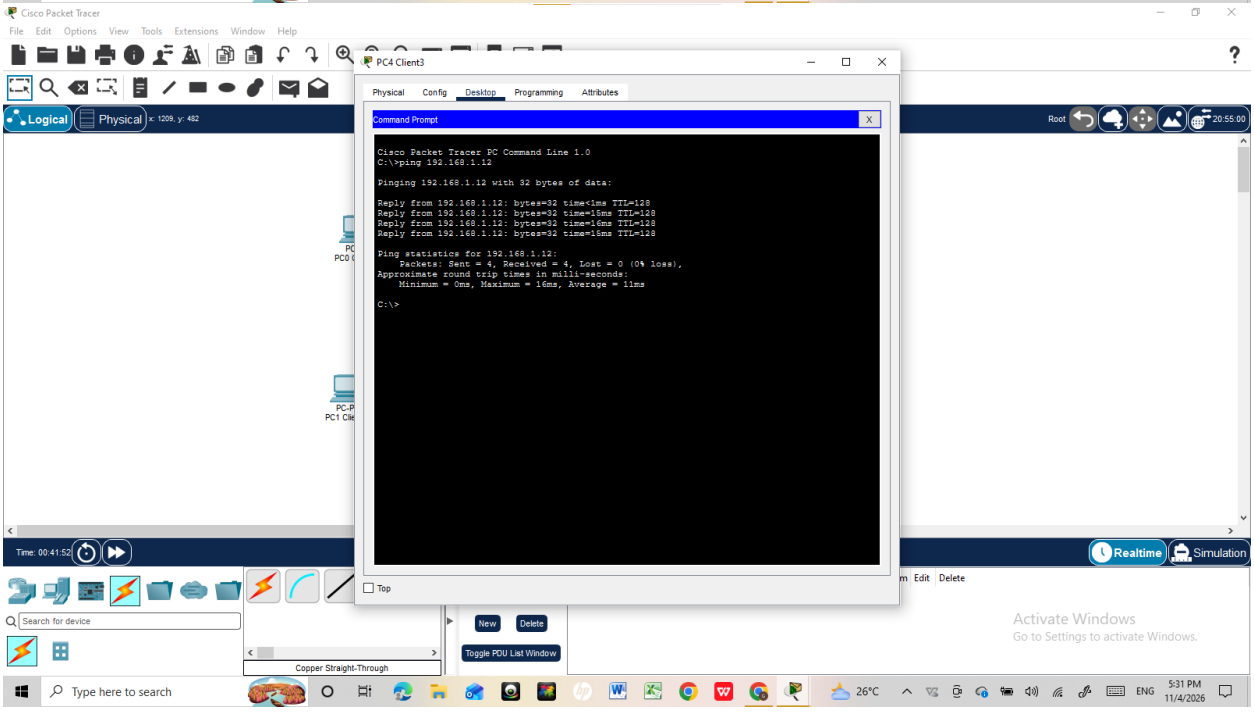

Cisco Packet Tracer
PC0 Client1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.10
Pinging 192.168.1.10 with 32 bytes of data:
Reply from 192.168.1.10: bytes=32 time=40ms TTL=128
Reply from 192.168.1.10: bytes=32 time=1ms TTL=128
Reply from 192.168.1.10: bytes=32 time=1ms TTL=128
Reply from 192.168.1.10: bytes=32 time=18ms TTL=128
Ping statistics for 192.168.1.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 40ms, Average = 14ms
C:\>
Top
Logical
Physical
Root
Realtime
Simulation
Search for device
Copper Straight-Through
New
Delete
Toggle PDU List Window
Activate Windows
Type here to search

Client2

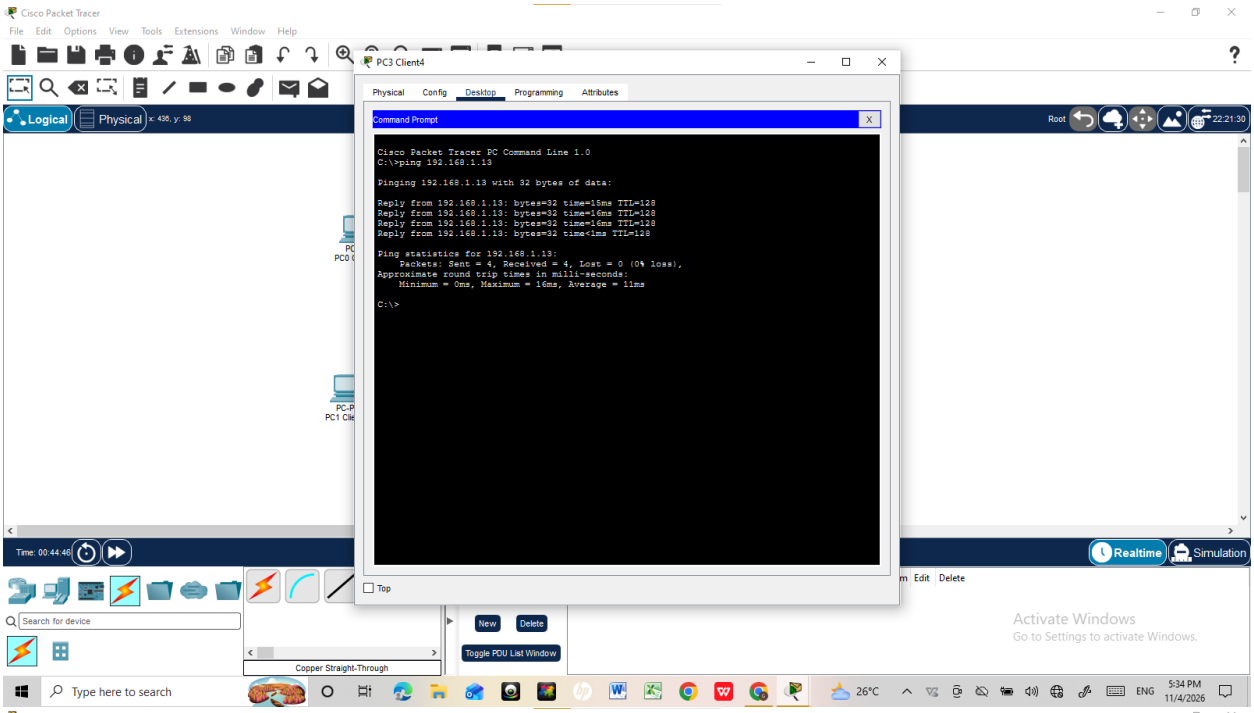

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
PC1 Client2
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>192.168.1.11
Invalid Command.
C:\>ping 192.168.1.11
Pinging 192.168.1.11 with 32 bytes of data:
Reply from 192.168.1.11: bytes=32 time<1ms TTL=128
Reply from 192.168.1.11: bytes=32 time=15ms TTL=128
Reply from 192.168.1.11: bytes=32 time=12ms TTL=128
Reply from 192.168.1.11: bytes=32 time=5ms TTL=128
Ping statistics for 192.168.1.11:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 15ms, Average = 8ms
C:\>
Top
Logical
Physical
Root
Realtime
Simulation
Edit
Delete
New
Delete
Toggle PDU List Window
Search for device
Copper Straight-Through
Activate Windows
Go to Settings to activate Windows.
Type here to search
26°C
ENG
5:26 PM
11/4/2026

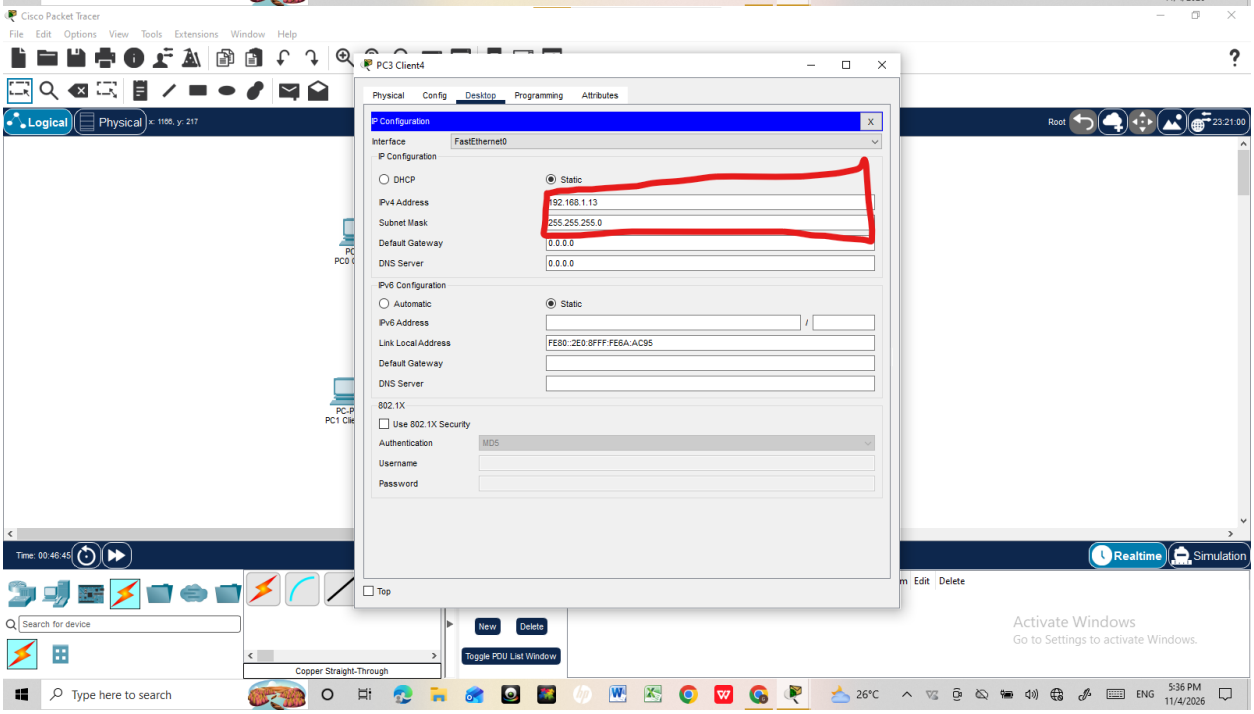
Client3


PC4 Client3
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
DHCP
Static
IPv4 Address
192.168.1.12
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::201:C7FF:FE6D:5050
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top
New
Delete
Toggle PDU List Window
Copper Straight-Through
Realtime
Simulation
Activate Windows
Go to Settings to activate Windows.

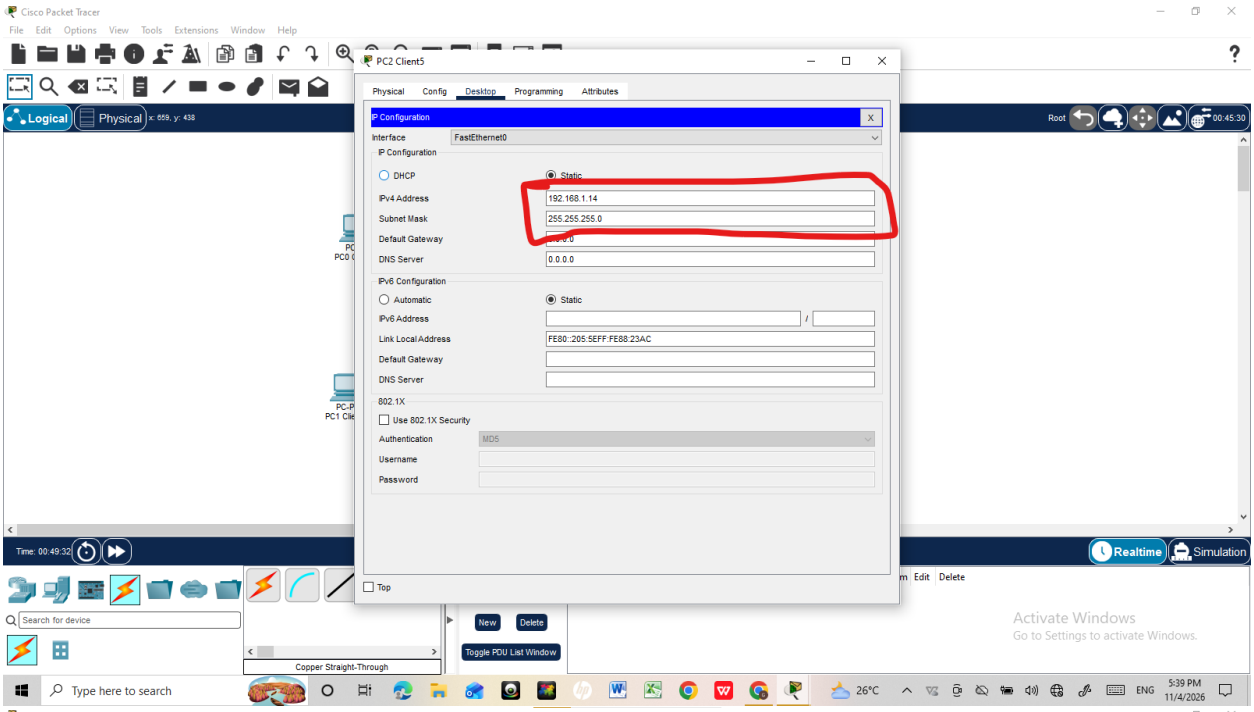

PC4 Client3
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.12
Pinging 192.168.1.12 with 32 bytes of data:
Reply from 192.168.1.12: bytes=32 time<1ms TTL=128
Reply from 192.168.1.12: bytes=32 time=15ms TTL=128
Reply from 192.168.1.12: bytes=32 time=16ms TTL=128
Reply from 192.168.1.12: bytes=32 time=16ms TTL=128
Ping statistics for 192.168.1.12:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 16ms, Average = 11ms
C:\>
Top
New
Delete
Toggle PDU List Window
Copper Straight-Through
Realtime
Simulation
Activate Windows
Go to Settings to activate Windows.

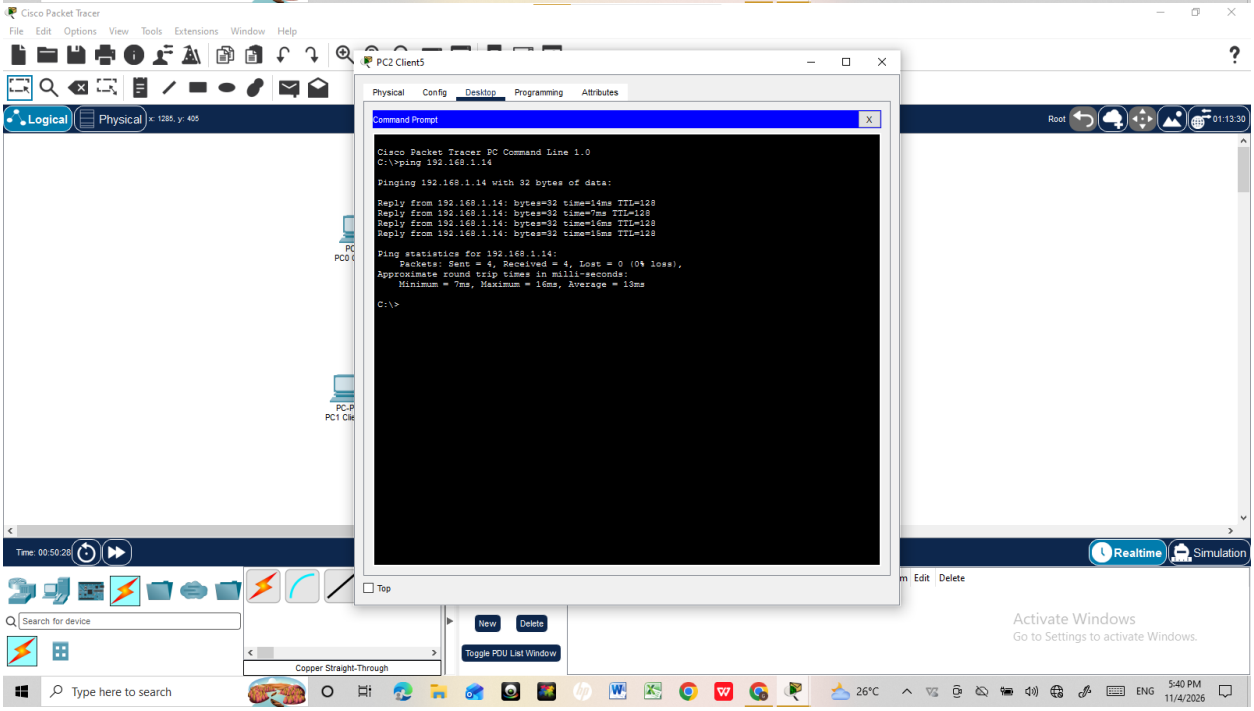
Client4


Cisco Packet Tracer
PC3 Client4
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.13
Pinging 192.168.1.13 with 32 bytes of data:
Reply from 192.168.1.13: bytes=32 time=15ms TTL=128
Reply from 192.168.1.13: bytes=32 time=16ms TTL=128
Reply from 192.168.1.13: bytes=32 time=16ms TTL=128
Reply from 192.168.1.13: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.1.13:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 16ms, Average = 11ms
C:\>
Top
New
Delete
Toggle PDU List Window
Copper Straight-Through
Realtime
Simulation
Activate Windows
Go to Settings to activate Windows.
Type here to search
26°C
ENG
5:34 PM
11/4/2026

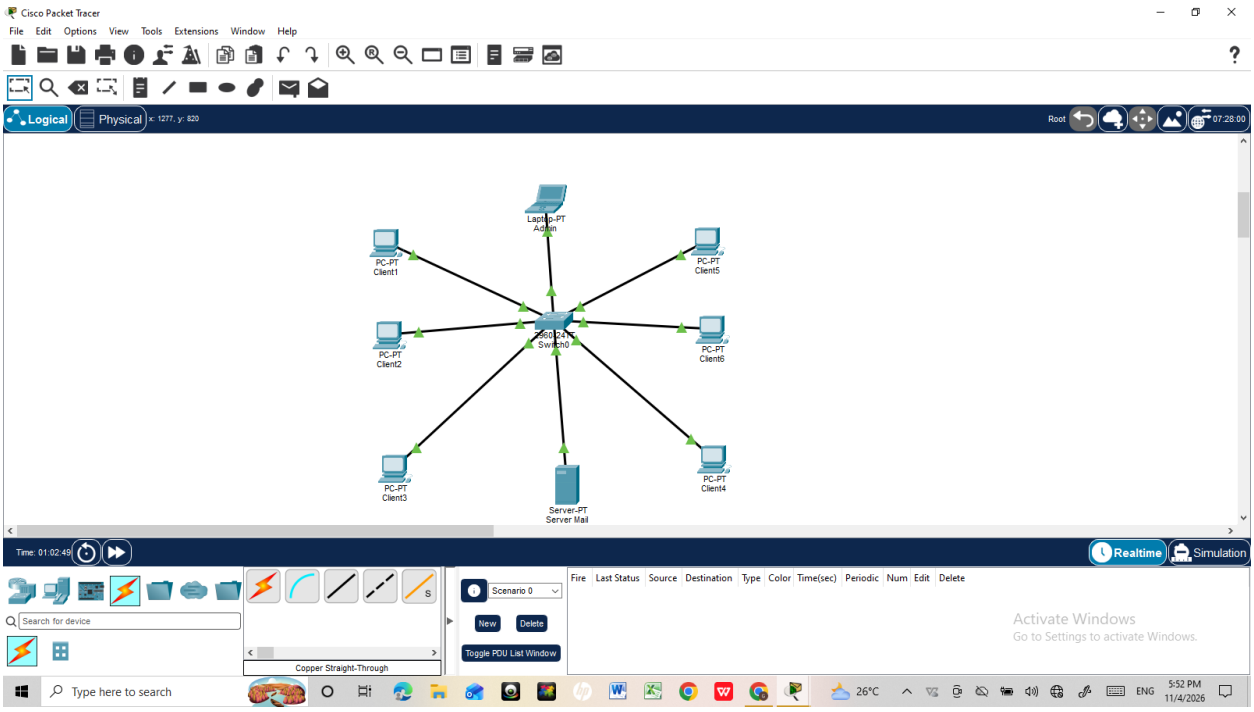

Cisco Packet Tracer
PC3 Client4
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.1.13
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::2E0:8FFF:FE6A:AC95
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top
New
Delete
Toggle PDU List Window
Copper Straight-Through
Realtime
Simulation
Activate Windows
Go to Settings to activate Windows.
Type here to search
26°C
ENG
5:36 PM
11/4/2026

Client5

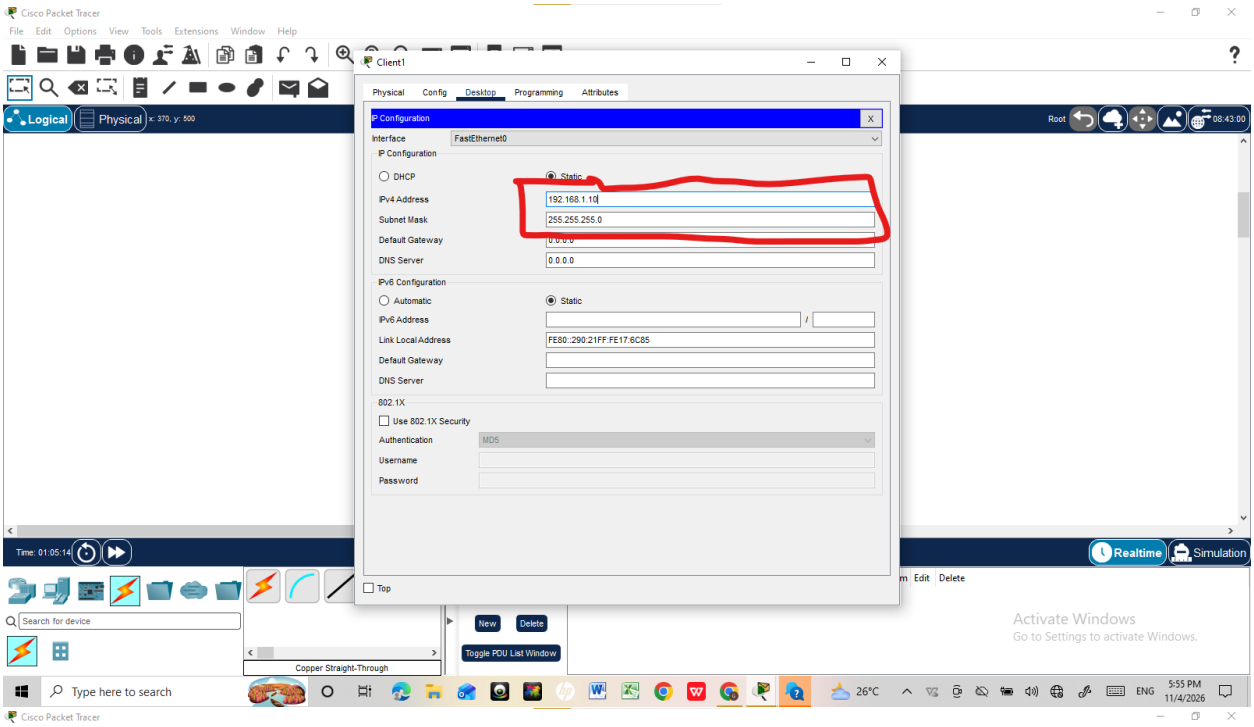

PC2 Client5
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
DHCP
Static
IPv4 Address
192.168.1.14
Subnet Mask
255.255.255.0
Default Gateway
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::205:5EFF:FE88:23AC
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top
New
Delete
Toggle PDU List Window
Copper Straight-Through
Realtime
Simulation
Activate Windows
Go to Settings to activate Windows.

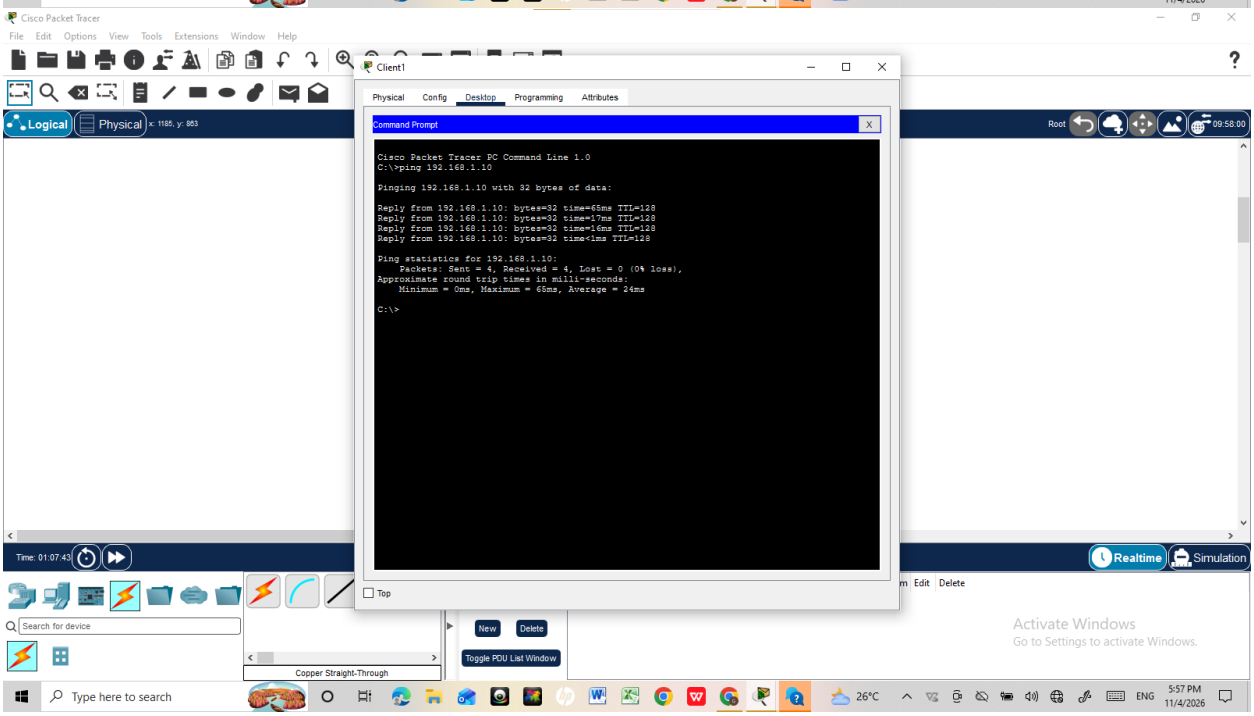

PC2 Client5
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.14
Pinging 192.168.1.14 with 32 bytes of data:
Reply from 192.168.1.14: bytes=32 time=14ms TTL=128
Reply from 192.168.1.14: bytes=32 time=7ms TTL=128
Reply from 192.168.1.14: bytes=32 time=16ms TTL=128
Reply from 192.168.1.14: bytes=32 time=15ms TTL=128
Ping statistics for 192.168.1.14:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 7ms, Maximum = 16ms, Average = 13ms
C:\>
Top
New
Delete
Toggle PDU List Window
Copper Straight-Through
Realtime
Simulation
Activate Windows
Go to Settings to activate Windows.

Configuration IPv4 de l’exercice #2 pour chaque client de 1 à 6.

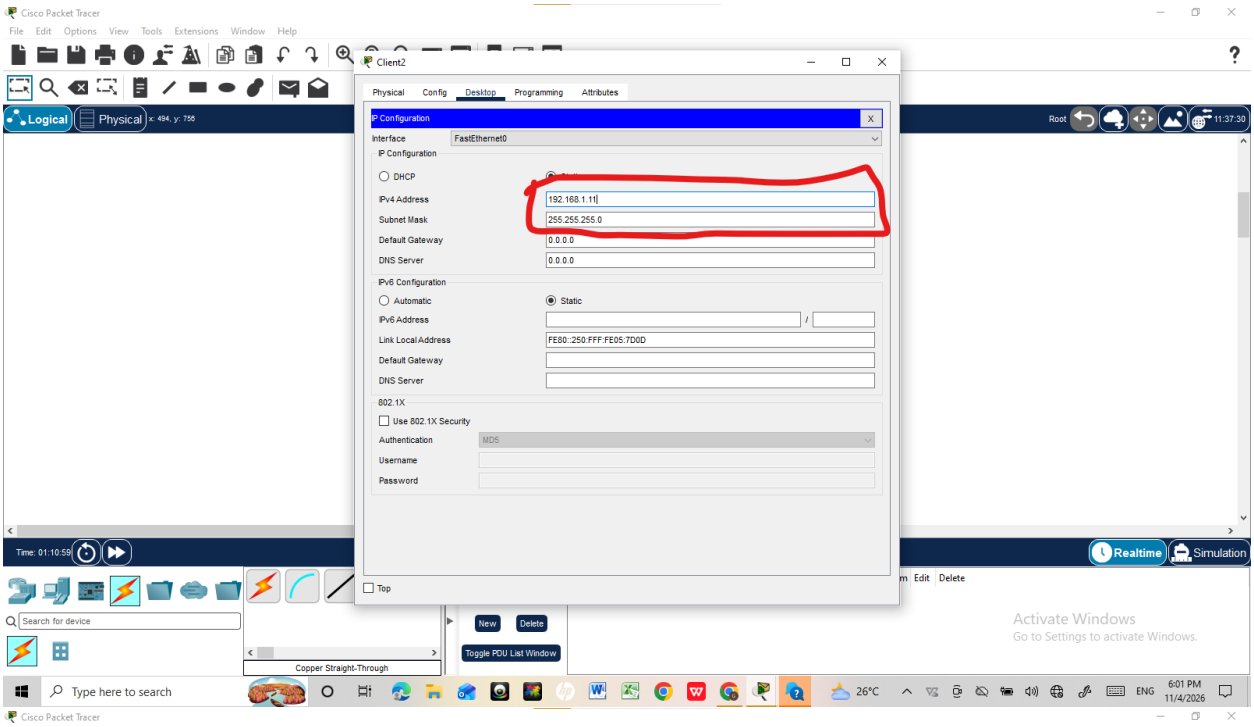


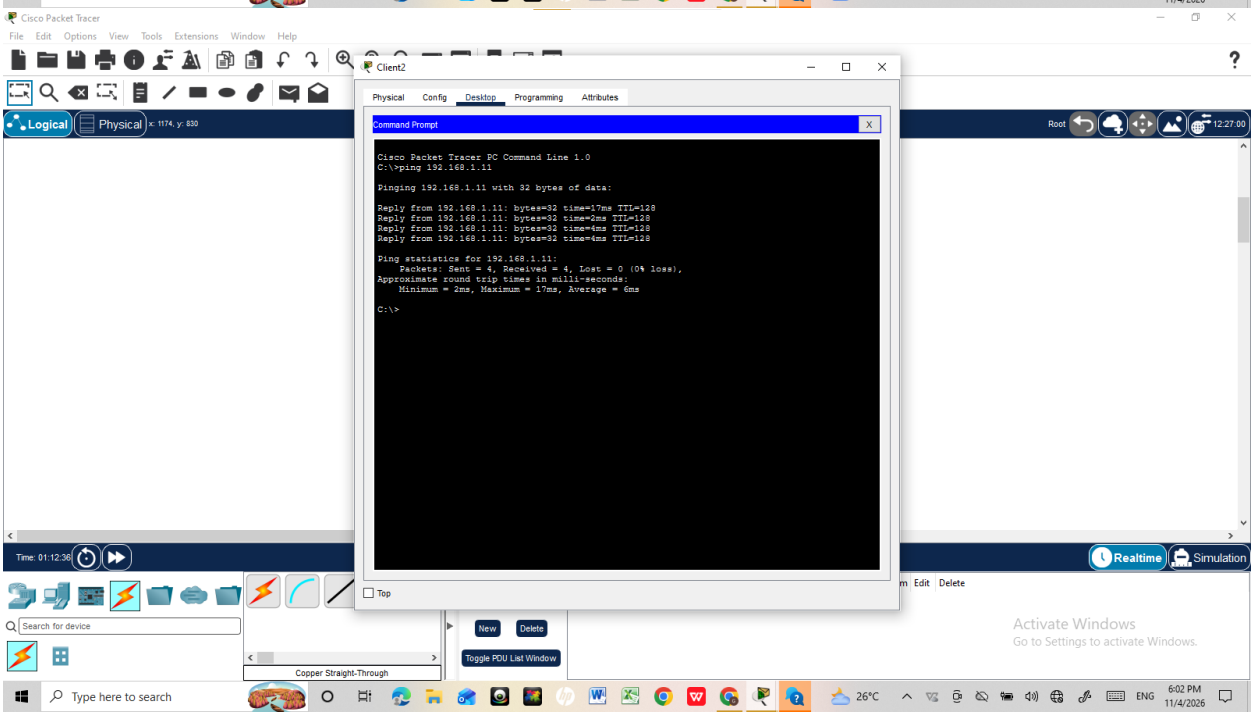
Client1


Client1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
DHCP
Static
IPv4 Address
192.168.1.10
Subnet Mask
255.255.255.0
Default Gateway
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::290:21FF:FE17:6C85
802.1X
Use 802.1X Security
Authentication
Username
Password
Top
New
Delete
Toggle PDU List Window
Copper Straight-Through
Realtime
Simulation

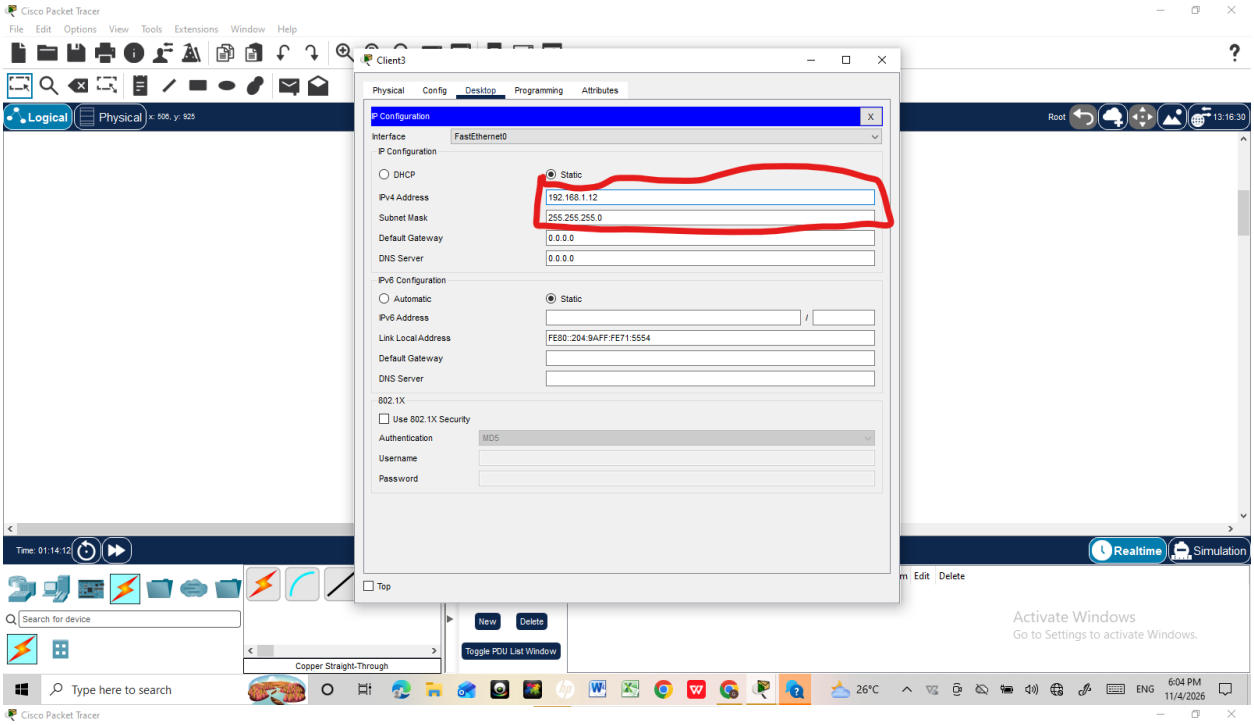

Client1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.10
Pinging 192.168.1.10 with 32 bytes of data:
Reply from 192.168.1.10: bytes=32 time=65ms TTL=128
Reply from 192.168.1.10: bytes=32 time=17ms TTL=128
Reply from 192.168.1.10: bytes=32 time=16ms TTL=128
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.1.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 65ms, Average = 24ms
C:\>
Top
New
Delete
Toggle PDU List Window
Copper Straight-Through
Realtime
Simulation

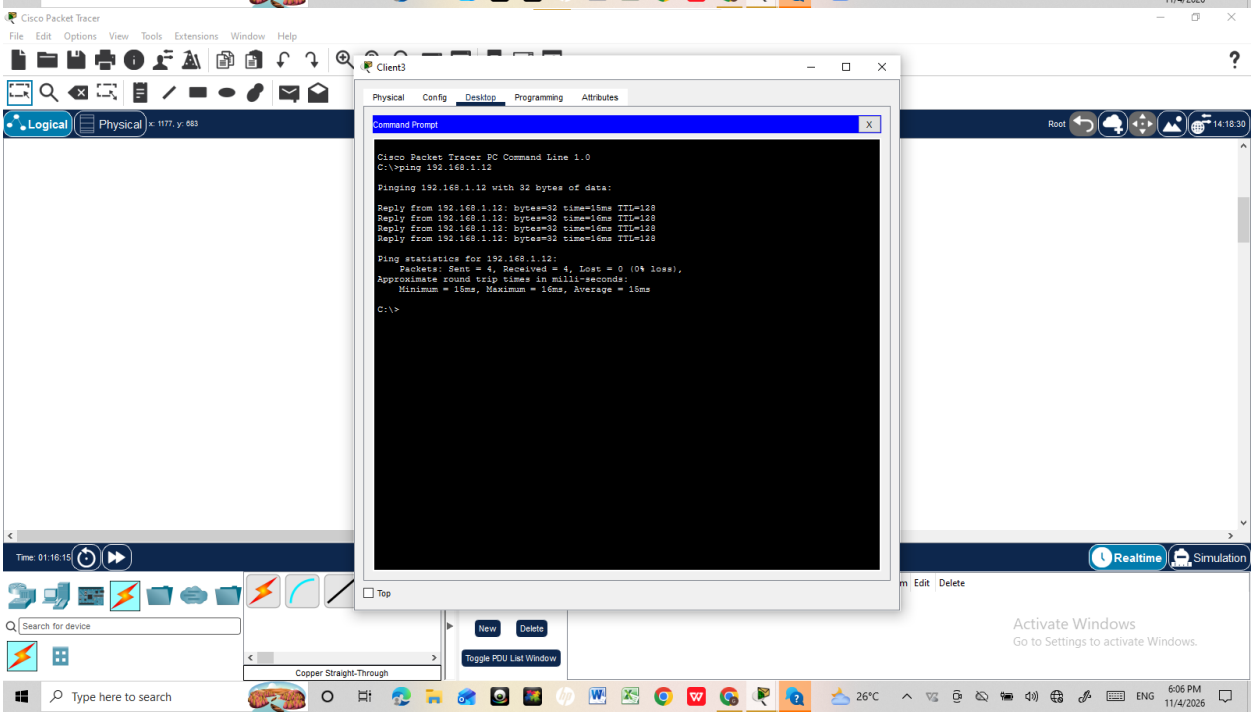
Client2


Client2
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
DHCP
IPv4 Address
192.168.1.11
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::250:FFF:FE05:7D0D
802.1X
Use 802.1X Security
Authentication
Username
Password
Top
New
Delete
Toggle PDU List Window
Copper Straight-Through
Realtime
Simulation
Activate Windows
Go to Settings to activate Windows.

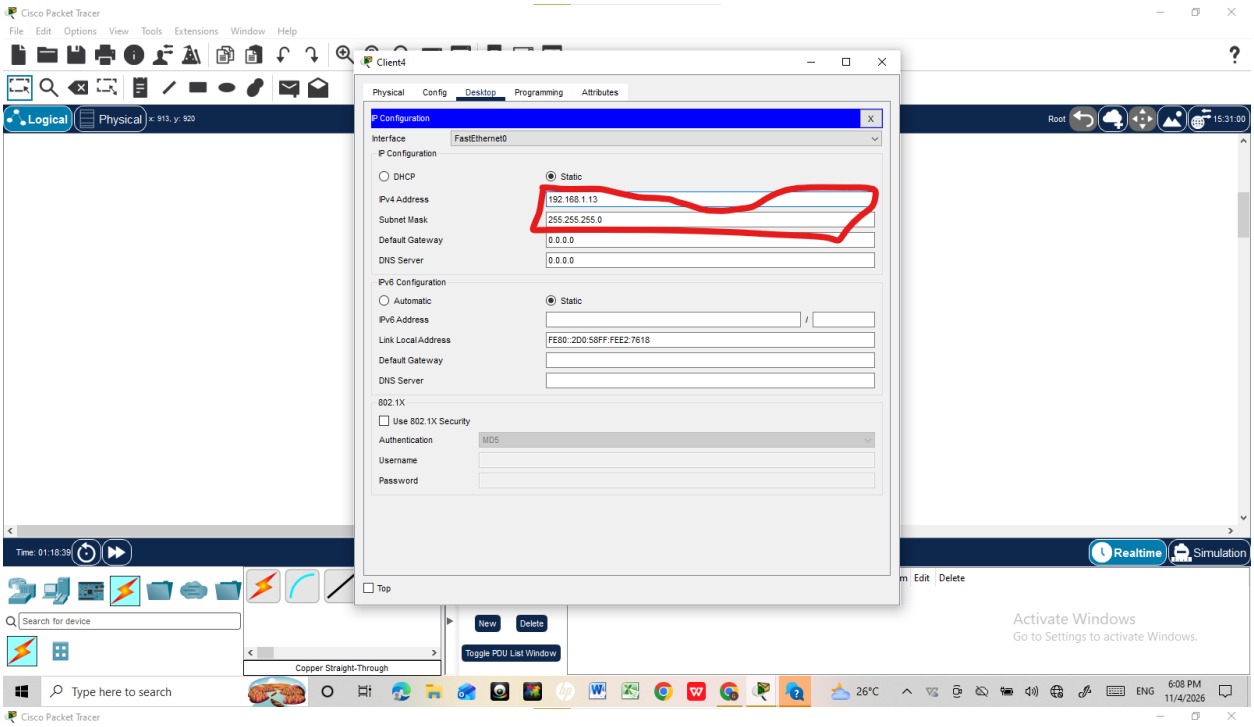

Client2
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.11
Pinging 192.168.1.11 with 32 bytes of data:
Reply from 192.168.1.11: bytes=32 time=17ms TTL=128
Reply from 192.168.1.11: bytes=32 time=2ms TTL=128
Reply from 192.168.1.11: bytes=32 time=4ms TTL=128
Reply from 192.168.1.11: bytes=32 time=4ms TTL=128
Ping statistics for 192.168.1.11:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 17ms, Average = 6ms
C:\>
Top
New
Delete
Toggle PDU List Window
Copper Straight-Through
Realtime
Simulation
Activate Windows
Go to Settings to activate Windows.

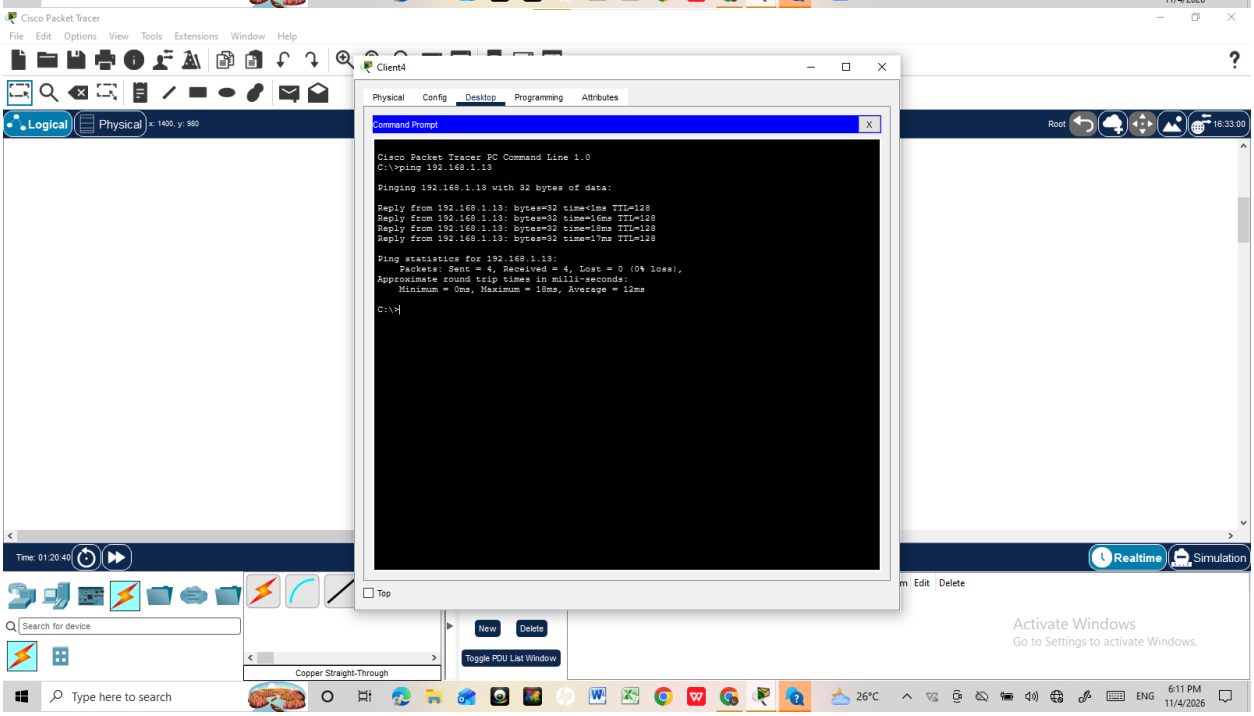
Client3


Client3
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
DHCP
Static
IPv4 Address
192.168.1.12
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::204:9AFF:FE71:5554
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top
Logical
Physical
Root
Realtime
Simulation
New
Delete
Toggle PDU List Window
Copper Straight-Through
Activate Windows
Go to Settings to activate Windows.
Type here to search
26°C
ENG
6:04 PM
11/4/2026

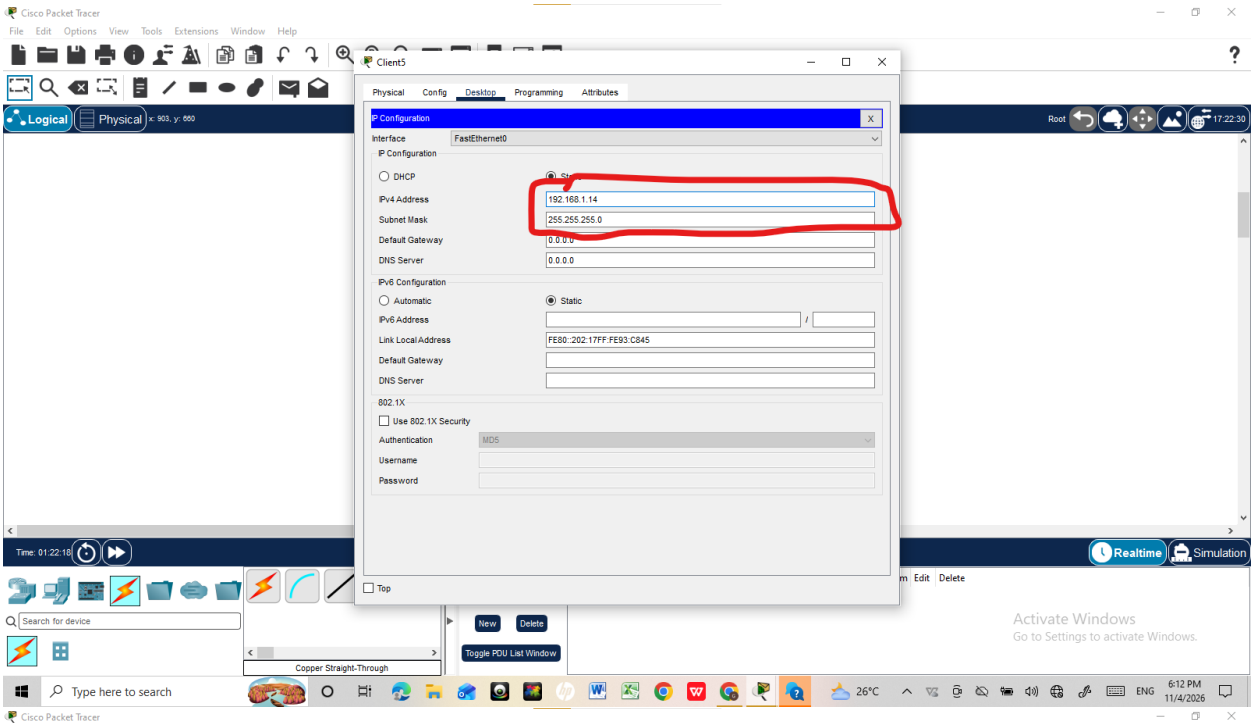

Client3
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.12
Pinging 192.168.1.12 with 32 bytes of data:
Reply from 192.168.1.12: bytes=32 time=15ms TTL=128
Reply from 192.168.1.12: bytes=32 time=16ms TTL=128
Reply from 192.168.1.12: bytes=32 time=16ms TTL=128
Reply from 192.168.1.12: bytes=32 time=16ms TTL=128
Ping statistics for 192.168.1.12:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 15ms, Maximum = 16ms, Average = 15ms
C:\>
Top
Logical
Physical
Root
Realtime
Simulation
New
Delete
Toggle PDU List Window
Copper Straight-Through
Activate Windows
Go to Settings to activate Windows.
Type here to search
26°C
ENG
6:06 PM
11/4/2026

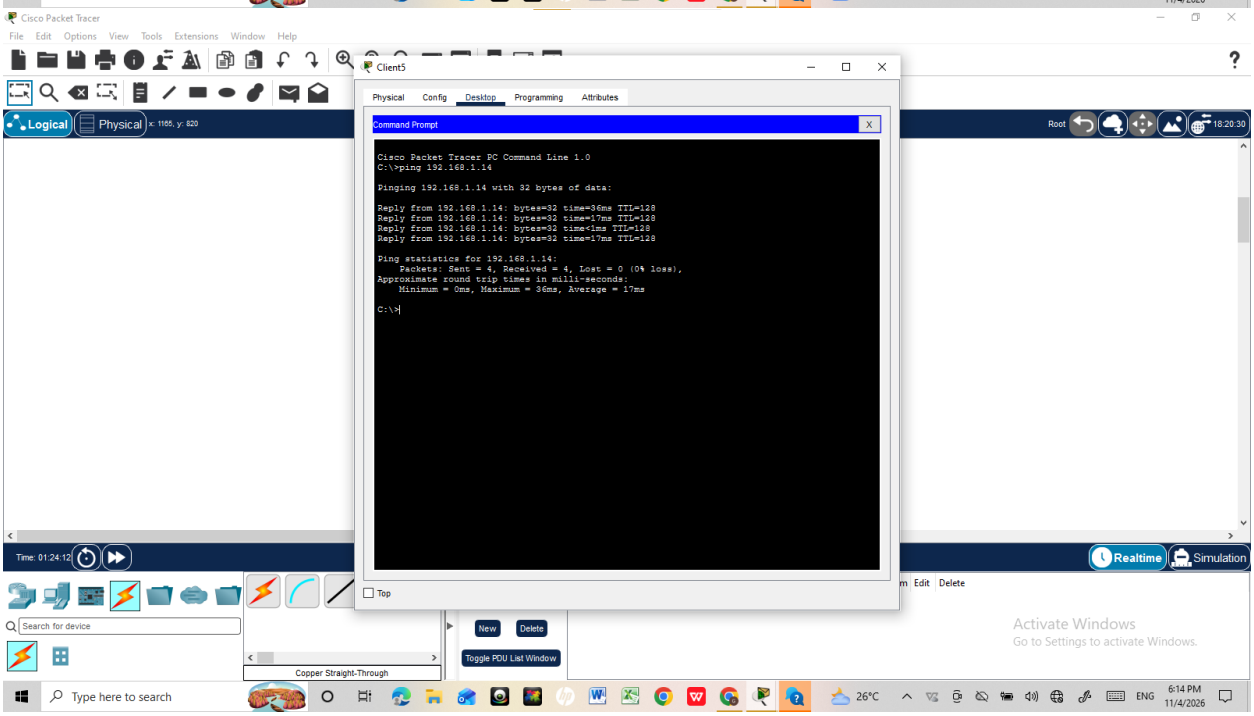
Client4


Client4
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
DHCP
Static
IPv4 Address
192.168.1.13
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::2D0:58FF:FEE2:7618
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top
Logical
Physical
Root
Realtime
Simulation
New
Delete
Toggle PDU List Window
Copper Straight-Through
Activate Windows
Go to Settings to activate Windows.
Type here to search
26°C
ENG
6:08 PM
11/4/2026

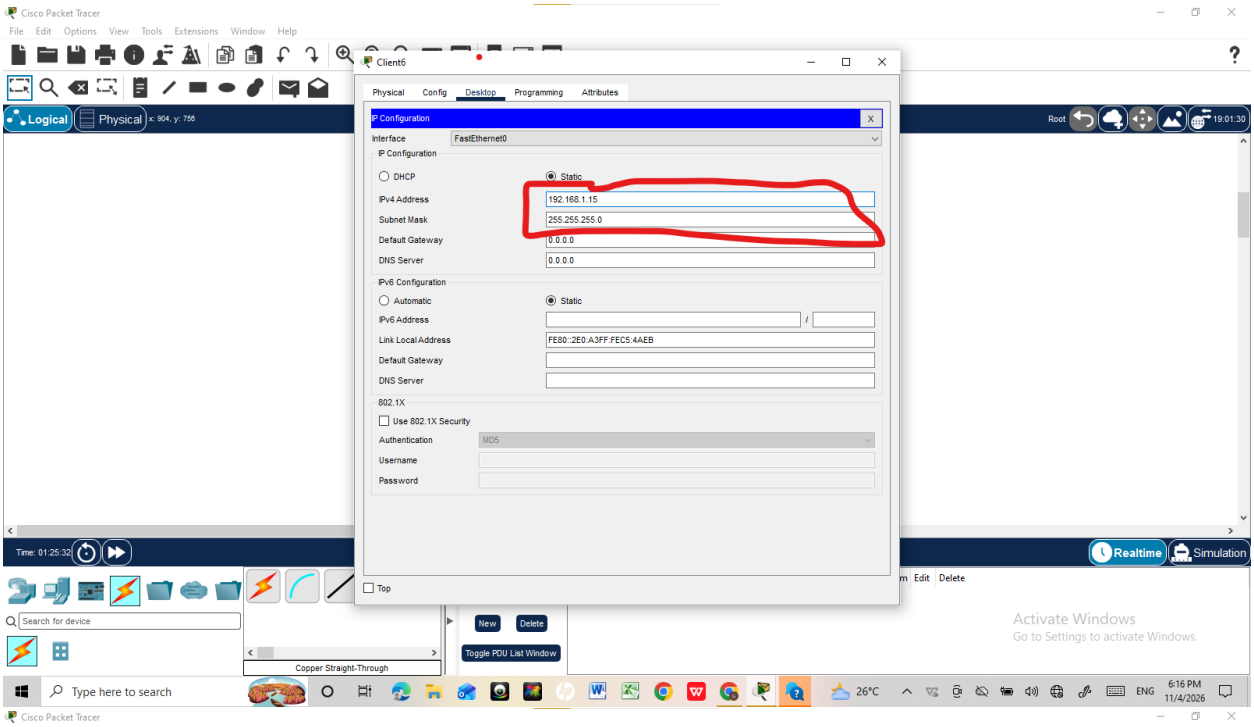

Client4
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.13
Pinging 192.168.1.13 with 32 bytes of data:
Reply from 192.168.1.13: bytes=32 time<1ms TTL=128
Reply from 192.168.1.13: bytes=32 time=16ms TTL=128
Reply from 192.168.1.13: bytes=32 time=18ms TTL=128
Reply from 192.168.1.13: bytes=32 time=17ms TTL=128
Ping statistics for 192.168.1.13:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 18ms, Average = 12ms
C:\>
Top
Logical
Physical
Root
Realtime
Simulation
New
Delete
Toggle PDU List Window
Copper Straight-Through
Activate Windows
Go to Settings to activate Windows.
Type here to search
26°C
ENG
6:11 PM
11/4/2026

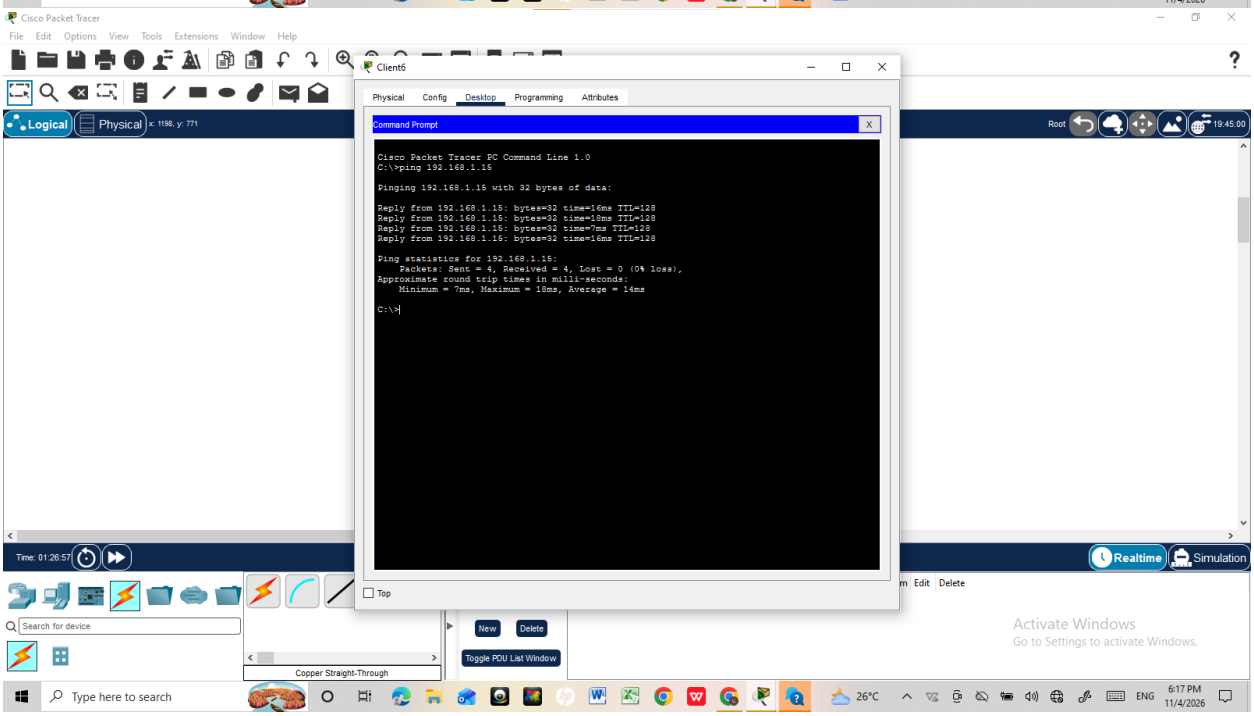
Client5


Client5
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
DHCP
IPv4 Address
192.168.1.14
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::202:17FF:FE93:C845
802.1X
Use 802.1X Security
Authentication
Username
Password
Top

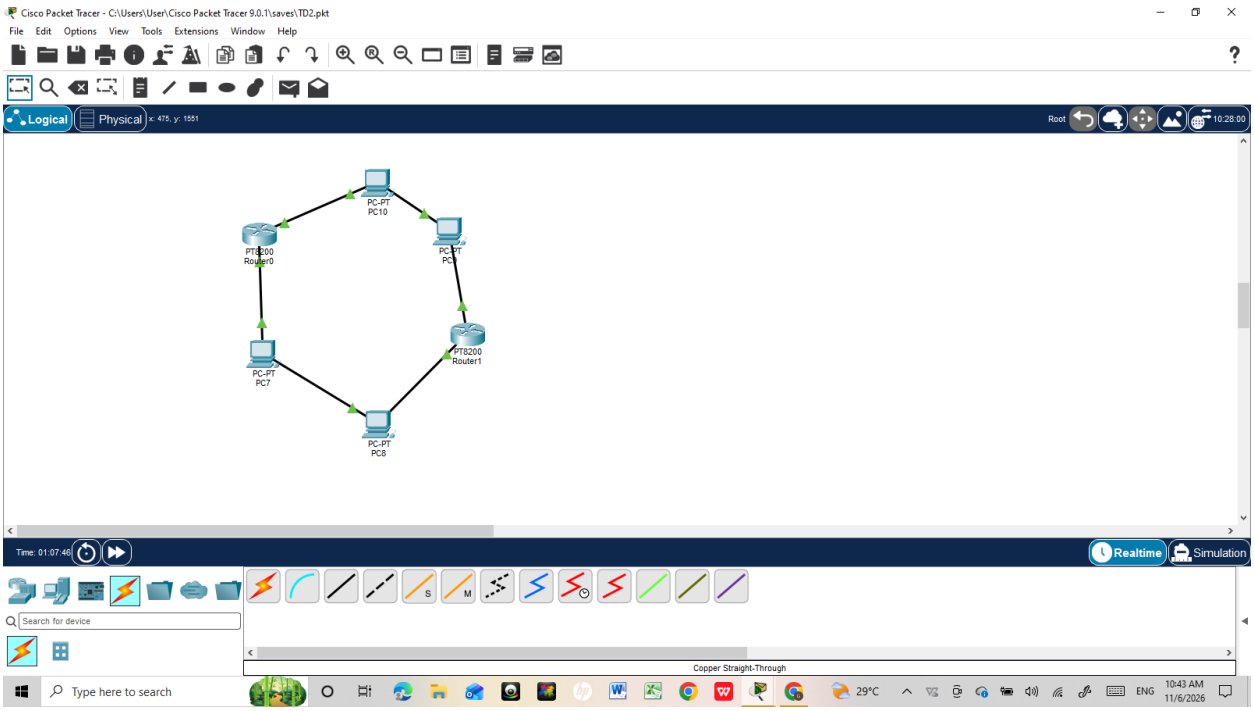

Client5
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.14
Pinging 192.168.1.14 with 32 bytes of data:
Reply from 192.168.1.14: bytes=32 time=36ms TTL=128
Reply from 192.168.1.14: bytes=32 time=17ms TTL=128
Reply from 192.168.1.14: bytes=32 time<1ms TTL=128
Reply from 192.168.1.14: bytes=32 time=17ms TTL=128
Ping statistics for 192.168.1.14:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 36ms, Average = 17ms
C:\>
Top

Client 6

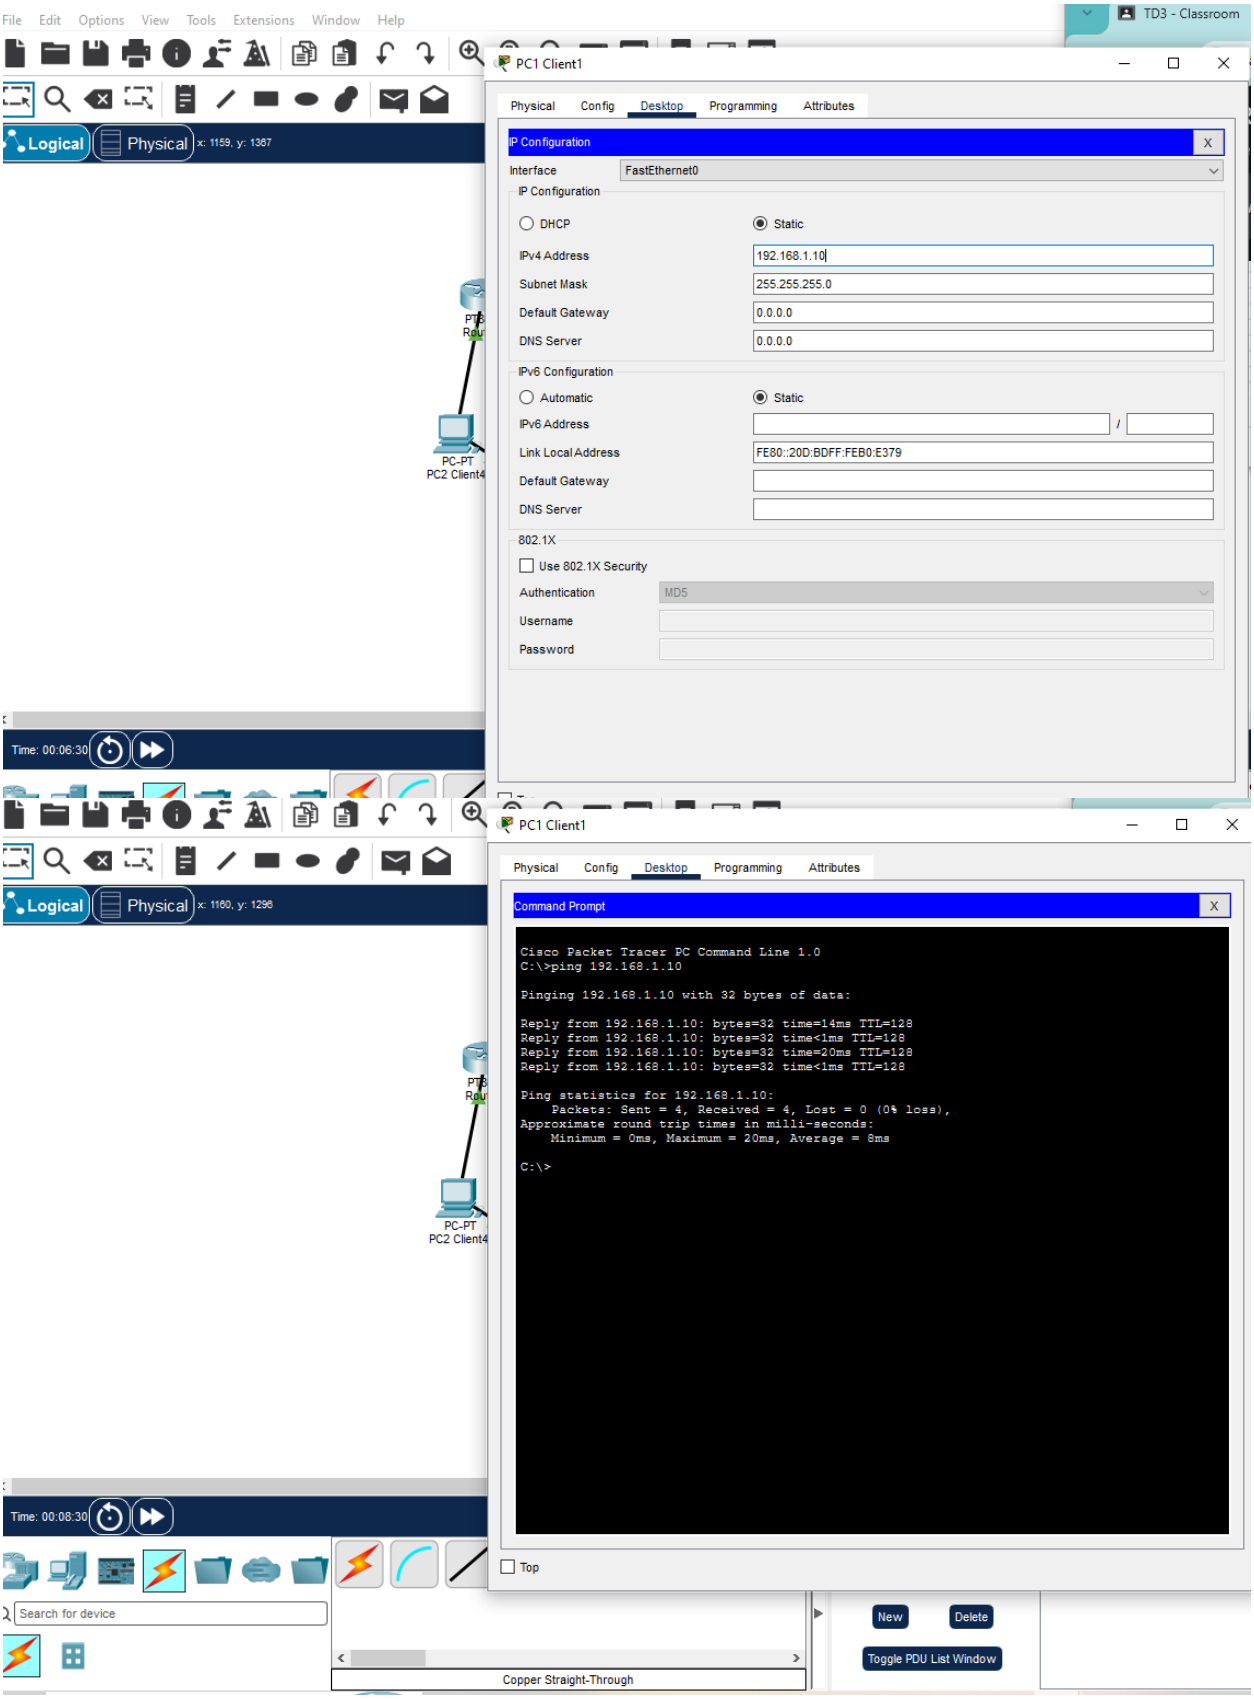

Client6
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
DHCP
Static
IPv4 Address
192.168.1.15
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::2E0:A3FF:FEC5:4AEB
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top
Logical
Physical
Realtime
Simulation
New
Delete
Toggle PDU List Window
Copper Straight-Through
Type here to search
Activate Windows
Go to Settings to activate Windows.


Client6
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.15
Pinging 192.168.1.15 with 32 bytes of data:
Reply from 192.168.1.15: bytes=32 time=16ms TTL=128
Reply from 192.168.1.15: bytes=32 time=18ms TTL=128
Reply from 192.168.1.15: bytes=32 time=7ms TTL=128
Reply from 192.168.1.15: bytes=32 time=16ms TTL=128
Ping statistics for 192.168.1.15:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 7ms, Maximum = 18ms, Average = 14ms
C:\>
Top
Logical
Physical
Realtime
Simulation
New
Delete
Toggle PDU List Window
Copper Straight-Through
Type here to search
Activate Windows
Go to Settings to activate Windows.

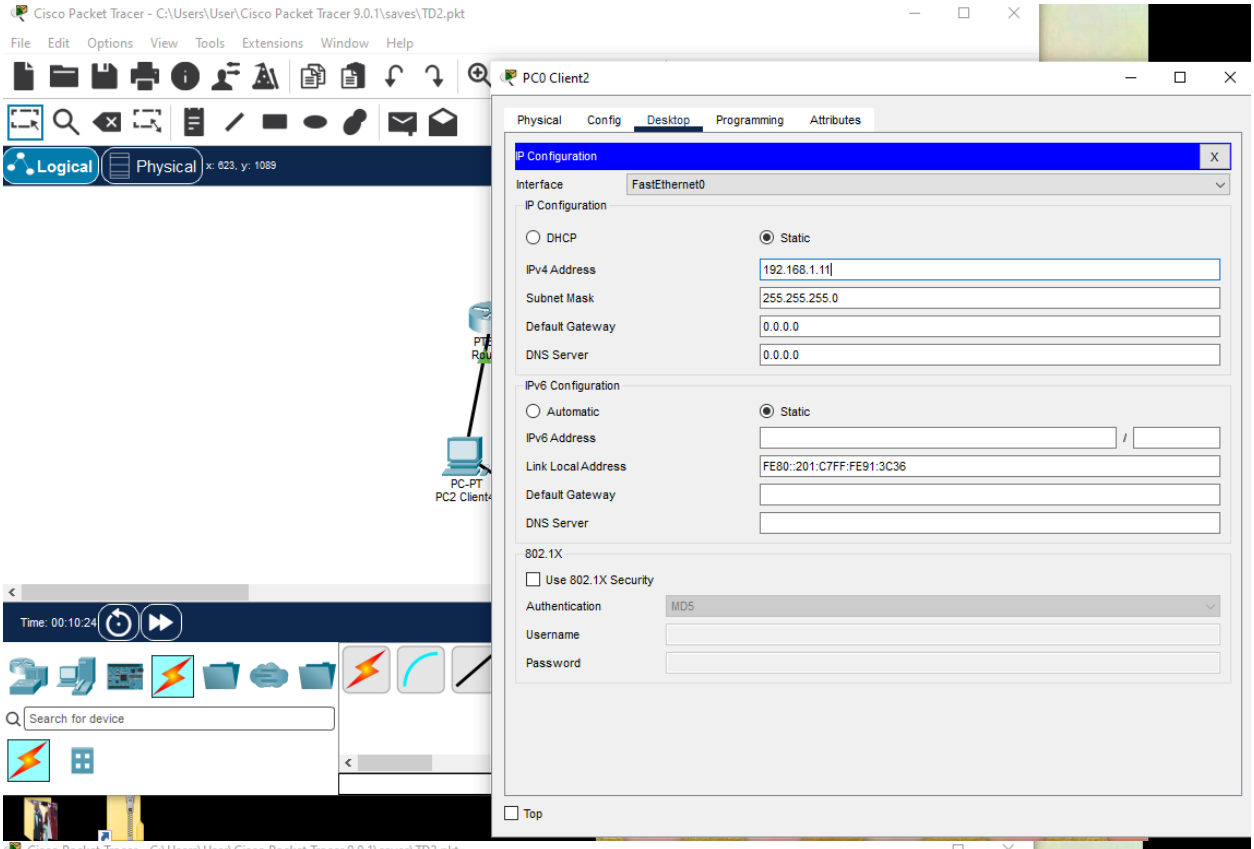
Configuration IPv4 de l’exercice #3 pour chaque client de 1 à 4.

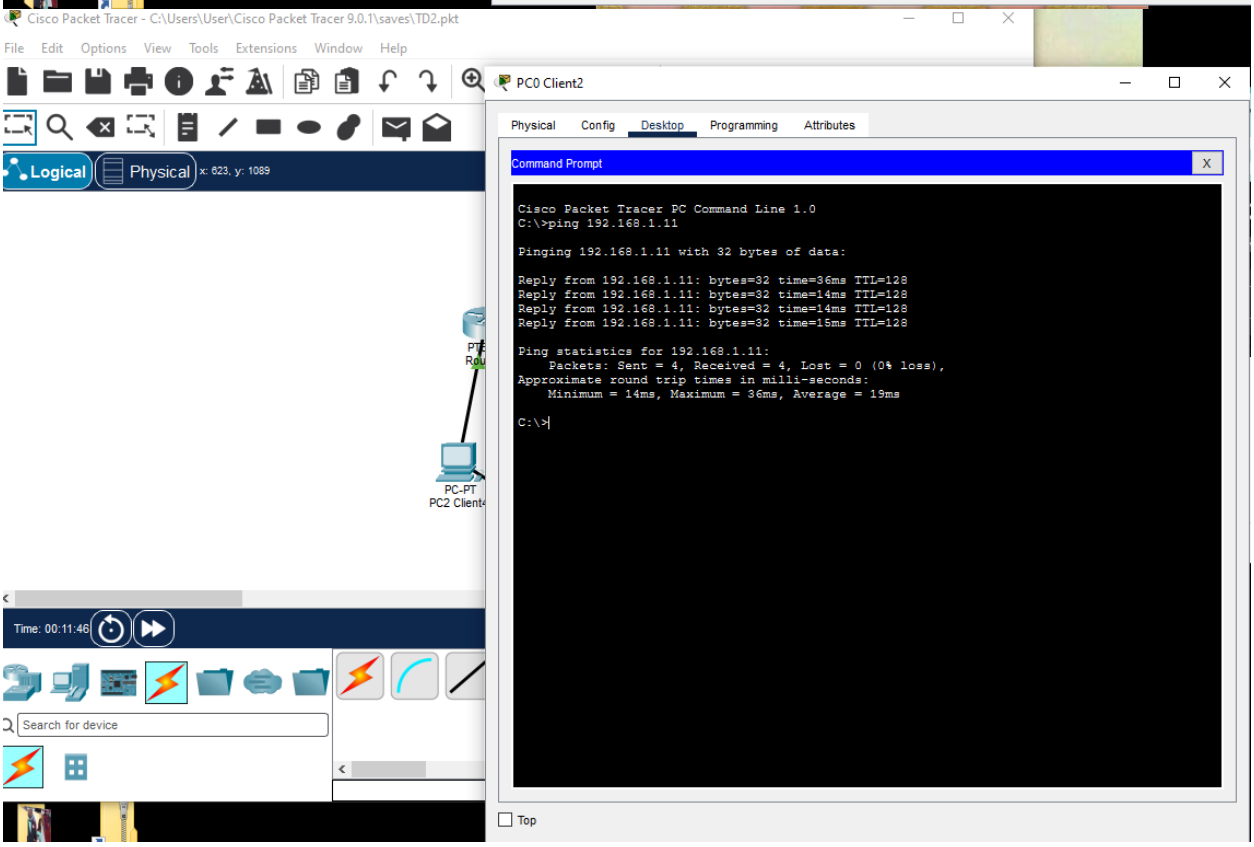


Client1

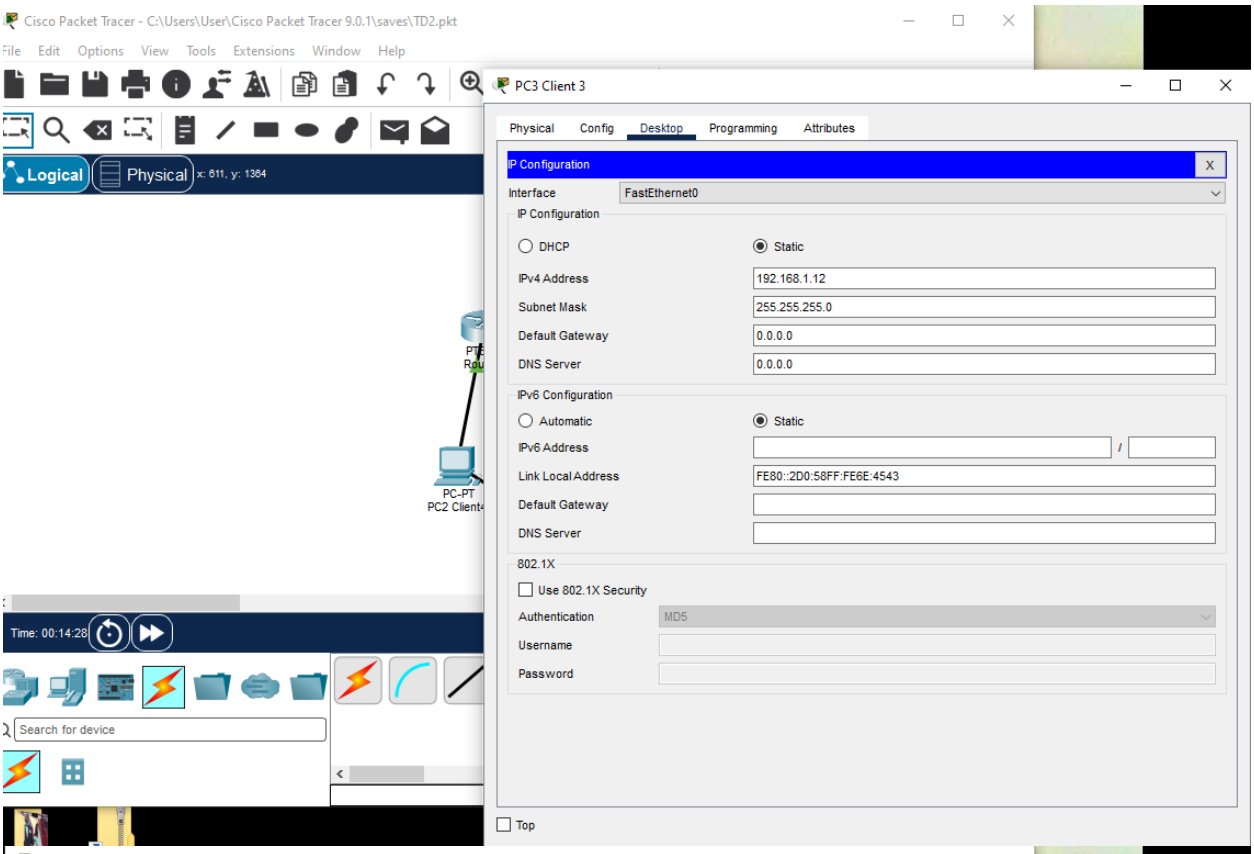

File Edit Options View Tools Extensions Window Help
TD3 - Classroom
Logical
Physical
x: 1159, y: 1367
PC1 Client1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.1.10
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::20D:BDFF:FEB0:E379
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
PC-PT
PC2 Client4
Time: 00:06:30
Logical
Physical
x: 1160, y: 1296
PC1 Client1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.10
Pinging 192.168.1.10 with 32 bytes of data:
Reply from 192.168.1.10: bytes=32 time=14ms TTL=128
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128
Reply from 192.168.1.10: bytes=32 time=20ms TTL=128
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.1.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 20ms, Average = 8ms
C:\>
PC-PT
PC2 Client4
Time: 00:08:30
Top
Search for device
New
Delete
Toggle PDU List Window
Copper Straight-Through

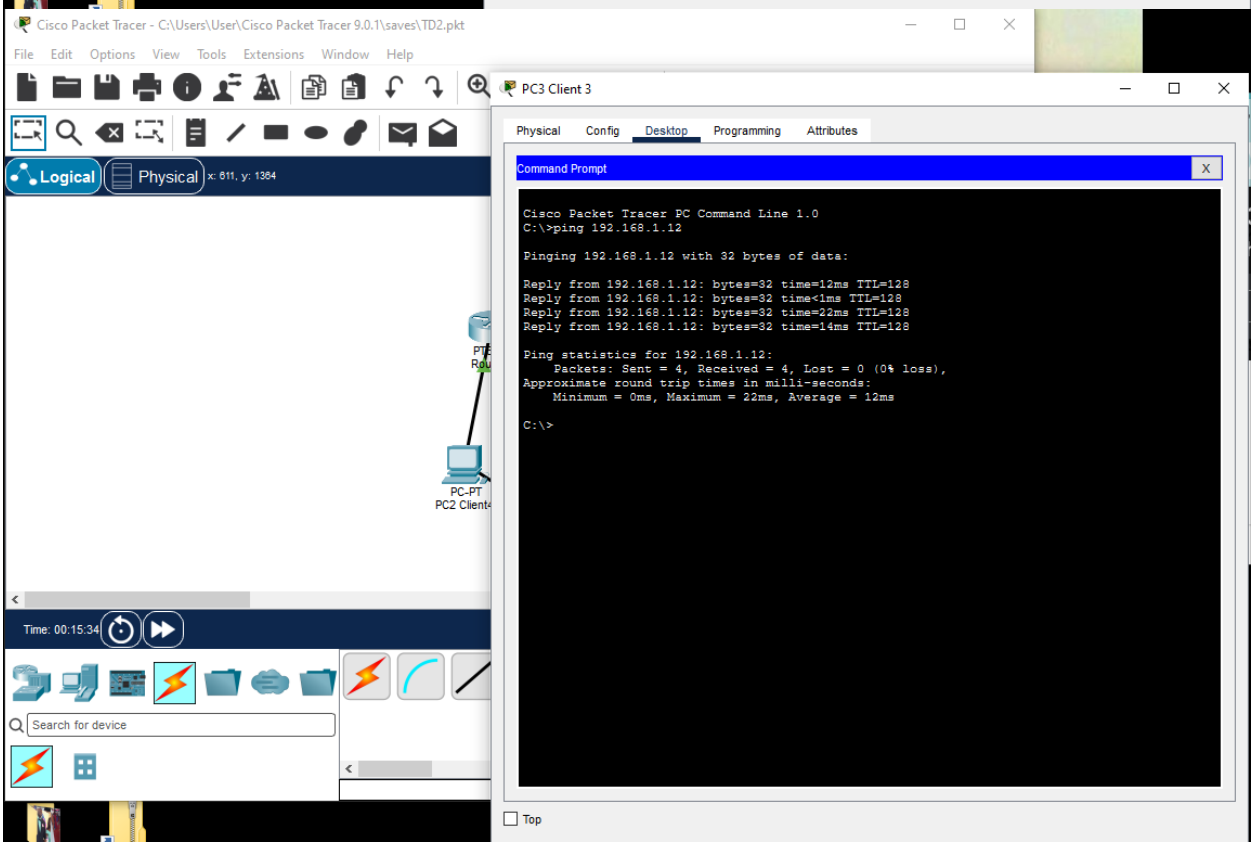
Client2


Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical Physical x: 623, y: 1089
PC0 Client2
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP Static
IPv4 Address 192.168.1.11
Subnet Mask 255.255.255.0
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic Static
IPv6 Address
Link Local Address FE80::201:C7FF:FE91:3C36
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
PC-PT PC2 Client
Time: 00:10:24
Search for device

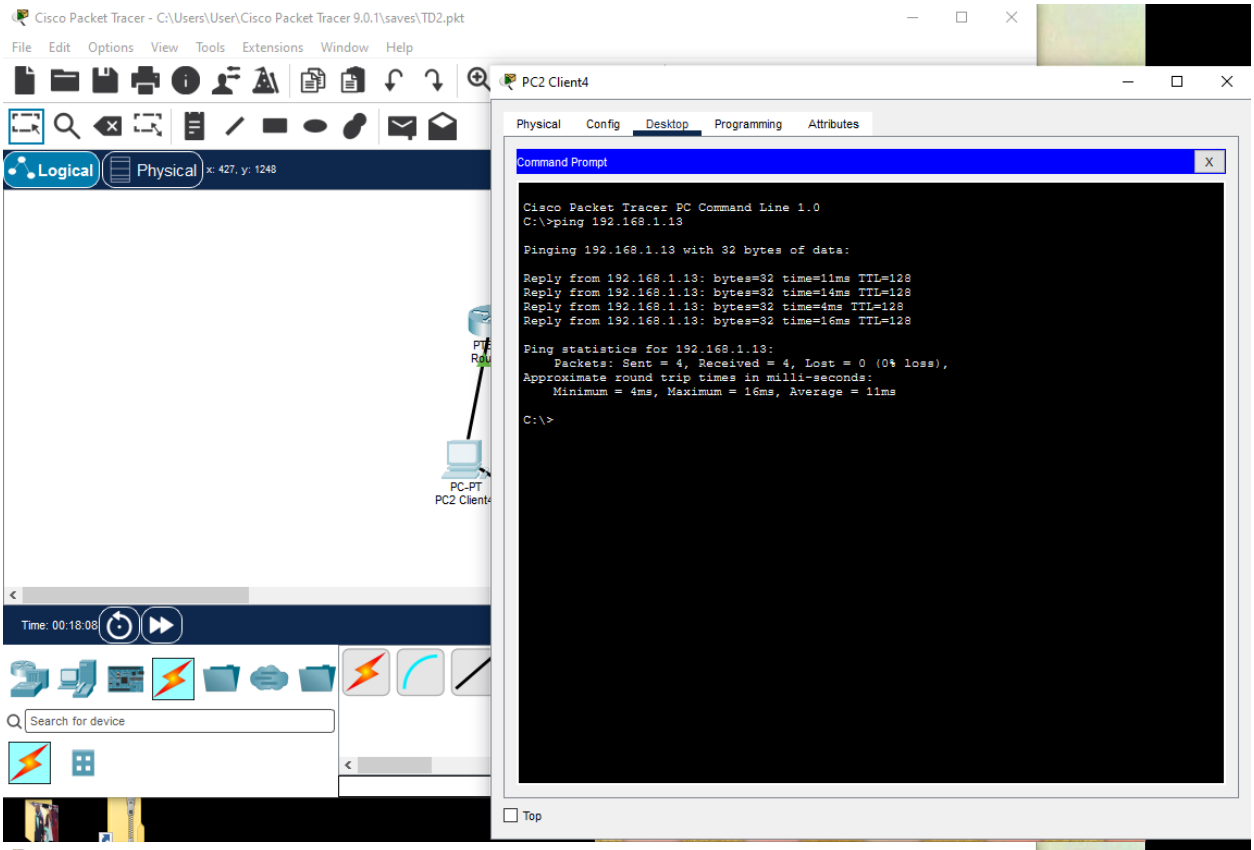

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical Physical x: 623, y: 1089
PC0 Client2
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.11
Pinging 192.168.1.11 with 32 bytes of data:
Reply from 192.168.1.11: bytes=32 time=36ms TTL=128
Reply from 192.168.1.11: bytes=32 time=14ms TTL=128
Reply from 192.168.1.11: bytes=32 time=14ms TTL=128
Reply from 192.168.1.11: bytes=32 time=15ms TTL=128
Ping statistics for 192.168.1.11:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 14ms, Maximum = 36ms, Average = 19ms
C:\>
Top
PC-PT PC2 Client
Time: 00:11:46
Search for device

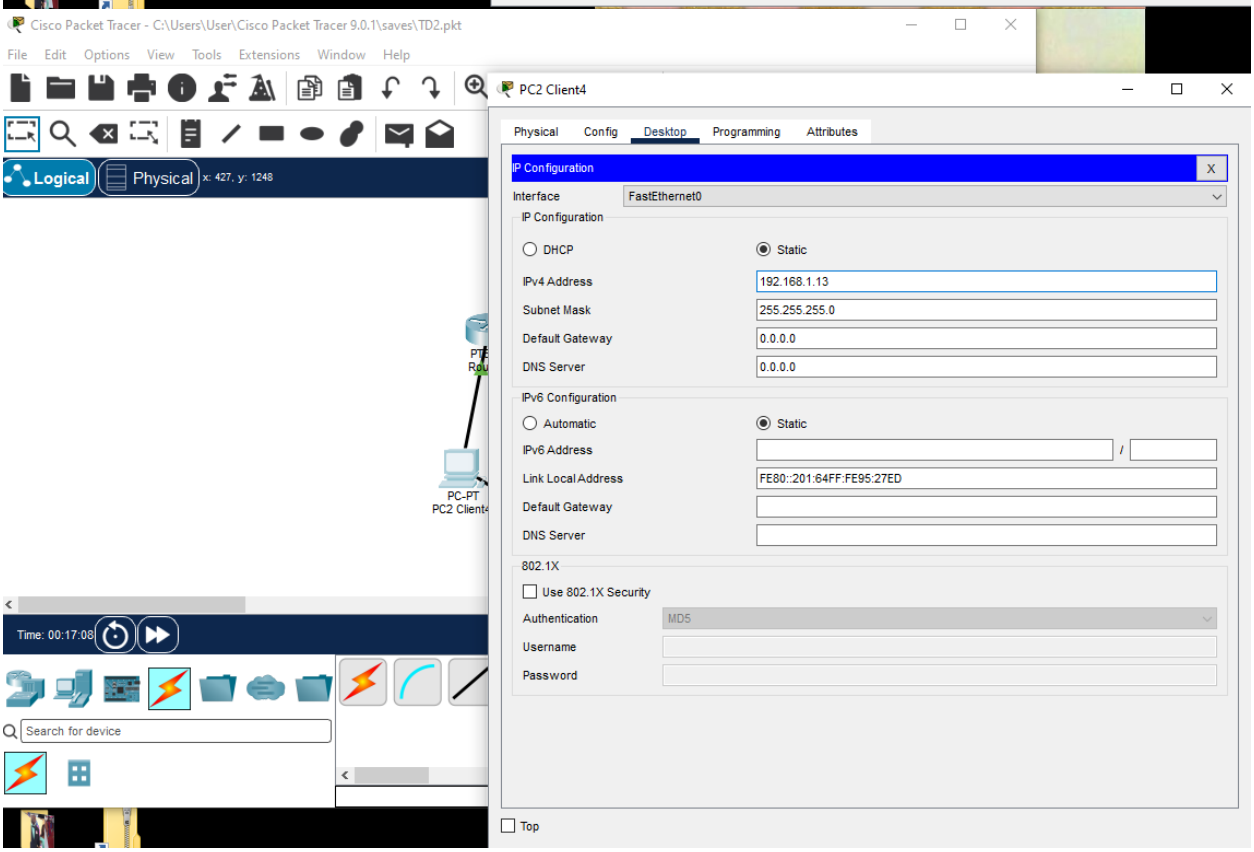
Client3


Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 611, y: 1364
PC-PT
PC2 Client
Time: 00:14:28
Search for device
PC3 Client 3
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.1.12
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::2D0:58FF:FE6E:4543
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

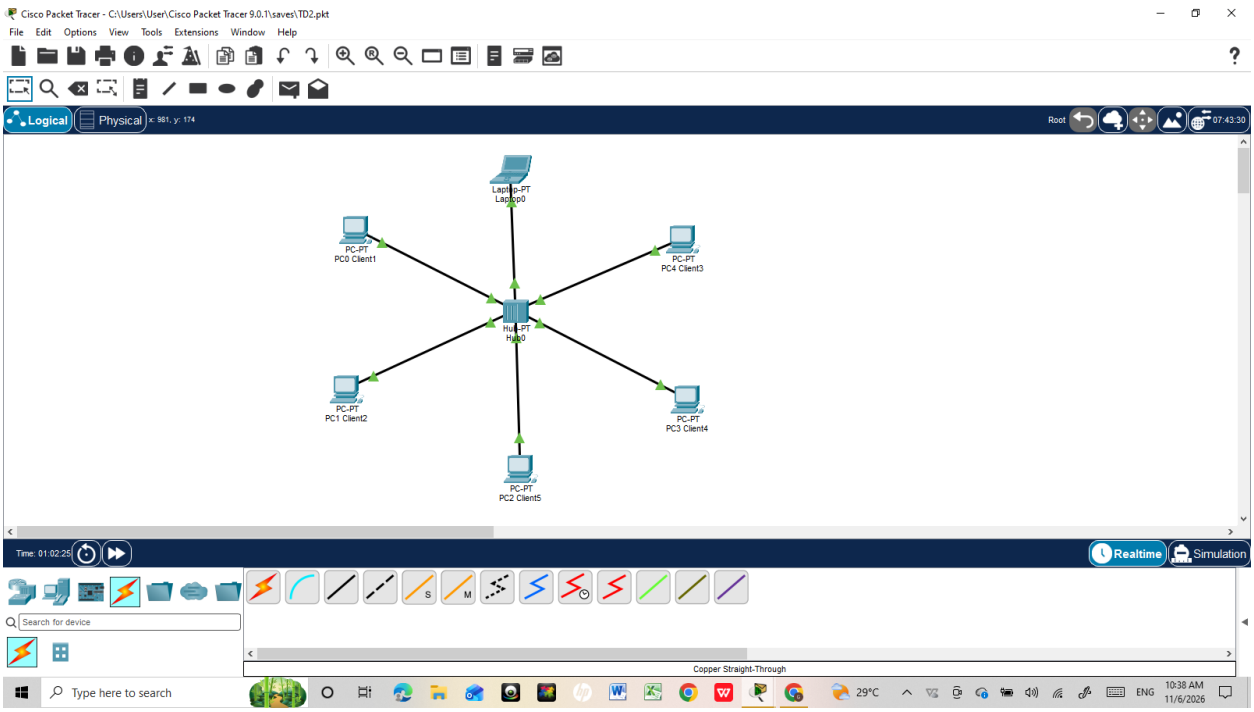

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 611, y: 1364
PC-PT
PC2 Client
Time: 00:15:34
Search for device
PC3 Client 3
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.12
Pinging 192.168.1.12 with 32 bytes of data:
Reply from 192.168.1.12: bytes=32 time=12ms TTL=128
Reply from 192.168.1.12: bytes=32 time<1ms TTL=128
Reply from 192.168.1.12: bytes=32 time=22ms TTL=128
Reply from 192.168.1.12: bytes=32 time=14ms TTL=128
Ping statistics for 192.168.1.12:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 22ms, Average = 12ms
C:\>
Top

Client4

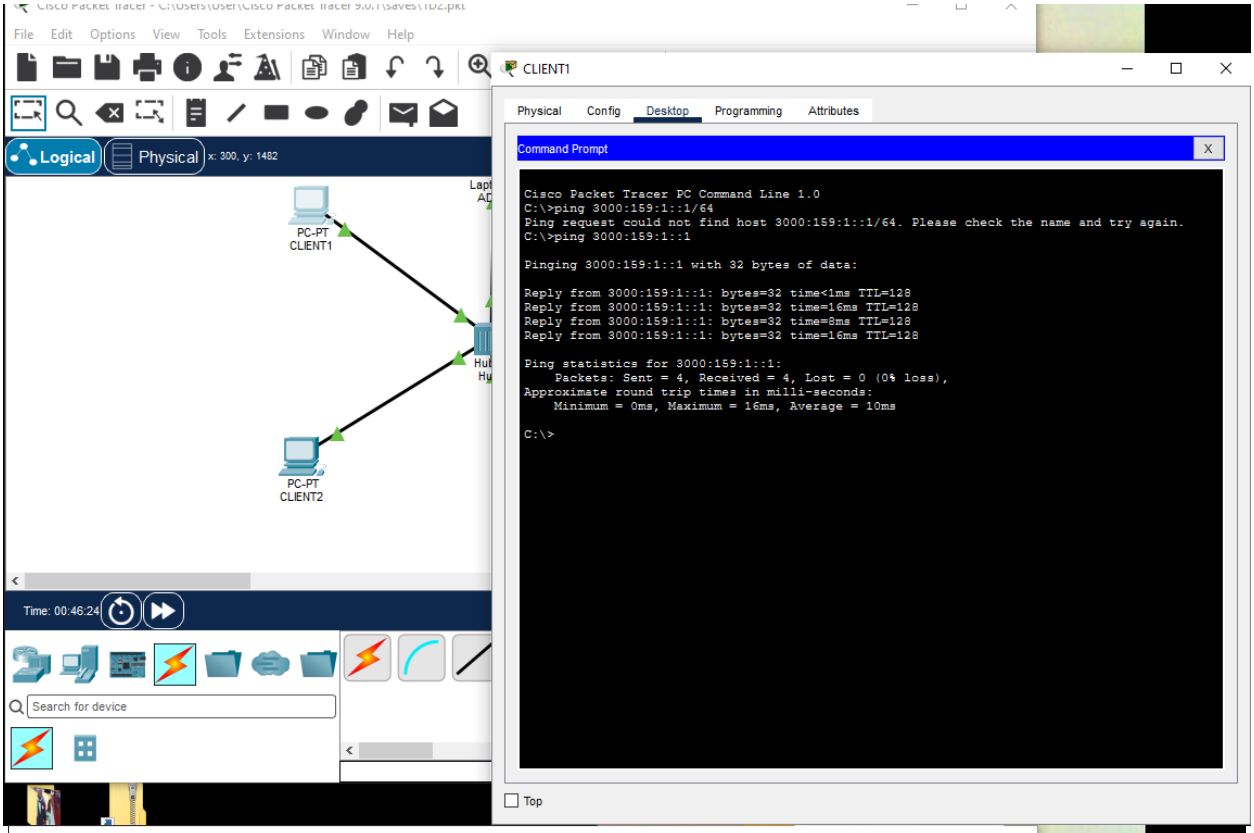

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 427, y: 1248
PC2 Client4
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.13
Pinging 192.168.1.13 with 32 bytes of data:
Reply from 192.168.1.13: bytes=32 time=11ms TTL=128
Reply from 192.168.1.13: bytes=32 time=14ms TTL=128
Reply from 192.168.1.13: bytes=32 time=4ms TTL=128
Reply from 192.168.1.13: bytes=32 time=16ms TTL=128
Ping statistics for 192.168.1.13:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 4ms, Maximum = 16ms, Average = 11ms
C:\>
PC-PT
PC2 Client4
Time: 00:18:08
Search for device
Top

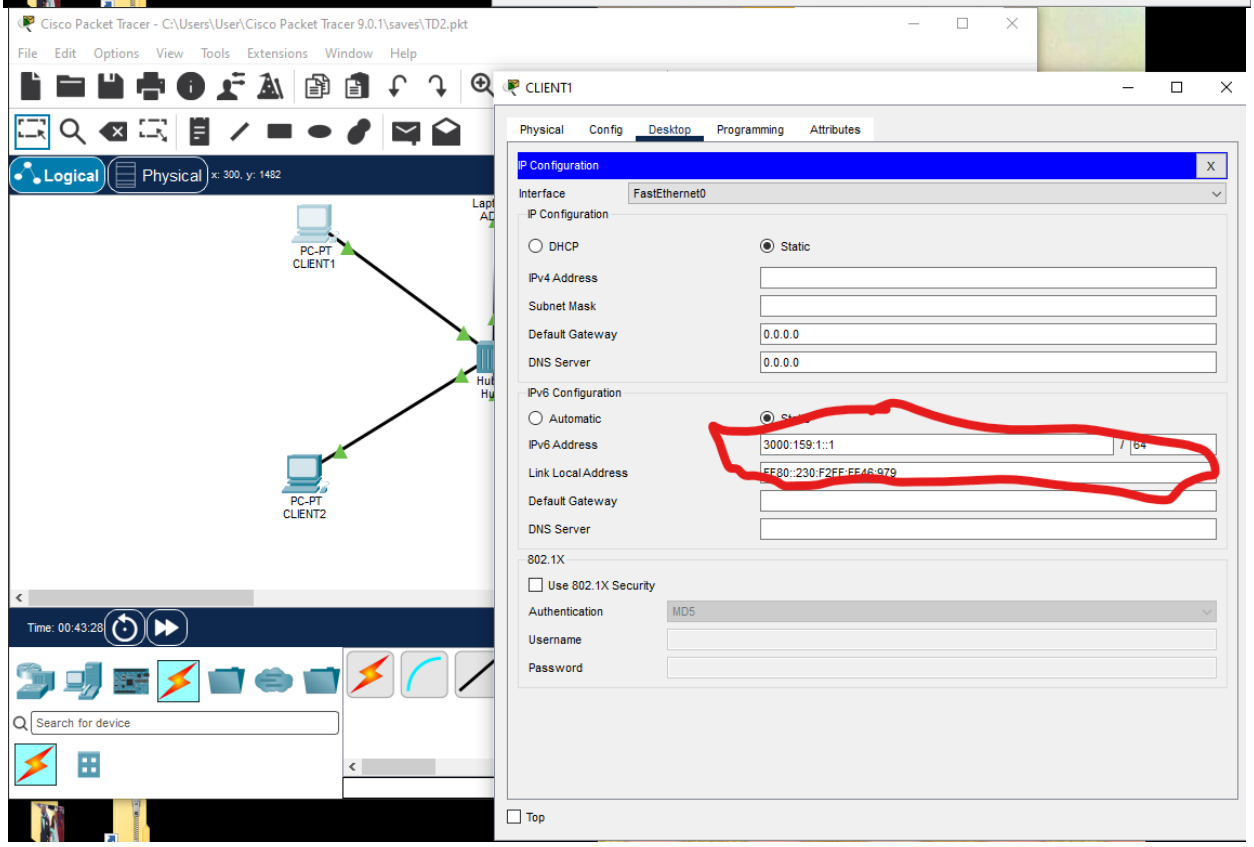

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 427, y: 1248
PC2 Client4
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address 192.168.1.13
Subnet Mask 255.255.255.0
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address FE80::201:64FF:FE95:27ED
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
PC-PT
PC2 Client4
Time: 00:17:08
Search for device
Top

Configuration IPv6 de l’exercice #4 pour chaque client de 1 à 5.

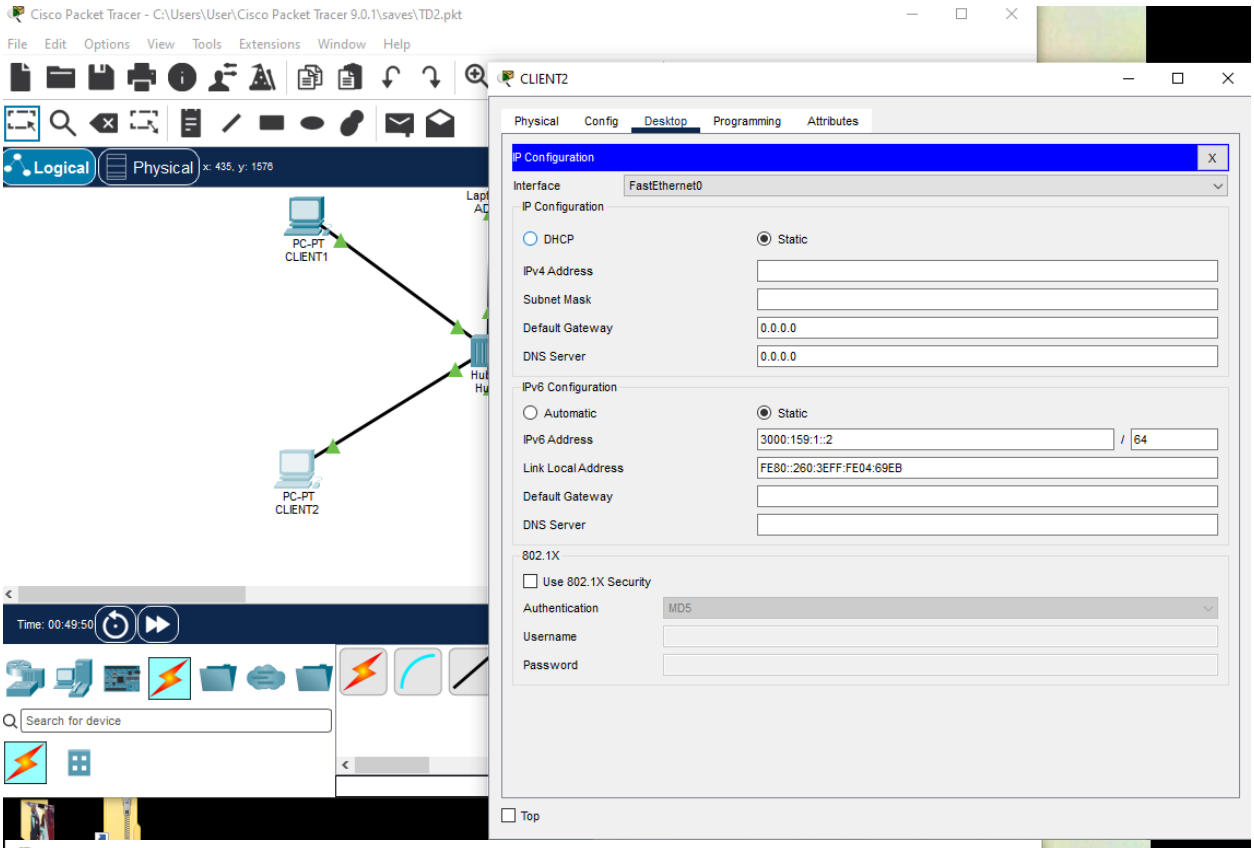


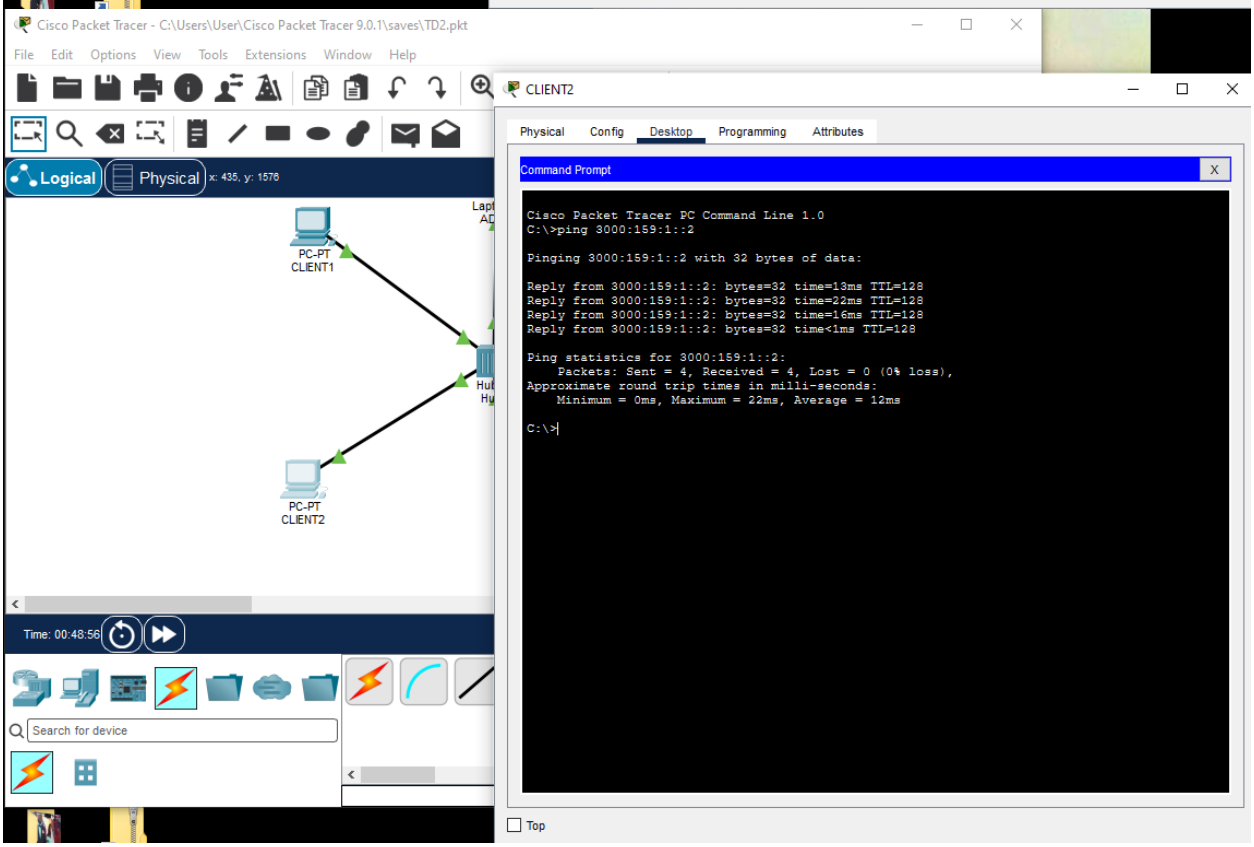
Client1


File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 300, y: 1482
PC-PT CLIENT1
PC-PT CLIENT2
Time: 00:46:24
Search for device
CLIENT1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::1/64
Ping request could not find host 3000:159:1::1/64. Please check the name and try again.
C:\>ping 3000:159:1::1
Pinging 3000:159:1::1 with 32 bytes of data:
Reply from 3000:159:1::1: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::1: bytes=32 time=16ms TTL=128
Reply from 3000:159:1::1: bytes=32 time=8ms TTL=128
Reply from 3000:159:1::1: bytes=32 time=16ms TTL=128
Ping statistics for 3000:159:1::1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 16ms, Average = 10ms
C:\>
Top

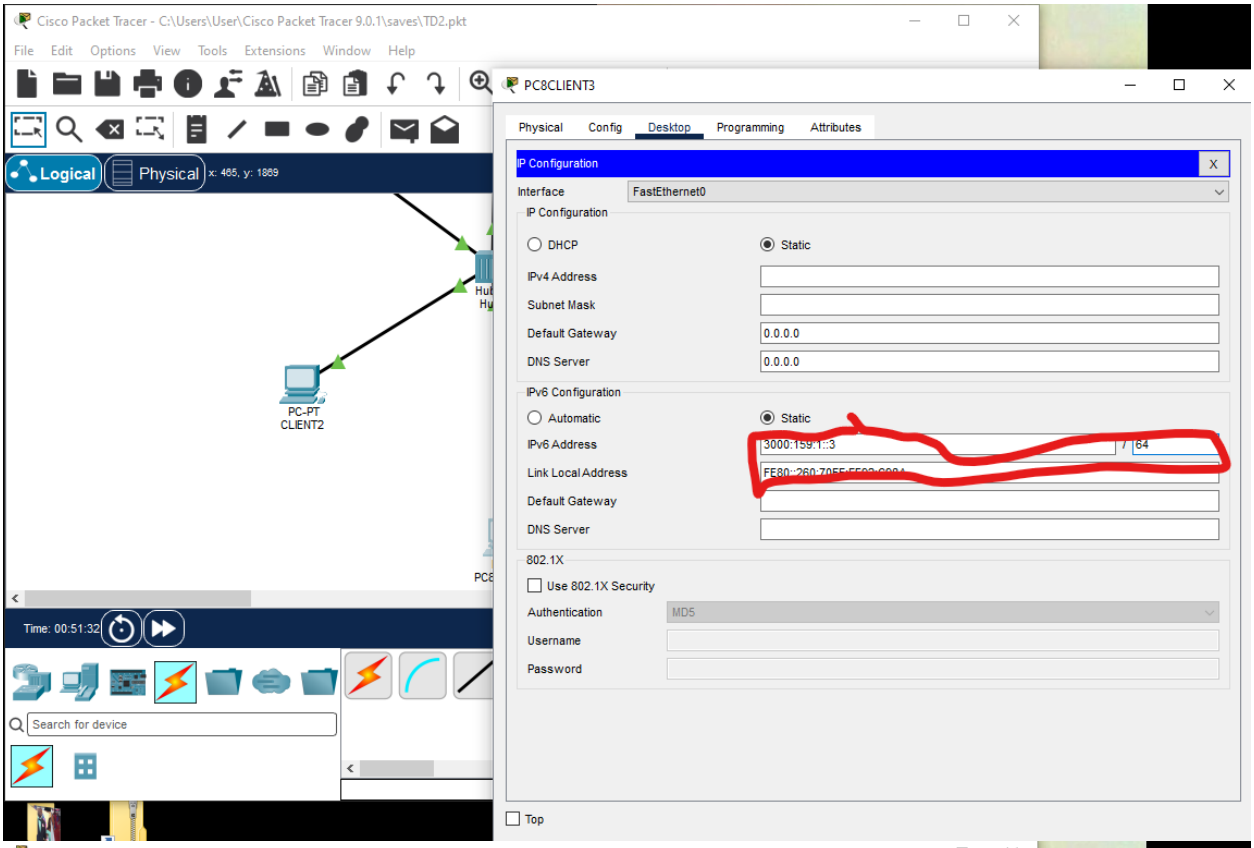

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 300, y: 1482
PC-PT CLIENT1
PC-PT CLIENT2
Time: 00:43:28
Search for device
CLIENT1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
IPv6 Address
3000:159:1::1
/ 64
Link Local Address
FE80::230:F2FF:FE46:979
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

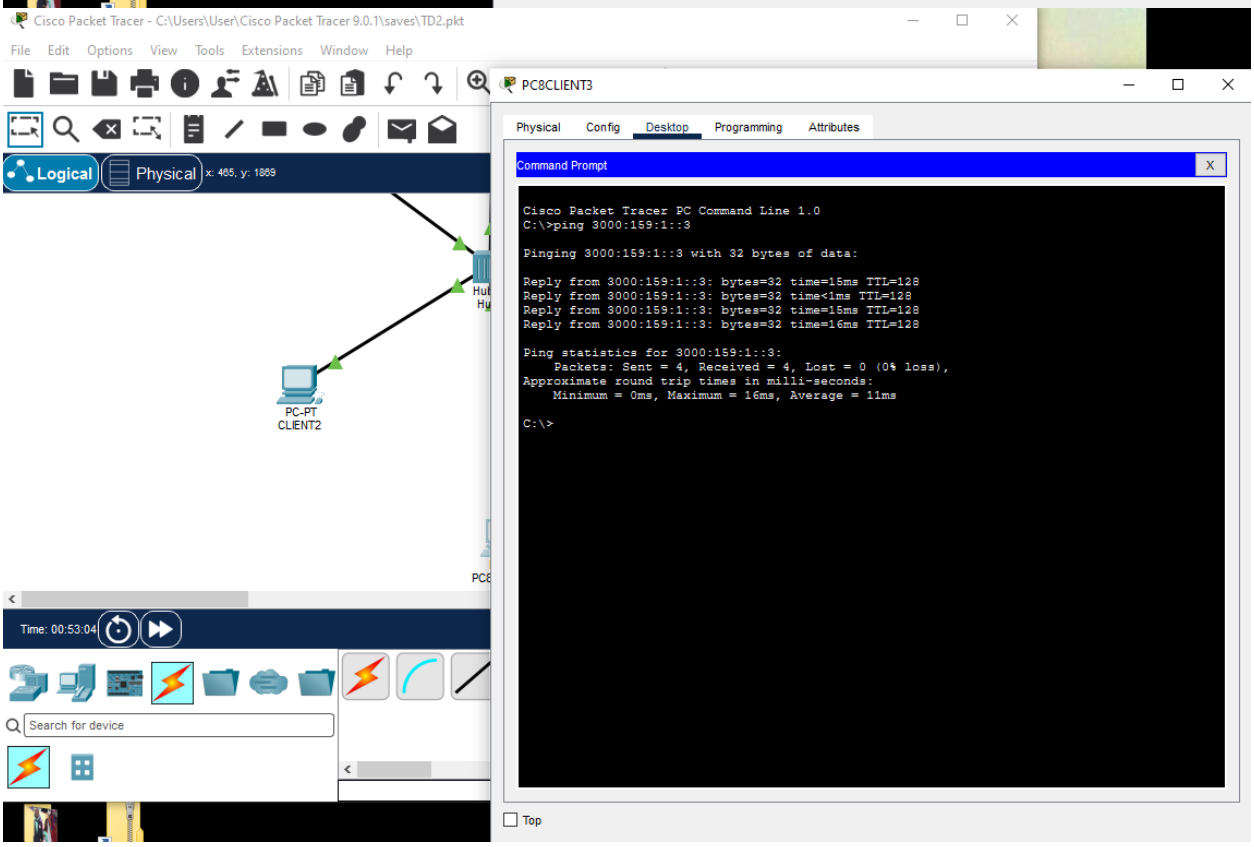
Client2


Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 435, y: 1576
PC-PT CLIENT1
PC-PT CLIENT2
Time: 00:49:50
Search for device
CLIENT2
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address 3000:159:1::2 / 64
Link Local Address FE80::260:3EFF:FE04:69EB
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top

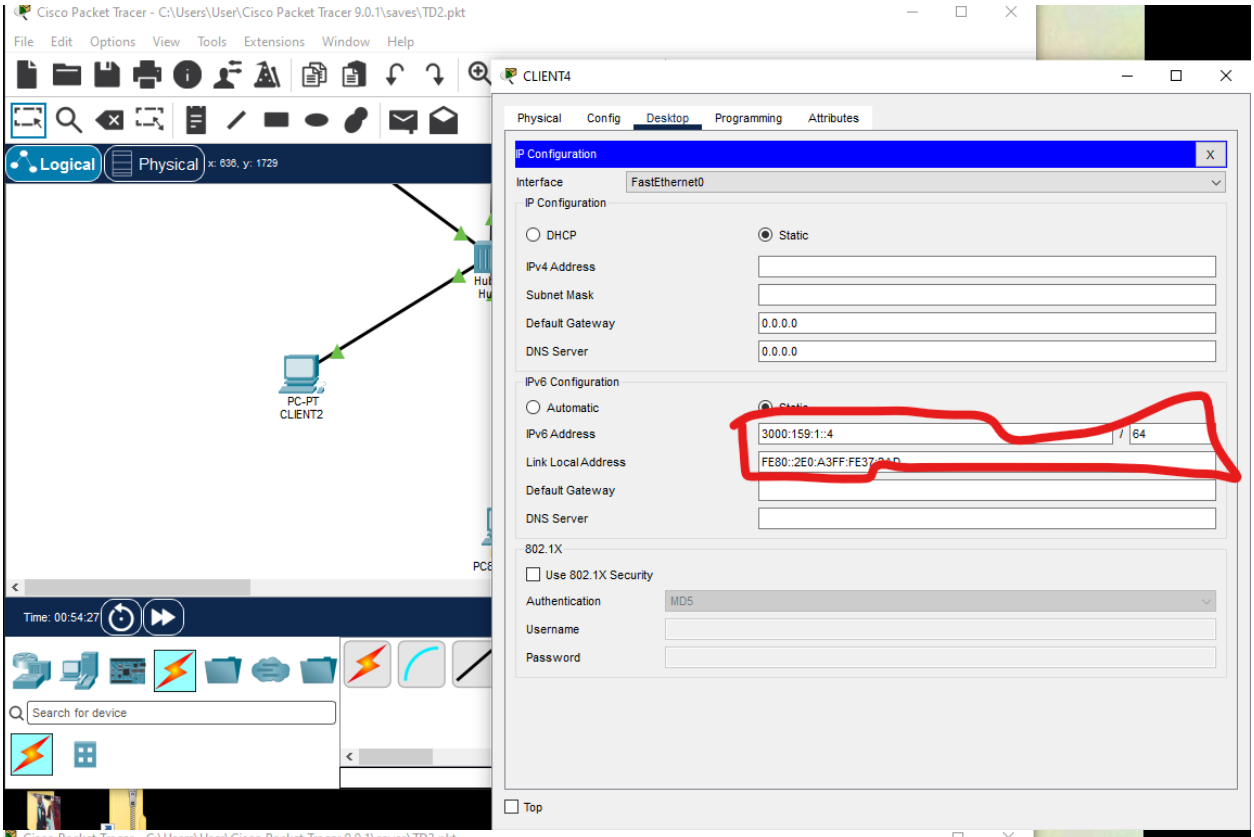

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 435, y: 1576
PC-PT CLIENT1
PC-PT CLIENT2
Time: 00:48:56
Search for device
CLIENT2
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::2
Pinging 3000:159:1::2 with 32 bytes of data:
Reply from 3000:159:1::2: bytes=32 time=13ms TTL=128
Reply from 3000:159:1::2: bytes=32 time=22ms TTL=128
Reply from 3000:159:1::2: bytes=32 time=16ms TTL=128
Reply from 3000:159:1::2: bytes=32 time<1ms TTL=128
Ping statistics for 3000:159:1::2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 22ms, Average = 12ms
C:\>
Top

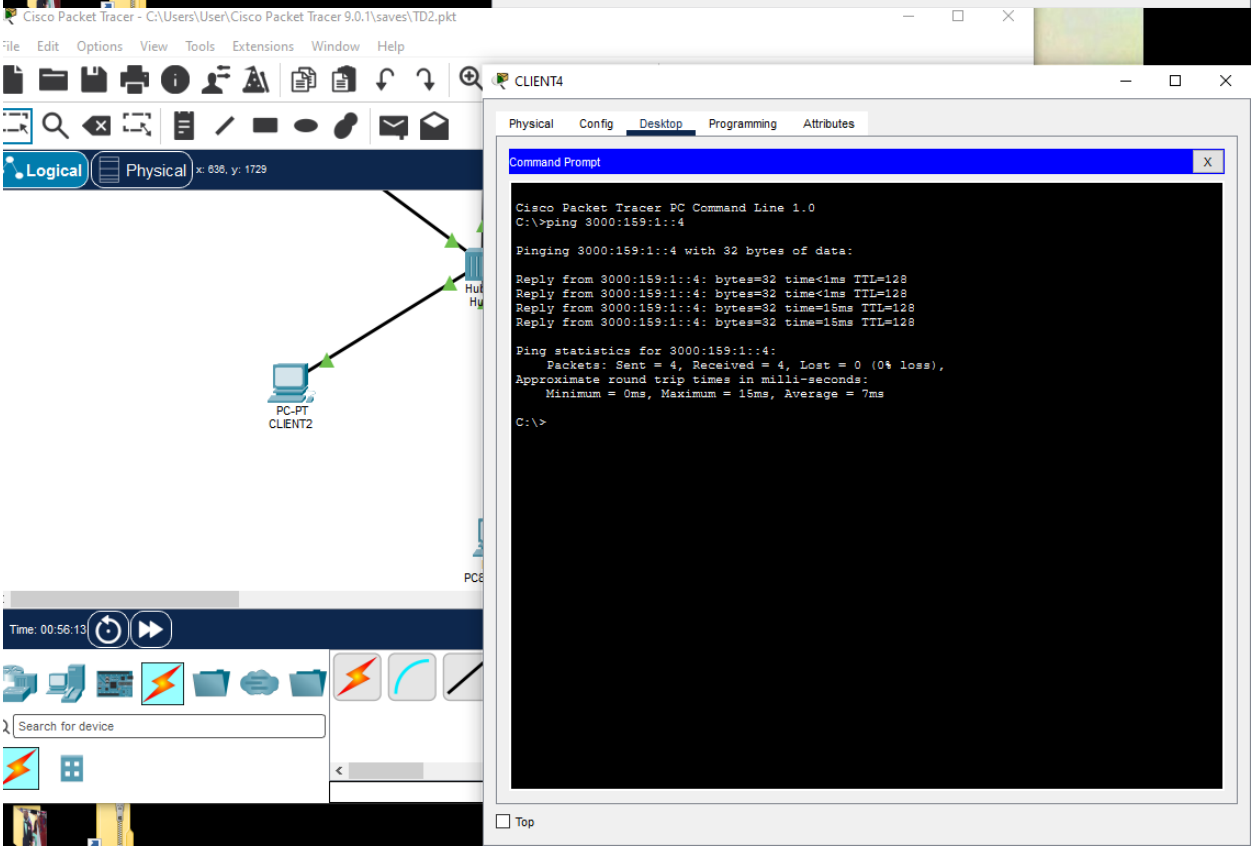
Client3


Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 465, y: 1869
PC-PT CLIENT2
Time: 00:51:32
Search for device
PC8CLIENT3
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address 3000:159:1::3 / 64
Link Local Address
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top

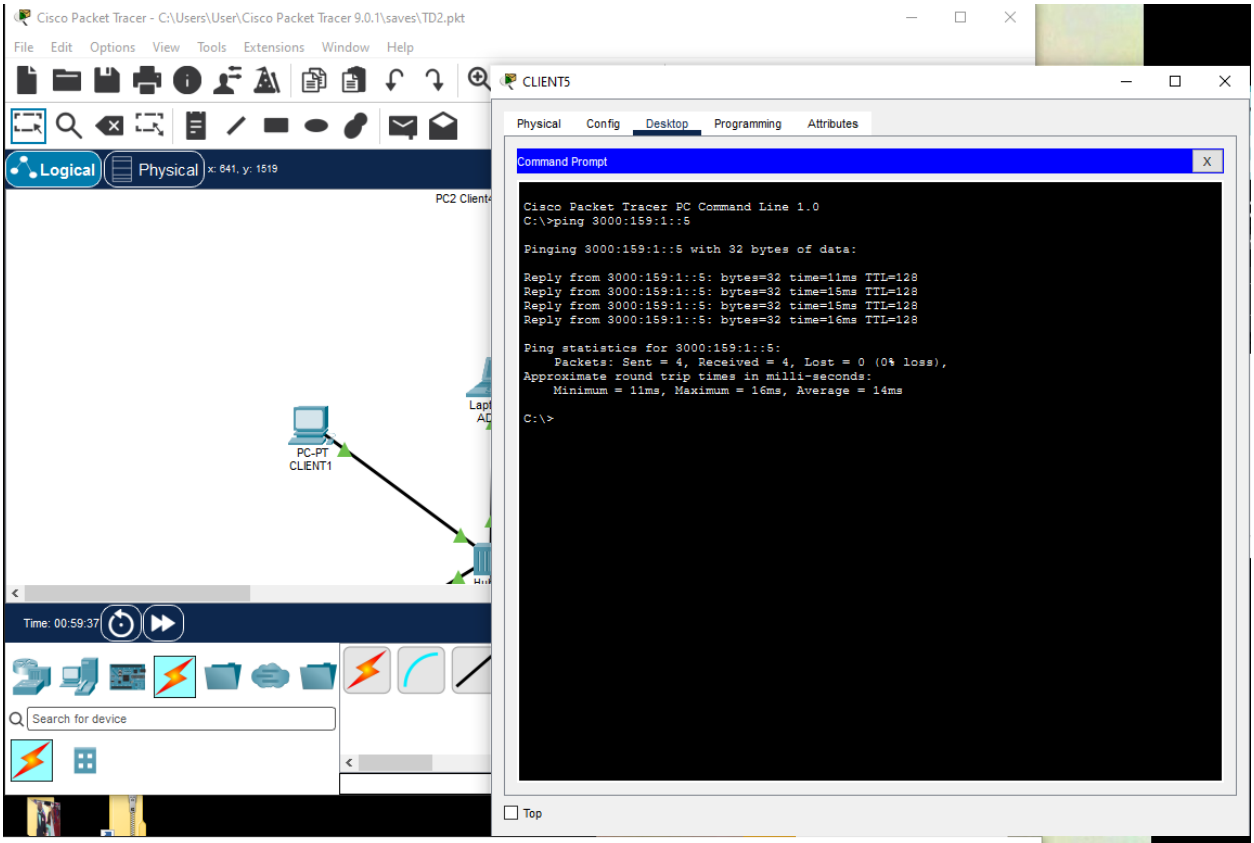

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 465, y: 1869
PC-PT CLIENT2
Time: 00:53:04
Search for device
PC8CLIENT3
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::3
Pinging 3000:159:1::3 with 32 bytes of data:
Reply from 3000:159:1::3: bytes=32 time=15ms TTL=128
Reply from 3000:159:1::3: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::3: bytes=32 time=15ms TTL=128
Reply from 3000:159:1::3: bytes=32 time=16ms TTL=128
Ping statistics for 3000:159:1::3:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 16ms, Average = 11ms
C:\>
Top

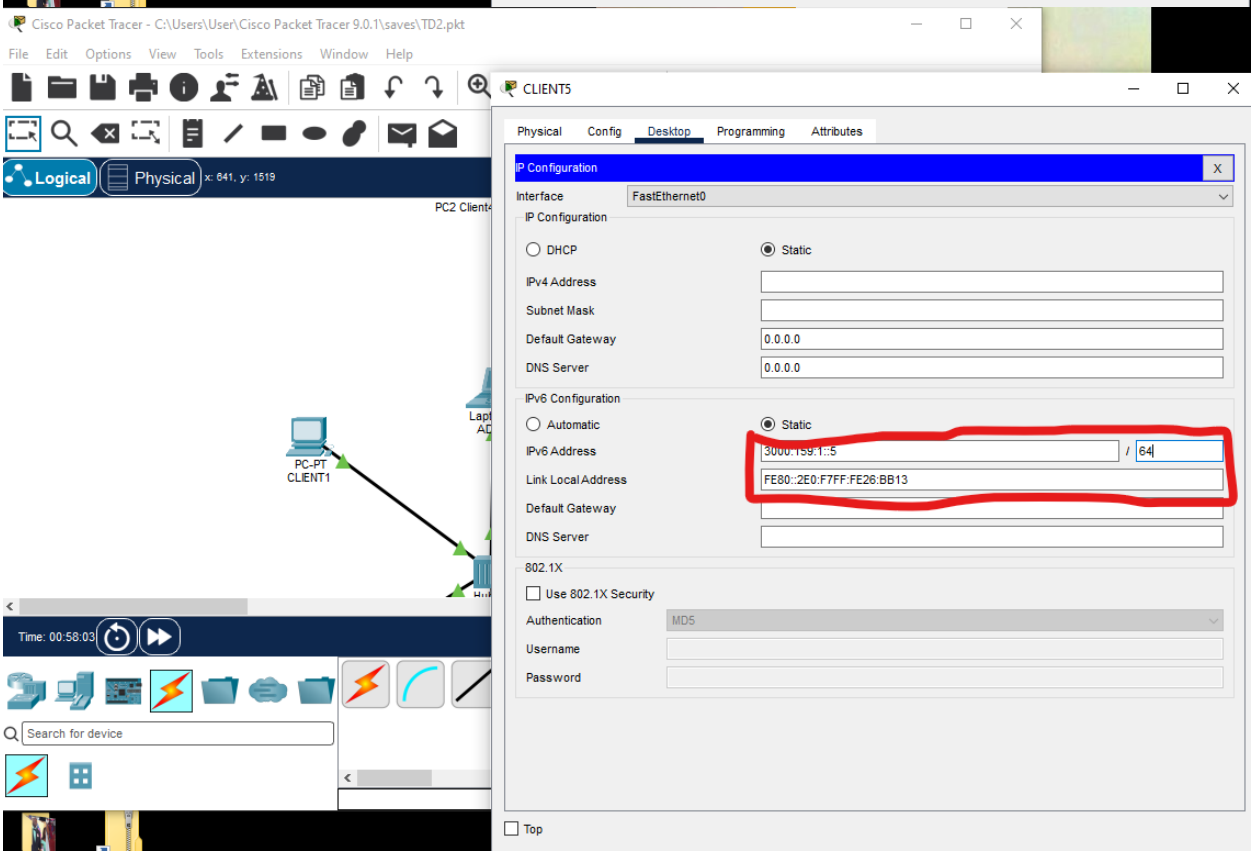
Client4


Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 636, y: 1729
PC-PT
CLIENT2
Time: 00:54:27
Search for device
CLIENT4
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address 3000:159:1::4 / 64
Link Local Address FE80::2E0:A3FF:FE37:
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top

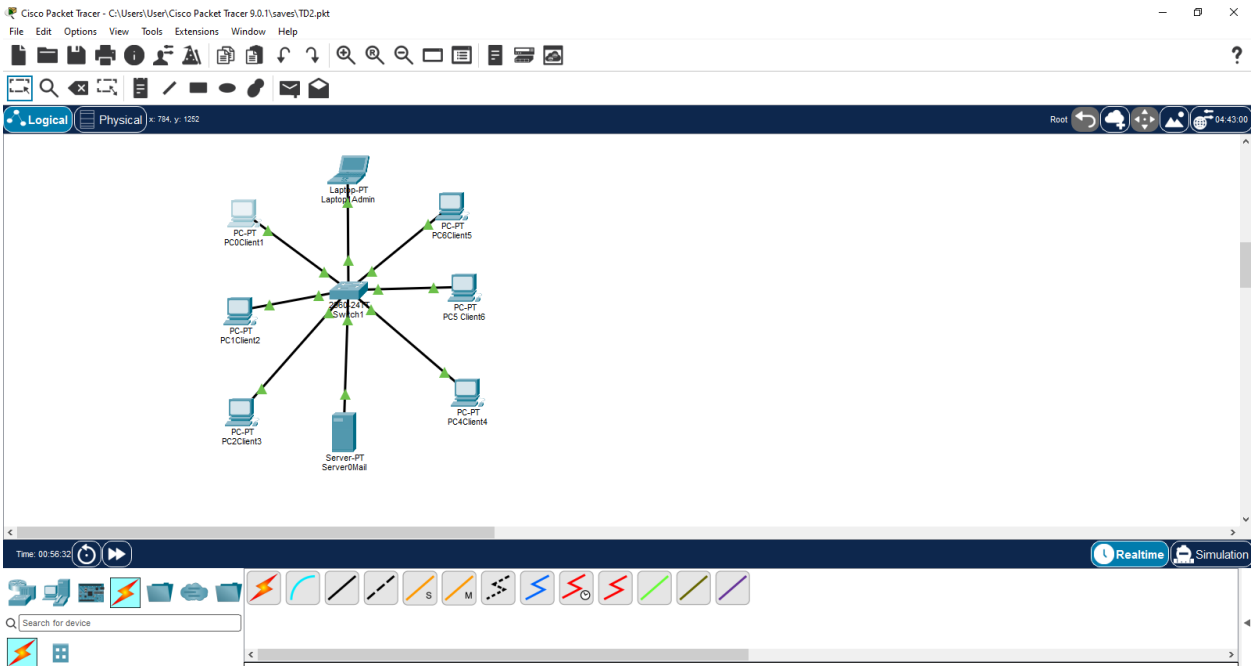

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
Logical
Physical
x: 636, y: 1729
PC-PT
CLIENT2
Time: 00:56:13
Search for device
CLIENT4
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::4
Pinging 3000:159:1::4 with 32 bytes of data:
Reply from 3000:159:1::4: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::4: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::4: bytes=32 time=15ms TTL=128
Reply from 3000:159:1::4: bytes=32 time=15ms TTL=128
Ping statistics for 3000:159:1::4:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 15ms, Average = 7ms
C:\>
Top

Client5

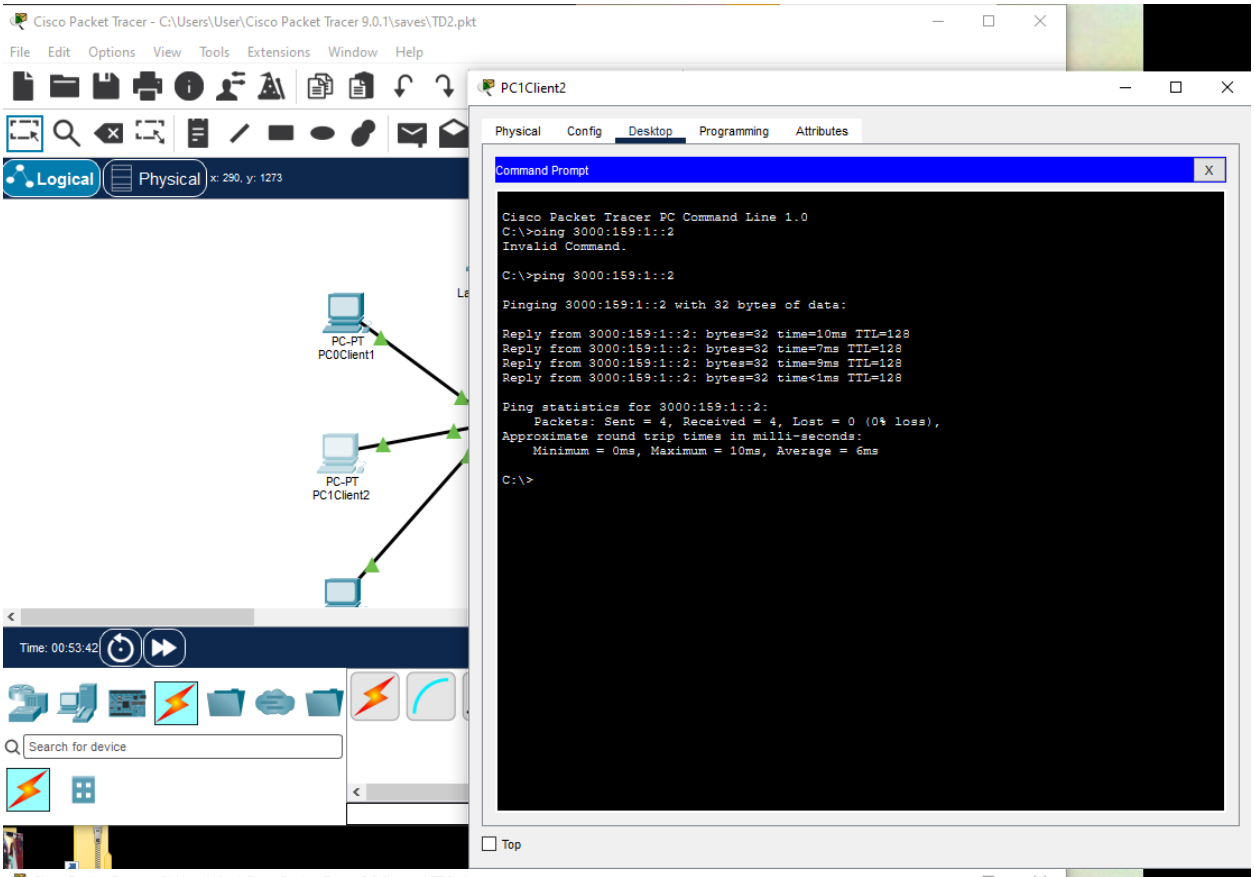

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 641, y: 1519
PC2 Client
PC-PT CLIENT1
Time: 00:59:37
Search for device
CLIENT5
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::5
Pinging 3000:159:1::5 with 32 bytes of data:
Reply from 3000:159:1::5: bytes=32 time=11ms TTL=128
Reply from 3000:159:1::5: bytes=32 time=15ms TTL=128
Reply from 3000:159:1::5: bytes=32 time=15ms TTL=128
Reply from 3000:159:1::5: bytes=32 time=16ms TTL=128
Ping statistics for 3000:159:1::5:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 11ms, Maximum = 16ms, Average = 14ms
C:\>
Top

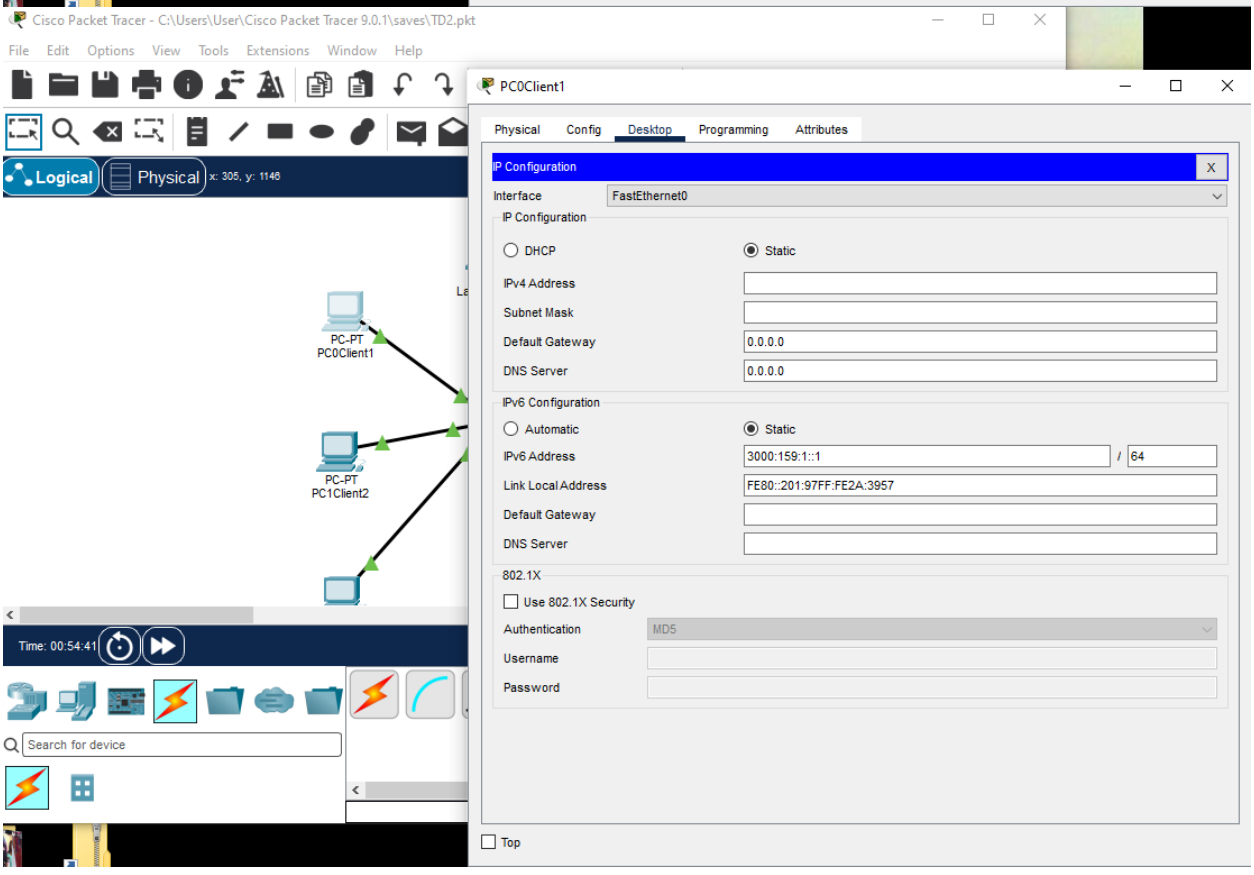

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 641, y: 1519
PC2 Client
PC-PT CLIENT1
Time: 00:58:03
Search for device
CLIENT5
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address 3000:159:1::5 / 64
Link Local Address FE80::2E0:F7FF:FE26:BB13
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top

Configuration IPv6 de l’exercice #5 pour chaque client de 1 à 6.

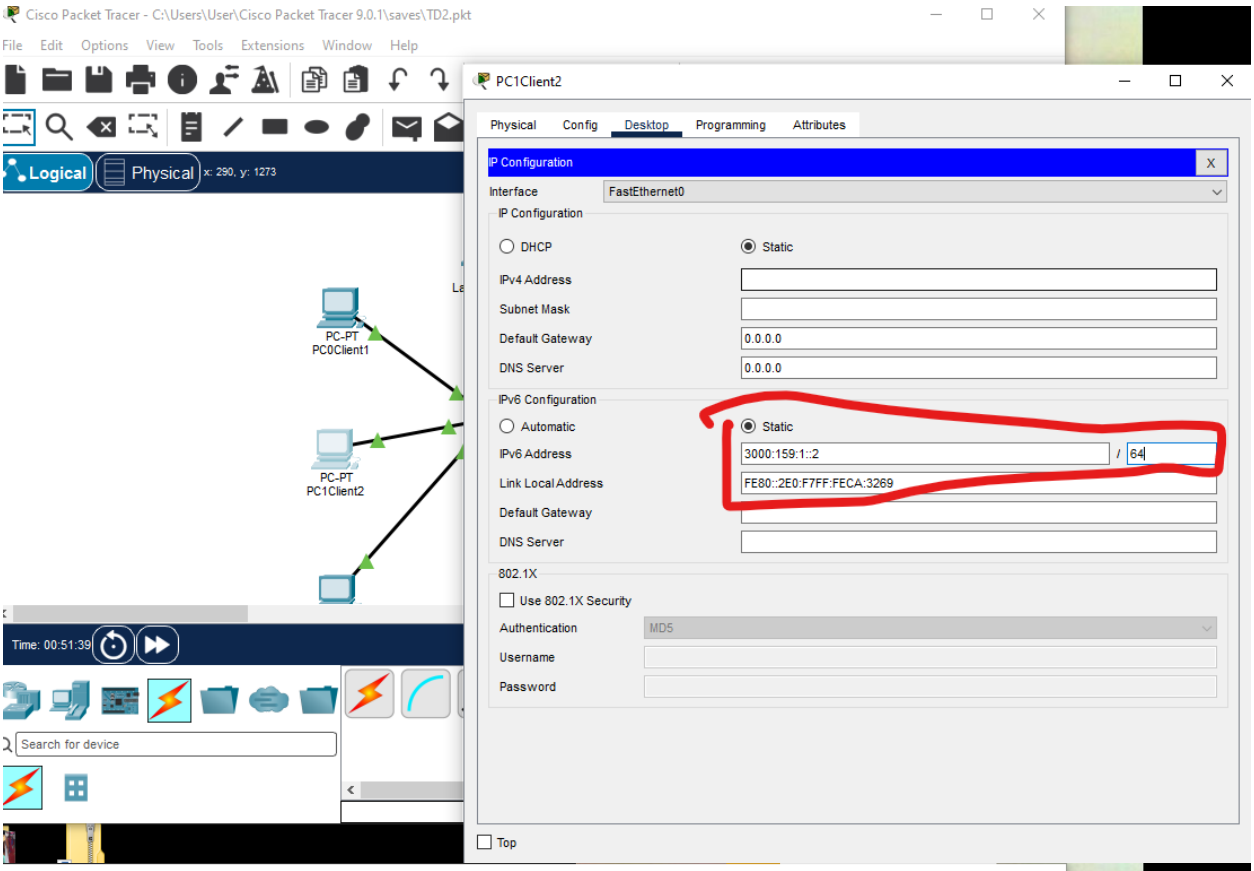


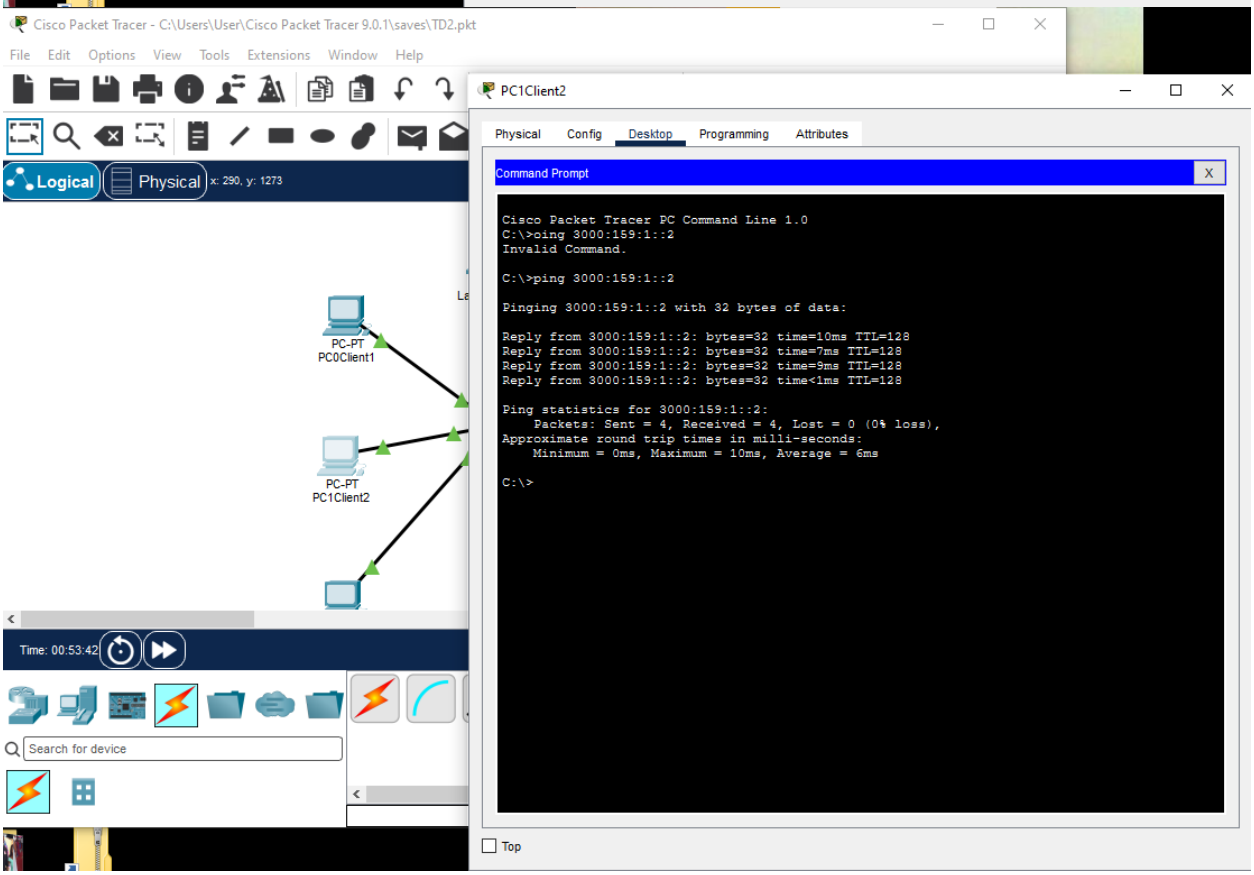
Client1


Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical Physical x: 290, y: 1273
PC-PT PC0Client1
PC-PT PC1Client2
Time: 00:53:42
Search for device
PC1Client2
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>oing 3000:159:1::2
Invalid Command.
C:\>ping 3000:159:1::2
Pinging 3000:159:1::2 with 32 bytes of data:
Reply from 3000:159:1::2: bytes=32 time=10ms TTL=128
Reply from 3000:159:1::2: bytes=32 time=7ms TTL=128
Reply from 3000:159:1::2: bytes=32 time=9ms TTL=128
Reply from 3000:159:1::2: bytes=32 time<1ms TTL=128
Ping statistics for 3000:159:1::2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 10ms, Average = 6ms
C:\>
Top

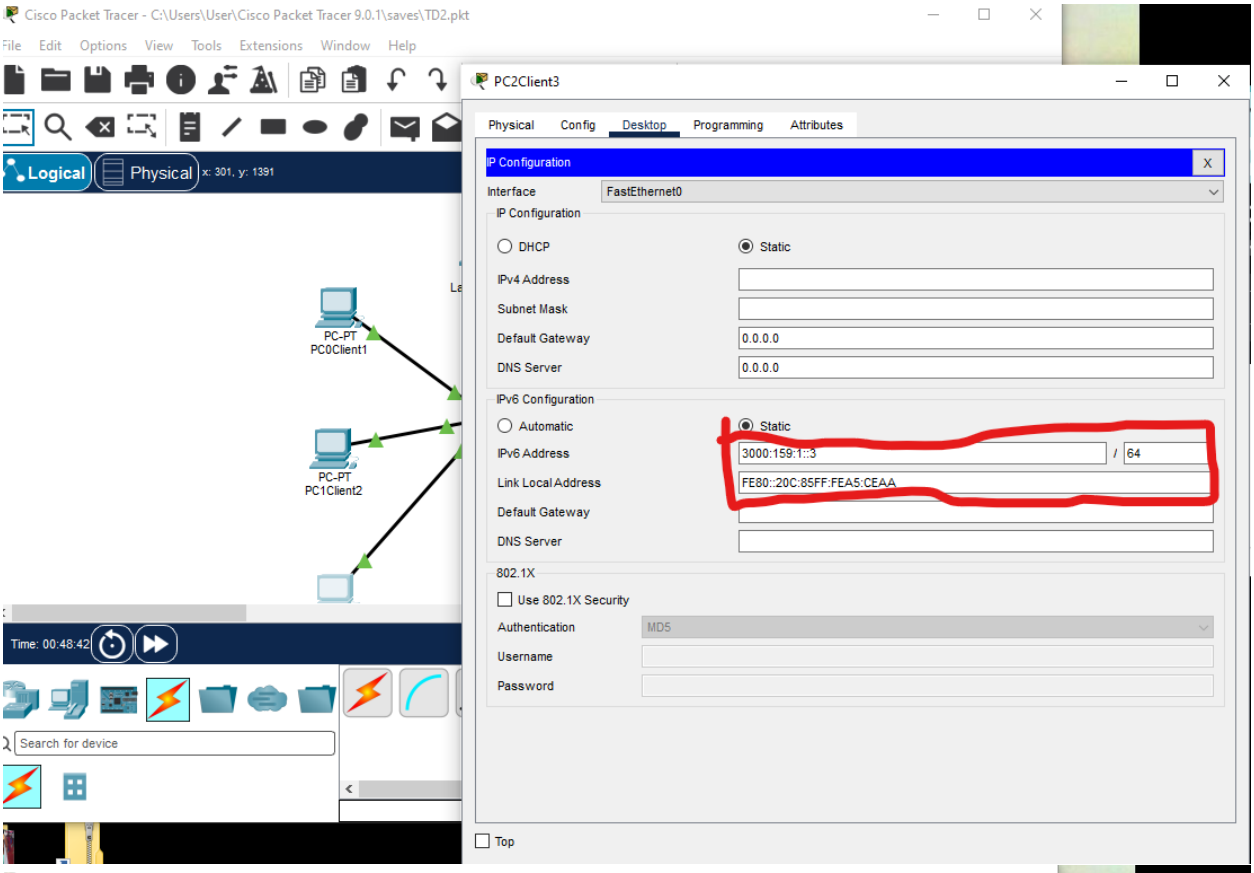

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical Physical x: 305, y: 1146
PC-PT PC0Client1
PC-PT PC1Client2
Time: 00:54:41
Search for device
PC0Client1
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic Static
IPv6 Address 3000:159:1::1 / 64
Link Local Address FE80::201:97FF:FE2A:3957
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top

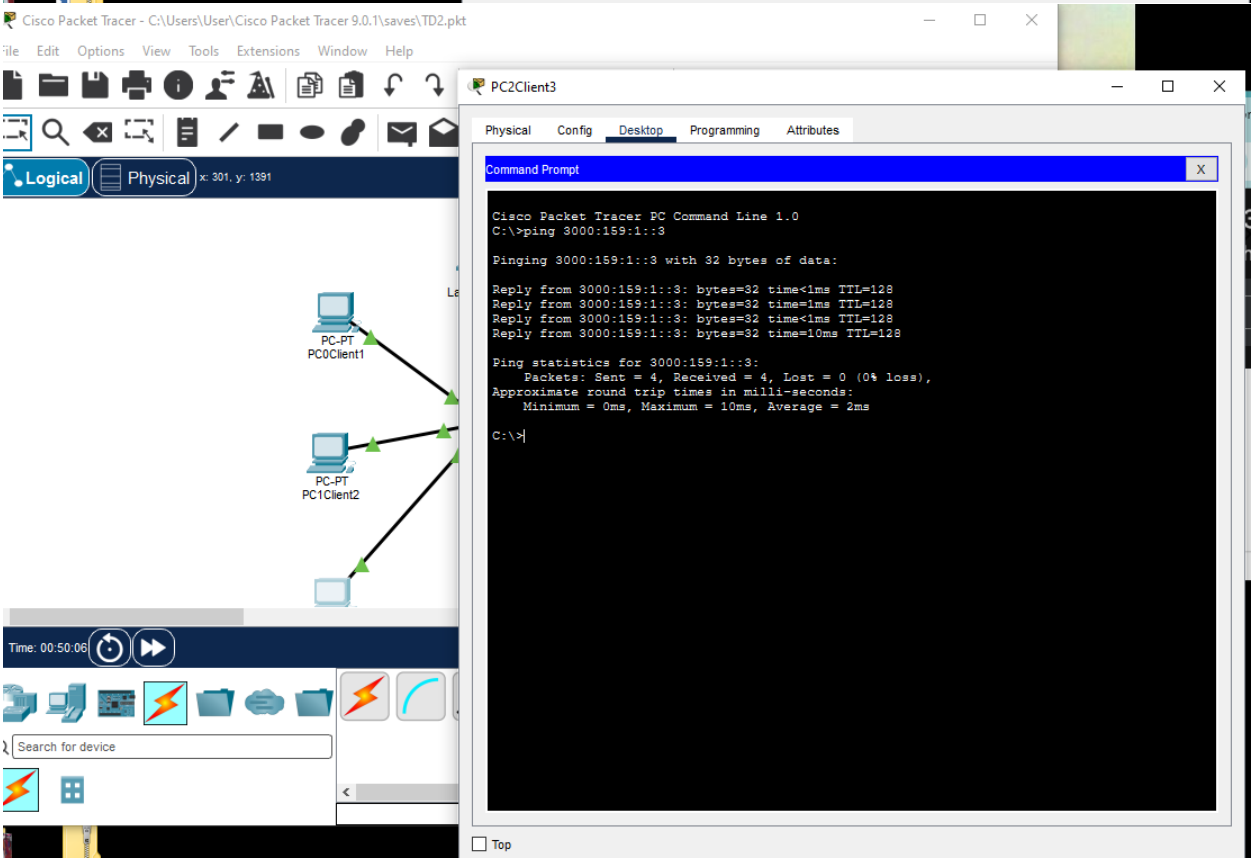
Client2


Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 290, y: 1273
PC-PT PC0Client1
PC-PT PC1Client2
Time: 00:51:39
Search for device
PC1Client2
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address 3000:159:1::2 / 64
Link Local Address FE80::2E0:F7FF:FECA:3269
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top

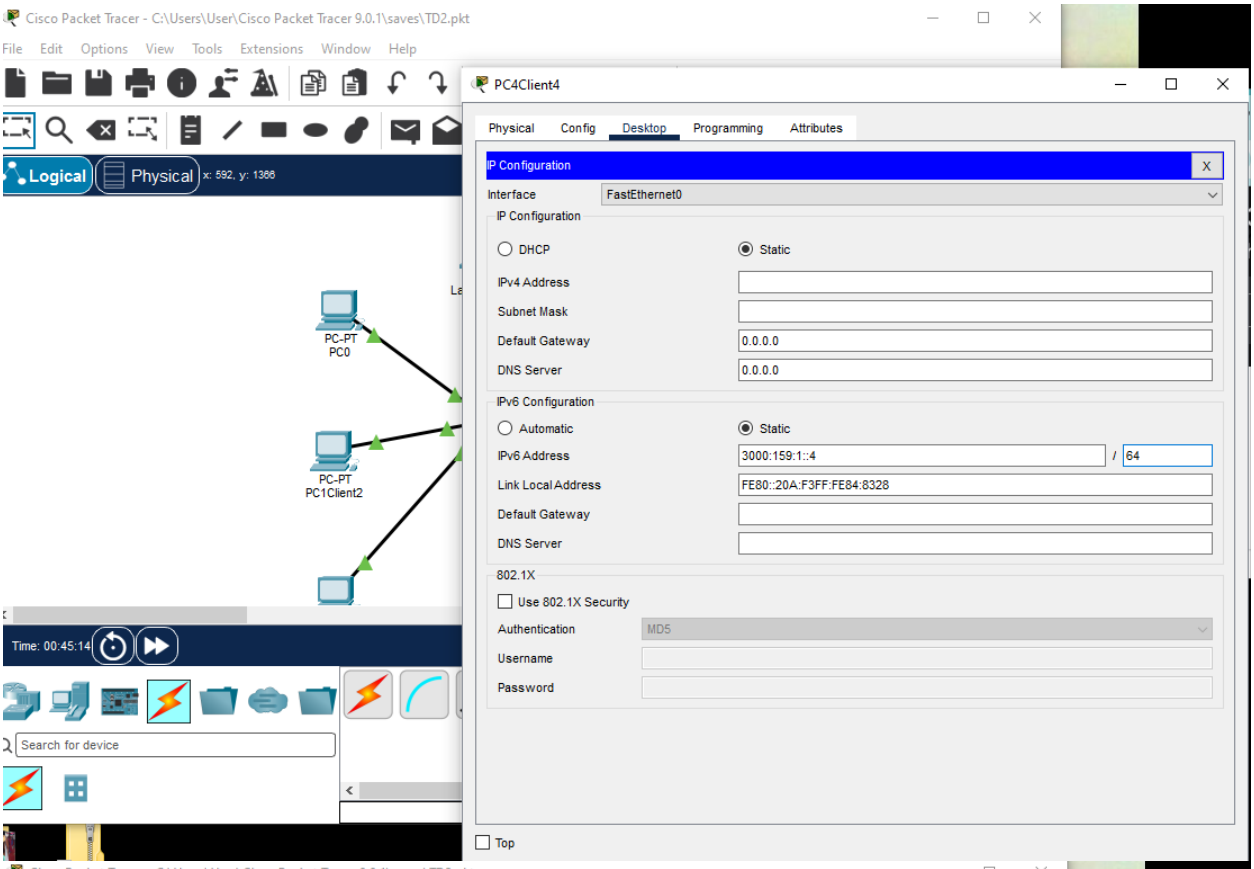

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 290, y: 1273
PC-PT PC0Client1
PC-PT PC1Client2
Time: 00:53:42
Search for device
PC1Client2
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>oing 3000:159:1::2
Invalid Command.
C:\>ping 3000:159:1::2
Pinging 3000:159:1::2 with 32 bytes of data:
Reply from 3000:159:1::2: bytes=32 time=10ms TTL=128
Reply from 3000:159:1::2: bytes=32 time=7ms TTL=128
Reply from 3000:159:1::2: bytes=32 time=9ms TTL=128
Reply from 3000:159:1::2: bytes=32 time<1ms TTL=128
Ping statistics for 3000:159:1::2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 10ms, Average = 6ms
C:\>
Top

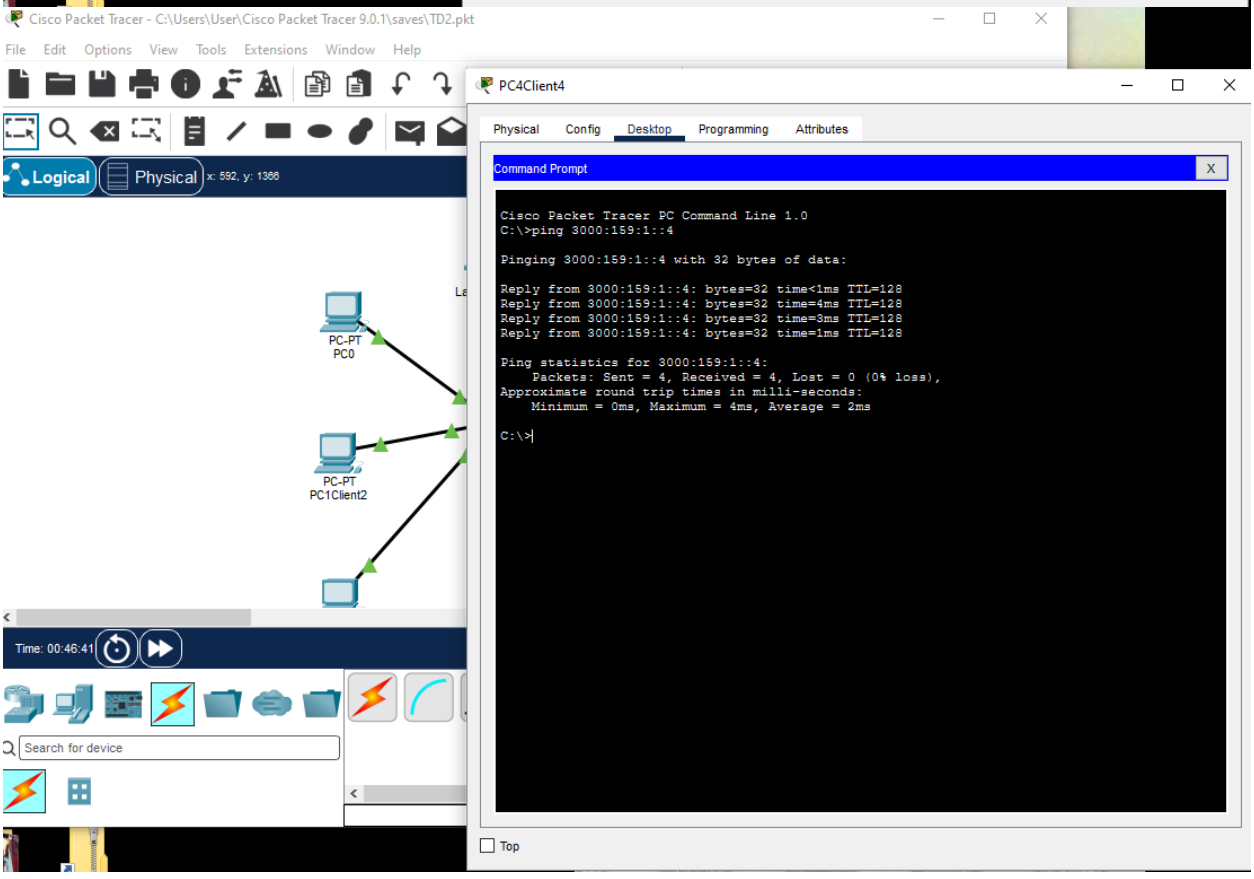
Client3


Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 301, y: 1391
PC-PT PC0Client1
PC-PT PC1Client2
Time: 00:48:42
Search for device
PC2Client3
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address 3000:159:1::3 / 64
Link Local Address FE80::20C:85FF:FEA5:CEAA
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top

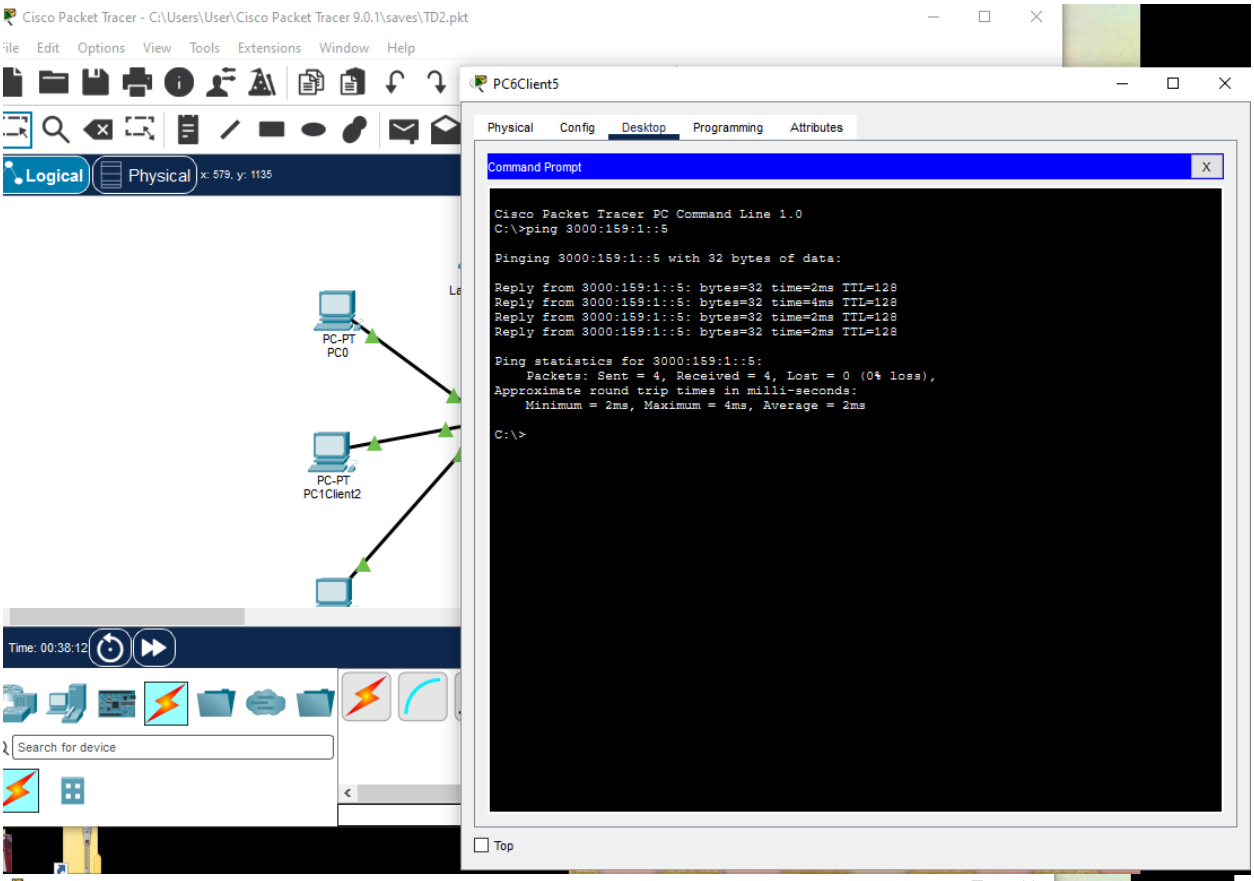

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 301, y: 1391
PC-PT PC0Client1
PC-PT PC1Client2
Time: 00:50:06
Search for device
PC2Client3
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::3
Pinging 3000:159:1::3 with 32 bytes of data:
Reply from 3000:159:1::3: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::3: bytes=32 time=1ms TTL=128
Reply from 3000:159:1::3: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::3: bytes=32 time=10ms TTL=128
Ping statistics for 3000:159:1::3:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 10ms, Average = 2ms
C:\>
Top

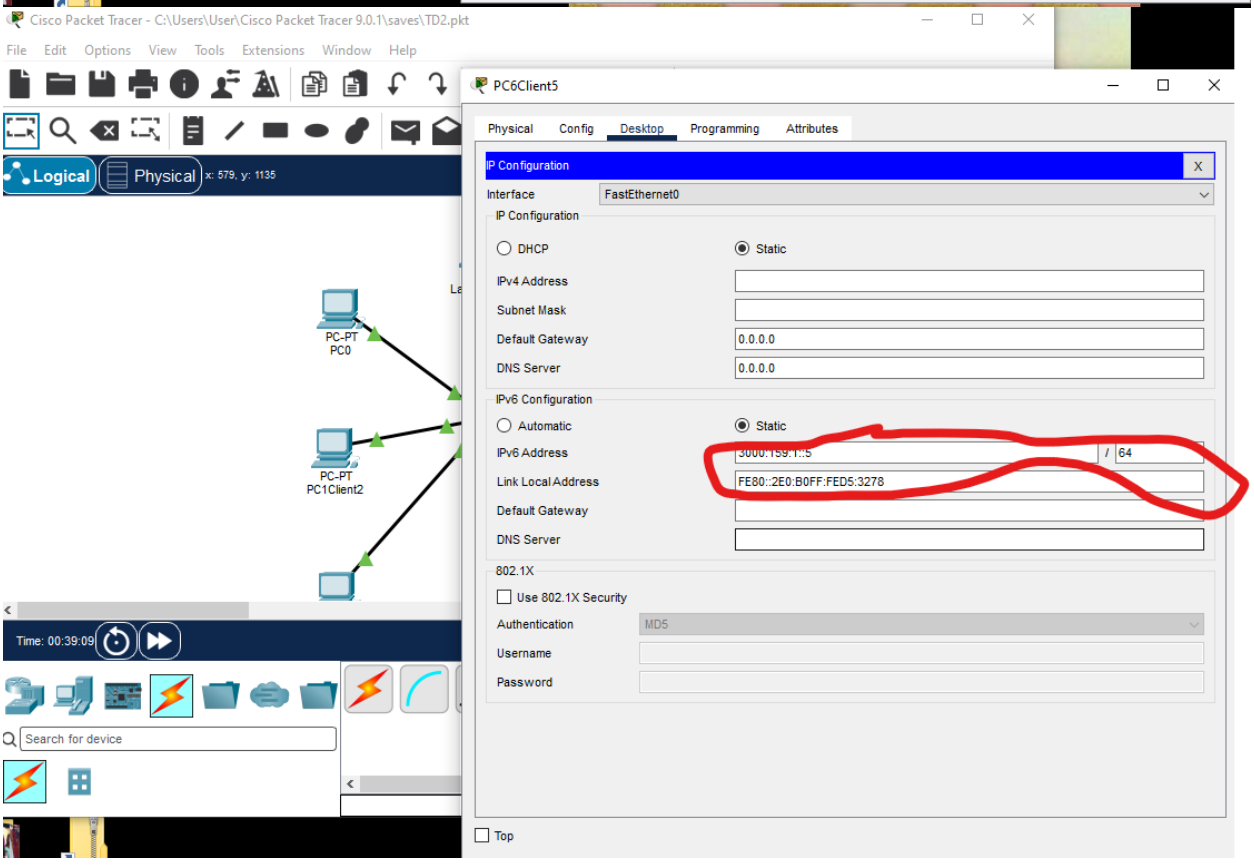
Client4


Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 592, y: 1366
PC-PT PC0
PC-PT PC1Client2
Time: 00:45:14
Search for device
PC4Client4
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address 3000:159:1::4 / 64
Link Local Address FE80::20A:F3FF:FE84:8328
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top

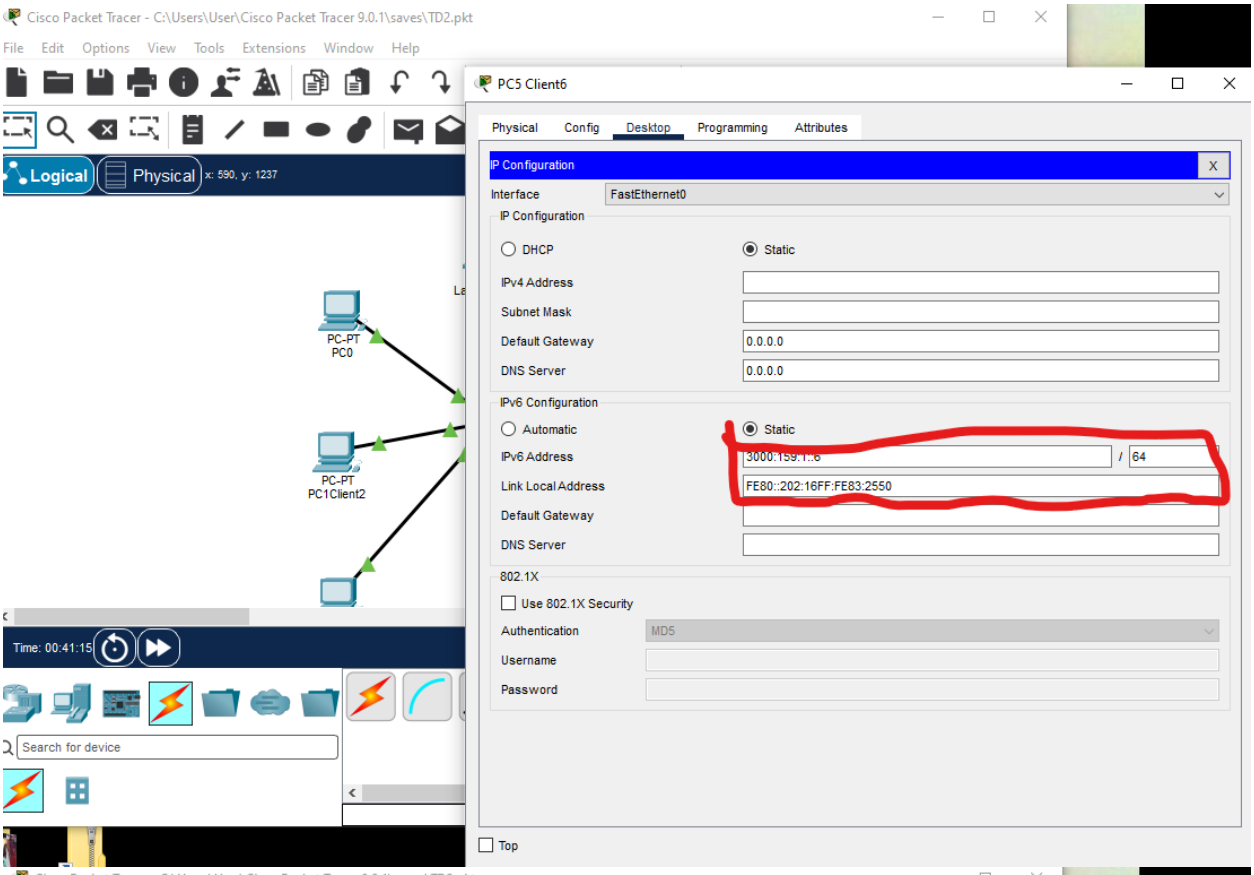

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 592, y: 1366
PC-PT PC0
PC-PT PC1Client2
Time: 00:46:41
Search for device
PC4Client4
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::4
Pinging 3000:159:1::4 with 32 bytes of data:
Reply from 3000:159:1::4: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::4: bytes=32 time=4ms TTL=128
Reply from 3000:159:1::4: bytes=32 time=3ms TTL=128
Reply from 3000:159:1::4: bytes=32 time=1ms TTL=128
Ping statistics for 3000:159:1::4:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 4ms, Average = 2ms
C:\>
Top

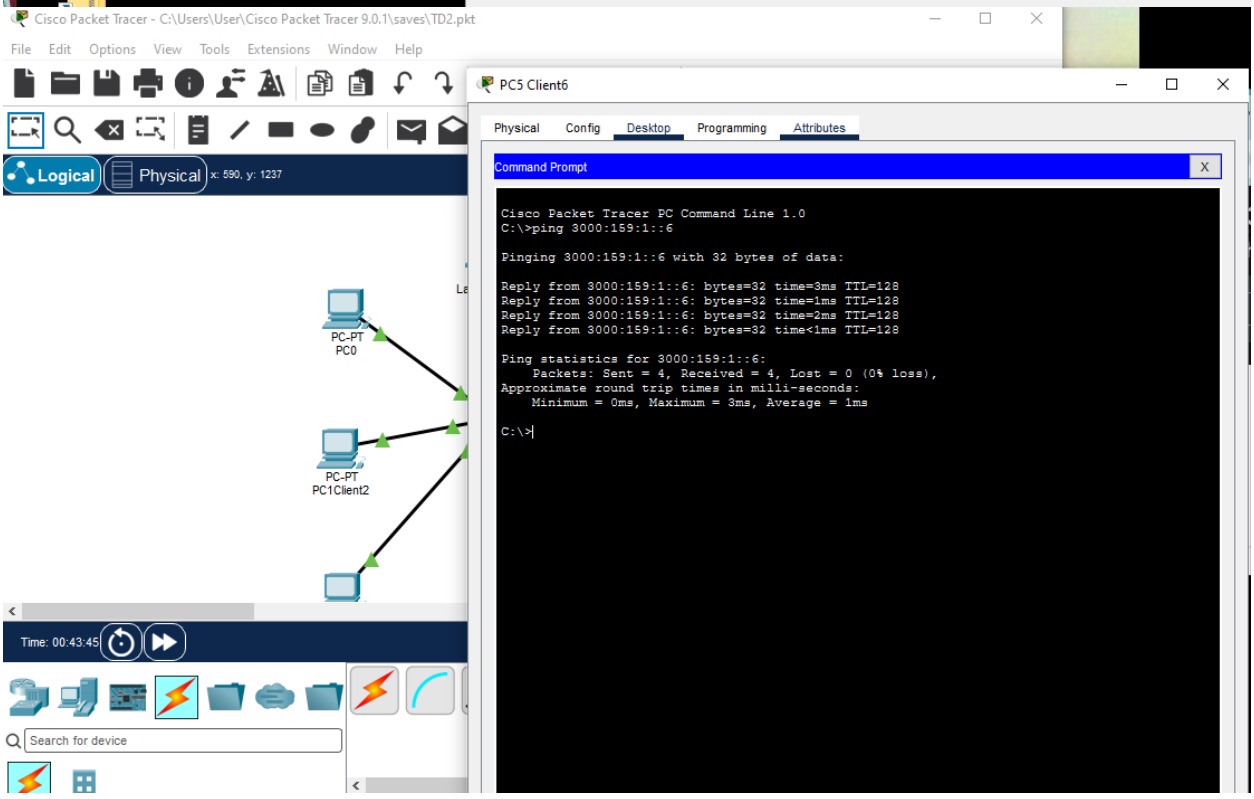
Client5


Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 579, y: 1135
PC-PT PC0
PC-PT PC1Client2
Time: 00:38:12
Search for device
PC6Client5
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::5
Pinging 3000:159:1::5 with 32 bytes of data:
Reply from 3000:159:1::5: bytes=32 time=2ms TTL=128
Reply from 3000:159:1::5: bytes=32 time=4ms TTL=128
Reply from 3000:159:1::5: bytes=32 time=2ms TTL=128
Reply from 3000:159:1::5: bytes=32 time=2ms TTL=128
Ping statistics for 3000:159:1::5:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 4ms, Average = 2ms
C:\>
Top

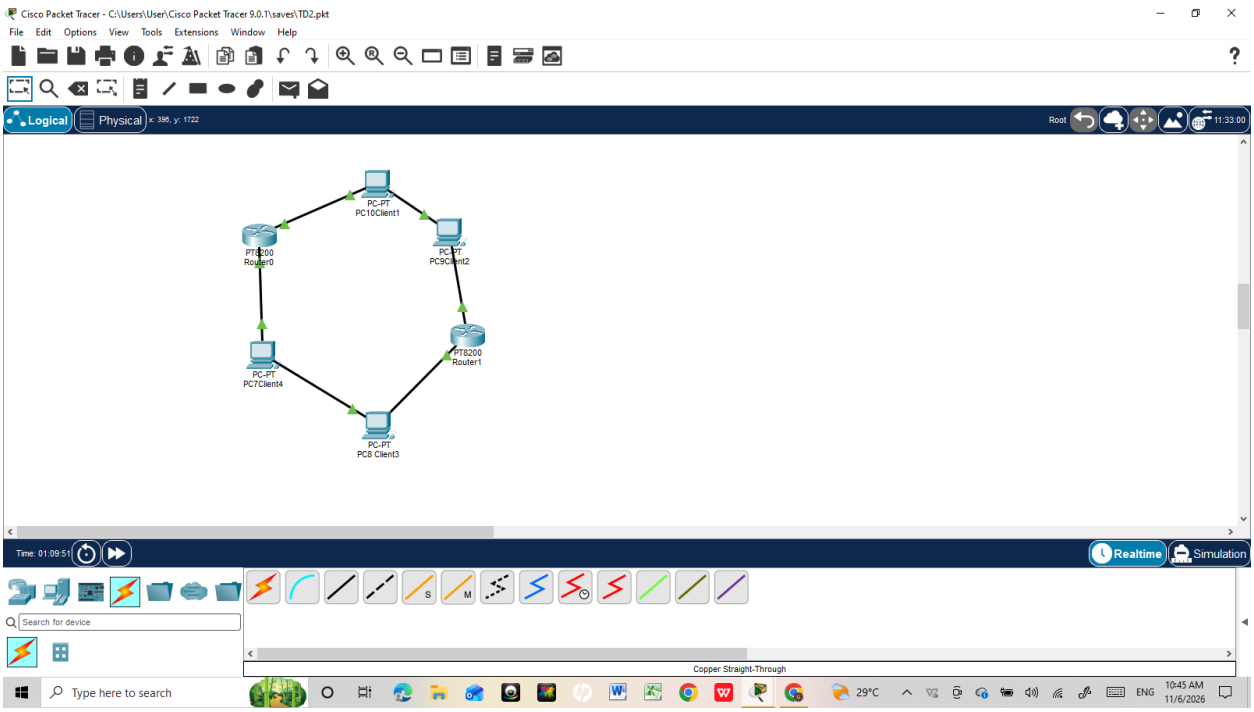

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 579, y: 1135
PC-PT PC0
PC-PT PC1Client2
Time: 00:39:09
Search for device
PC6Client5
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address 3000:159:1::5 / 64
Link Local Address FE80::2E0:B0FF:FED5:3278
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top

Client6

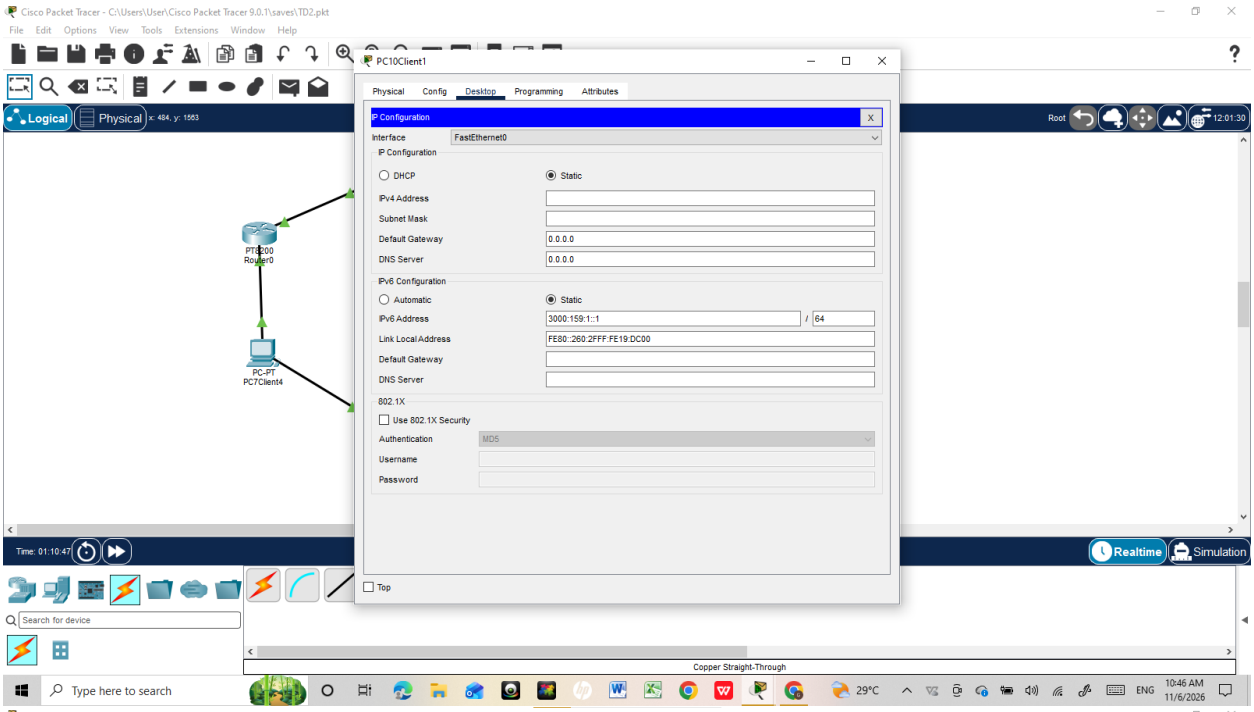

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical Physical x: 590, y: 1237
PC-PT PC0
PC-PT PC1Client2
Time: 00:41:15
Search for device
PC5 Client6
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic Static
IPv6 Address 3000:159:1::6 / 64
Link Local Address FE80::202:16FF:FE83:2550
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top

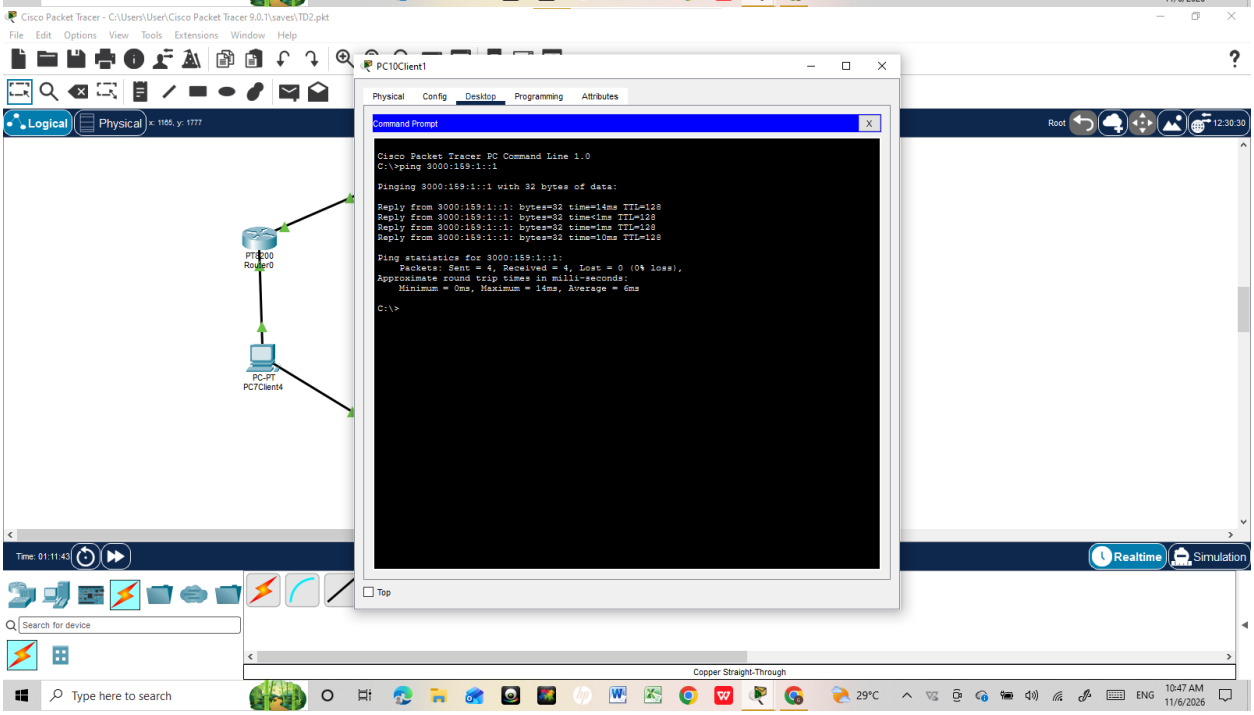

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical Physical x: 590, y: 1237
PC-PT PC0
PC-PT PC1Client2
Time: 00:43:45
Search for device
PC5 Client6
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::6
Pinging 3000:159:1::6 with 32 bytes of data:
Reply from 3000:159:1::6: bytes=32 time=3ms TTL=128
Reply from 3000:159:1::6: bytes=32 time=1ms TTL=128
Reply from 3000:159:1::6: bytes=32 time=2ms TTL=128
Reply from 3000:159:1::6: bytes=32 time<1ms TTL=128
Ping statistics for 3000:159:1::6:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 3ms, Average = 1ms
C:\>

Configuration IPv6 de l’exercice #6 pour chaque client de 1 à 4.

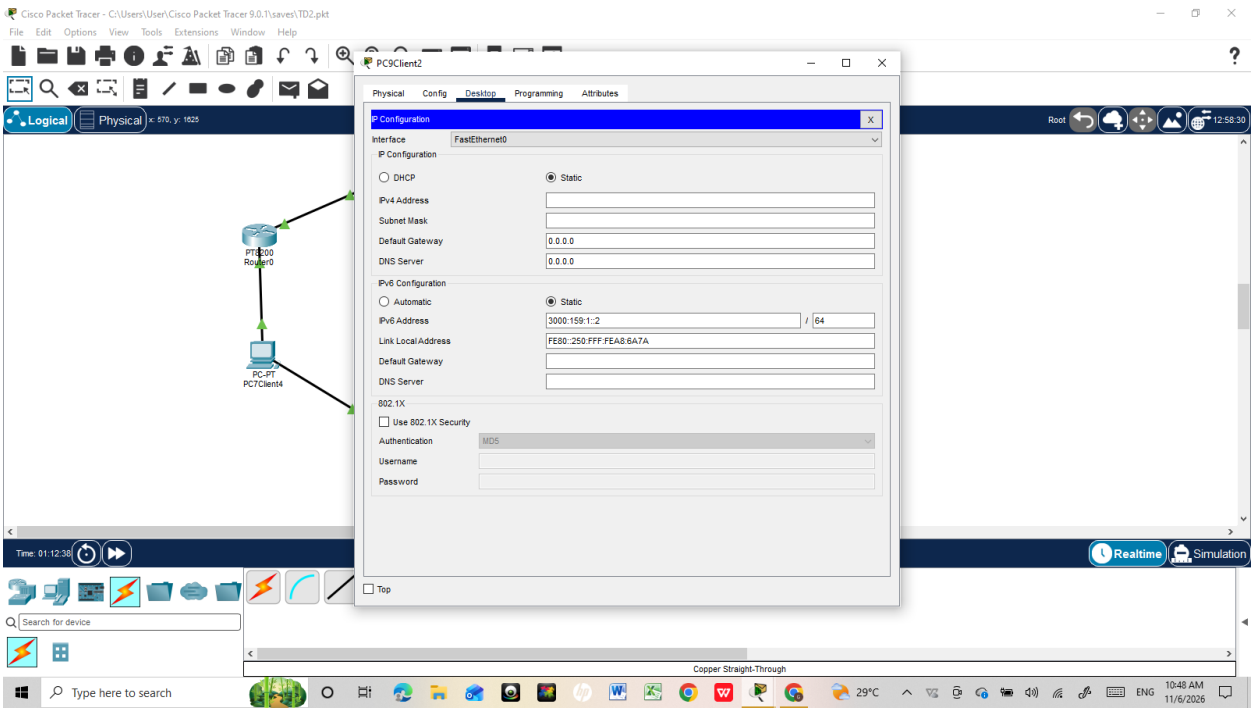


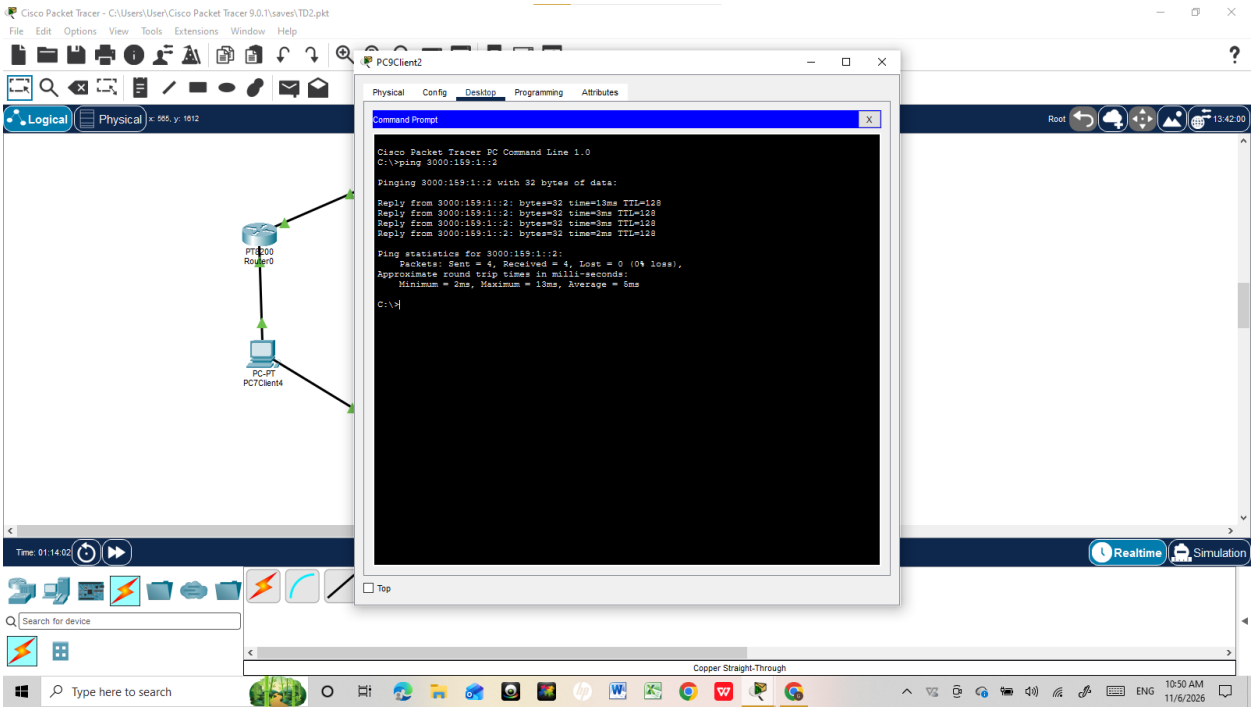
Client1


PC10Client1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:159:1::1
/ 64
Link Local Address
FE80::260:2FFF:FE19:DC00
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top
PT-2200 Router0
PC-PT PC7Client4
Copper Straight-Through
Realtime
Simulation

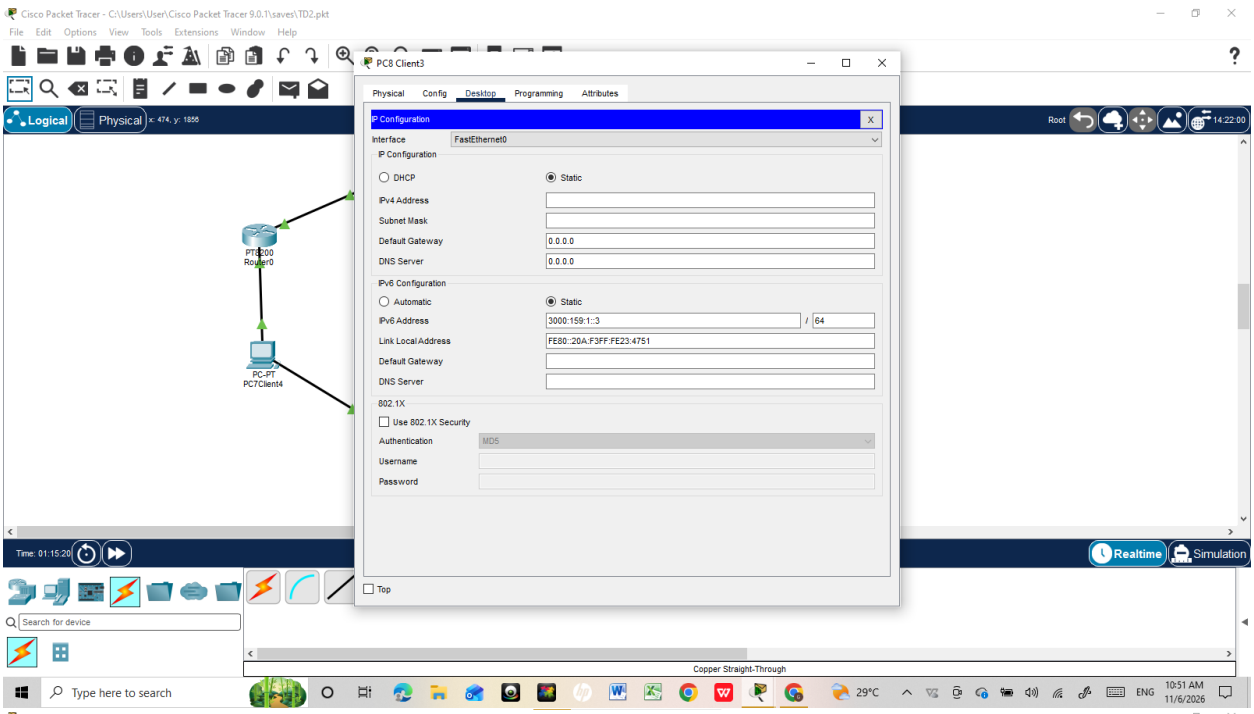

PC10Client1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::1
Pinging 3000:159:1::1 with 32 bytes of data:
Reply from 3000:159:1::1: bytes=32 time=14ms TTL=128
Reply from 3000:159:1::1: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::1: bytes=32 time=1ms TTL=128
Reply from 3000:159:1::1: bytes=32 time=10ms TTL=128
Ping statistics for 3000:159:1::1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 14ms, Average = 6ms
C:\>
Top
PT-2200 Router0
PC-PT PC7Client4
Copper Straight-Through
Realtime
Simulation

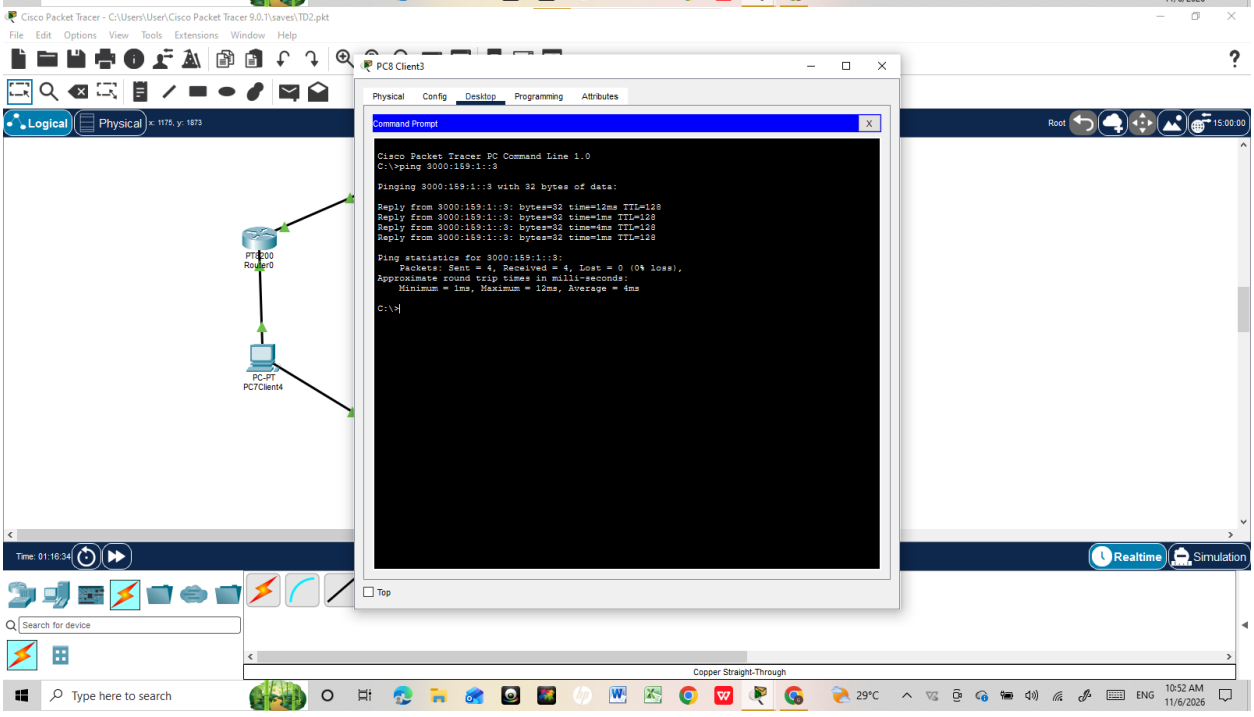
Client2


PC9Client2
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:159:1::2
/ 64
Link Local Address
FE80::250:FFF:FEA8:6A7A
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top
PT-200
Router0
PC-PT
PC7Client4
Copper Straight-Through

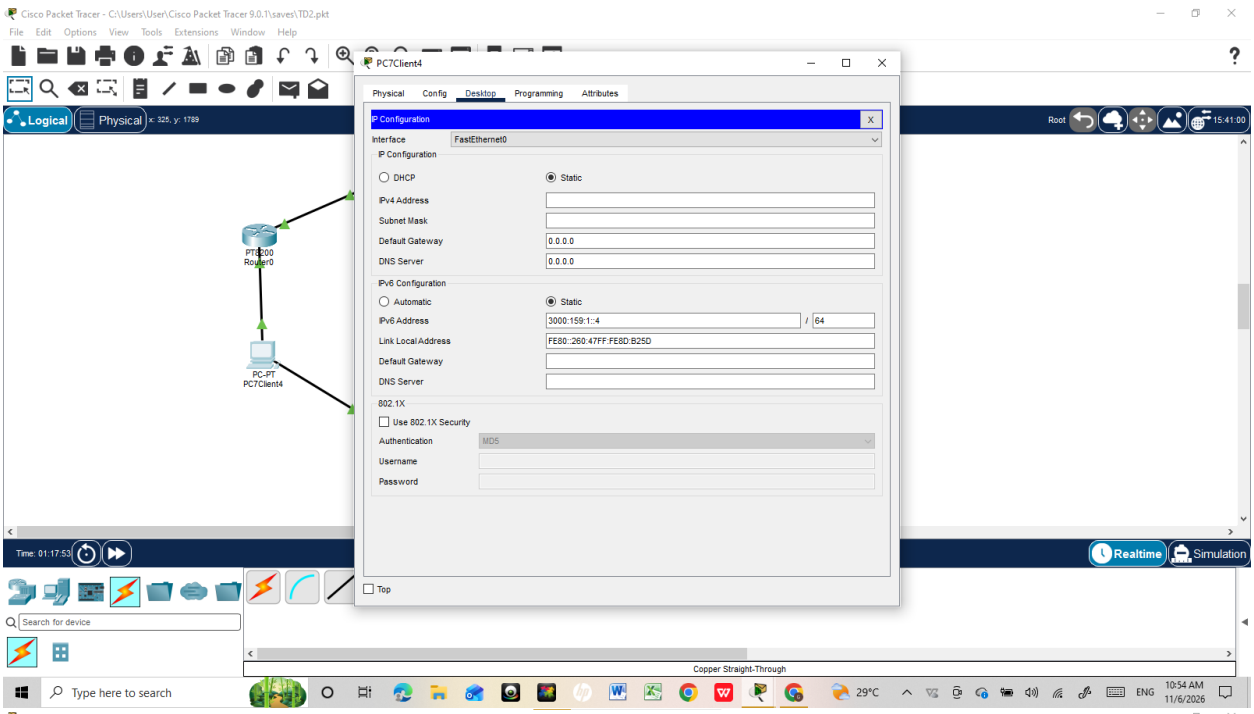

PC9Client2
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::2
Pinging 3000:159:1::2 with 32 bytes of data:
Reply from 3000:159:1::2: bytes=32 time=13ms TTL=128
Reply from 3000:159:1::2: bytes=32 time=9ms TTL=128
Reply from 3000:159:1::2: bytes=32 time=9ms TTL=128
Reply from 3000:159:1::2: bytes=32 time=2ms TTL=128
Ping statistics for 3000:159:1::2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 13ms, Average = 5ms
C:\>
Top
PT-200
Router0
PC-PT
PC7Client4
Copper Straight-Through

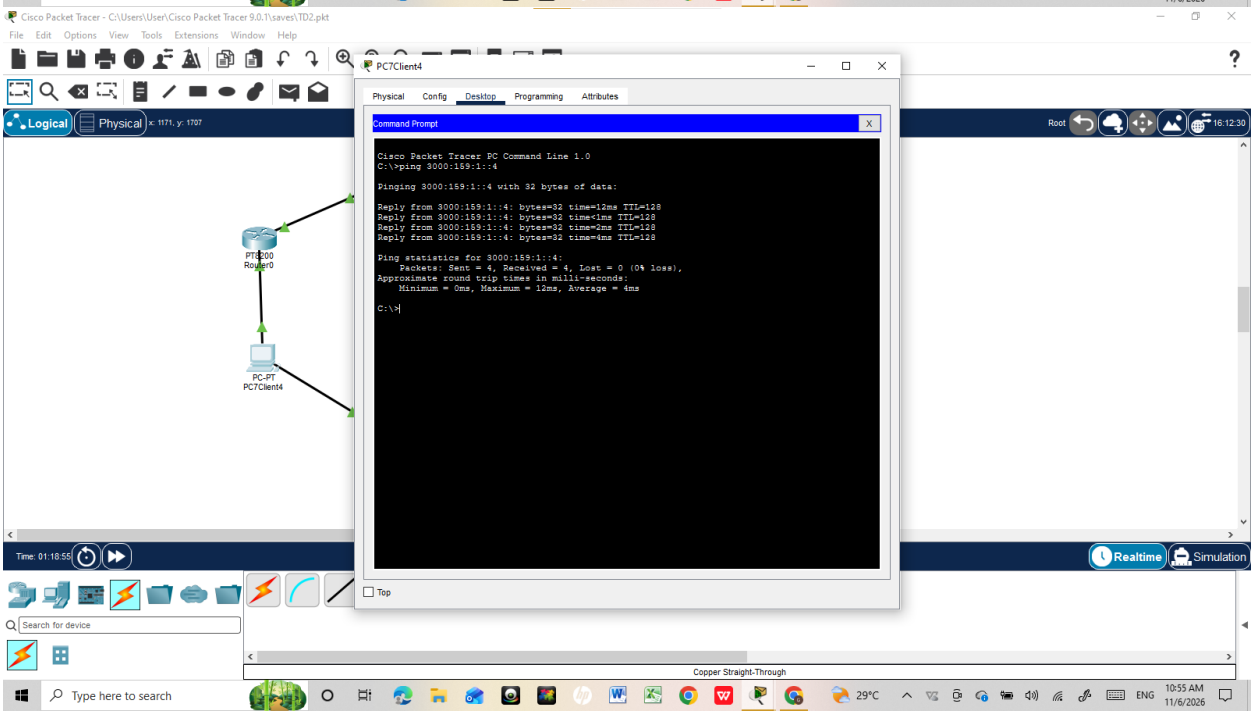
Client3


Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
PC8 Client3
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:159:1::3
/ 64
Link Local Address
FE80::20A:F3FF:FE23:4751
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top
Logical
Physical
Root
Realtime
Simulation
Copper Straight-Through
Type here to search
29°C
ENG
10:51 AM
11/6/2026


Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
PC8 Client3
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::3
Pinging 3000:159:1::3 with 32 bytes of data:
Reply from 3000:159:1::3: bytes=32 time=12ms TTL=128
Reply from 3000:159:1::3: bytes=32 time=1ms TTL=128
Reply from 3000:159:1::3: bytes=32 time=4ms TTL=128
Reply from 3000:159:1::3: bytes=32 time=1ms TTL=128
Ping statistics for 3000:159:1::3:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 12ms, Average = 4ms
C:\>
Top
Logical
Physical
Root
Realtime
Simulation
Copper Straight-Through
Type here to search
29°C
ENG
10:52 AM
11/6/2026

Client4


Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
PC7Client4
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address 3000:159:1::4 / 64
Link Local Address FE80::260:47FF:FE8D:B25D
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
PT-200 Router0
PC-PT PC7Client4
Copper Straight-Through
Realtime
Simulation
Type here to search
29°C
ENG
10:54 AM
11/6/2026


Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 9.0.1\saves\TD2.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
PC7Client4
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::4
Pinging 3000:159:1::4 with 32 bytes of data:
Reply from 3000:159:1::4: bytes=32 time=12ms TTL=128
Reply from 3000:159:1::4: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::4: bytes=32 time=2ms TTL=128
Reply from 3000:159:1::4: bytes=32 time=4ms TTL=128
Ping statistics for 3000:159:1::4:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 12ms, Average = 4ms
C:\>
Top
PT-200 Router0
PC-PT PC7Client4
Copper Straight-Through
Realtime
Simulation
Type here to search
29°C
ENG
10:55 AM
11/6/2026

Conclusion :

Ce TD m’apprend à configurer un adresse IPv4 et IPv6 sur des routeurs et hôtes. L’objectif du TD a été bien saisi et réussi.

1. Pratique et connaitre où configurer les IP.
2. Pratique des command prompt avec ping.
3. Configurer IPv4 dans l’interface IP configuration dans la case IPv4 adresse.
4. Savoir que les adresses IPv4 ont 32 bytes of data.
5. Configurer IPv6 dans l’interface IP configuration dans la case ipv6 en bas .
6. Savoir que les adresses IPv6 on 32 bytes of data.
7. Les adresse IPv4 sont différent de IPv6.