

FACULTE DES SCIENCES ET TECHNOLOGIES

(FST)

Troisième année.

Cours : Reseau1

Etudiant : Mikelo GONTRAND.


Professeur : Mr Ismael SAINT AMOUR.

Le 10 Novembre 2026.

L’objectif de ce TD est de :


1. Découvrir la configuration de base d’un Switch et d’un moteur.
2. Attribuer des adresses IPv4 et IPv6 aux périphériques.
3. Tester la connectivité entre les hôtes.
4. Utiliser le Mode Simulation pour analyser le trafic réseau.

Exercices-1.

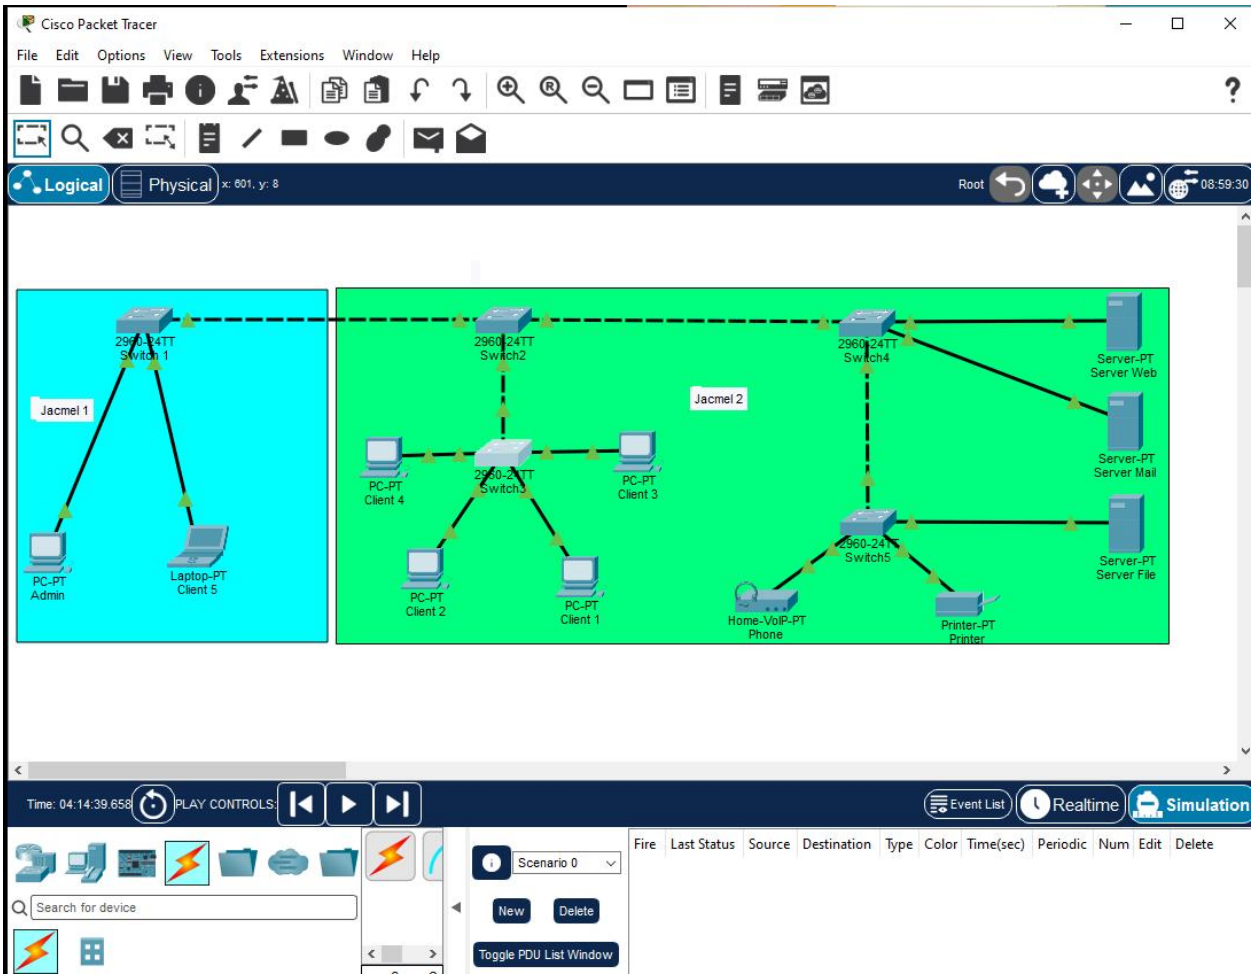

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
Root
Jacmel 1
Jacmel 2
2960-24TT Switch 1
2960-24TT Switch2
2960-24TT Switch3
2960-24TT Switch4
2960-24TT Switch5
PC-PT Admin
Laptop-PT Client 5
PC-PT Client 4
PC-PT Client 3
PC-PT Client 2
PC-PT Client 1
Server-PT Server Web
Server-PT Server Mail
Server-PT Server File
Home-VoIP-PT Phone
Printer-PT Printer
Time: 04:14:39.658
PLAY CONTROLS:
Event List
Realtime
Simulation
Search for device
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete

Configuration les switchs IPv4.


Switch 1.

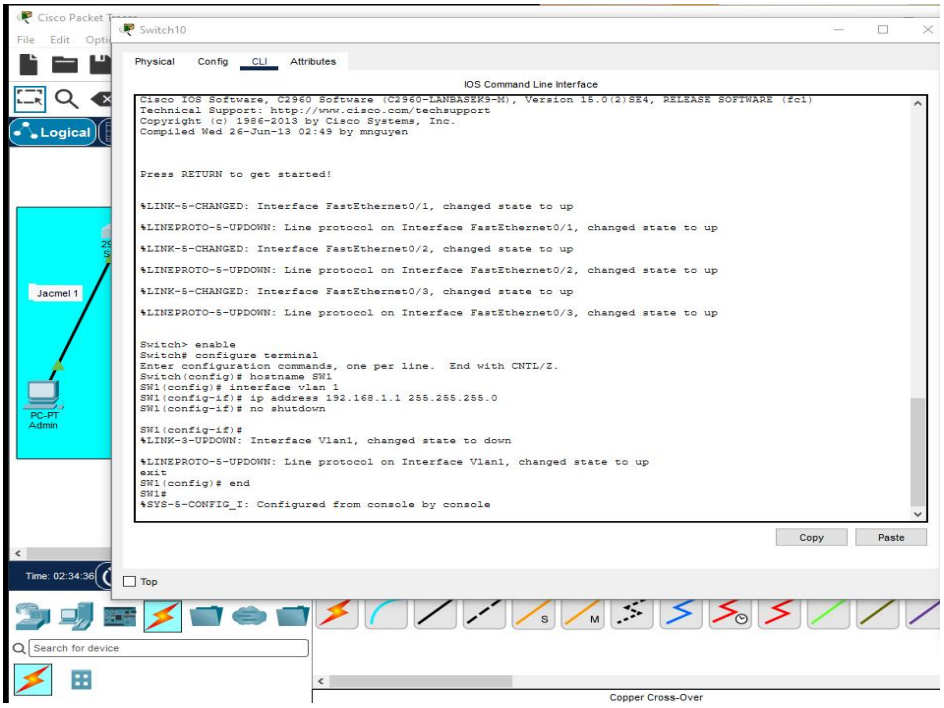


Switch 2.

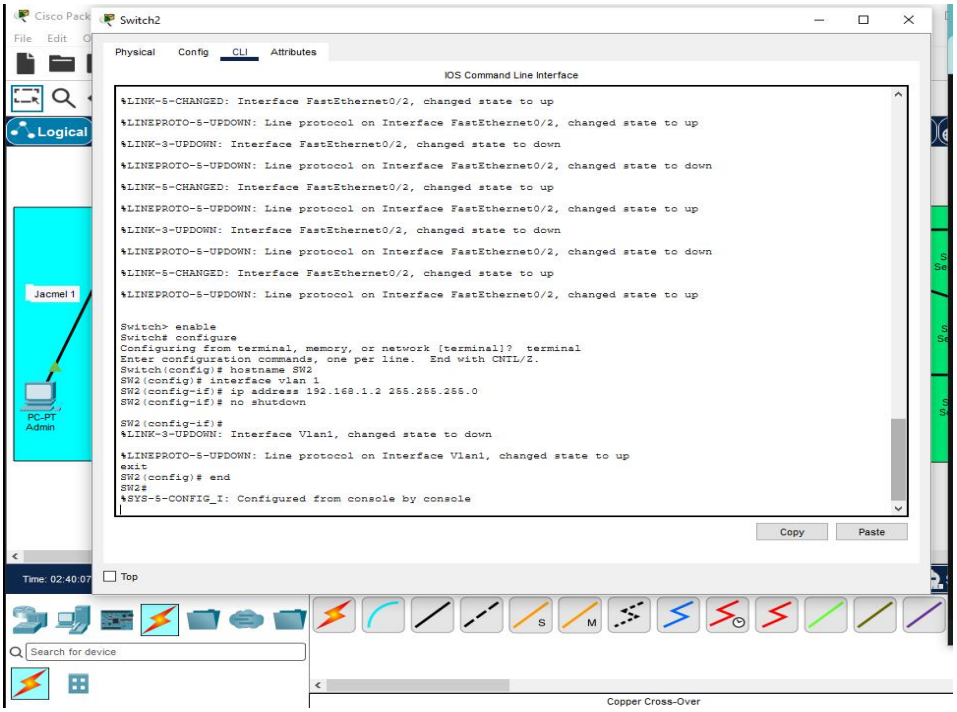


Switch 3.

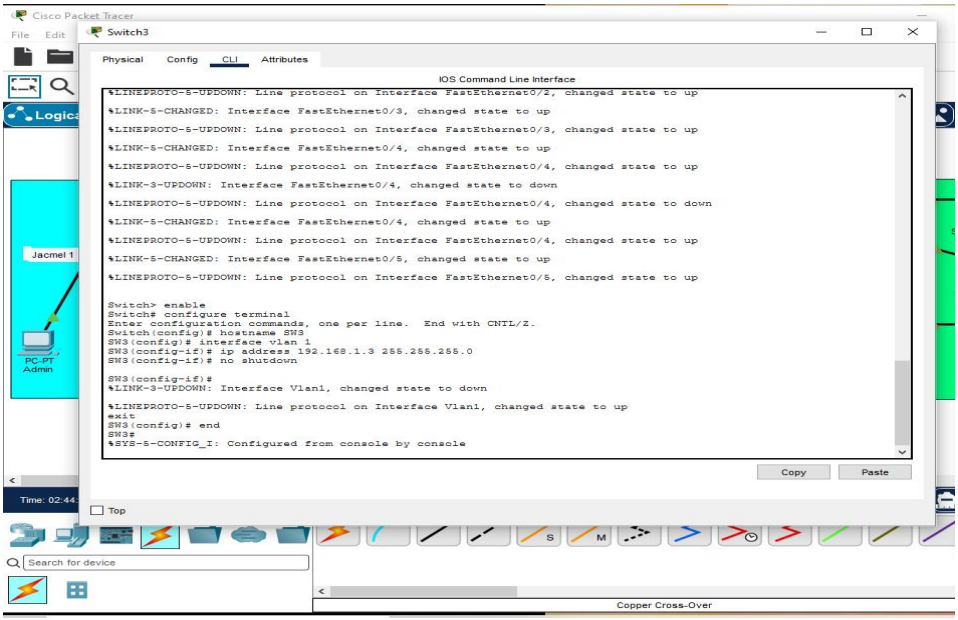

Switch 4.

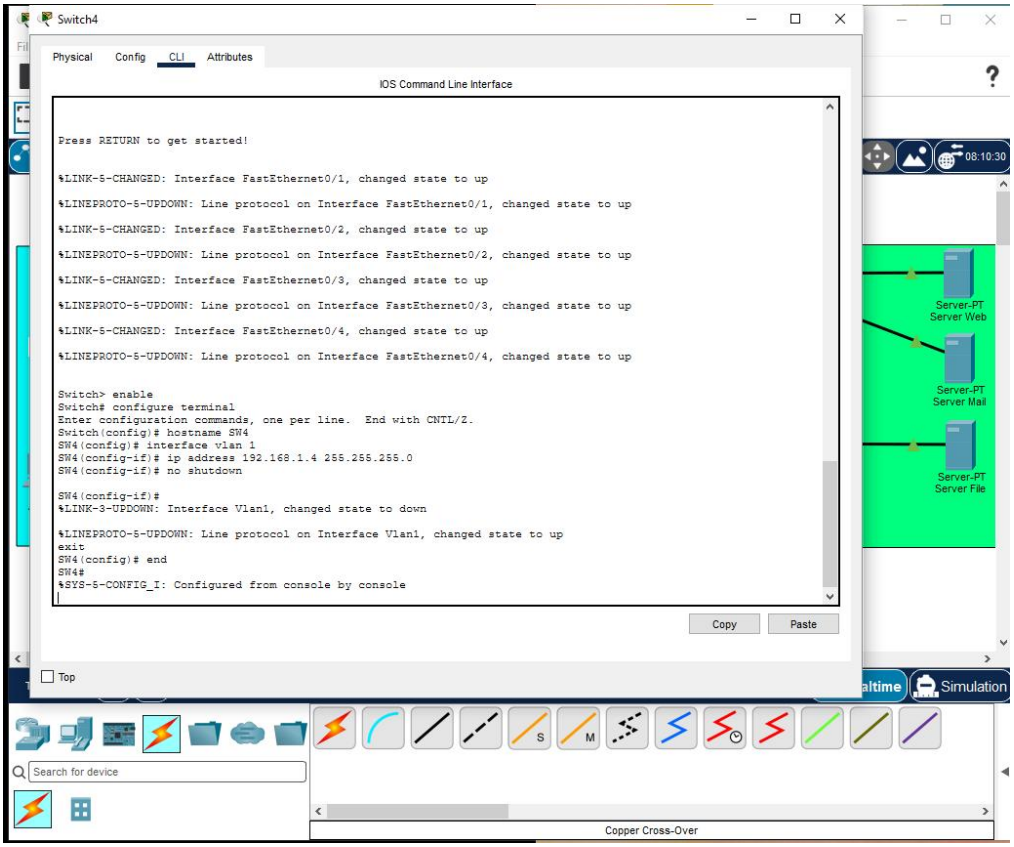



Switch 5.

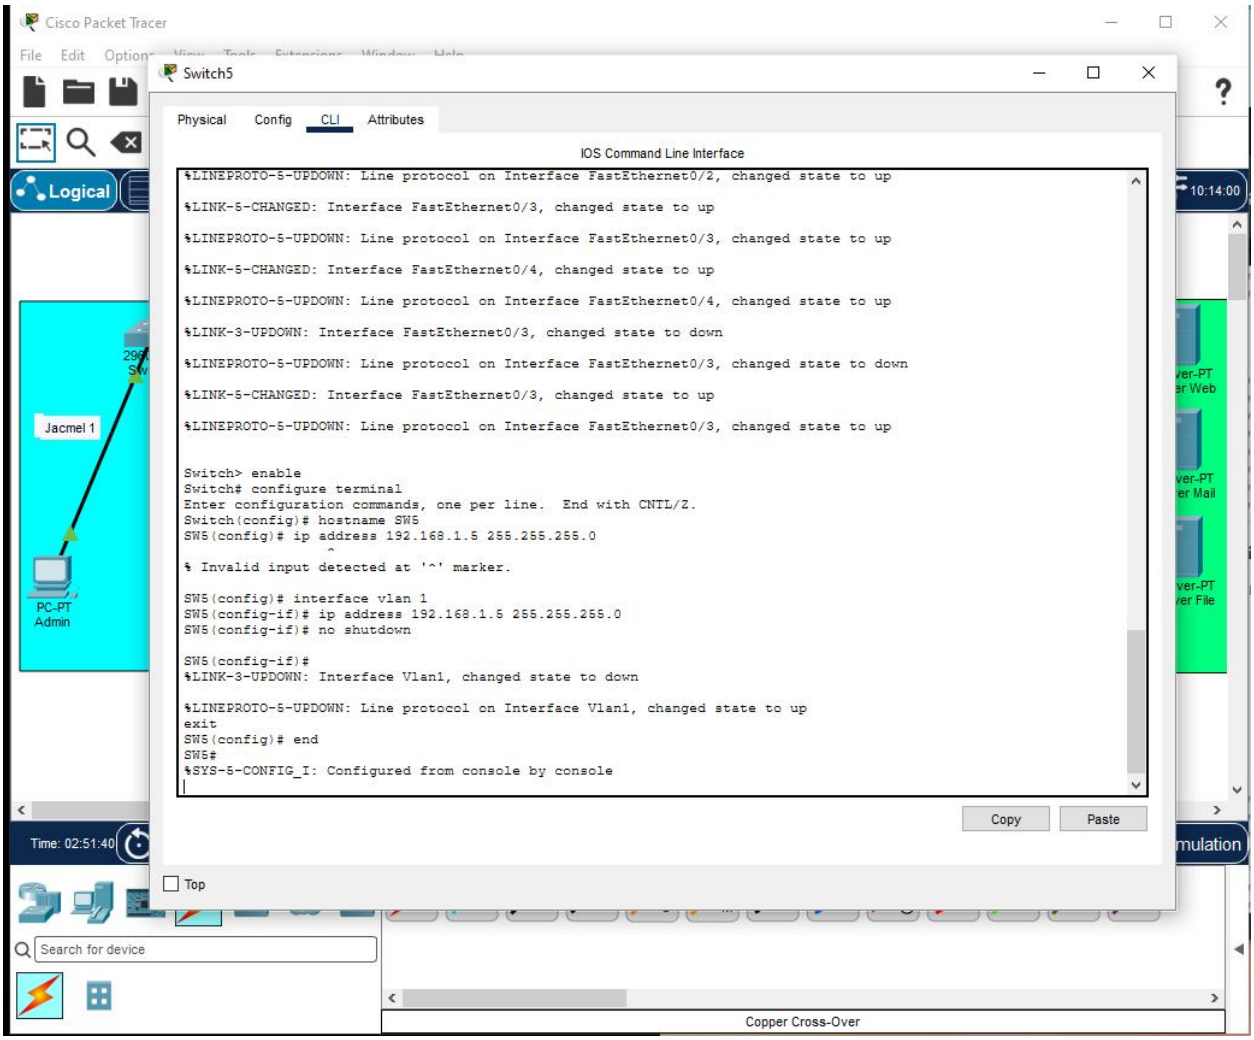
Cisco Packet Tracer
Switch5
Physical
Config
CLI
Attributes
IOS Command Line Interface
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up
%LINK-3-UPDOWN: Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
Switch> enable
Switch# configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)# hostname SW5
SW5(config)# ip address 192.168.1.5 255.255.255.0
% Invalid input detected at '^' marker.
SW5(config)# interface vlan 1
SW5(config-if)# ip address 192.168.1.5 255.255.255.0
SW5(config-if)# no shutdown
SW5(config-if)#
%LINK-3-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
exit
SW5(config)# end
SW5#
%SYS-5-CONFIG_I: Configured from console by console
Copy
Paste
Top
Logical
Jacmel 1
PC-PT
Admin
Time: 02:51:40
Search for device
Copper Cross-Over


IPv4 et Connectivité


PC admin/Jacmel1

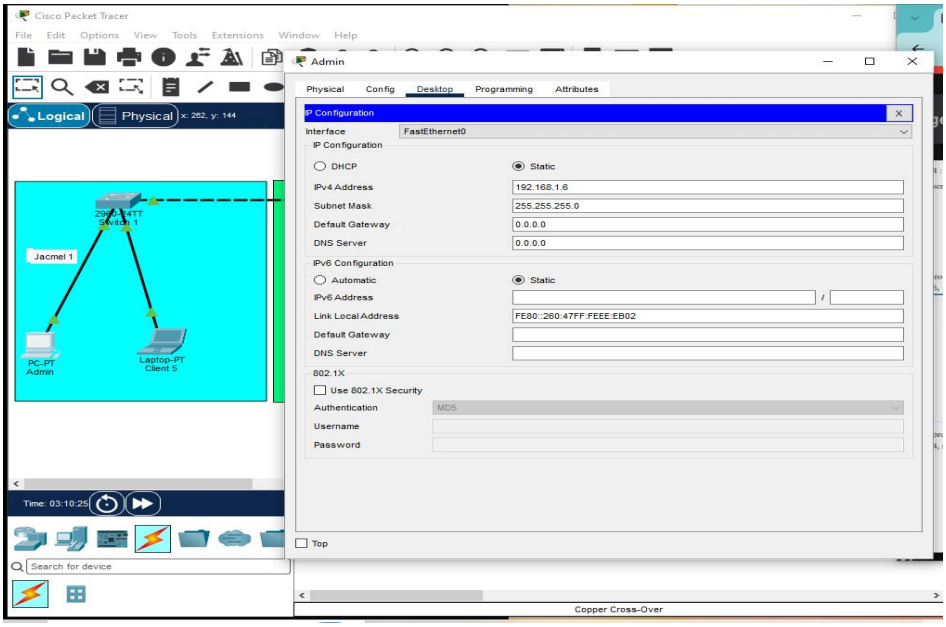

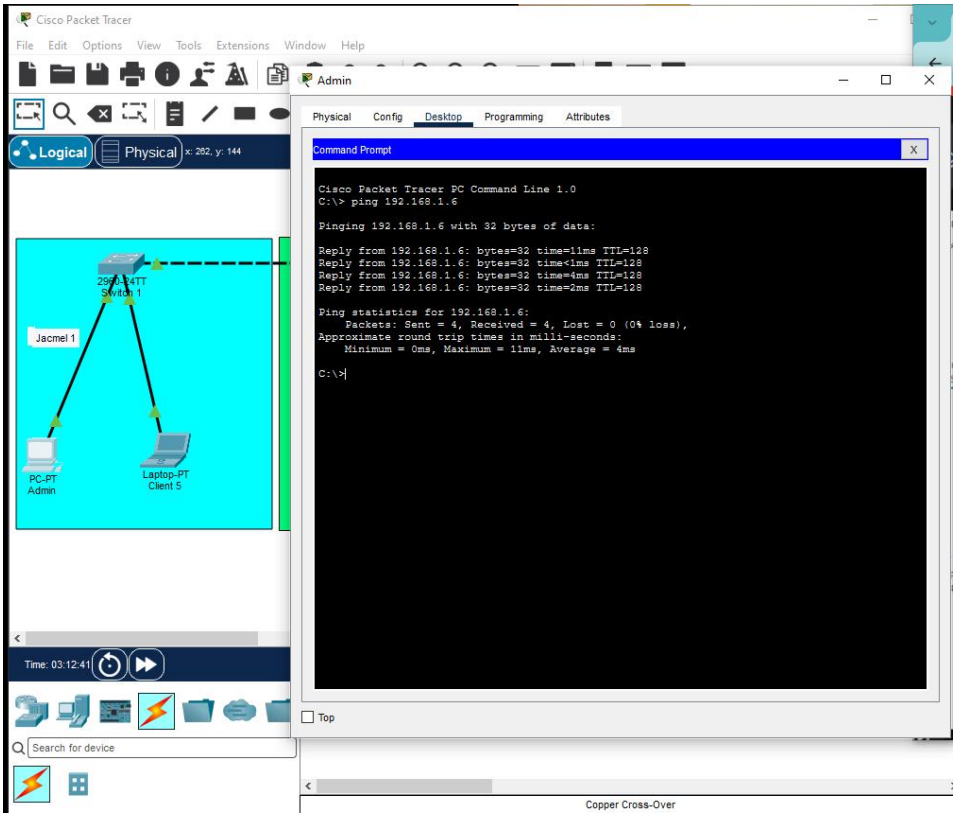



Client 5/Jacmel1.

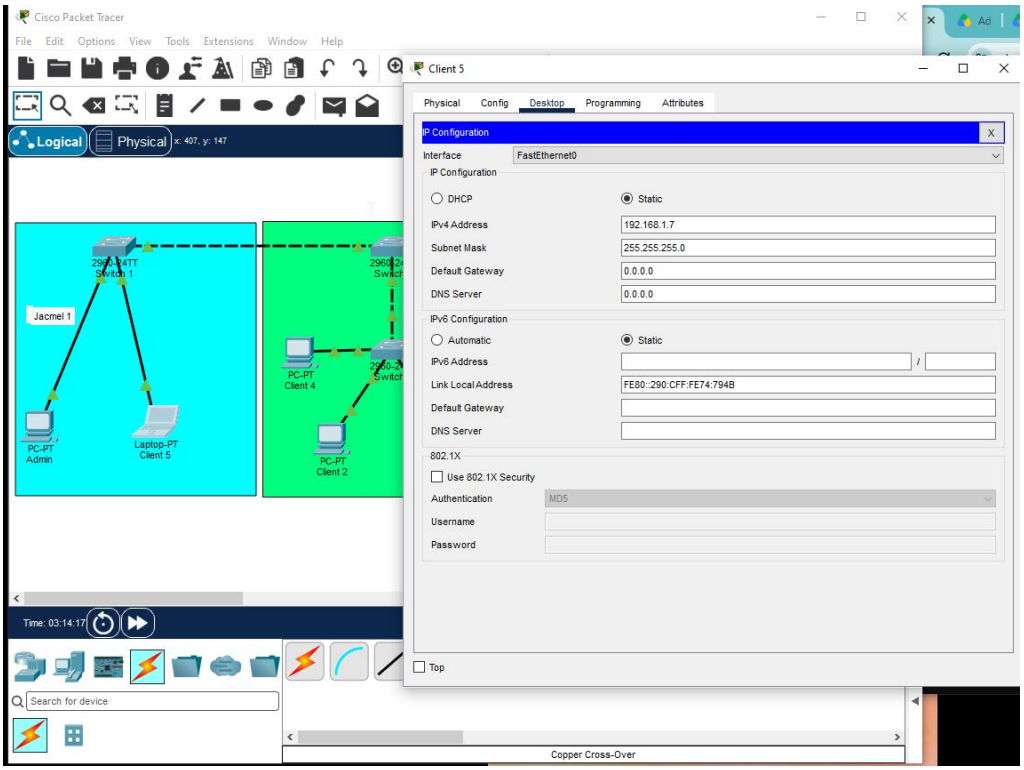

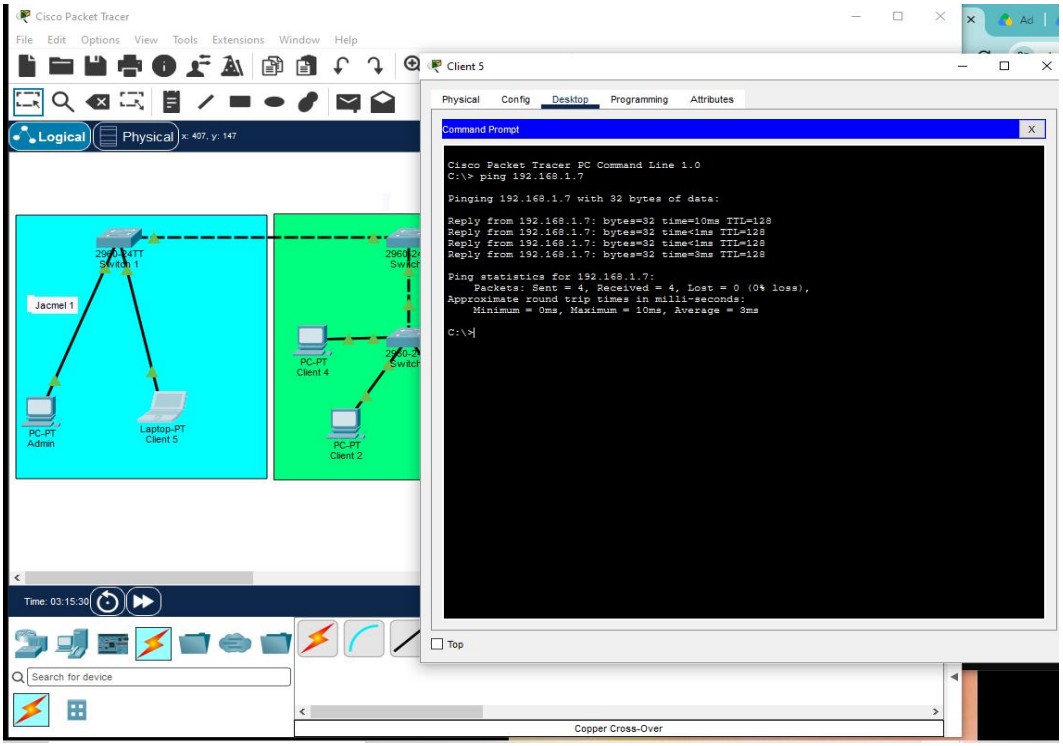



Client 1 /Jacmel2.

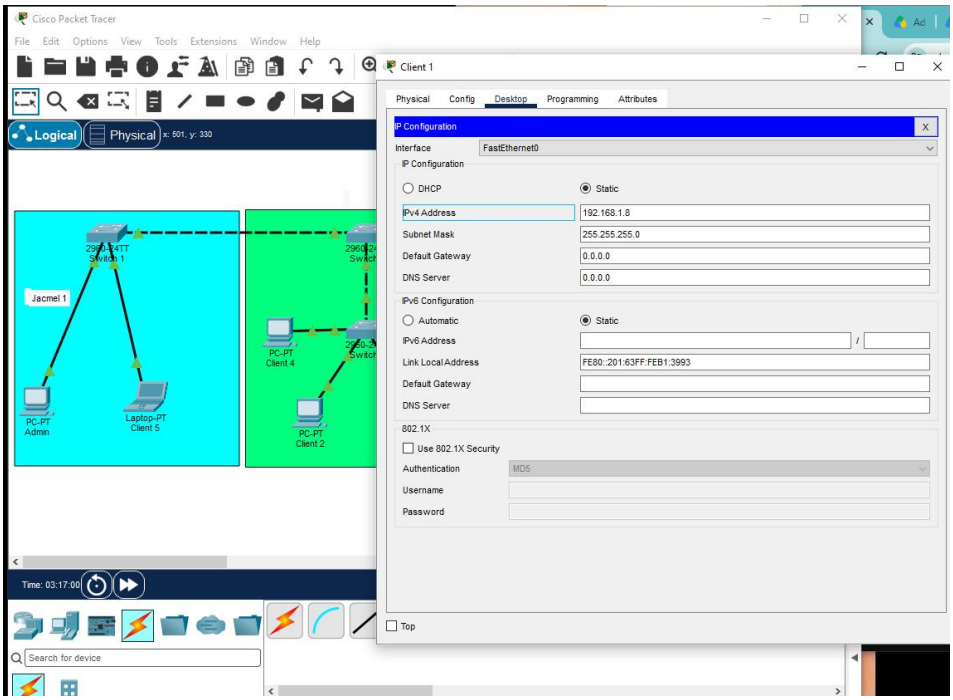

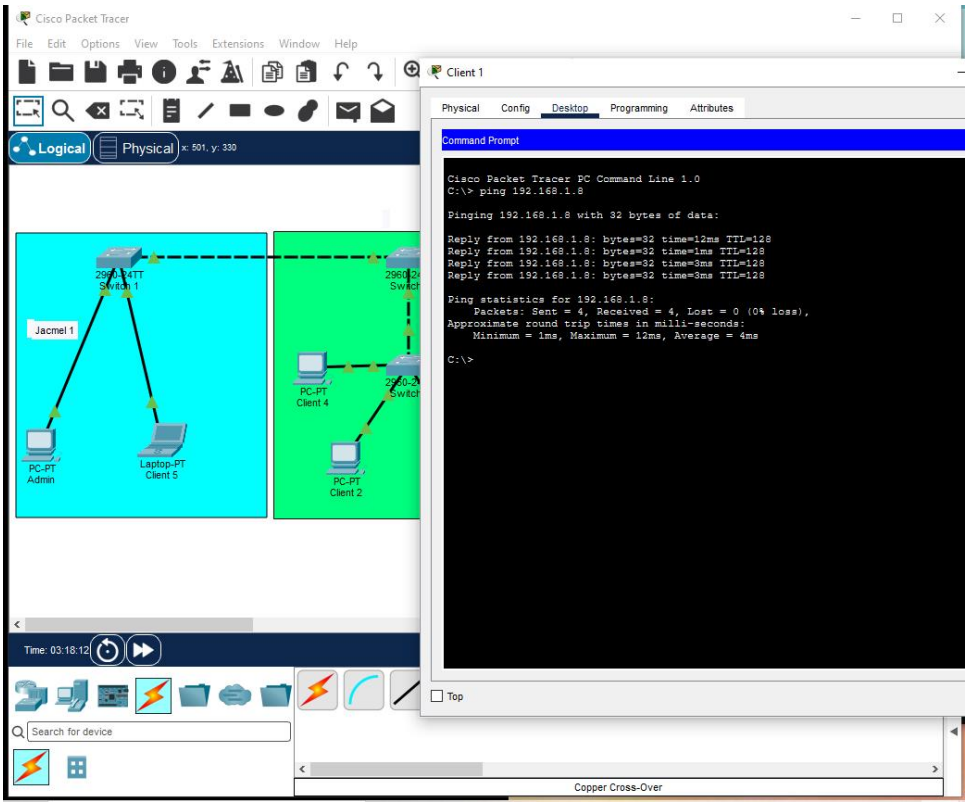



Client2 /Jacmel2.

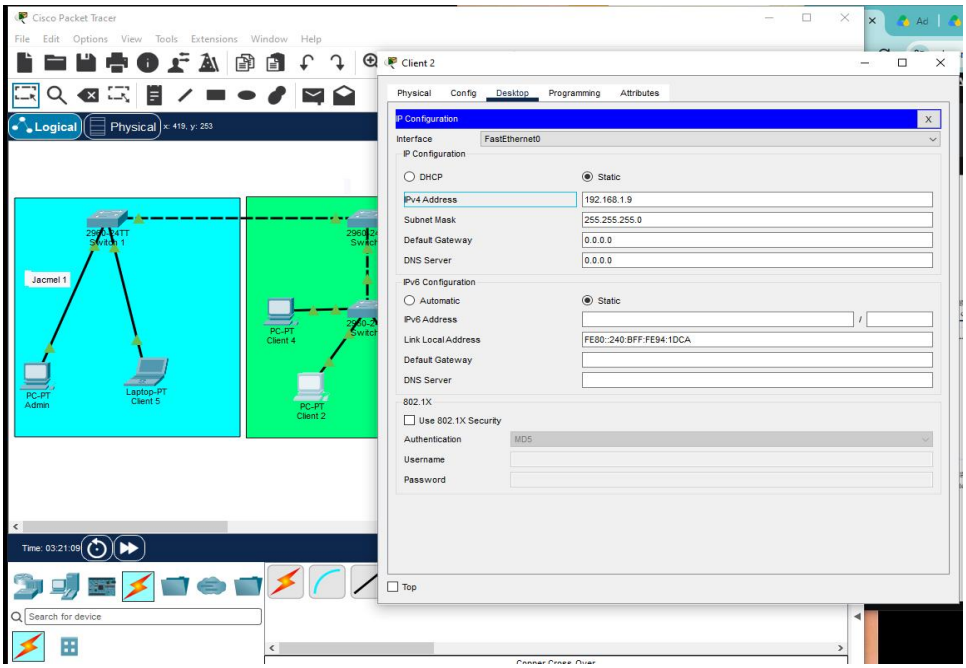

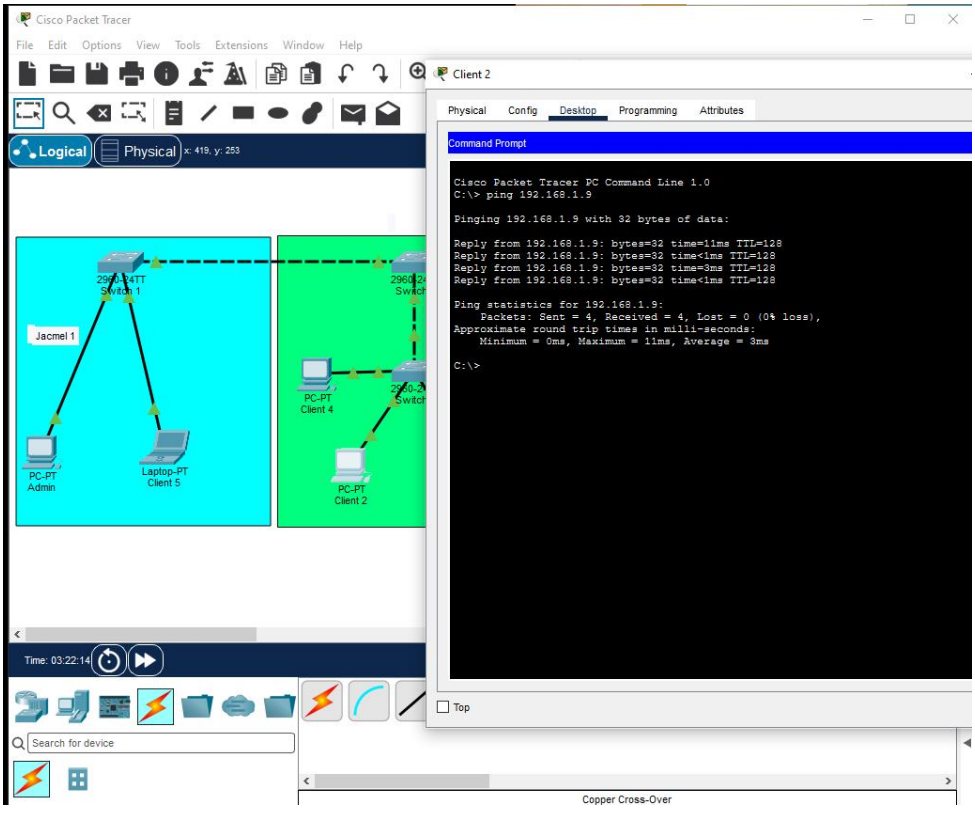



Client3/Jacmel2.

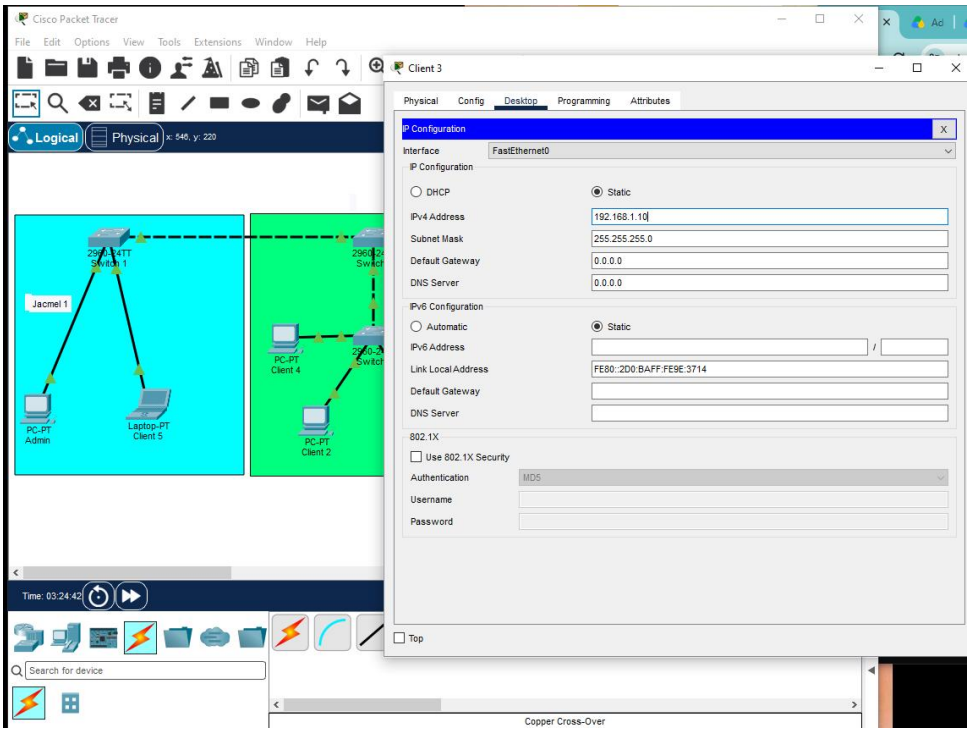

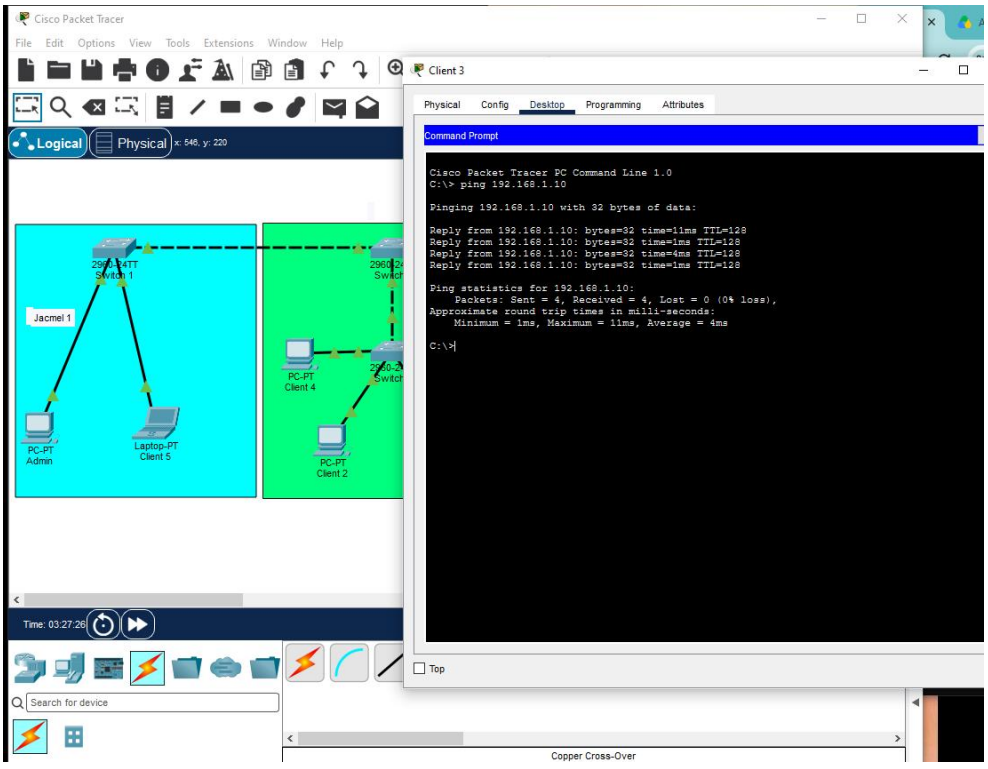



Client4/Jacmel2.

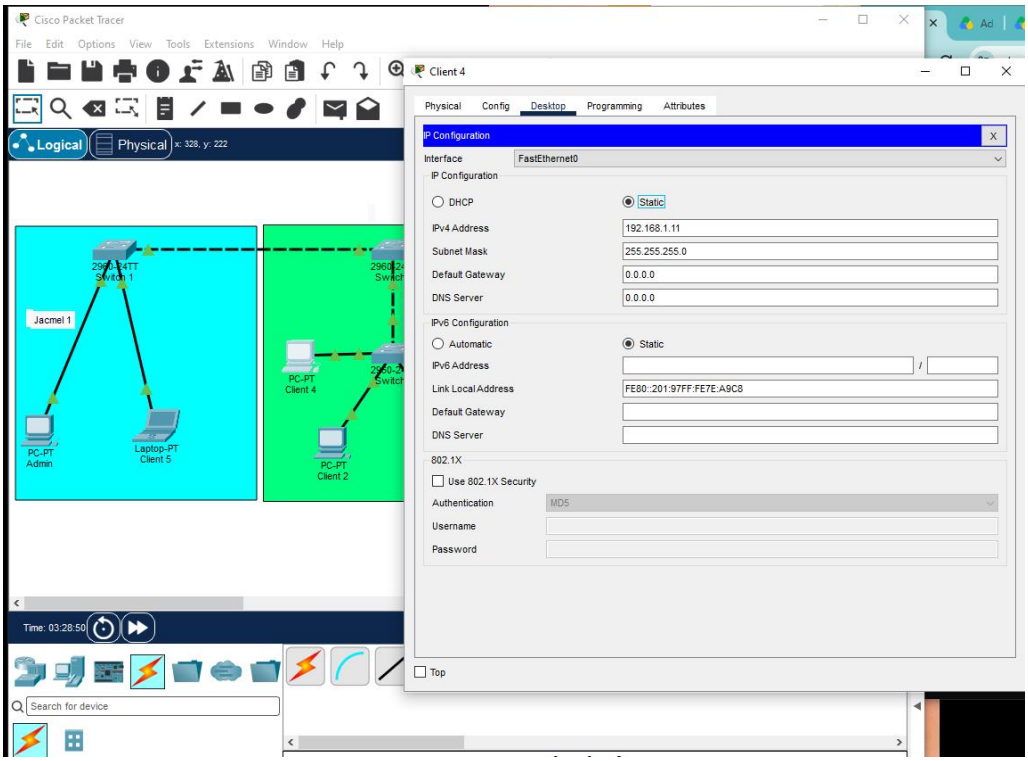

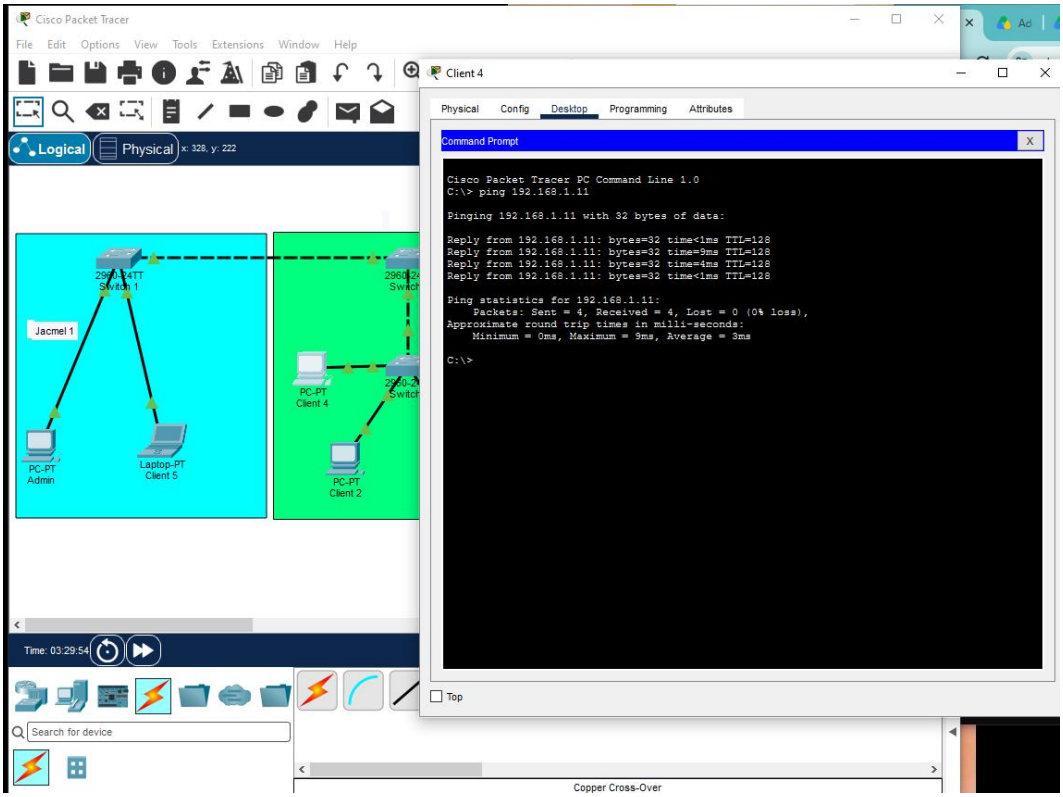



Serveur WEB/Jacmel2.

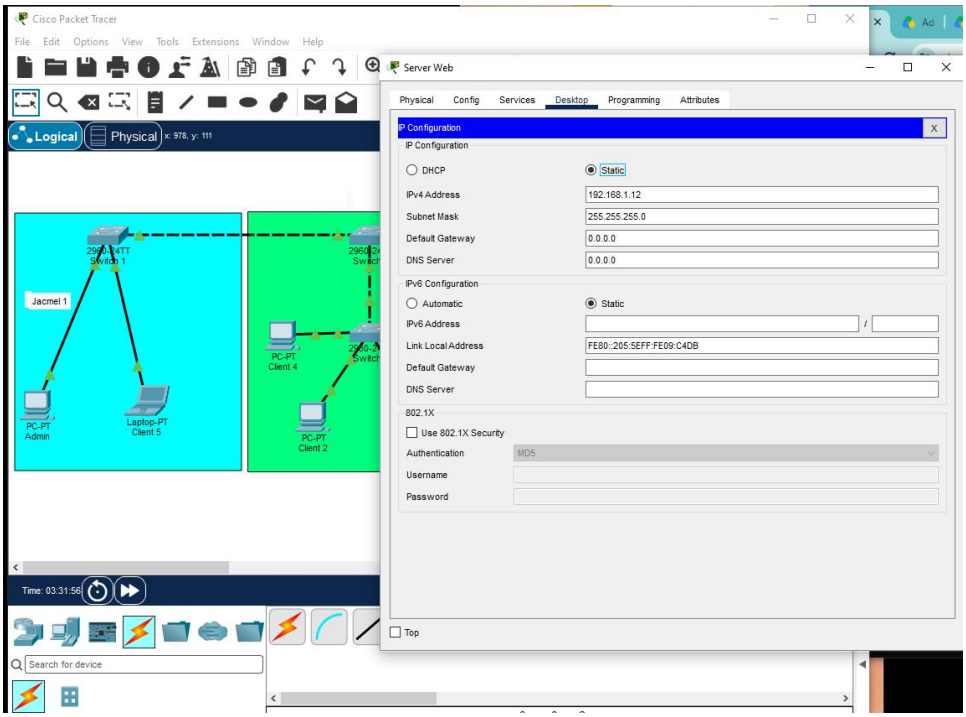

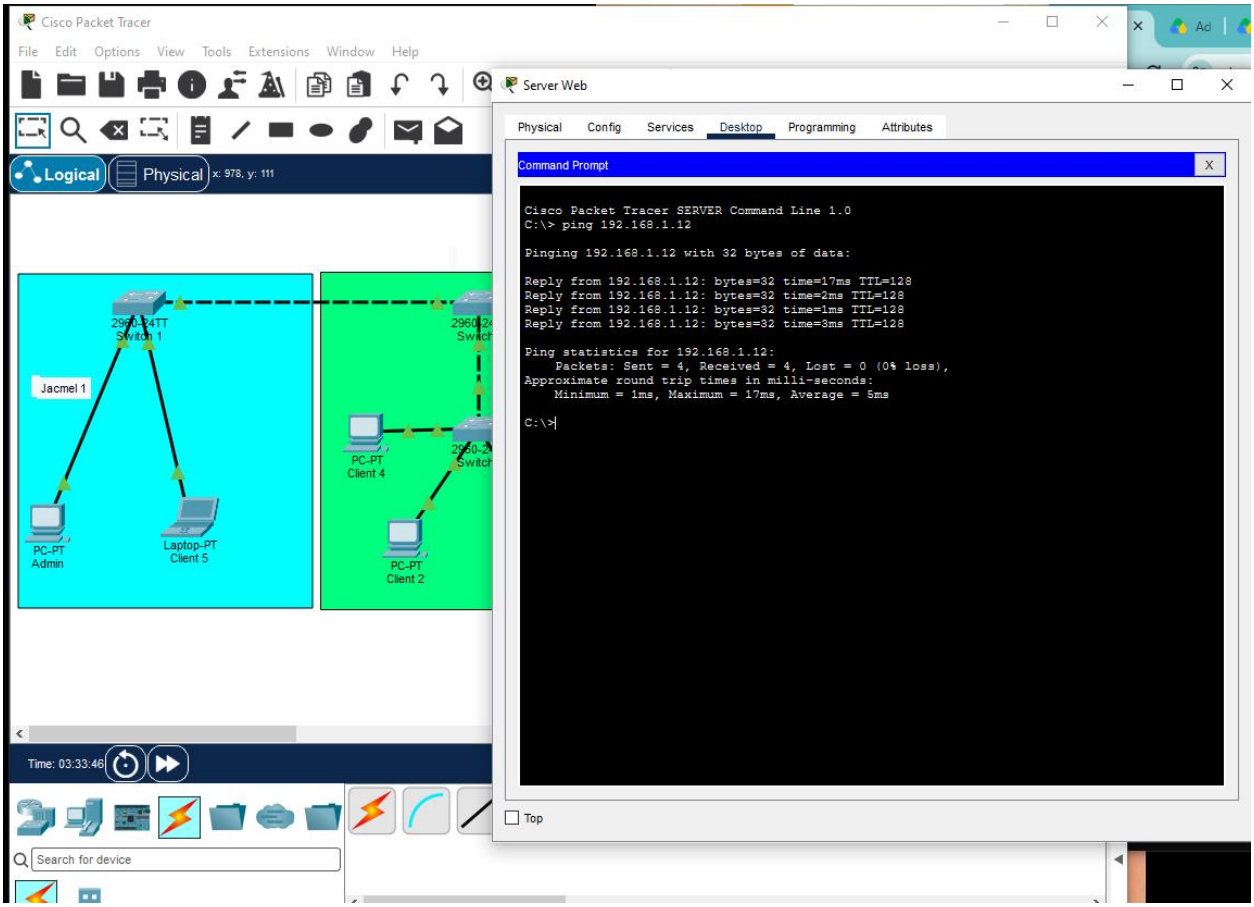



ServeurMAIL/Jacmel2.

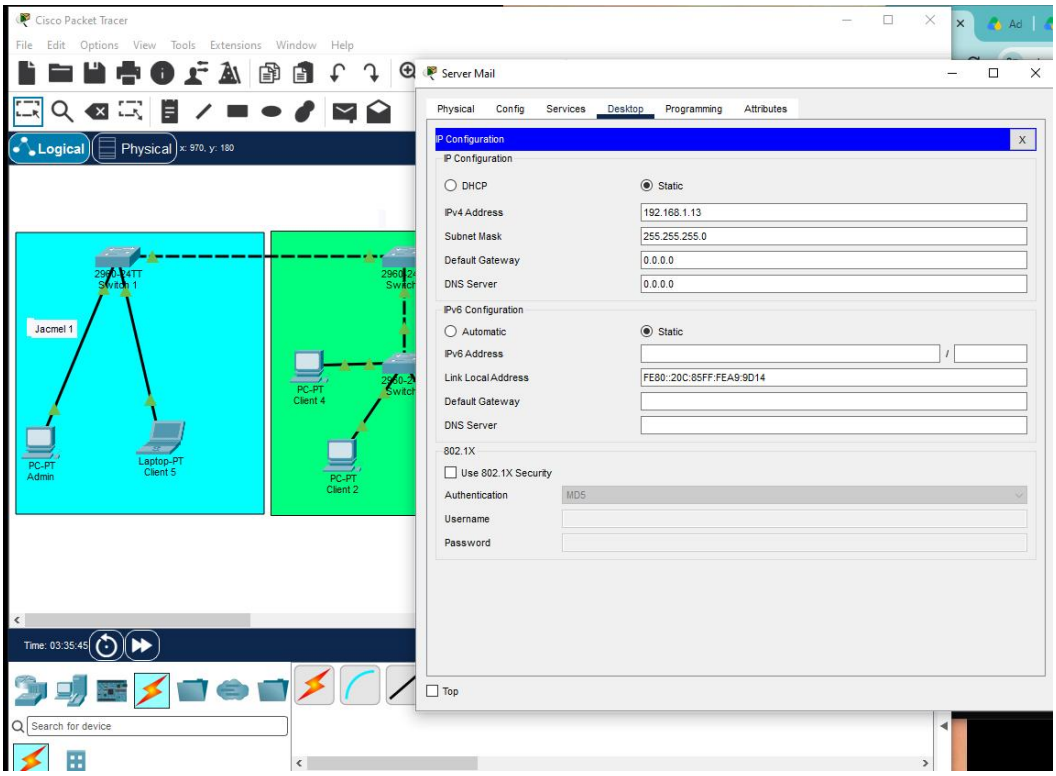

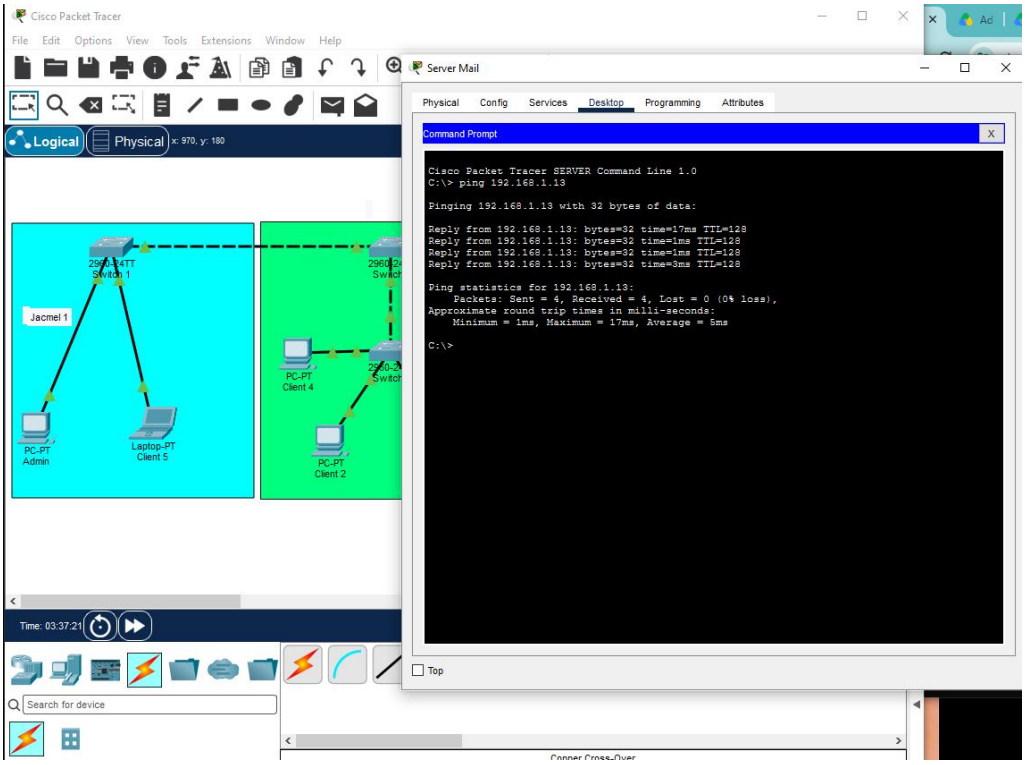


ServeurFILE/Jacmel2.

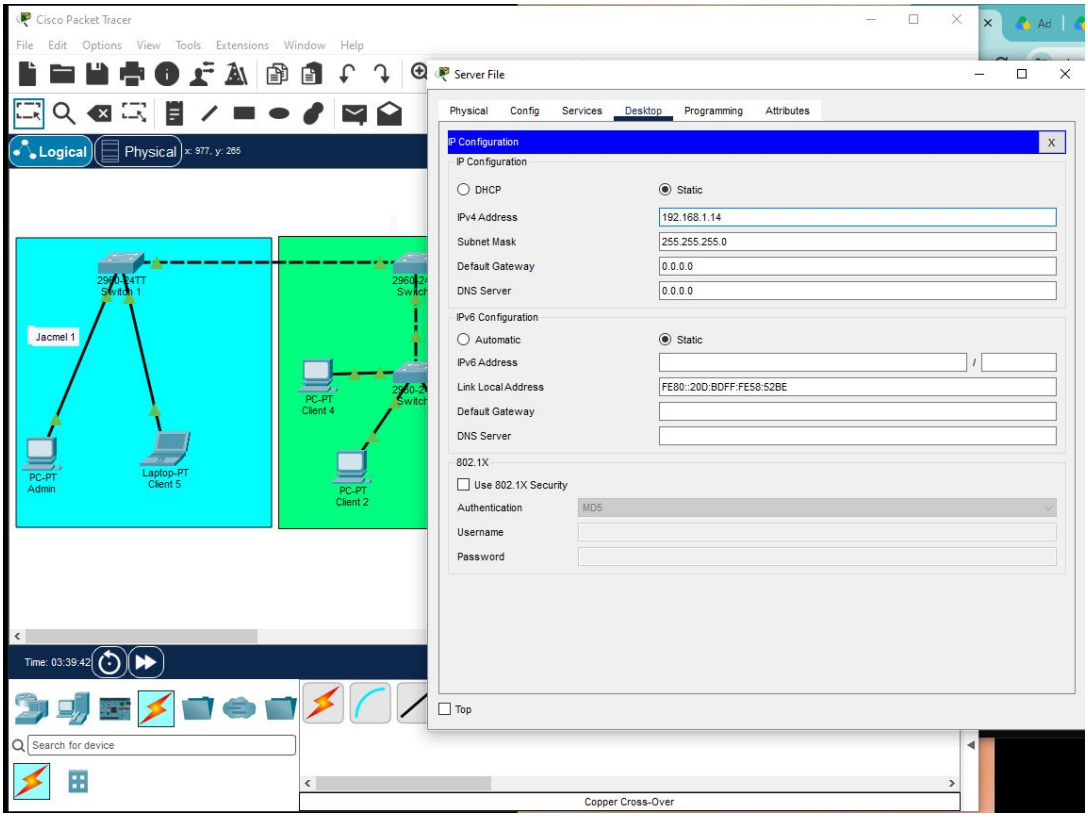


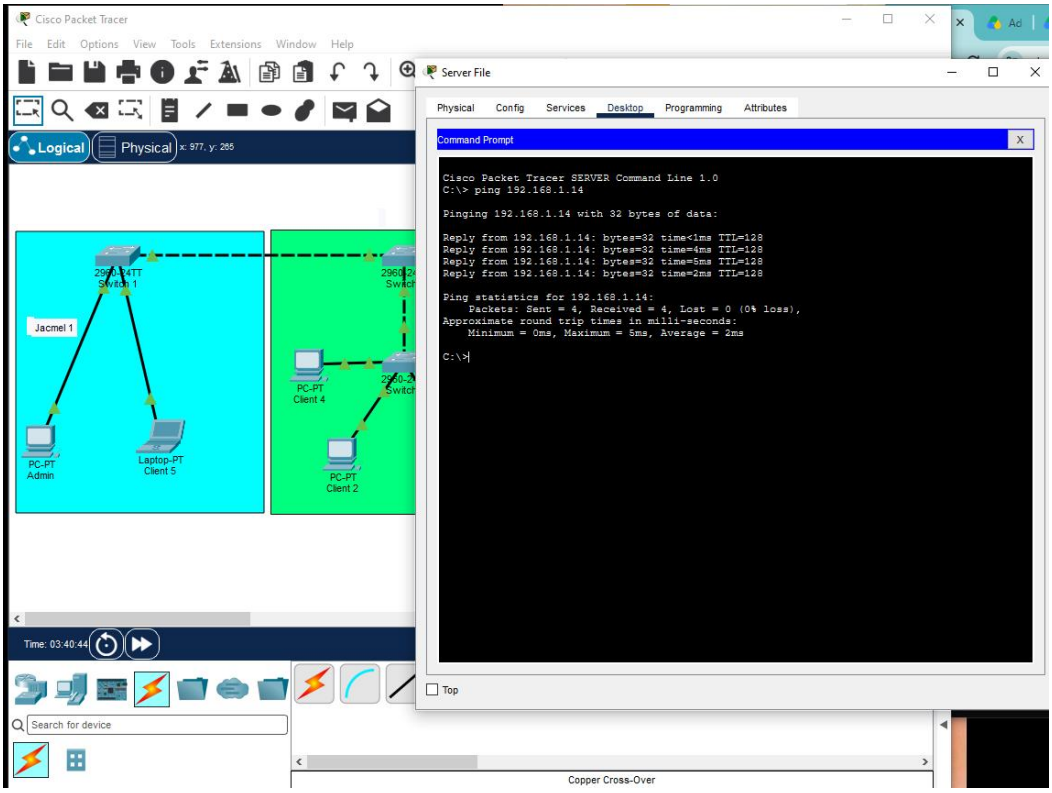


Simulation.

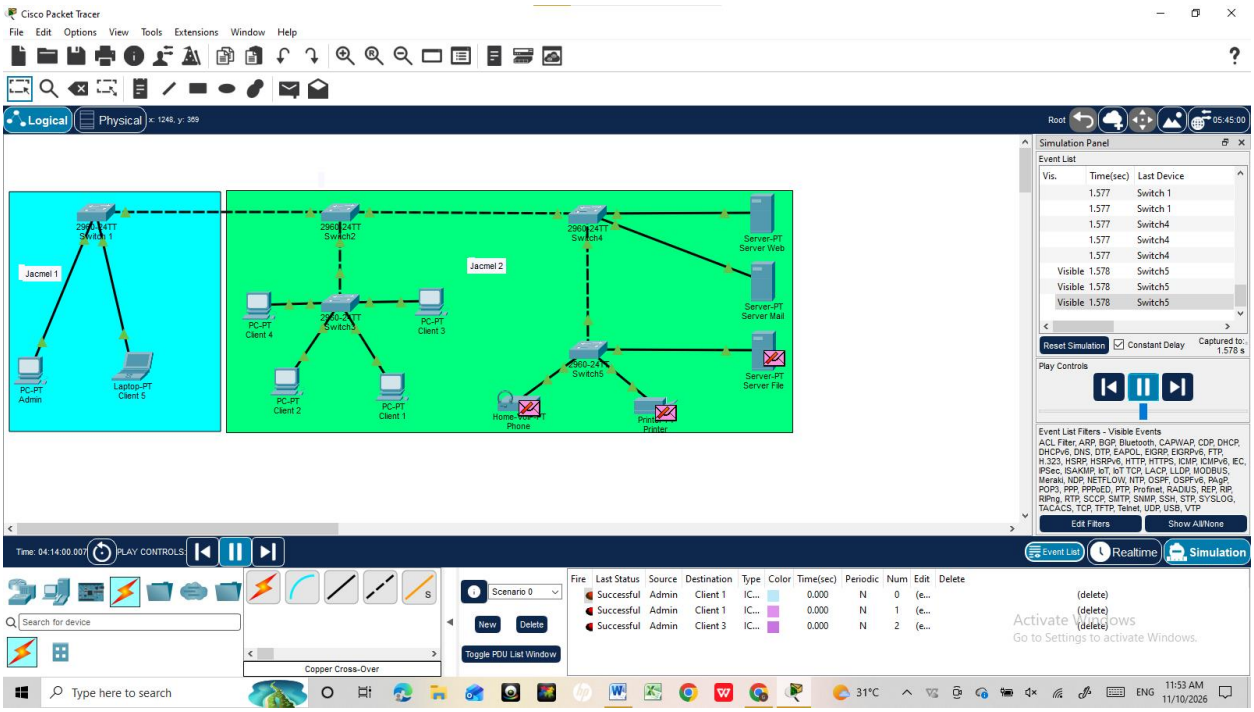
Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
Root
Jacmel 1
Jacmel 2
Switch1
Switch2
Switch3
Switch4
Switch5
PC-PT Admin
Laptop-PT Client 5
PC-PT Client 4
PC-PT Client 3
PC-PT Client 2
PC-PT Client 1
Server-PT Server Web
Server-PT Server Mail
Server-PT Server File
Home-PT Phone
Printer
Simulation Panel
Event List
Vis. Time(sec) Last Device
1.577 Switch 1
1.577 Switch 1
1.577 Switch4
1.577 Switch4
1.577 Switch4
Visible 1.578 Switch5
Visible 1.578 Switch5
Visible 1.578 Switch5
Reset Simulation
Constant Delay
Captured to: 1.578 s
Play Controls
Event List Filters - Visible Events
Edit Filters
Show All/None
Time: 04:14:00.007
PLAY CONTROLS:
Event List
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Successful Admin Client 1 IC... 0.000 N 0 (e... (delete)
Successful Admin Client 1 IC... 0.000 N 1 (e... (delete)
Successful Admin Client 3 IC... 0.000 N 2 (e... (delete)
Search for device
Copper Cross-Over
Activate Windows
Go to Settings to activate Windows.
Type here to search
31°C
ENG
11:53 AM
11/10/2026

Exercice-2.

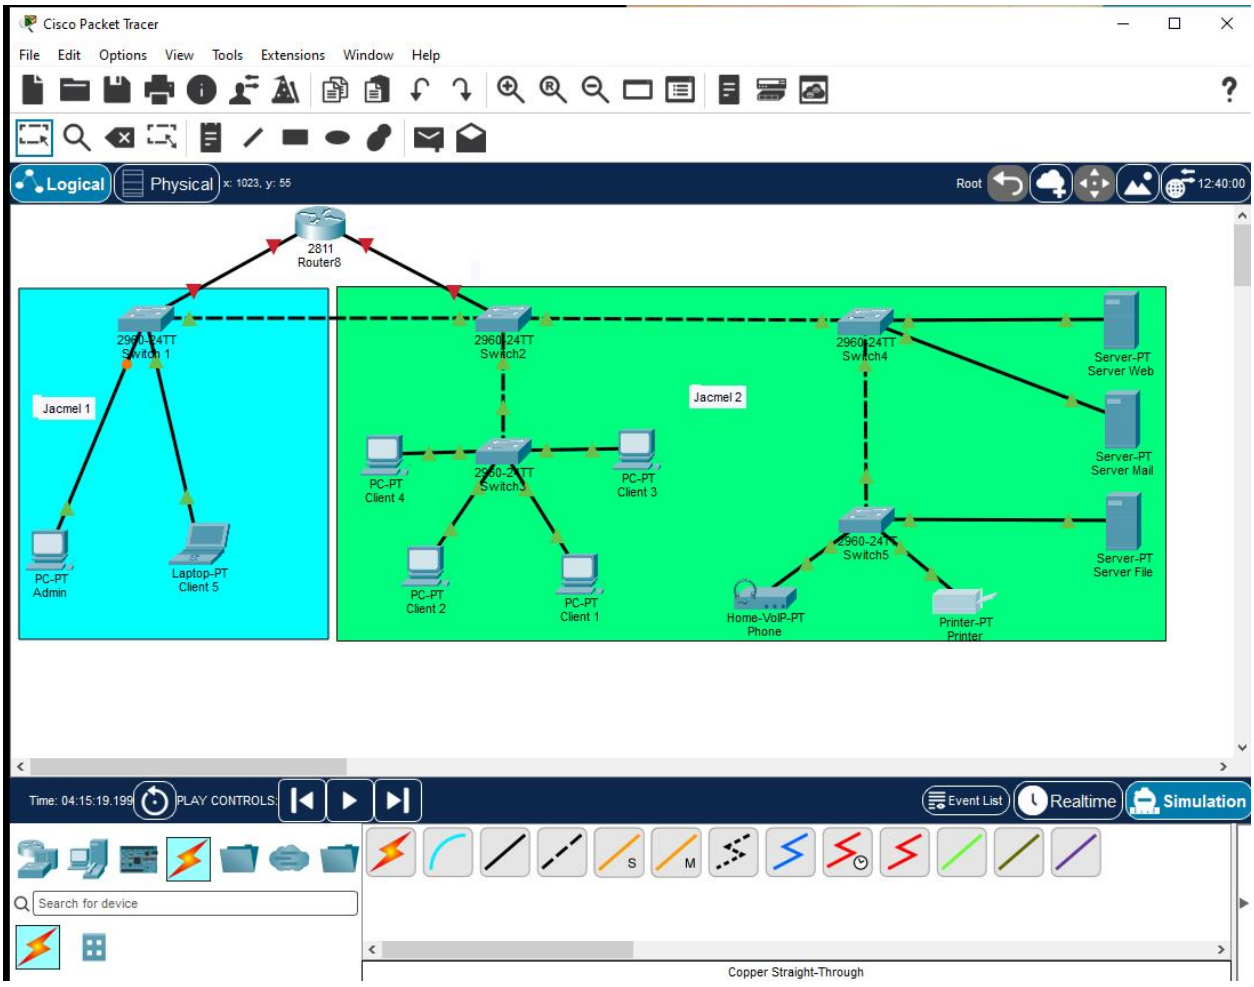

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
Root
2811
Router8
2960-24TT
Switch 1
2960-24TT
Switch2
2960-24TT
Switch4
Server-PT
Server Web
Server-PT
Server Mail
Server-PT
Server File
Jacmel 1
Jacmel 2
PC-PT
Client 4
PC-PT
Client 3
PC-PT
Admin
Laptop-PT
Client 5
PC-PT
Client 2
PC-PT
Client 1
2960-24TT
Switch5
Home-VoIP-PT
Phone
Printer-PT
Printer
Time: 04:15:19.199
PLAY CONTROLS:
Event List
Realtime
Simulation
Search for device
Copper Straight-Through

Configuration Router8.

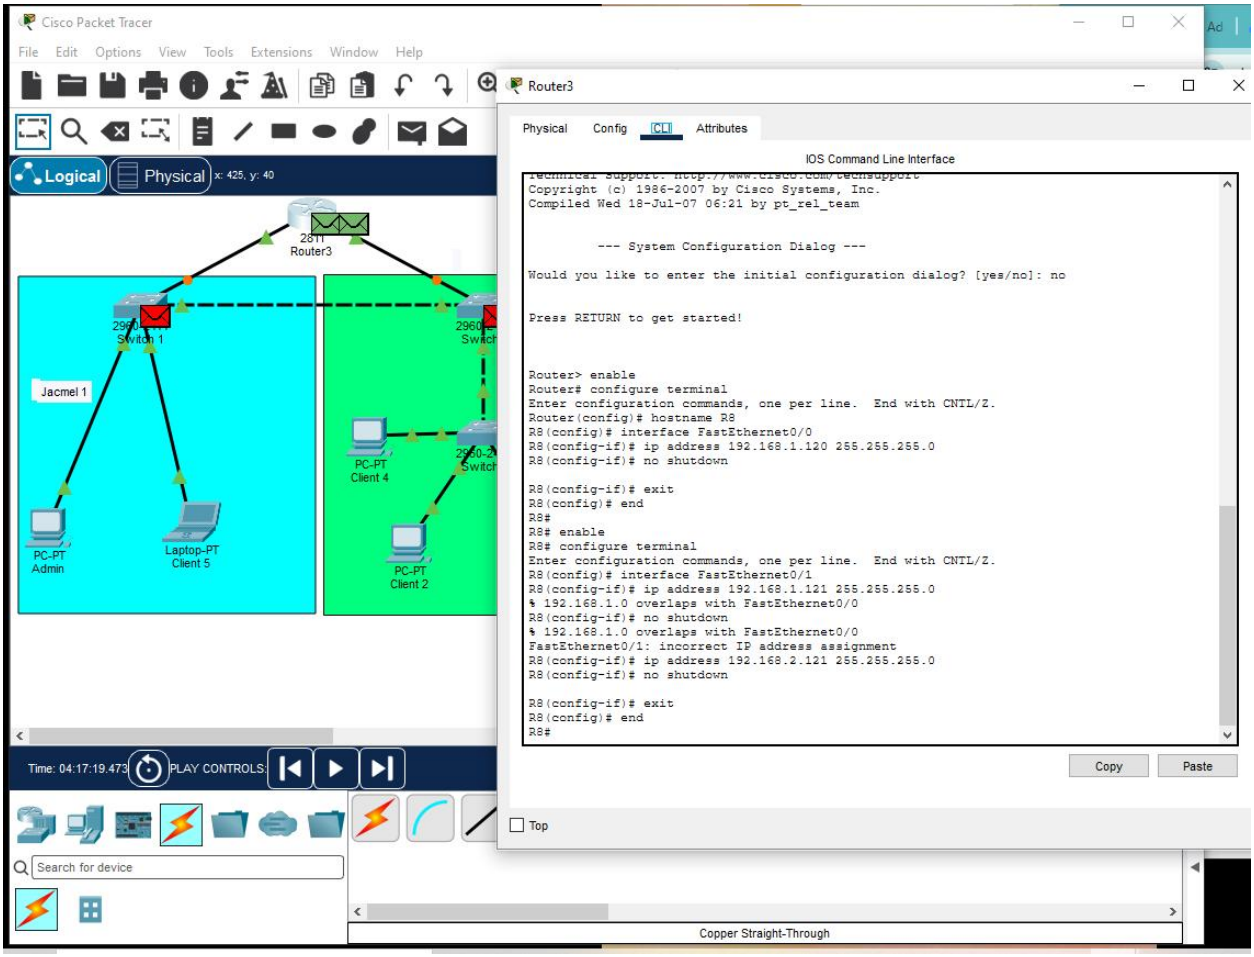


Configuration les switchs IPv4.


Switch 1.

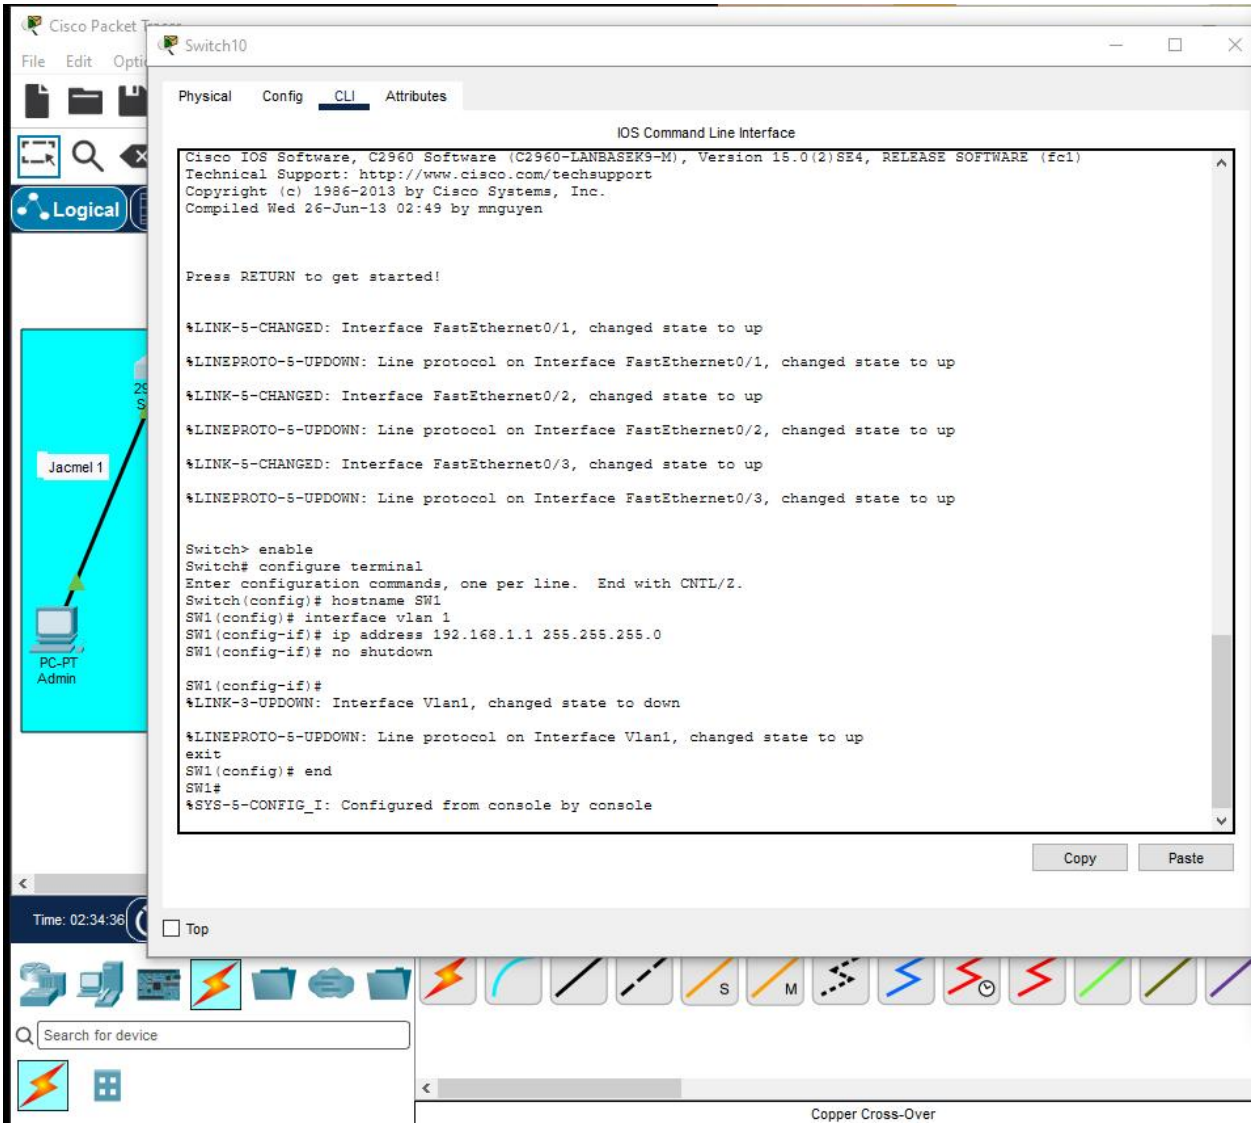


Switch 2.

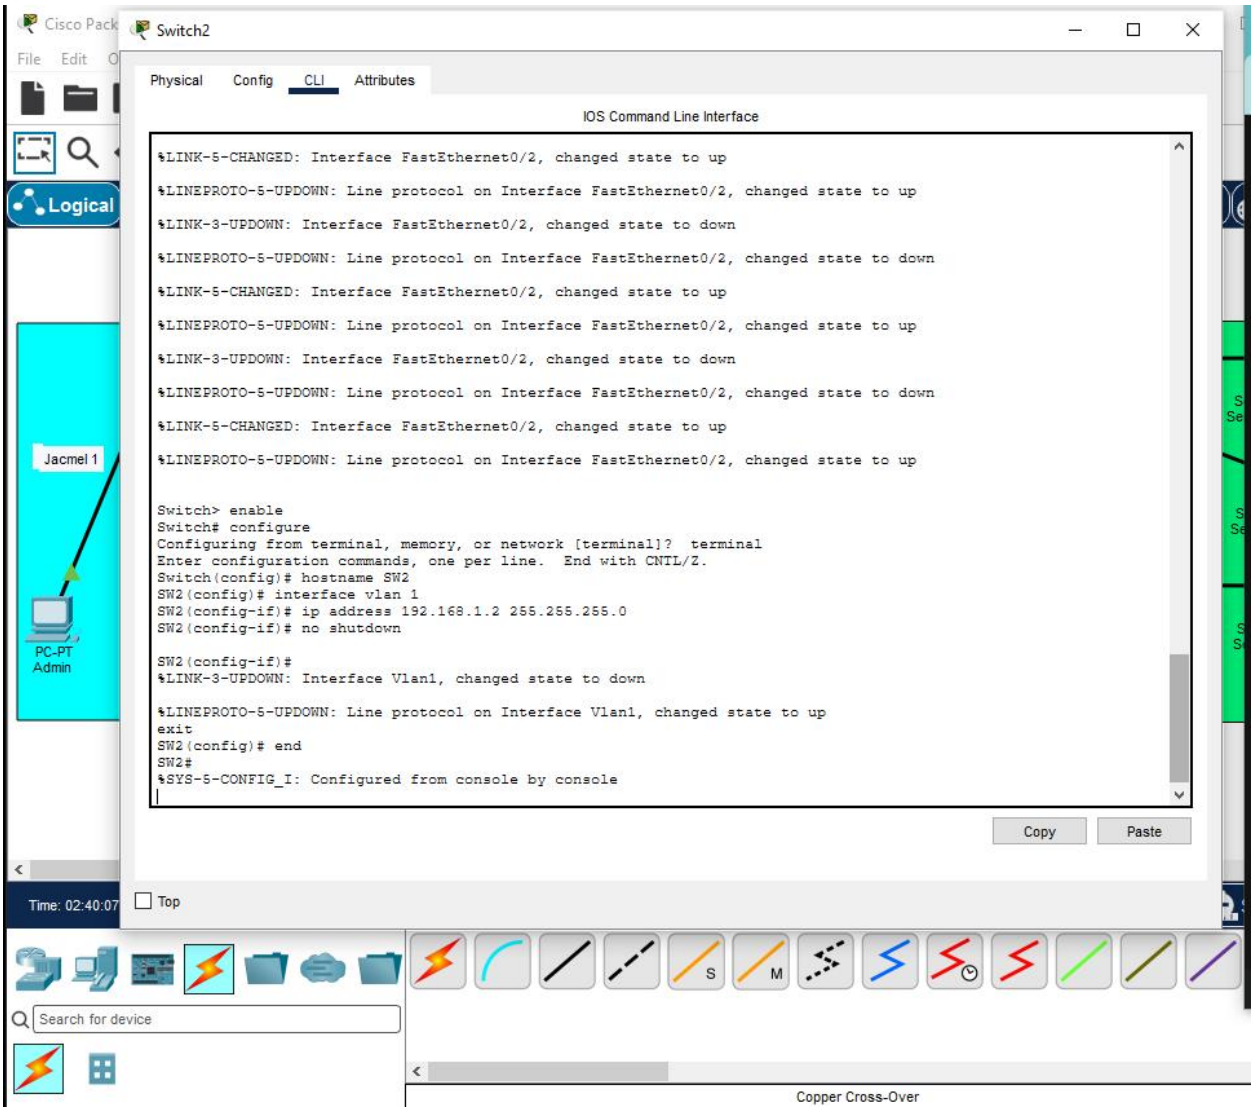
Switch2
Physical
Config
CLI
Attributes
IOS Command Line Interface
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-3-UPDOWN: Interface FastEthernet0/2, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to down
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-3-UPDOWN: Interface FastEthernet0/2, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to down
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
Switch> enable
Switch# configure
Configuring from terminal, memory, or network [terminal]? terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)# hostname SW2
SW2(config)# interface vlan 1
SW2(config-if)# ip address 192.168.1.2 255.255.255.0
SW2(config-if)# no shutdown
SW2(config-if)#
%LINK-3-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
exit
SW2(config)# end
SW2#
%SYS-5-CONFIG_I: Configured from console by console
Copy
Paste
Top
Logical
Jacmel 1
PC-PT
Admin
Time: 02:40:07
Search for device
Copper Cross-Over


Switch 3.

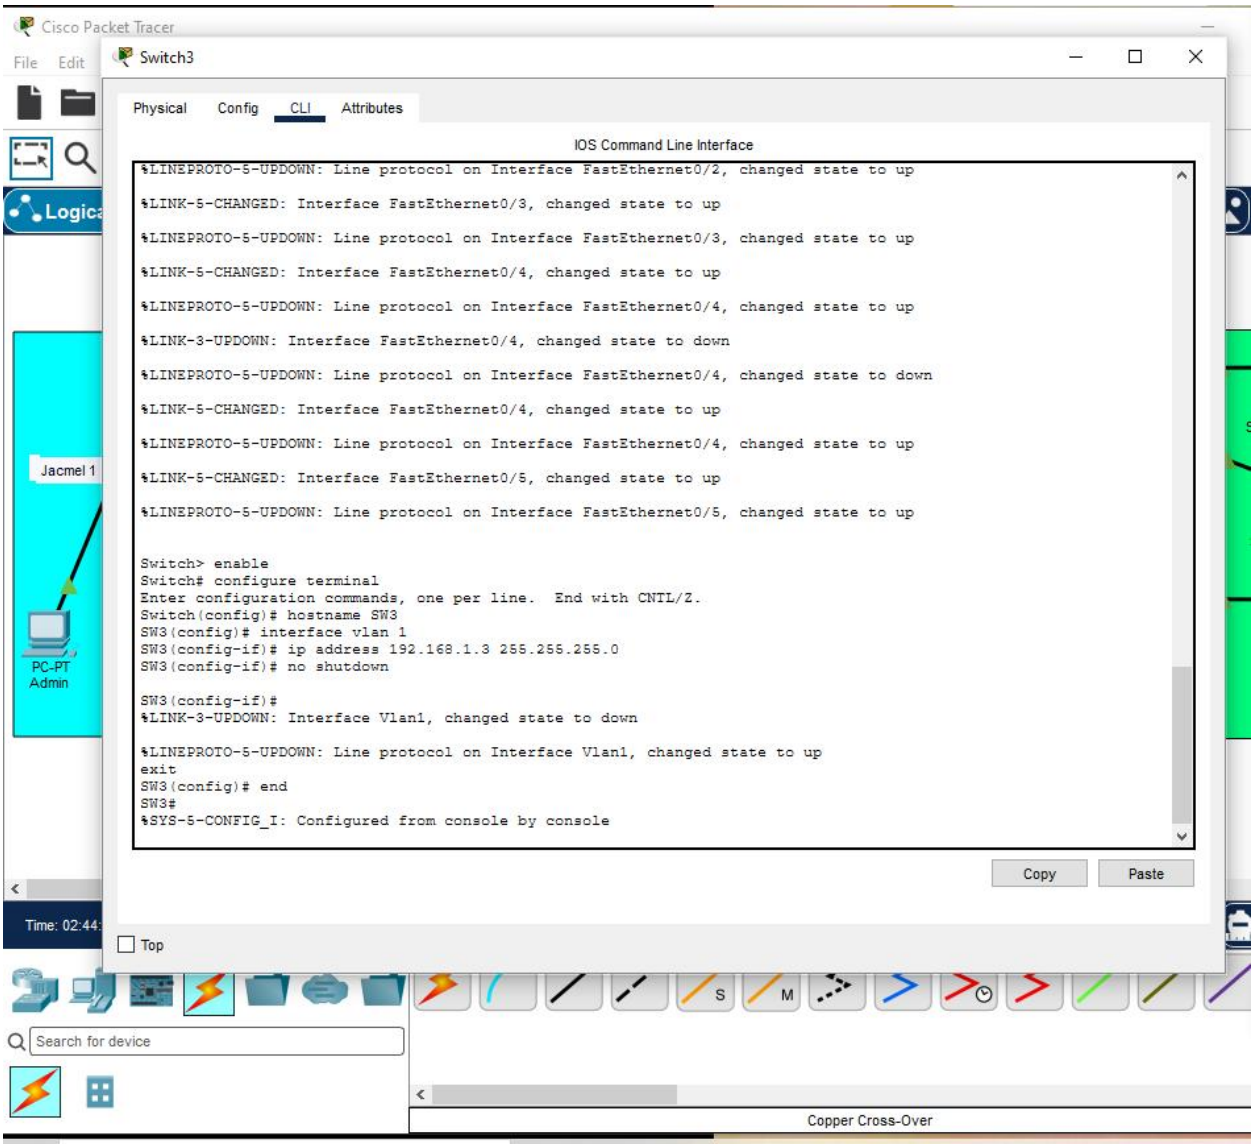
Cisco Packet Tracer
File Edit
Switch3
Physical Config CLI Attributes
IOS Command Line Interface
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up
%LINK-3-UPDOWN: Interface FastEthernet0/4, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to down
%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/5, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to up
Switch> enable
Switch# configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)# hostname SW3
SW3(config)# interface vlan 1
SW3(config-if)# ip address 192.168.1.3 255.255.255.0
SW3(config-if)# no shutdown
SW3(config-if)#
%LINK-3-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
exit
SW3(config)# end
SW3#
%SYS-5-CONFIG_I: Configured from console by console
Copy
Paste
Top
Jacmel 1
PC-PT
Admin
Time: 02:44:
Search for device
Copper Cross-Over

Switch 4.

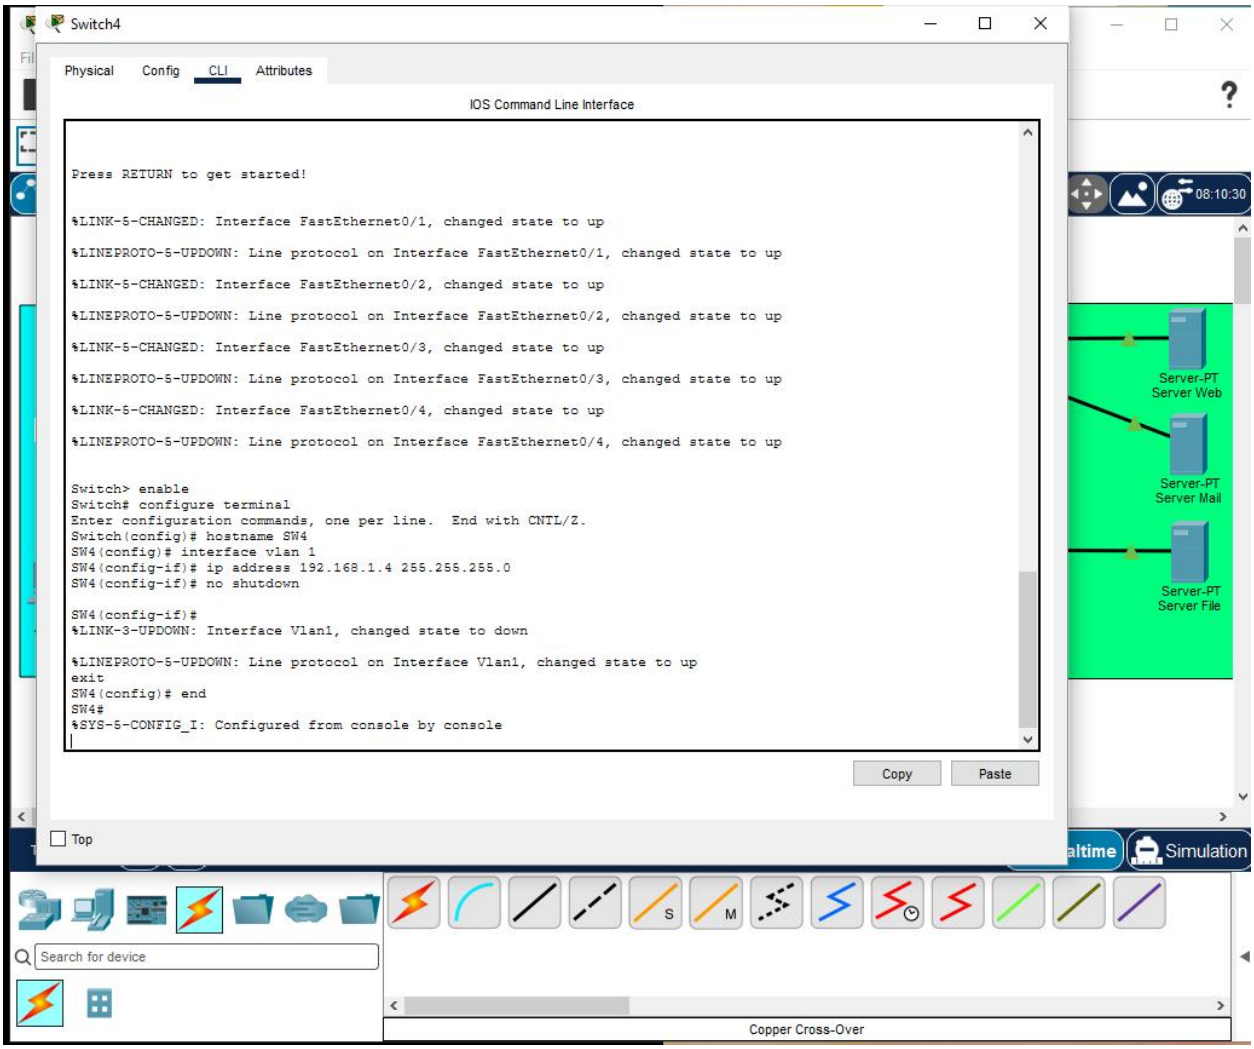

Switch4
Physical
Config
CLI
Attributes
IOS Command Line Interface
Press RETURN to get started!
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up
Switch> enable
Switch# configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)# hostname SW4
SW4(config)# interface vlan 1
SW4(config-if)# ip address 192.168.1.4 255.255.255.0
SW4(config-if)# no shutdown
SW4(config-if)#
%LINK-3-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
exit
SW4(config)# end
SW4#
%SYS-5-CONFIG_I: Configured from console by console
Copy
Paste
Top
Server-PT Server Web
Server-PT Server Mail
Server-PT Server File
08:10:30
Simulation
Search for device
Copper Cross-Over


Switch 5.

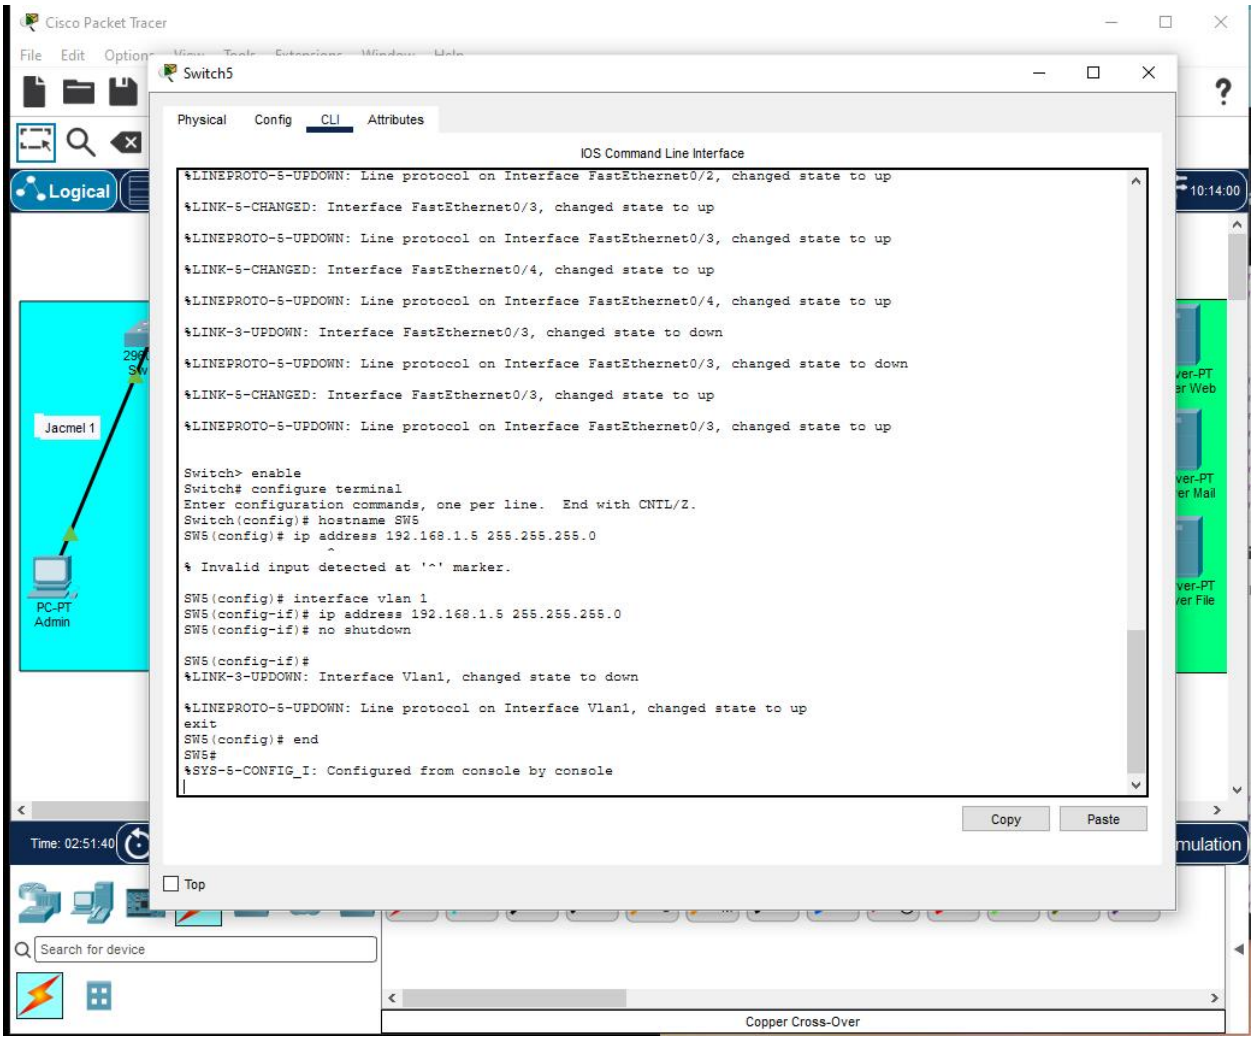
Cisco Packet Tracer
Switch5
Physical
Config
CLI
Attributes
IOS Command Line Interface
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up
%LINK-3-UPDOWN: Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
Switch> enable
Switch# configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)# hostname SW5
SW5(config)# ip address 192.168.1.5 255.255.255.0
% Invalid input detected at '^' marker.
SW5(config)# interface vlan 1
SW5(config-if)# ip address 192.168.1.5 255.255.255.0
SW5(config-if)# no shutdown
SW5(config-if)#
%LINK-3-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
exit
SW5(config)# end
SW5#
%SYS-5-CONFIG_I: Configured from console by console
Copy
Paste
Top
Logical
Jacmel 1
PC-PT
Admin
Time: 02:51:40
Search for device
Copper Cross-Over

IPv4 et Connectivité


PC admin/Jacmel1.

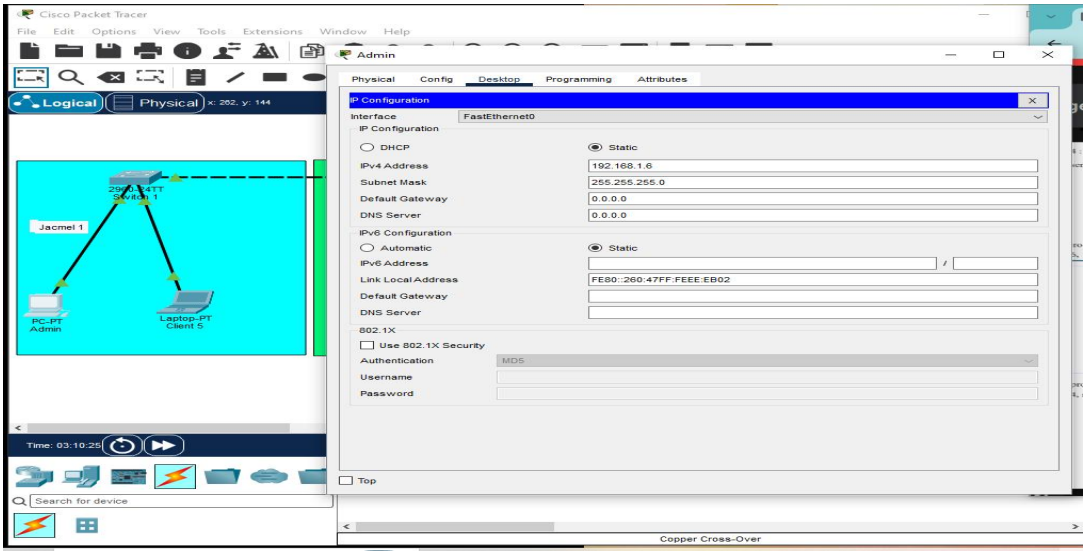


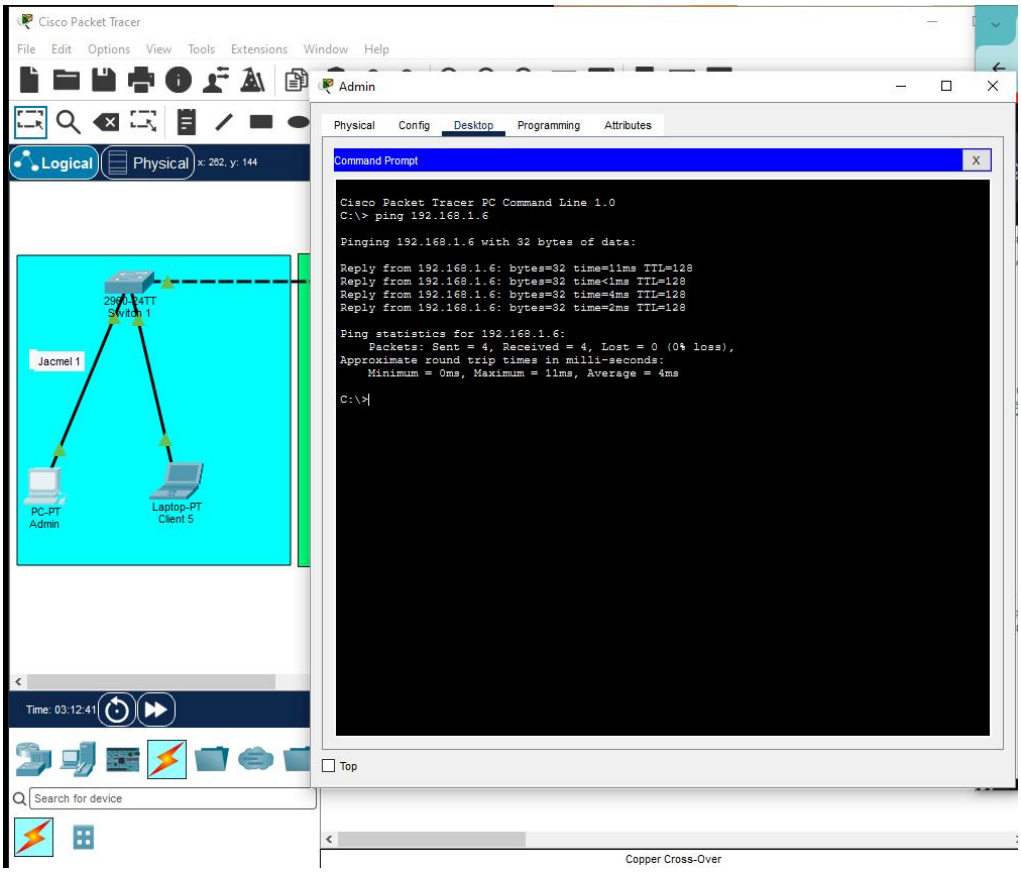


IPv4 et Connectivité


PC admin/Jacmel1.

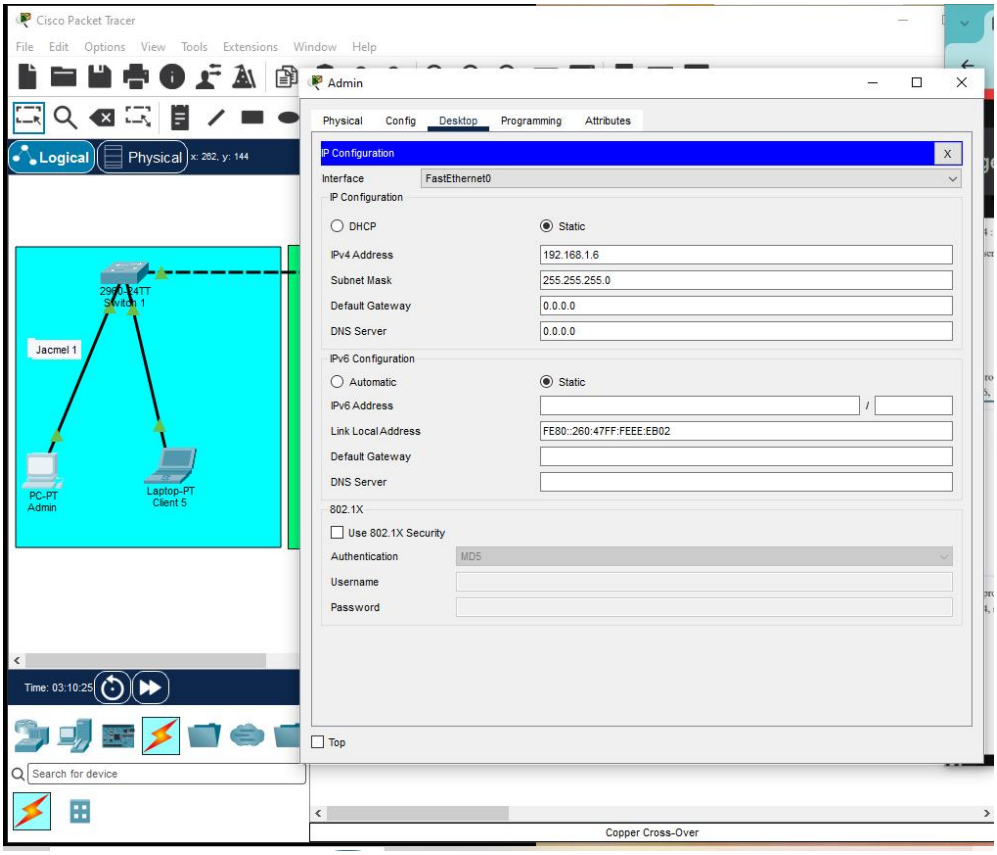

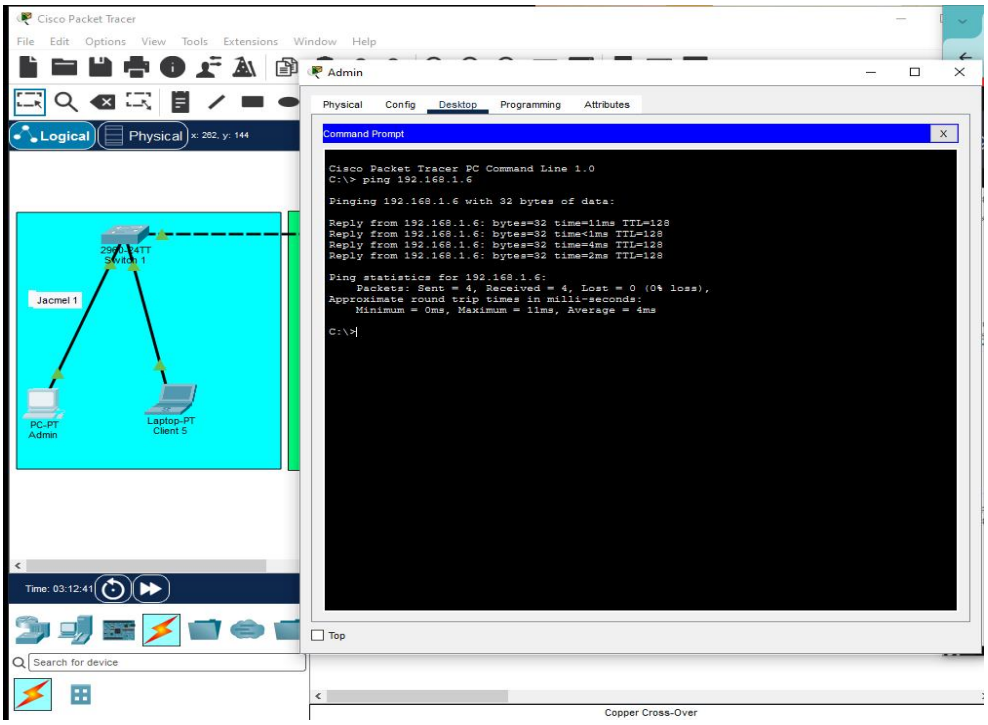


Client 5/Jacmel1.

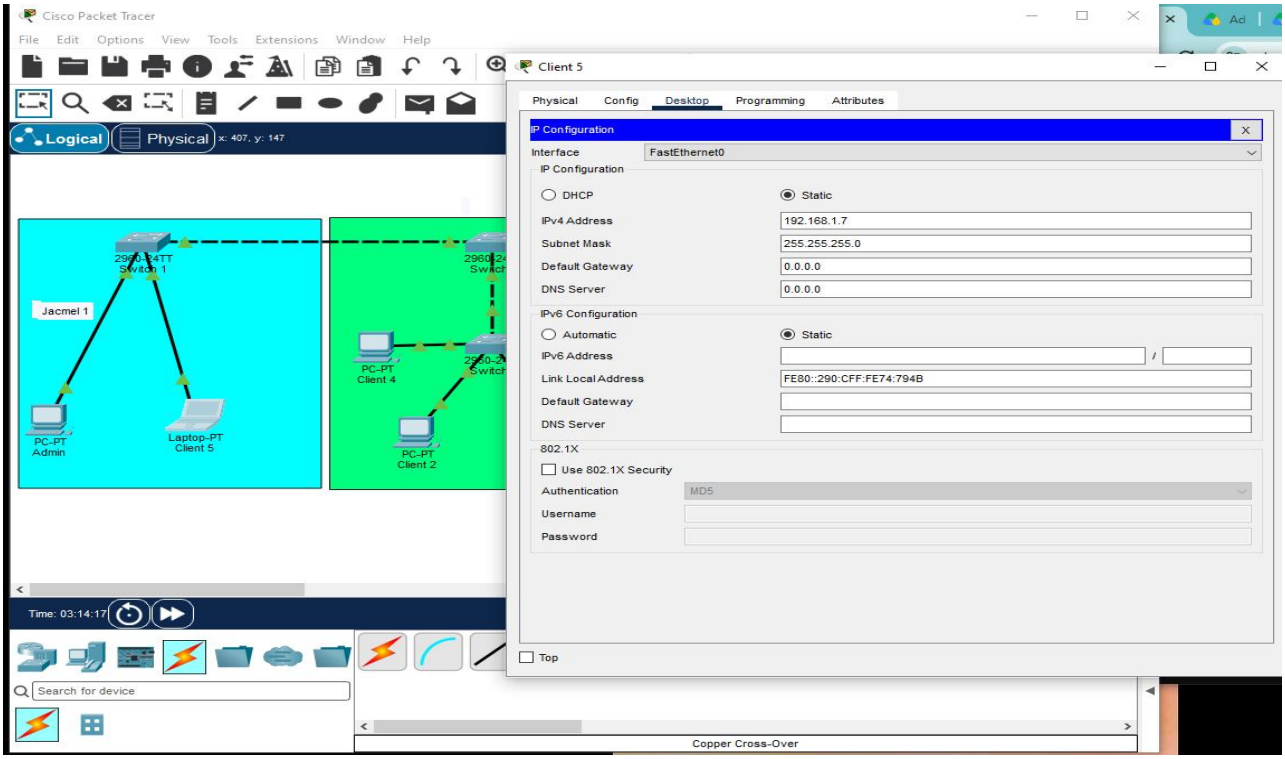


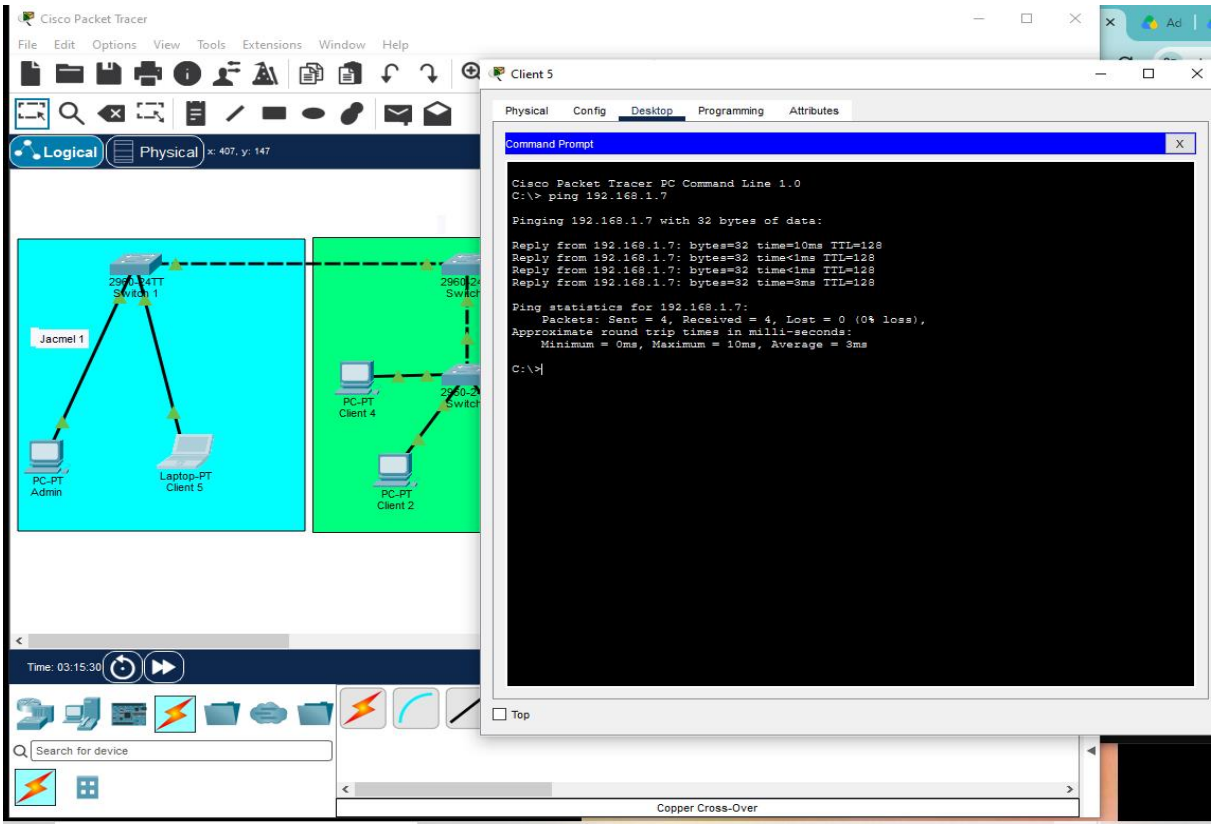


Client 1/Jacmel2.

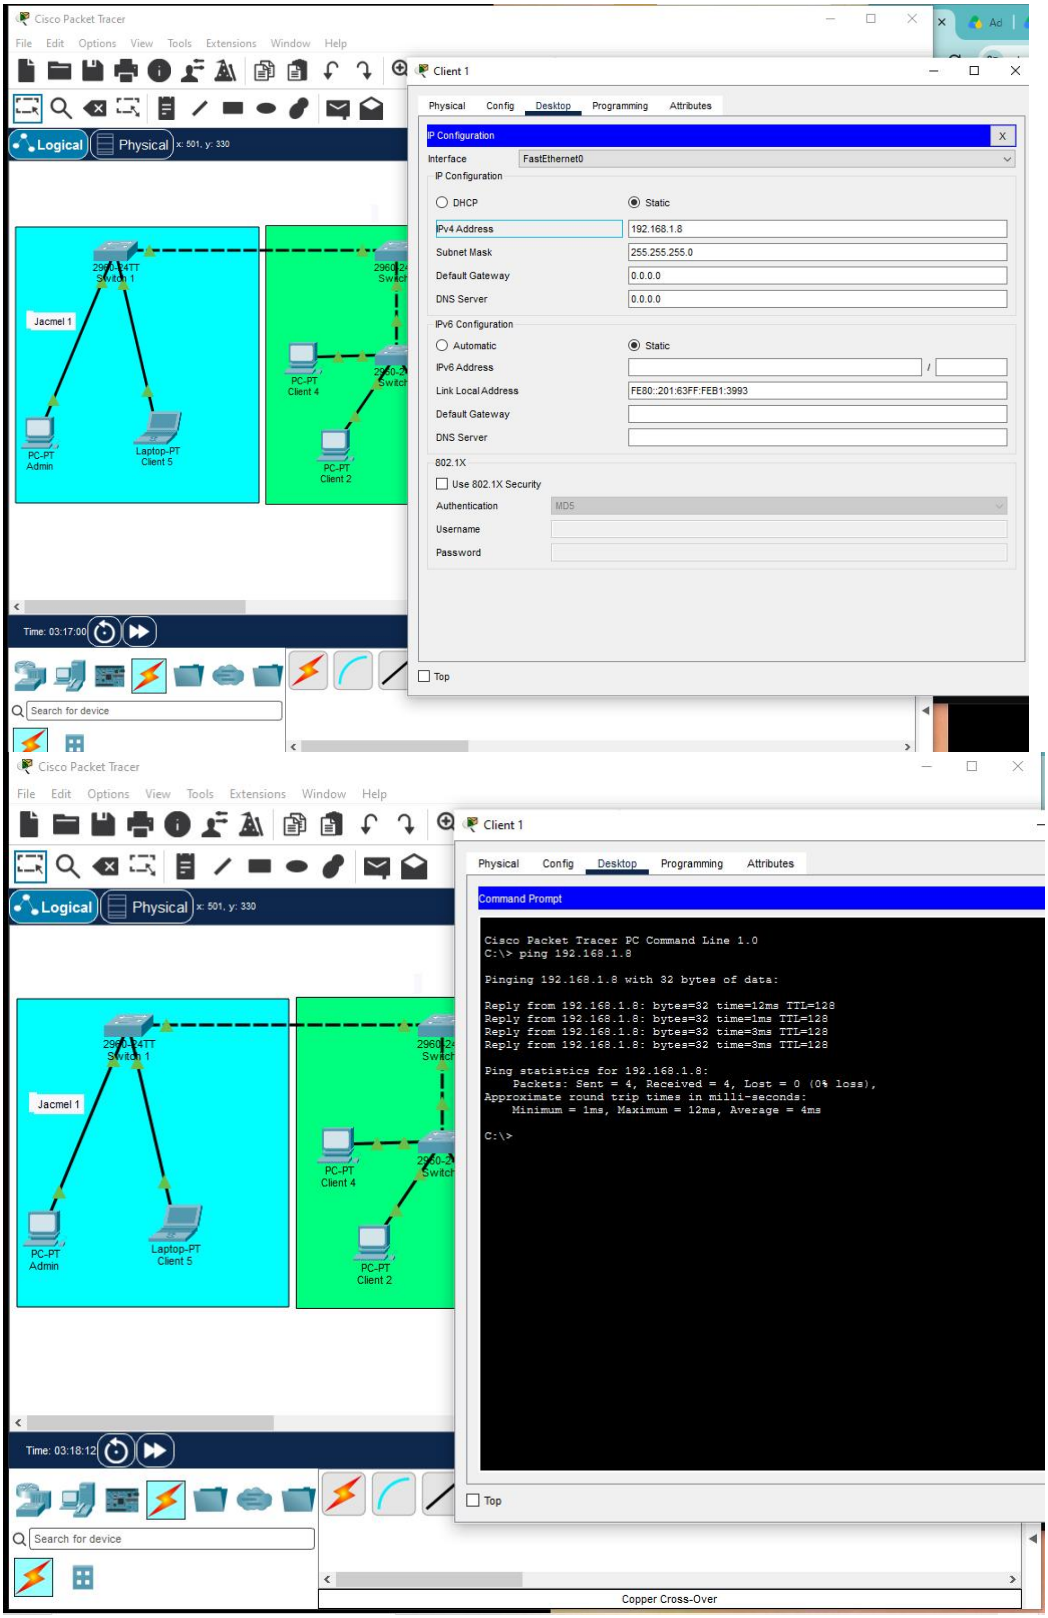



Client 2/Jacmel2.

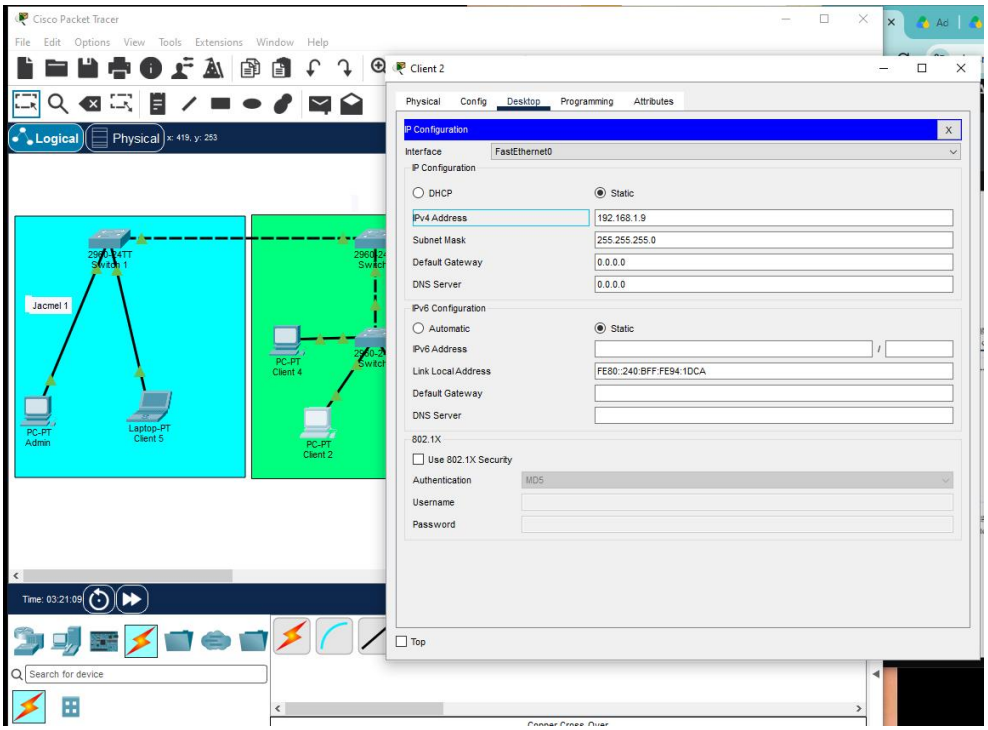

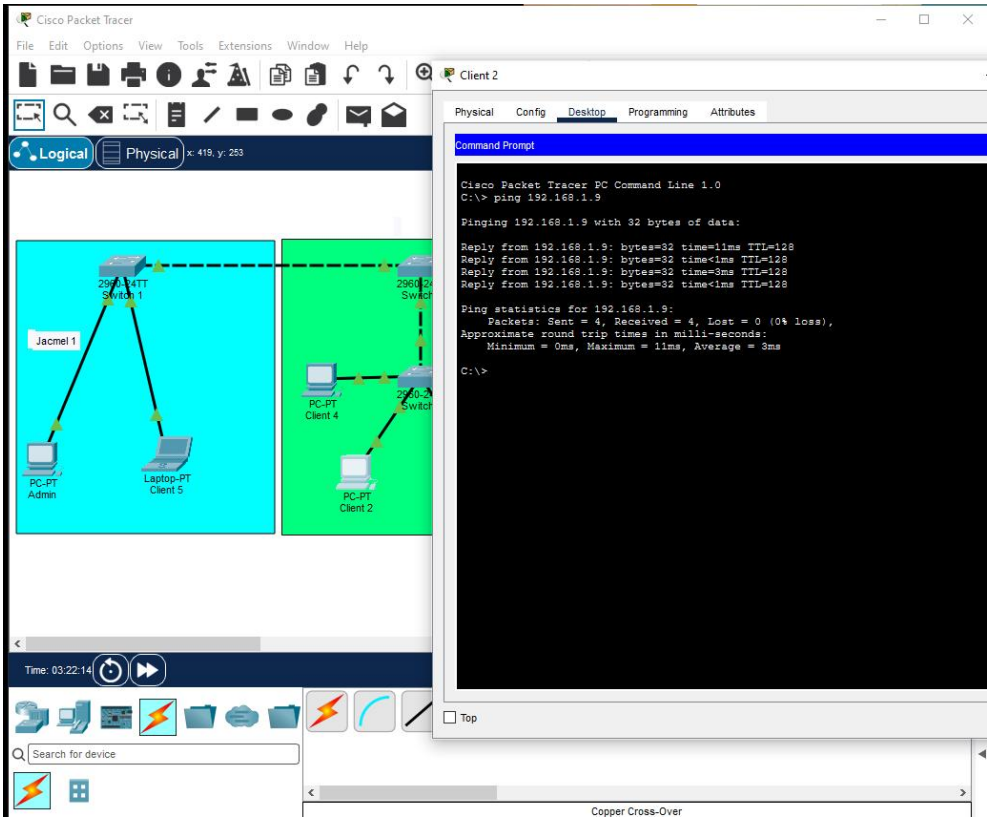



Client 3/Jacmel2.

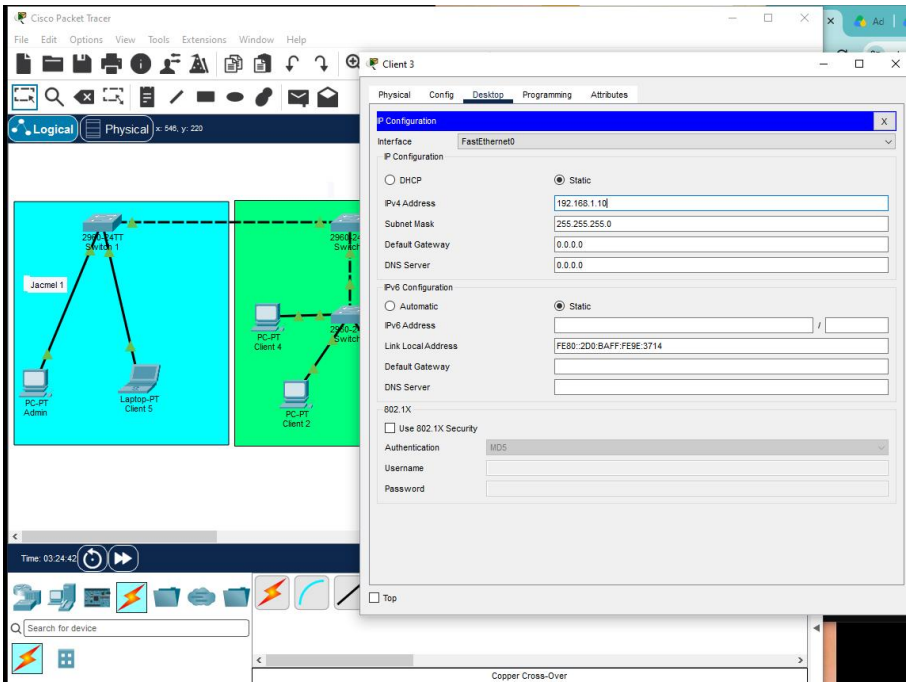

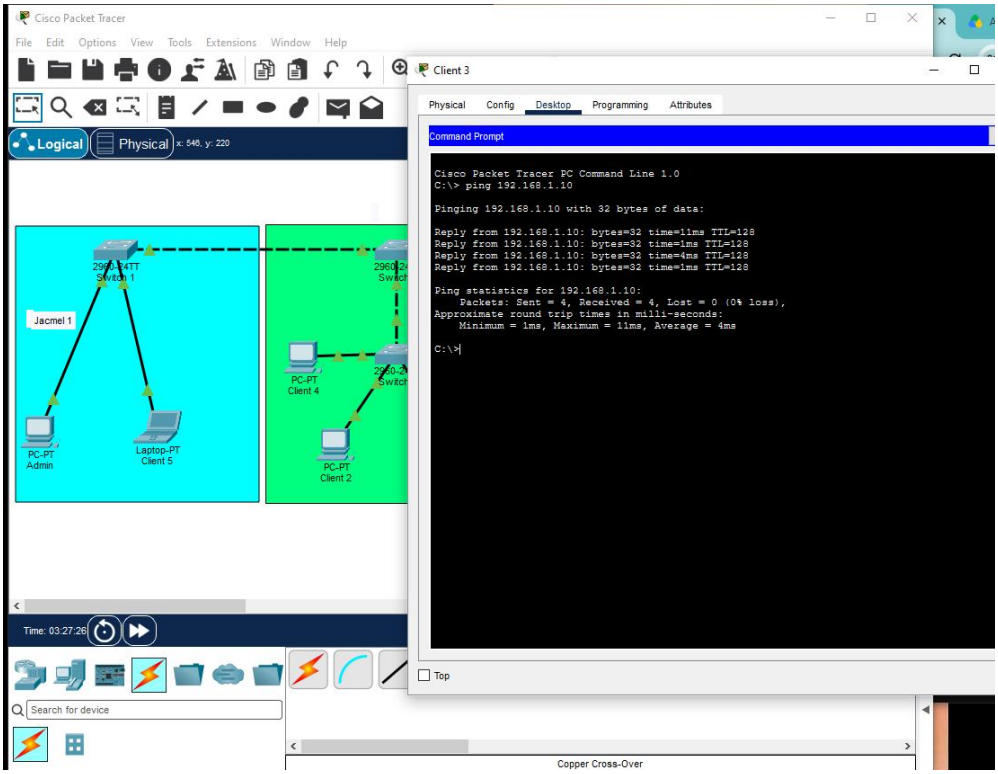



Client 4/Jacmel2.

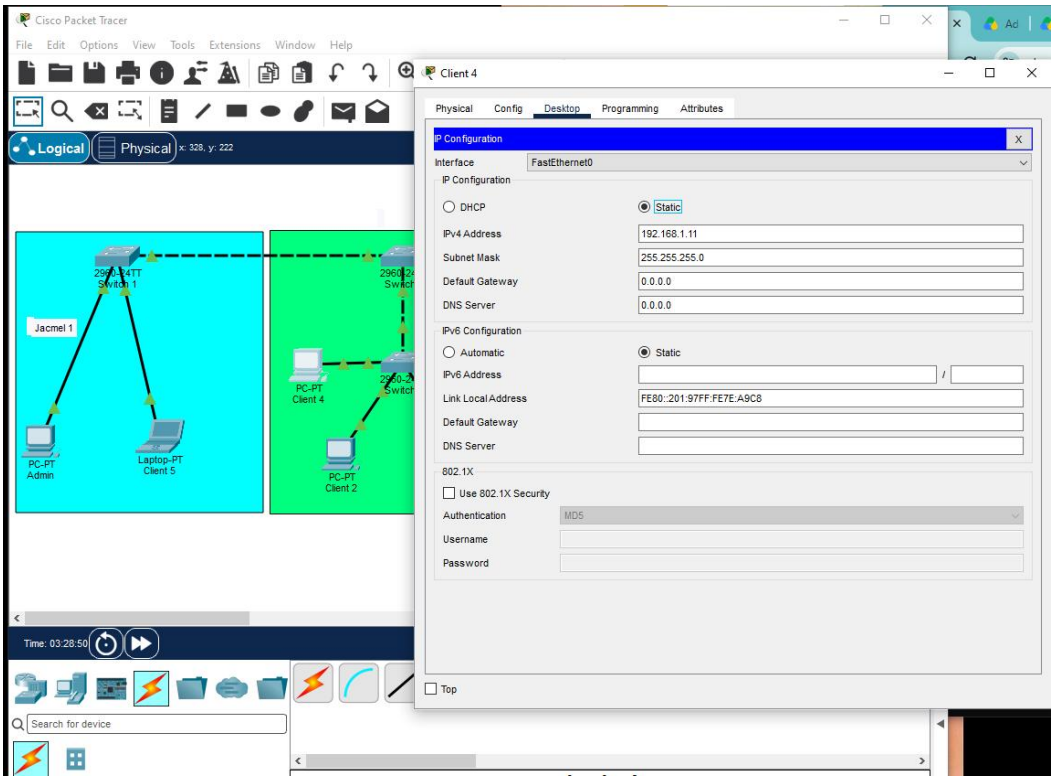

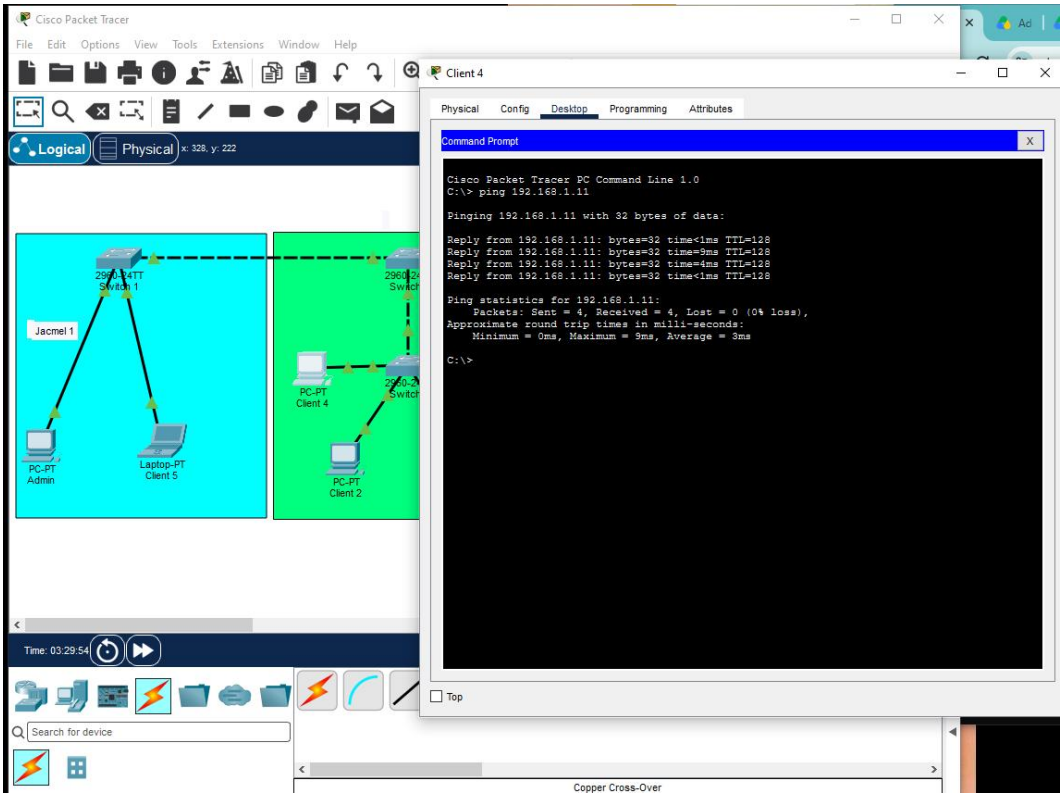



Serveur WEB/Jacmel2.

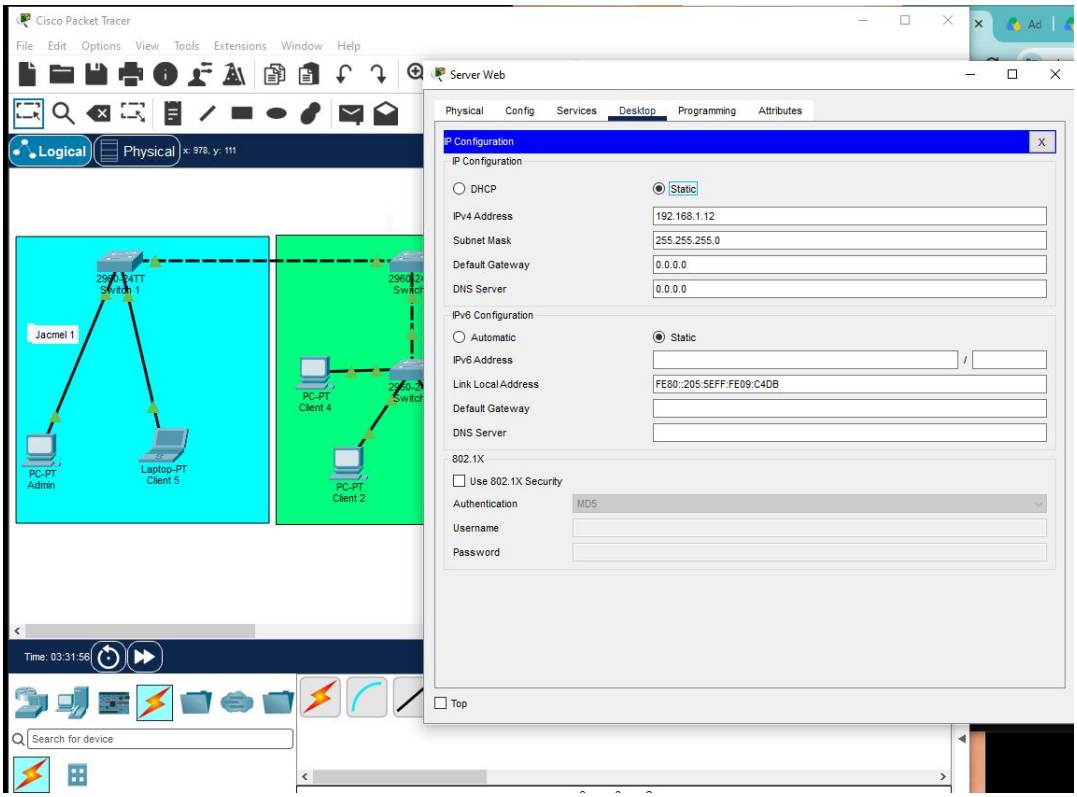

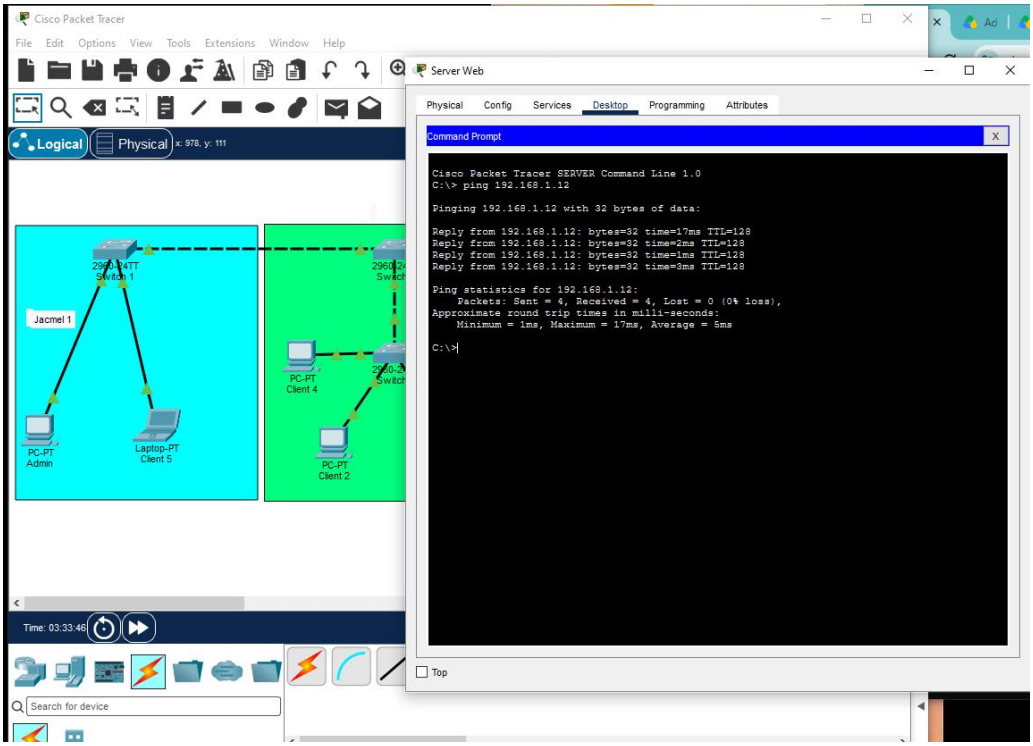



SERVEUR MAIL.

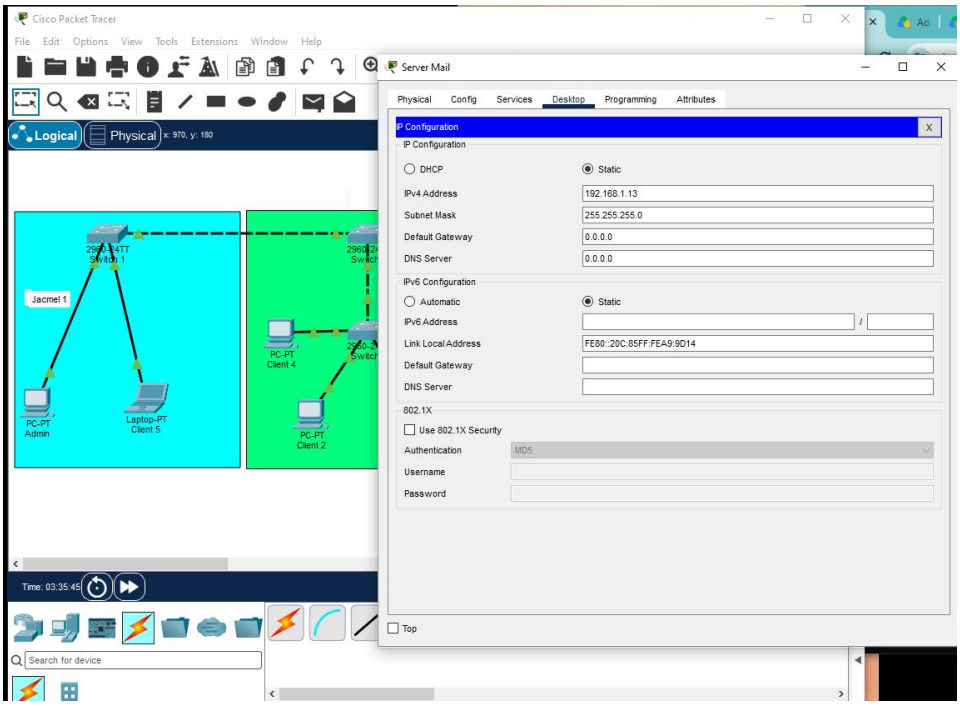

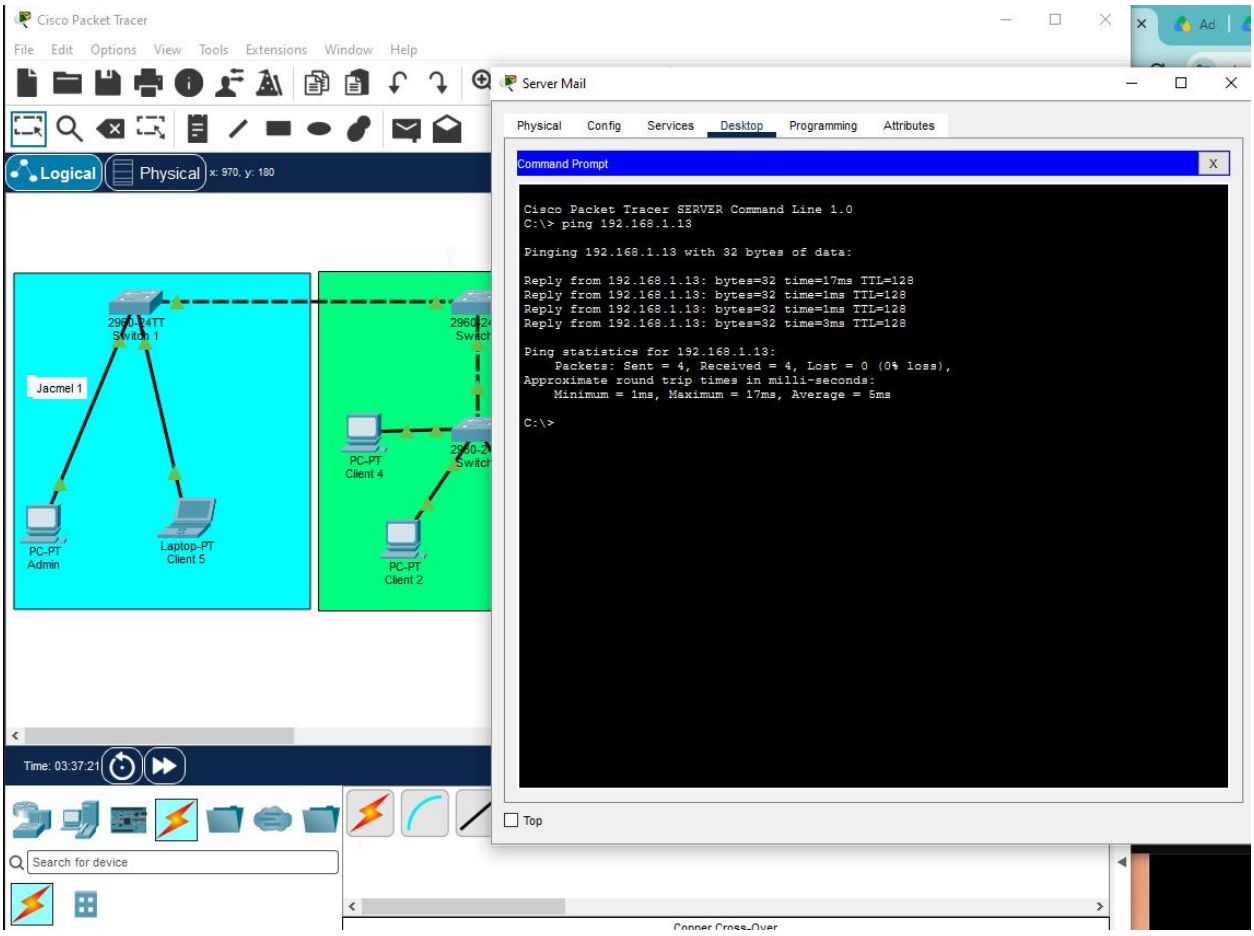

SERVEUR FILE.

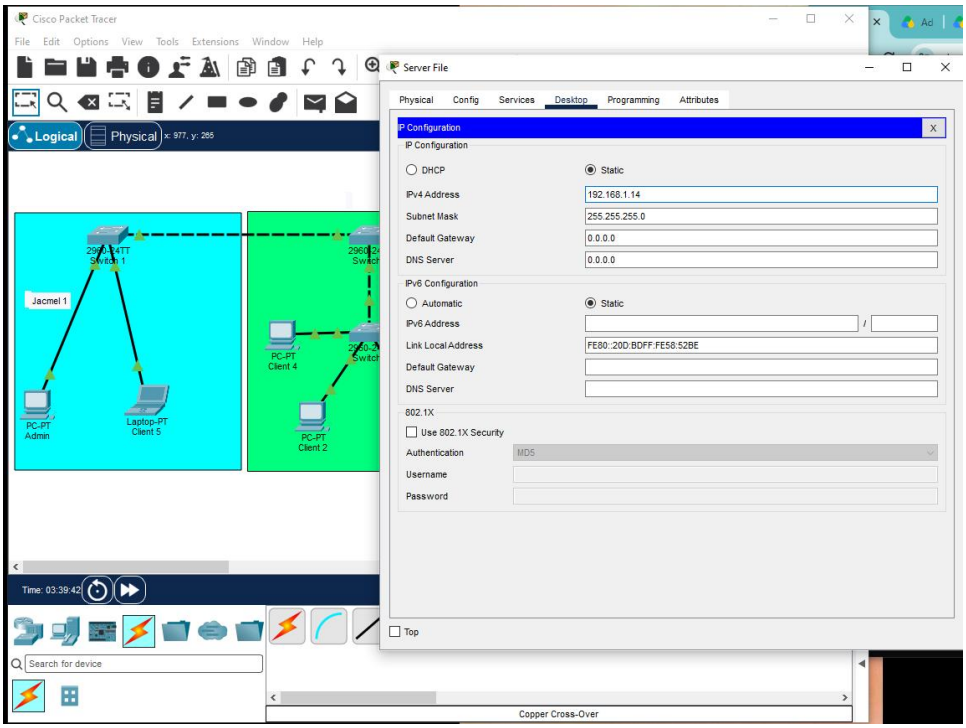

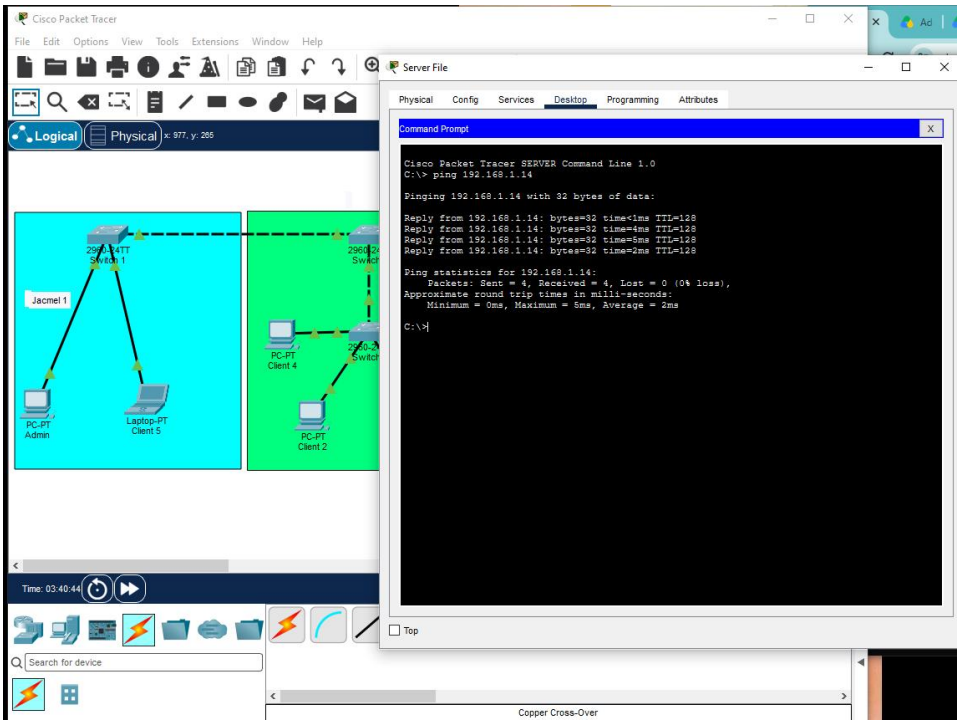

Conclusion :

Ce TD me permet de configurer et mettre un adresse IP (IPv6 et IPv4) même si c'était au choix dans ce TD. Permet la simulation pour analyser le trafic du message du réseau.