


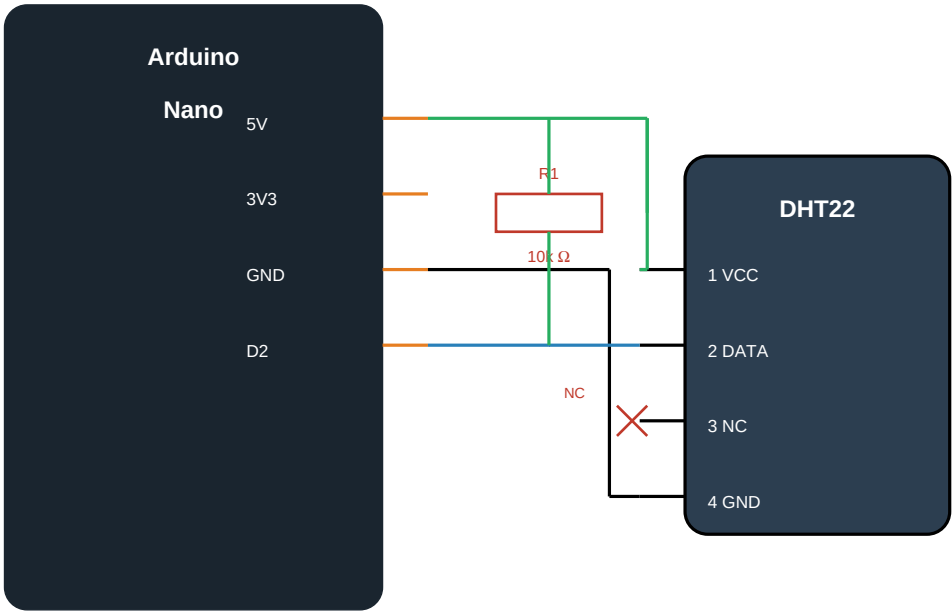

Wire colours:

Power (VCC / 5V) Ground (GND) Data / Signal

Ref	Component	Value / Part	Description
U1	Arduino Nano	ATmega328P	Microcontroller board
U2	DHT22 Sensor	AM2302	Temp & humidity sensor
R1	Pull-up Resistor	10 kΩ	Data line pull-up

Note: DHT22 operates at 3.3V-5V. 10kΩ pull-up resistor required between VCC and DATA pins. Pin 3 (NC) is left unconnected.

EasyEDA

TITLE:

Arduino Nano + DHT22

Company: Your Company

REV: 1.0

Date: 2026-05-07 Drawn By: michael.irunguSheet: 1/1