




SILCOLLECTION COPYRIGHT 2026

CARLISLE SKIRT

Pattern + Instruction

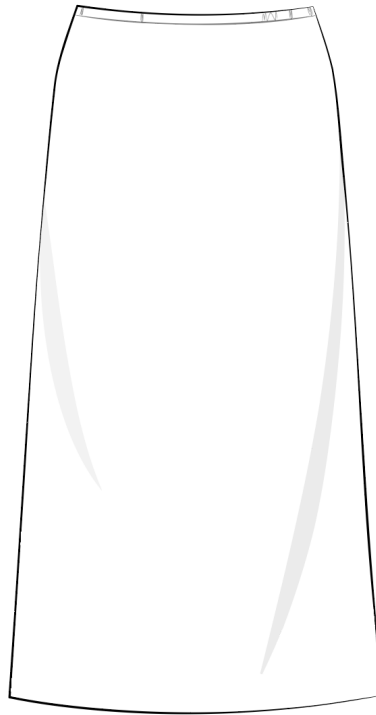


Beginner ● ○ ○ ○ ○ Intermediate

PDF CONTENTS

Table of Contents.....	2
How To Use This PDF Pattern	3
Materials Needed.....	4
Final Product Images.....	5
Size Guide & Overview.....	6
Illustrated Instructions.....	7


HOW TO USE THIS PDF PATTERN

1. Purchase & Download

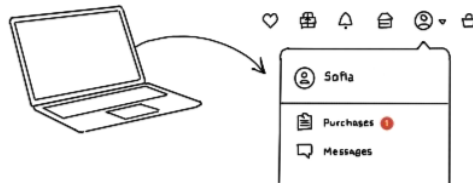


If bought on Etsy, go to orders and download your files. If bought from our website, download your files from the email we sent you. (Choose relevant size + paper format)

2. Print

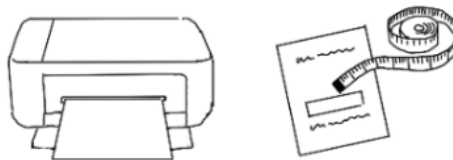


Print the pattern and tutorial at home. Check the scale using the test square on the first page of the PDF.

3. Assemble

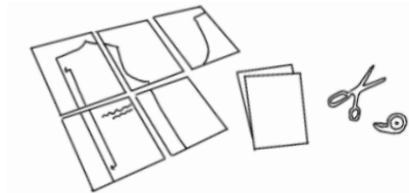

Arrange and tape the pattern pages together in order. Cut out your size.

4. Sew

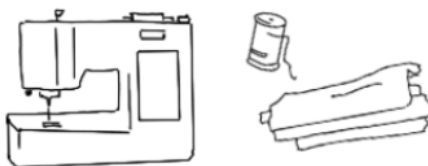

Gather the correct materials (see supply list). Follow the illustrated instructions to make your garment.

WHAT YOU NEED

Fabric & Trims

○ Fabric

XS-M: 1.5 yard

L-XL: 2 yards

(Based on a standard 55"-60" fabric width)

Recommended Fabrics:

For Drapier Fit:

- Rayon
- Satin
- Silk

For Structured Fit:

- Lightweight Linen
- Lightweight Cotton

○ Thread

○ 1/4" Width Elastic Waistband

Cut elastic 1-2" smaller than the wearer's waist measurement, depending on desired fit.

Tools

○ Sewing Machine

○ Iron + Ironing Board

○ Fabric Scissors

○ Sewing Pins

○ Measuring Tape

○ Fabric Weights

○ Optional (for finishing seams) : Serger


○ Optional (for finishing seams): Baby Hem Machine Presser Foot

PRODUCT PHOTOS



PATTERN PIECE OVERVIEW

Seam allowance is included in all pattern pieces, please refer to your pattern for specific measurements.

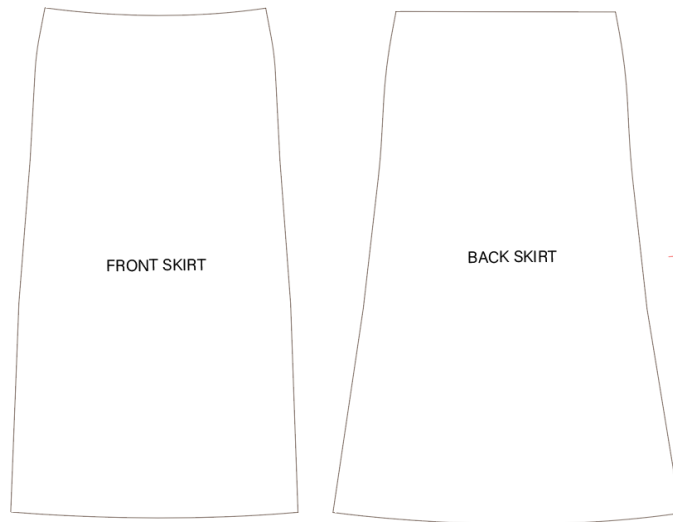

SIZE GUIDE


Skirt length is fixed for all sizes. To lengthen or shorten the skirt, adjust the hemline evenly around the entire bottom edge.

	Hip
XS	34-35"
S	36-37"
M	38-39"
L	40-41"
XL	42-43"

SKIRT INSTRUCTIONS

This pattern uses French seams throughout. This is a recommended method, but other seam finishing techniques may also be used.

1. Cut Fabric

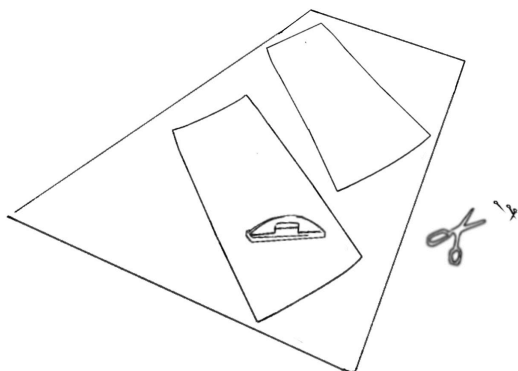


Arrange the pattern pieces on the fabric and secure with pins or fabric weights before cutting.

Make sure the grainline arrows are aligned with the grain of the fabric. This skirt is cut on the bias, which gives the garment its soft drape and stretch.

Cut out all pattern pieces.

2. Sew Front & Back Skirt Together

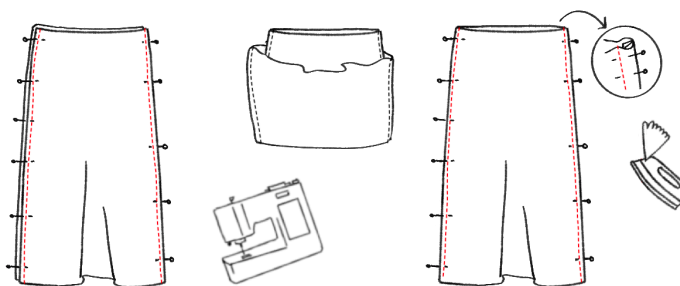

Place the front and back skirt pieces with wrong sides together to create a French seam finish.

Align the side seams, pin in place, and stitch along the edges.


Tip: Trim the seam allowance close to the stitching line to reduce bulk and create a smoother enclosed seam.

Turn the skirt inside out. Press the side seams flat with an iron.

Pin the side seams again and stitch along the edge to fully enclose the raw seam allowance.

Press seams flat with an iron.

3. Finish Bottom Hem

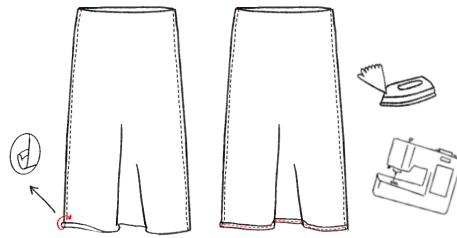


Fold the bottom edge inward by 1/4" and press flat with an iron.

Fold inward another 1/4", pin in place, and stitch along the edge.

Press flat with an iron.

4. Finish Waistband

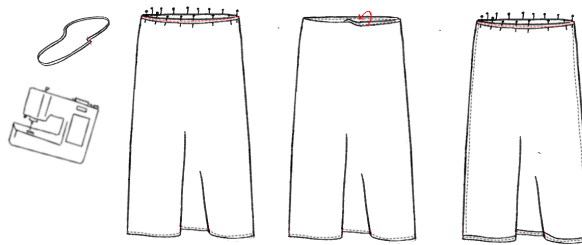

Overlap the ends of the elastic and stitch securely to create a closed loop.

Pin the elastic evenly around the right side of the upper skirt edge.


Stretch the elastic evenly as you sew to prevent gathering or puckering. Stitch along the edge.

Fold the elastic to the inside of the skirt twice so that the elastic band is not exposed and pin in place.

Stitch along the edge, stretching the elastic as you sew to keep the fabric flat.

Press flat with an iron.

5. Your Garment Is Done!

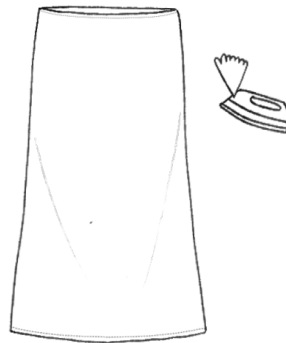

Give the garment a final press and trim any loose threads. Enjoy your Carlisle Skirt.