




SILCOLLECTION COPYRIGHT 2026

SAVILLE TOP

Pattern + Instruction

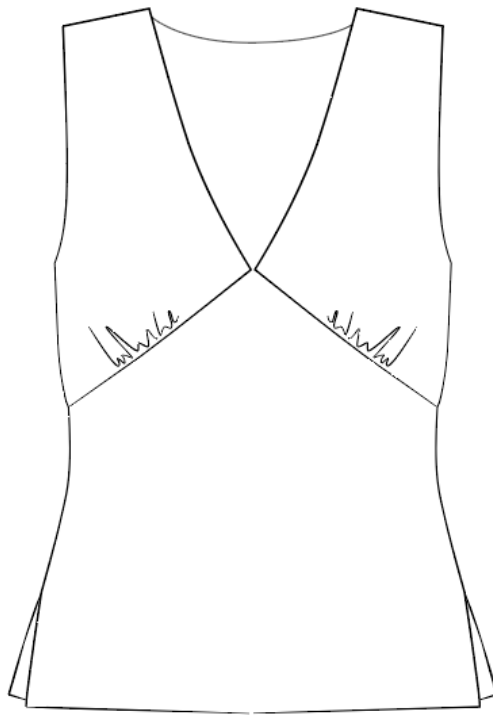


Beginner ● ● ● ● ○ Intermediate

PDF CONTENTS

Table of Contents.....	2
How To Use This PDF Pattern	3
Materials Needed.....	4
Final Product Images.....	5
Size Guide & Overview.....	6
Illustrated Instructions.....	7


HOW TO USE THIS PDF PATTERN

1. Purchase & Download

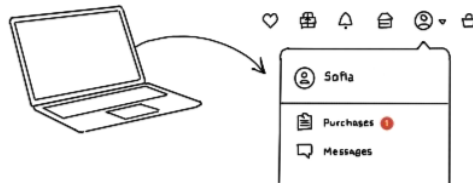


If bought on Etsy, go to orders and download your files. If bought from our website, download your files from the email we sent you. (Choose relevant size + paper format)

2. Print

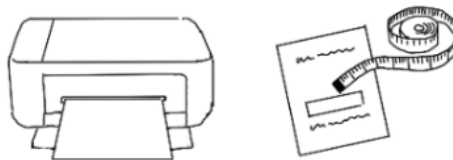


Print the pattern and tutorial at home. Check the scale using the test square on the first page of the PDF.

3. Assemble

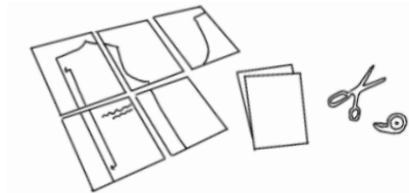

Arrange and tape the pattern pages together in order. Cut out your size.

4. Sew

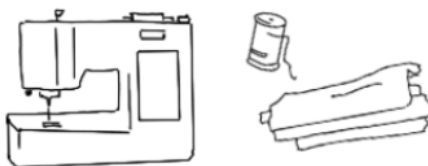

Gather the correct materials (see supply list). Follow the illustrated instructions to make your garment.

WHAT YOU NEED

Fabric & Trims

○ Fabric

S-M: 1 yard L-XL: 1.2 yards (Based on a standard 55"-60" fabric width)

Recommended Fabrics:

For Drapier Fit:

- Rayon
- Satin
- Silk

For Structured Fit:

- Lightweight Linen
- Lightweight Cotton

○ Thread

○ 1/4" Width Bias Tape

3 yards. Option to make this from your fabric or buy pre-made

Tools

○ Sewing machine

○ Iron + ironing board

○ Fabric scissors

○ Sewing pins

○ Measuring tape

○ Fabric weights

○ Optional (for finishing seams) : serger


○ Optional (for finishing seams): baby hem machine presser foot

PRODUCT PHOTOS



PATTERN PIECE OVERVIEW

Seam allowance is included in all pattern pieces, please refer to your pattern for specific measurements.

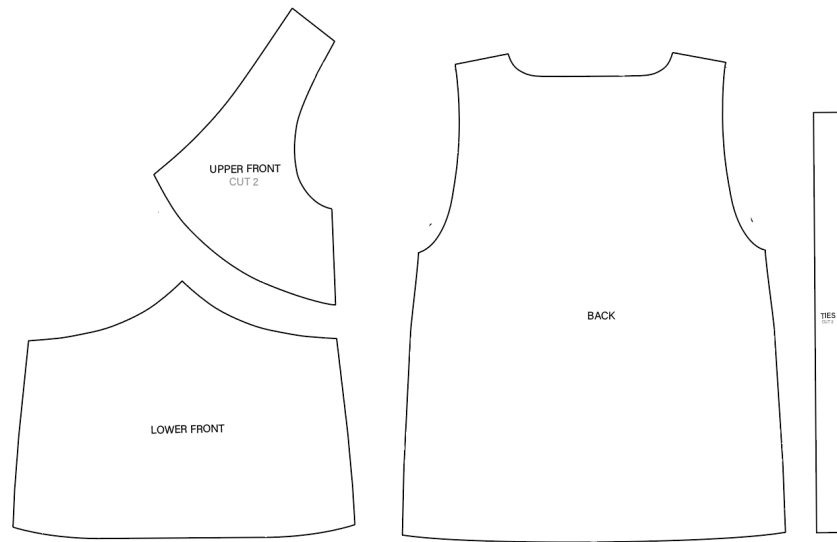

SIZE GUIDE


Please note: This garment is designed with a close-fitting bust and no zipper or closure. It is best suited to A–C cup sizes and may require a snug fit when putting on and taking off the garment.

Top	Waist	Bust
XS	24"-26"	31"-32.5"
S	26"-28"	32.5"-34"
M	28"-30"	34"-35.5"
L	30"-32"	35.5"-37.5"
XL	32"-36"	37.5"-40"

TOP INSTRUCTIONS

This pattern uses French seams throughout. This is a recommended method, but other seam finishing techniques may also be used.

1. Cut Fabric

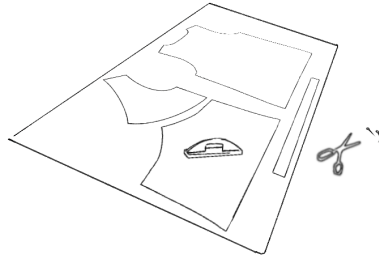


Arrange the pattern pieces on the fabric and secure with pins or fabric weights before cutting.

Make sure the grainline arrows are aligned with the grain of the fabric.

Cut out all pattern pieces.


2. Sew Back Darts

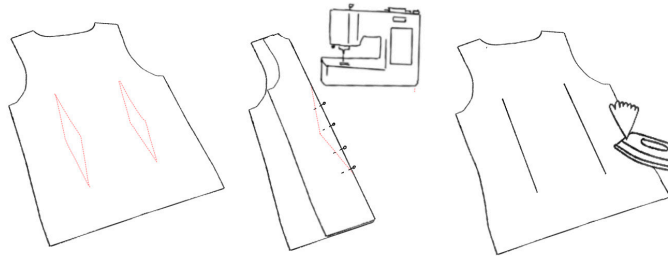

Using the dart markings on the pattern, fold and pin the darts on the wrong side of the fabric.

Stitch the darts closed and press flat with an iron.

3. Sew Shoulder Seams

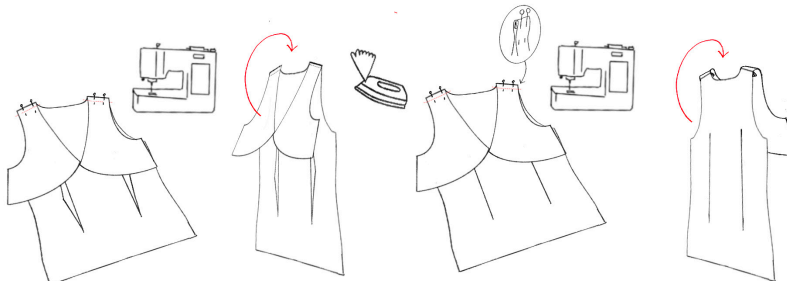


Place the bust pieces and back piece with wrong sides together.

Pin along the shoulder seams and stitch in place.

Fold the front pieces over the seam allowance to fully enclose the raw edge. Pin along the shoulder seams again and stitch to fully enclose the seam allowance. Press seams flat.

4. Finish Neckline & Armhole Edges

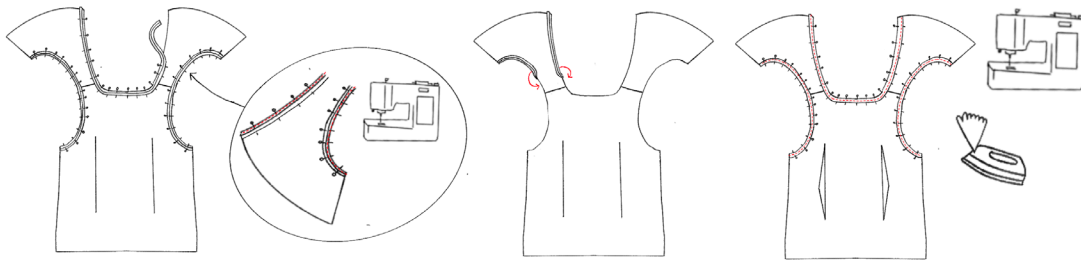


Pin the bias tape along the neckline and armhole edges on the right side of the garment, with the open edge of the bias tape facing upward.

Stitch along the edge.

Fold the bias tape to the inside of the garment and pin in place.

Stitch again along the edge to secure. Press flat with an iron.

5. Attach Bust to Torso

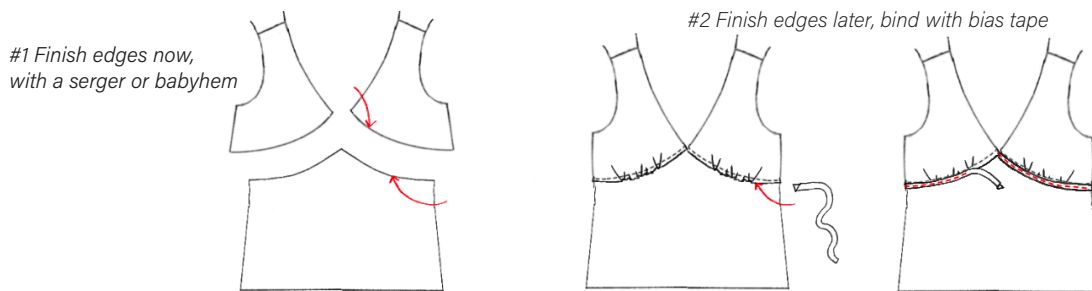


#1 Finish edges now,
with a serger or babyhem

#2 Finish edges later, bind with bias tape

Part 1: Optional Edge Finishing

You may finish the bottom edge of the bust pieces and the top edge of the front lower piece now if using a serger or baby hem. If using bias tape, apply it in Step 7 before sewing the side seams.

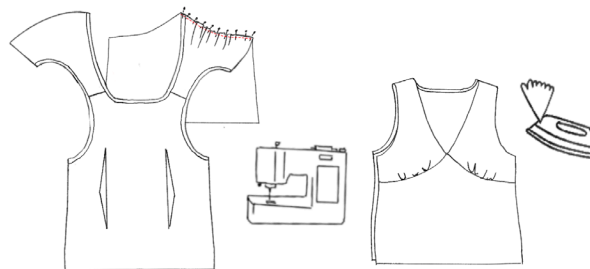


Part 2: Attach Bust to Torso

With right sides together, pin the bust pieces to the torso piece along the edge.

The squiggly line on your torso pattern marks the section where the excess bust fabric should be evenly distributed.

Evenly distribute the excess fabric within this section while pinning so the bust pieces fit the torso evenly. Stitch in place.

6. Finish Side Slits

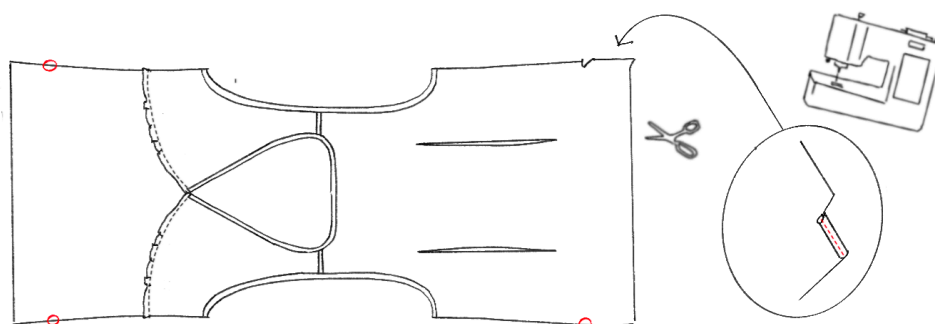

There is a 2" slit on each side seam. Finish all 4 slit edges.


Clip into the fabric at the slit mark by 1/2".

Fold each slit edge inward by 1/4" twice.

Pin in place and stitch along the folded edge.

Press flat with an iron.

7. Finish Bottom Hem

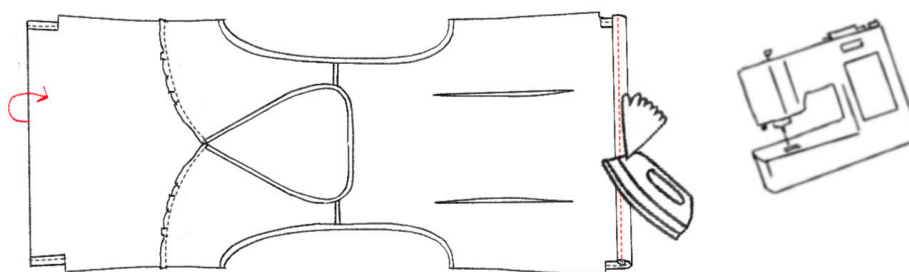


Fold the bottom edge of both the front and back pieces inward by 1/4" and press.

Fold inward another 1/4", pin in place, and stitch along the edge.

Press flat with an iron.

8. Sew Waist Ties

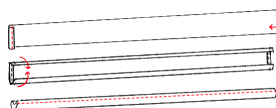


Fold the short edges of the tie inward by 1/4". Stitch in place and press flat with an iron.

Fold the long edges inward by 1/4" and press flat.

Fold the tie in half lengthwise so no raw edges are visible. Pin in place and stitch along the long edge. Press flat with an iron.

9. Sew Side Seams

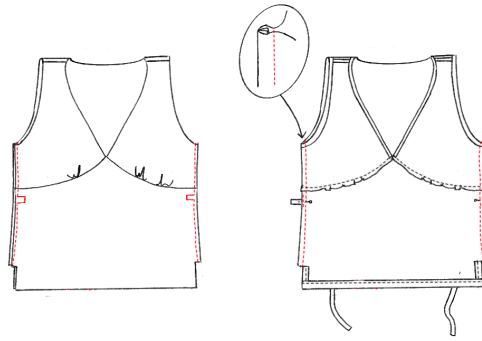

Place the front and back pieces right sides together.

Mark the 1/2" opening along each side seam, as indicated on the pattern. Do not stitch this section closed, as the waist ties will be inserted here later.

Pin the side seams and stitch with a 1/4" seam allowance, stopping at the slit marks and leaving the 1/2" opening unstitched.


Turn the garment inside out.

Insert the waist ties through the side seam openings, positioning the long ends inside the garment. Pin in place.

Pin the side seams again and stitch along the edge to enclose the raw seam allowance, securing the waist ties in place as you sew.

Press seams flat with an iron.

10. Your Garment Is Done!

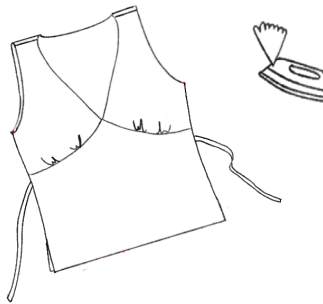

Give the garment a final press and trim any loose threads. Enjoy your Saville Top.