



www.millennium-machines.com/

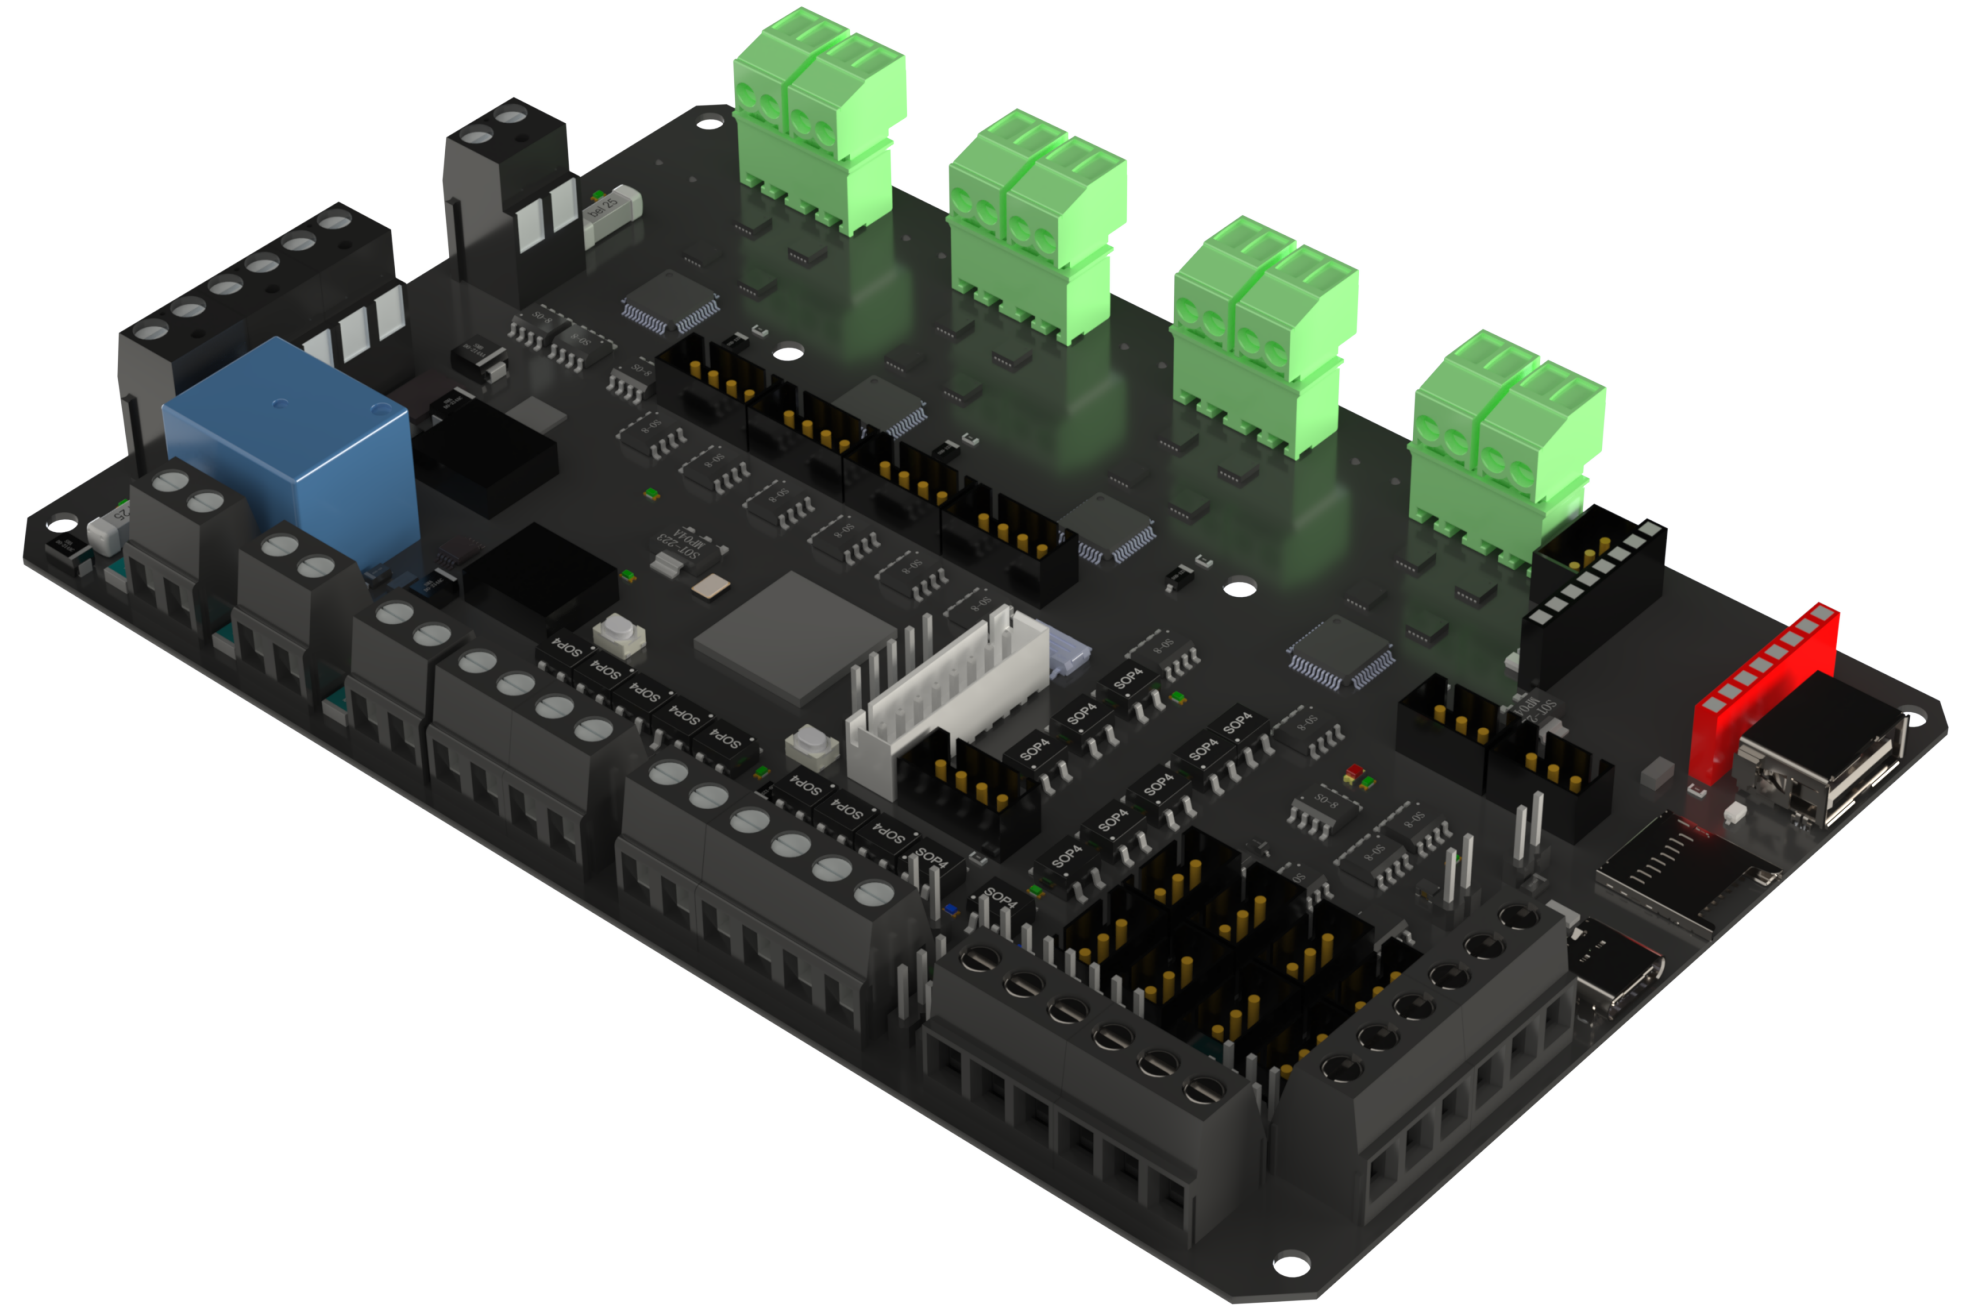


V2 / V1.6 WIRING REFERENCE




MAINS INLET WIRING

IEC color scheme is shown for the mains wiring. Depending on your region, the color scheme and wiring standards will differ.



WIRING WITH INLET & ROCKER SWITCH

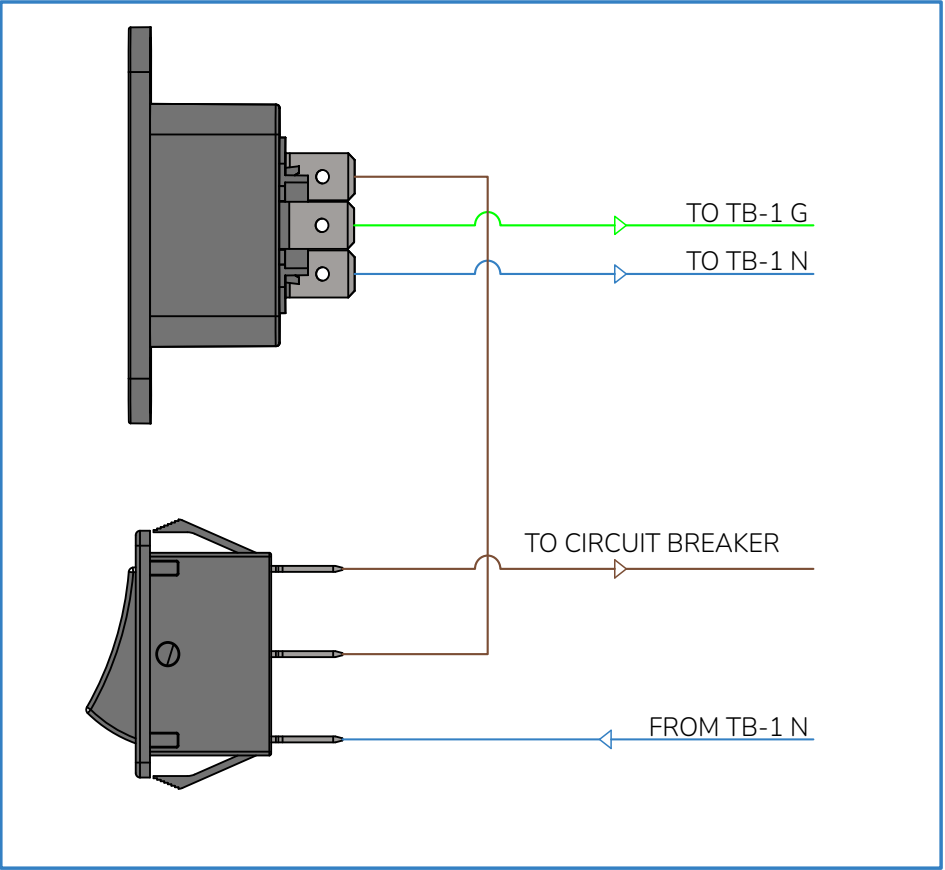


MINIATURE CIRCUIT BREAKER

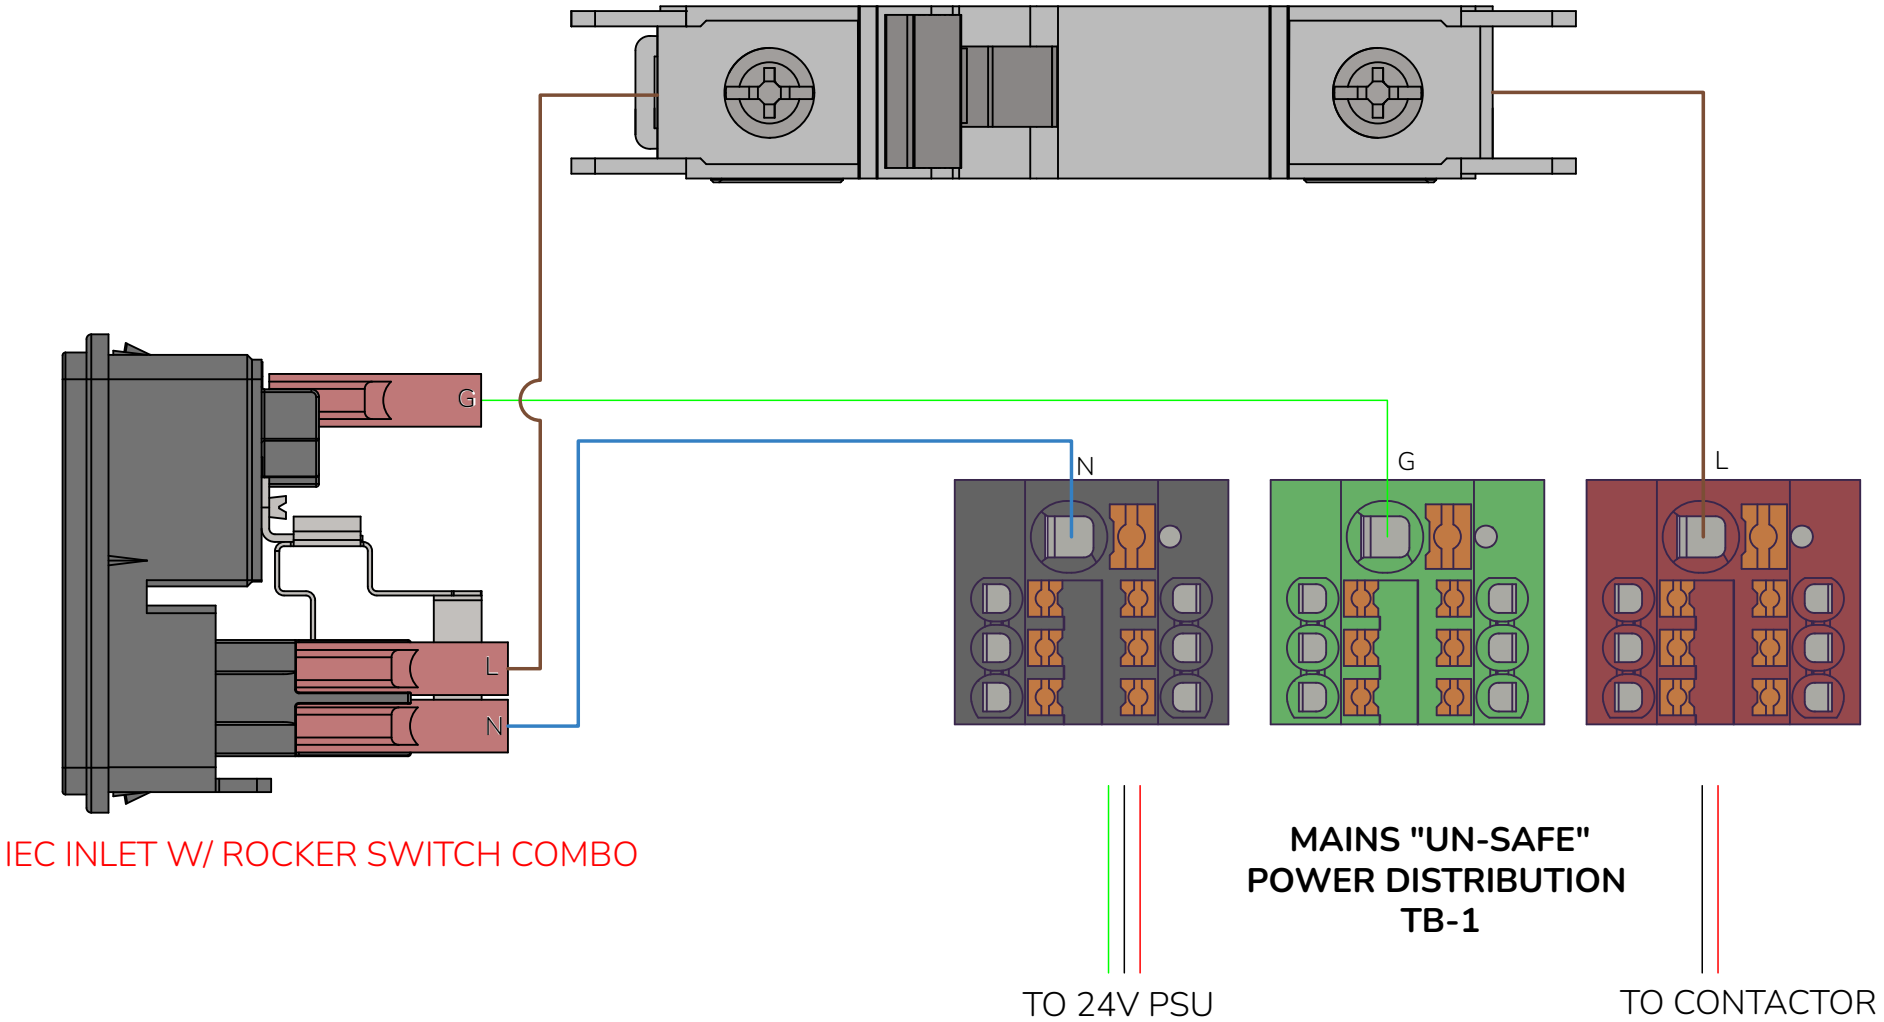




IEC INLET W/ ROCKER SWITCH COMBO

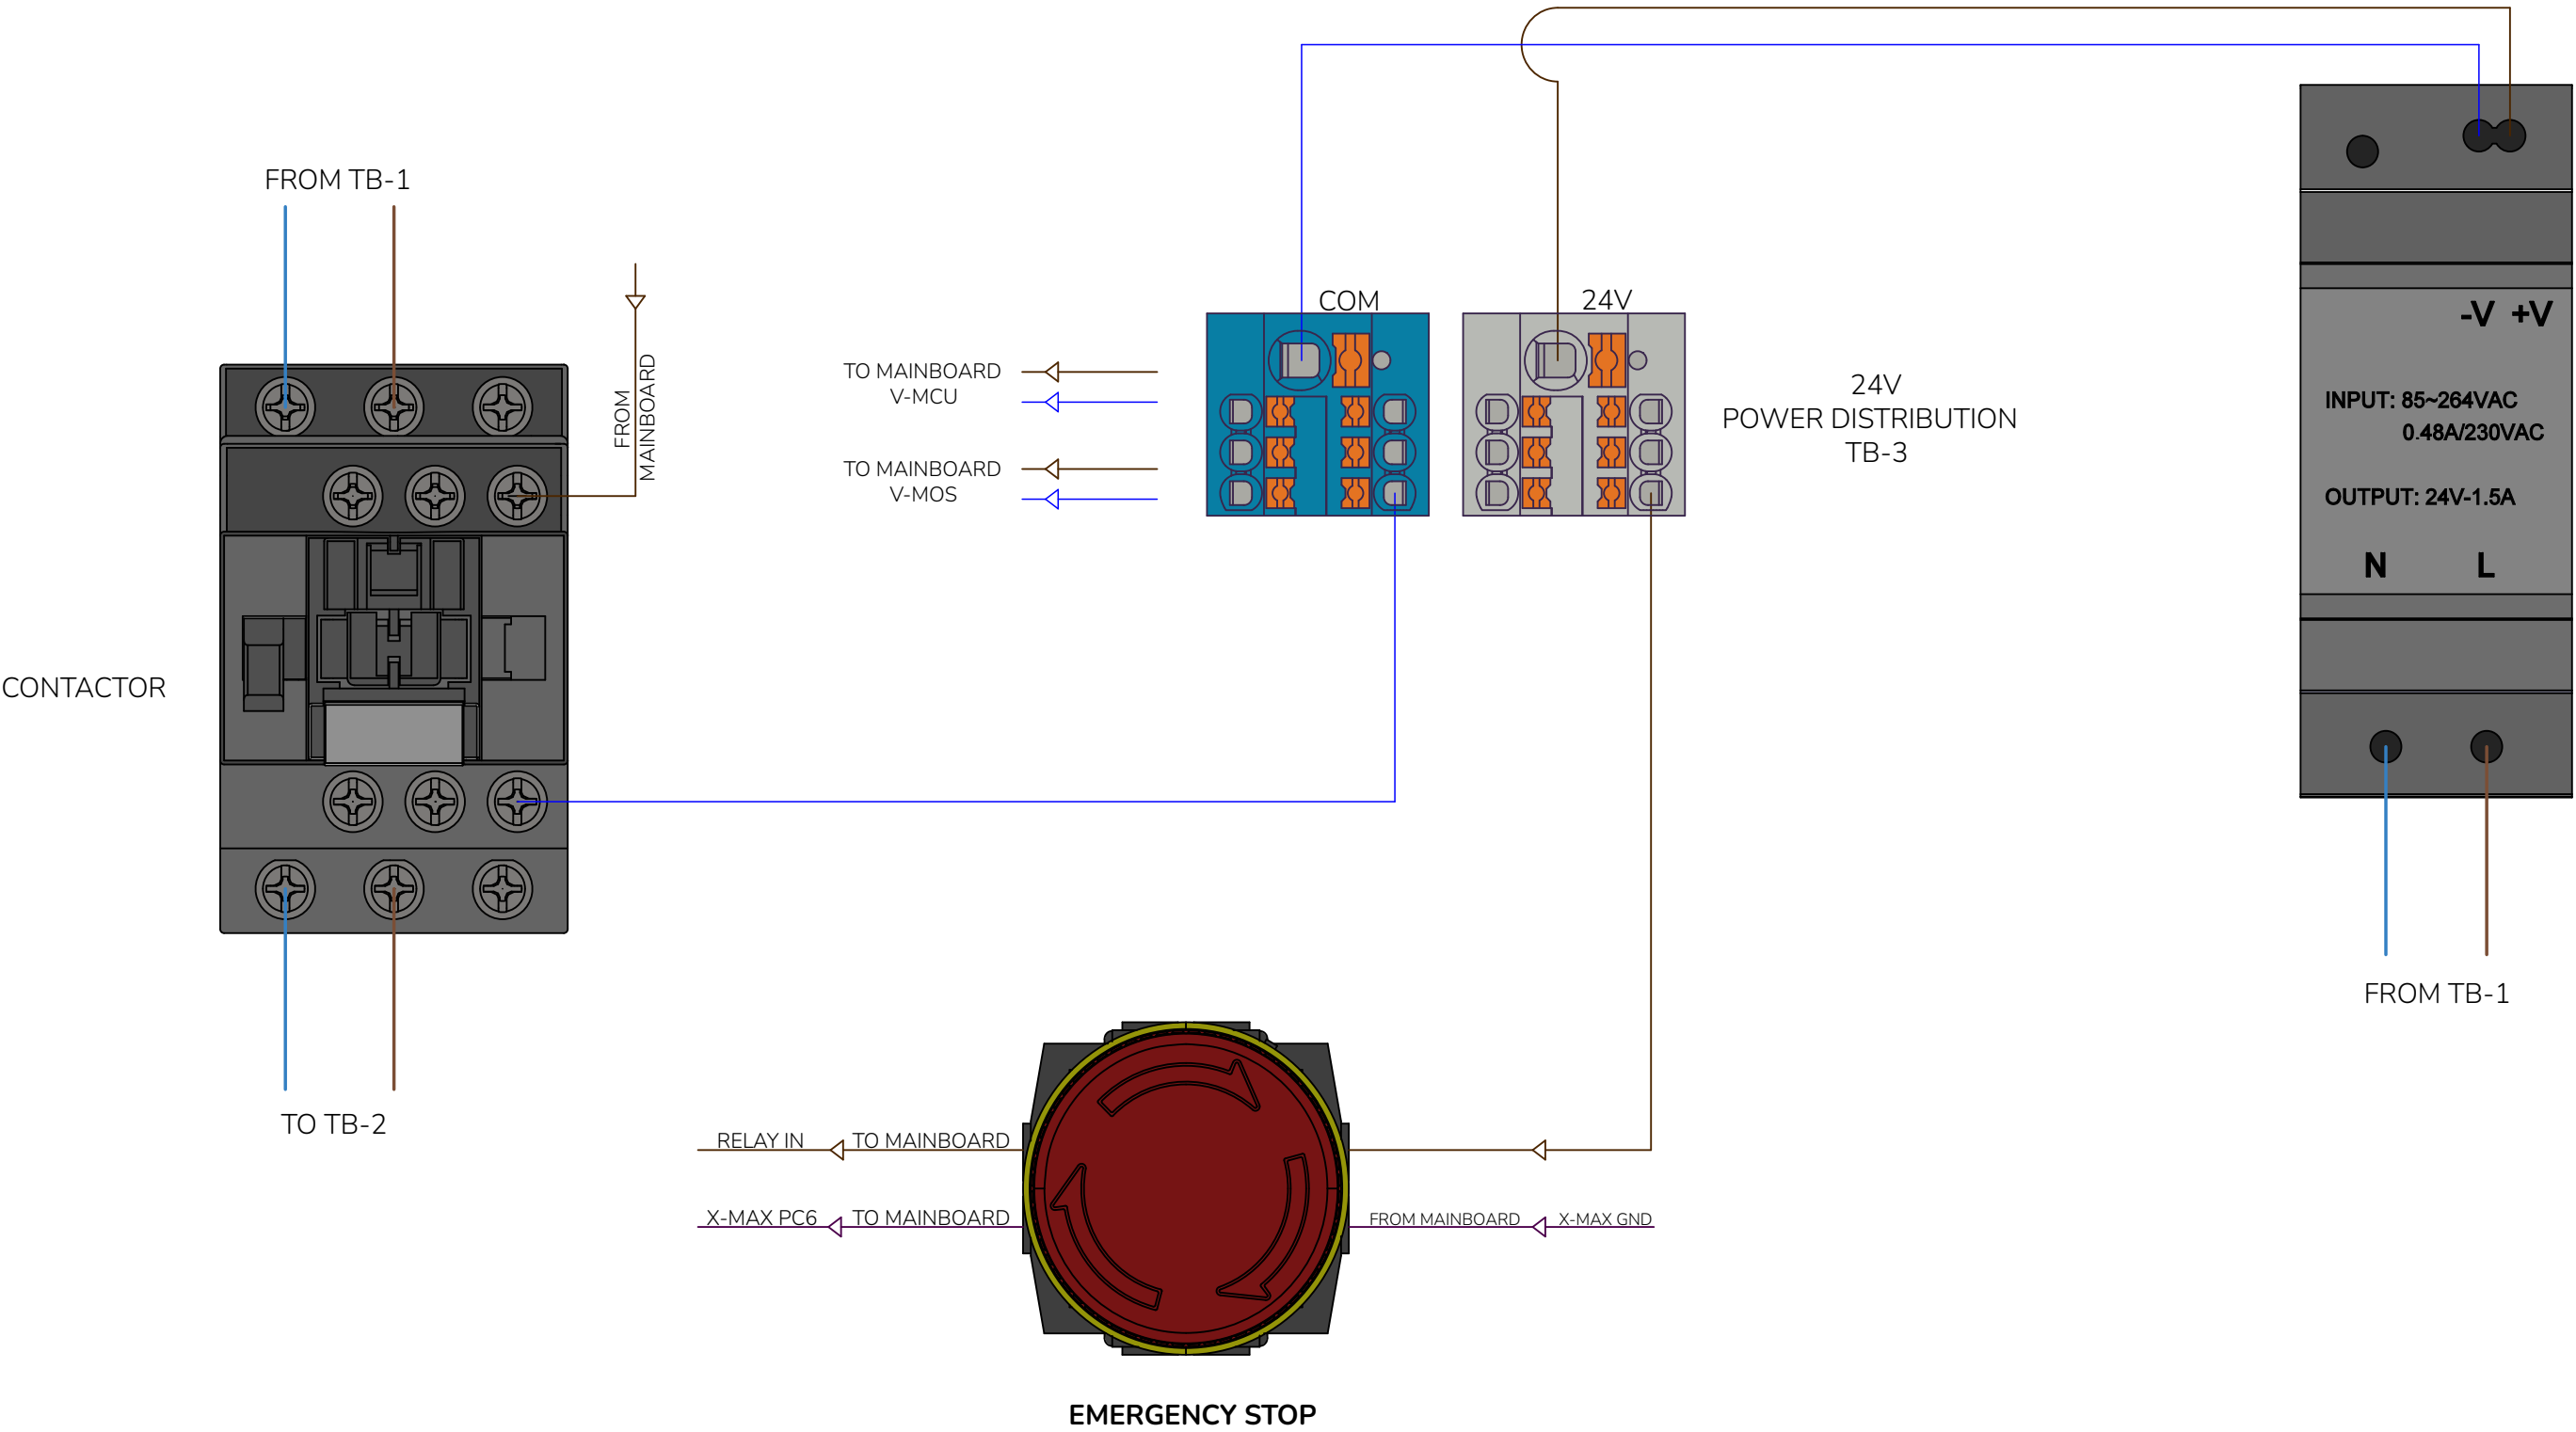



WIRING
24V / SAFE CIRCUIT

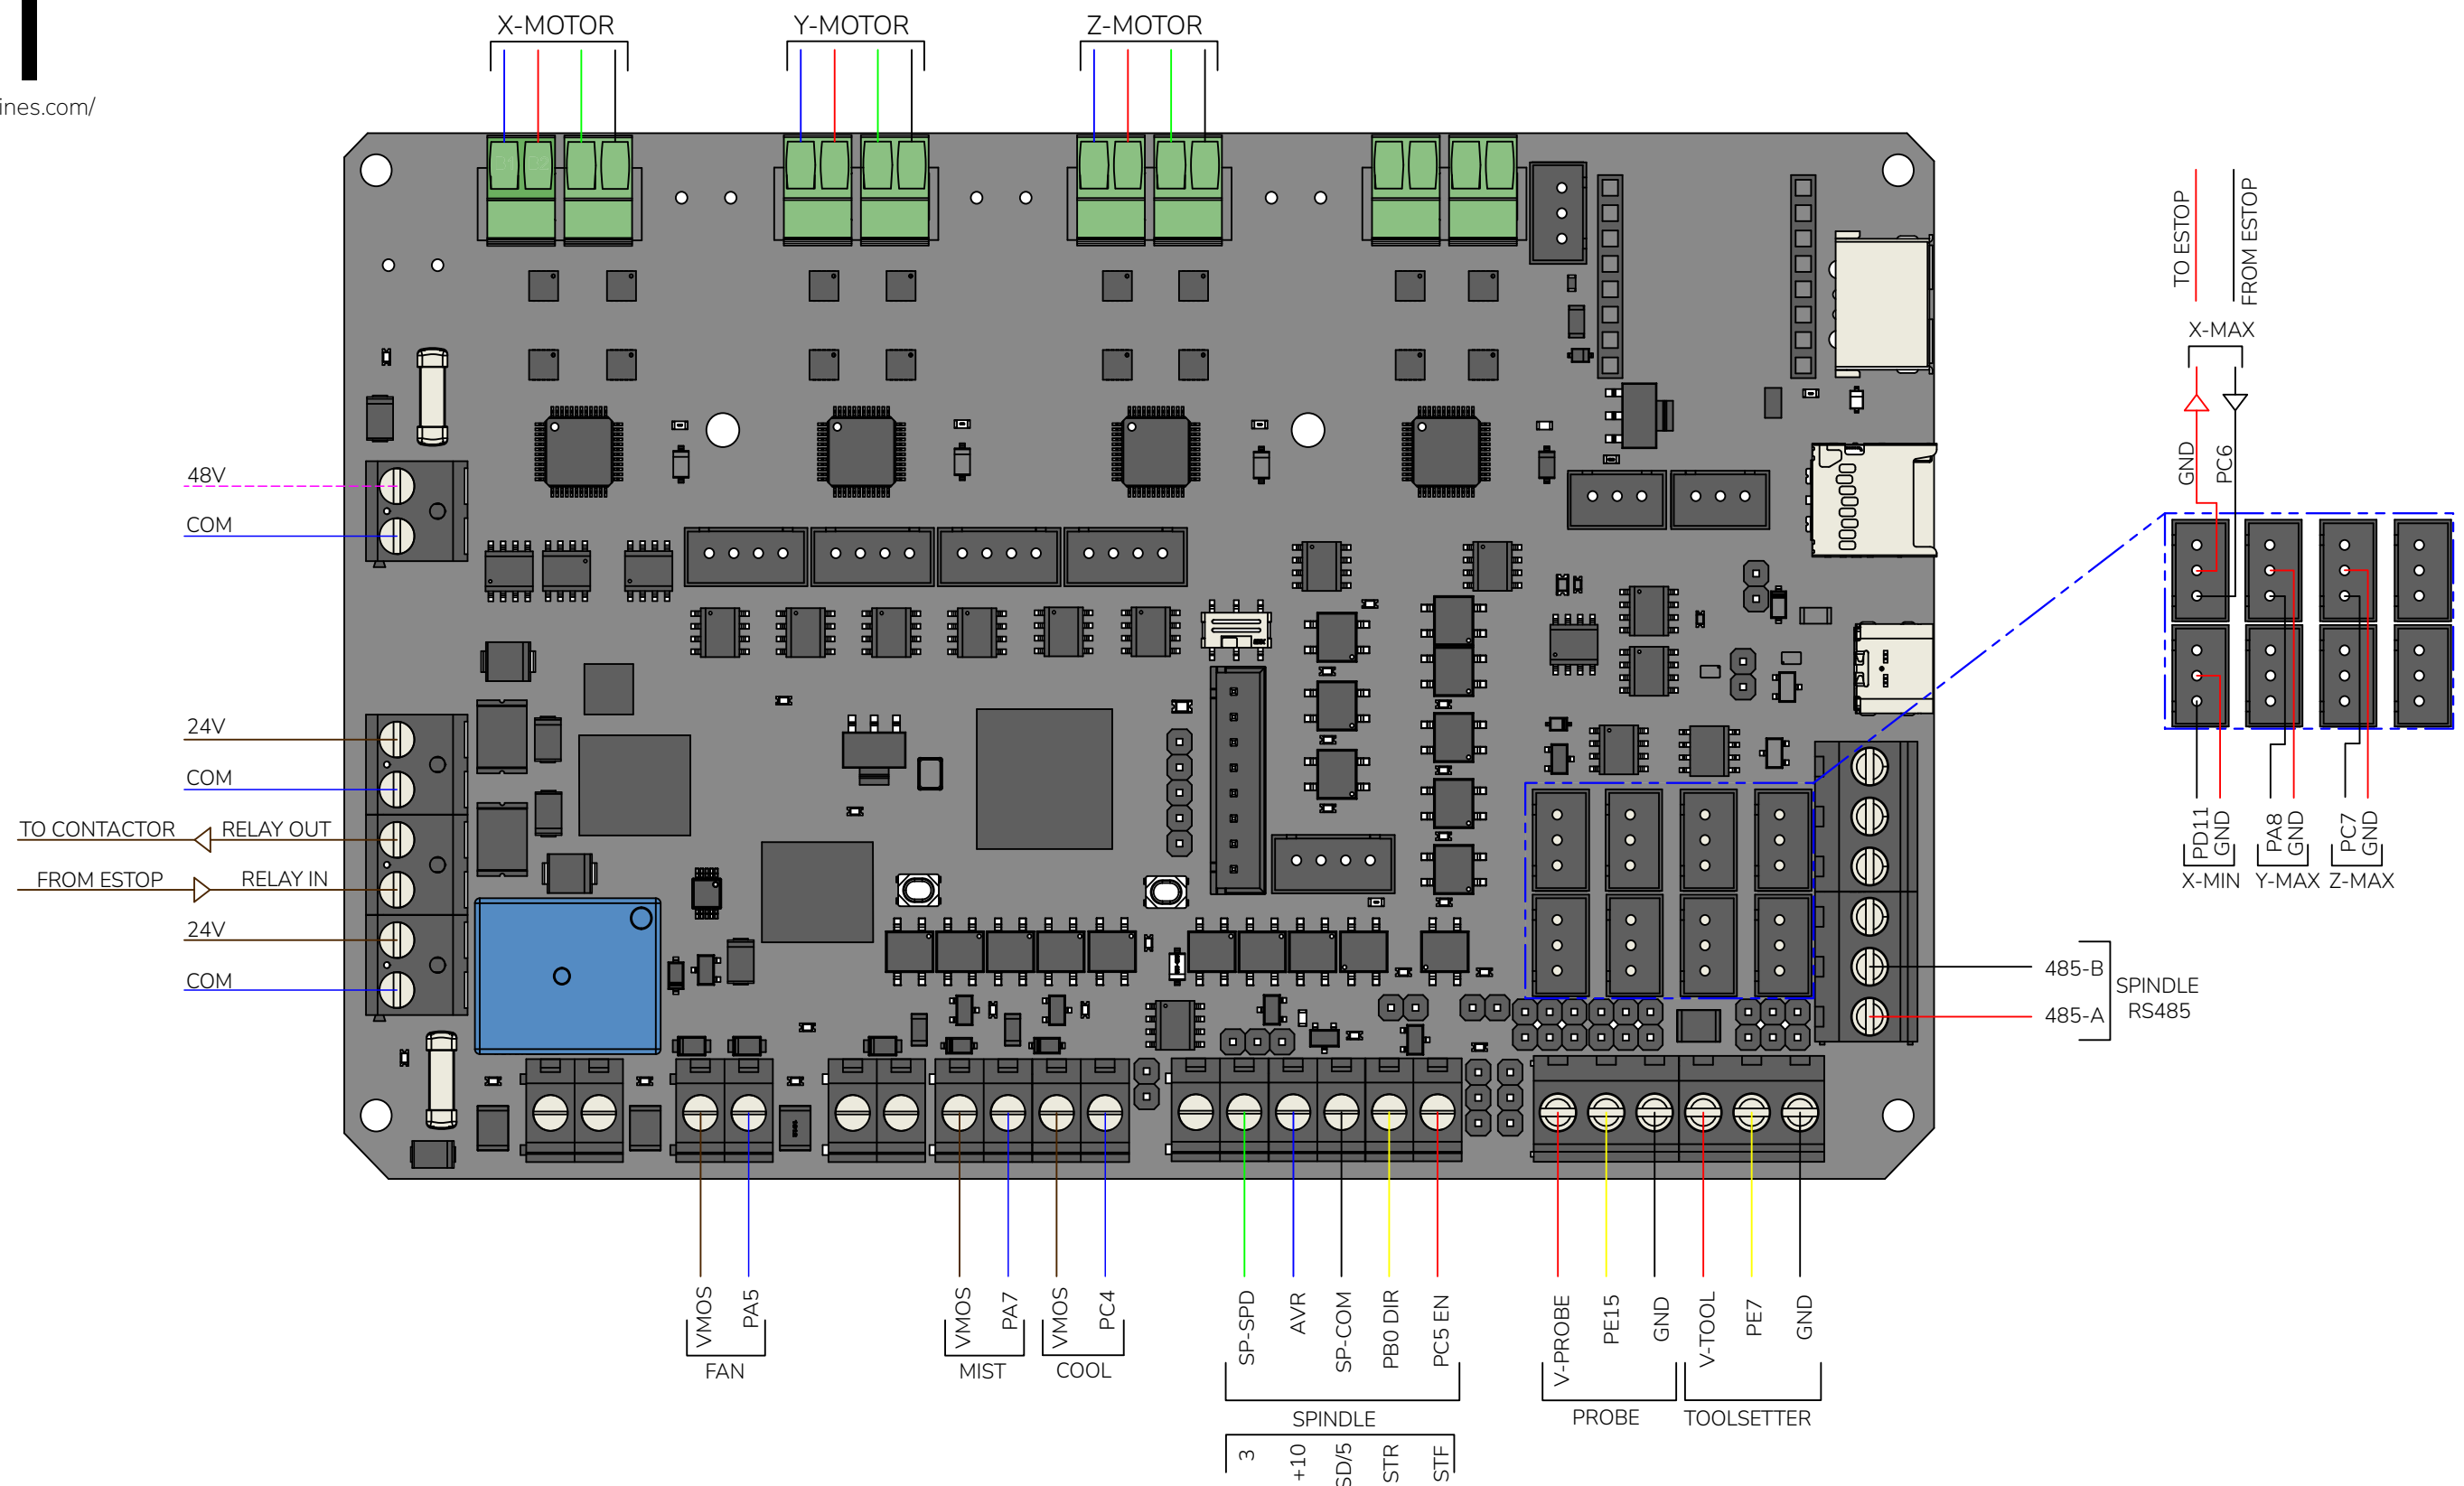


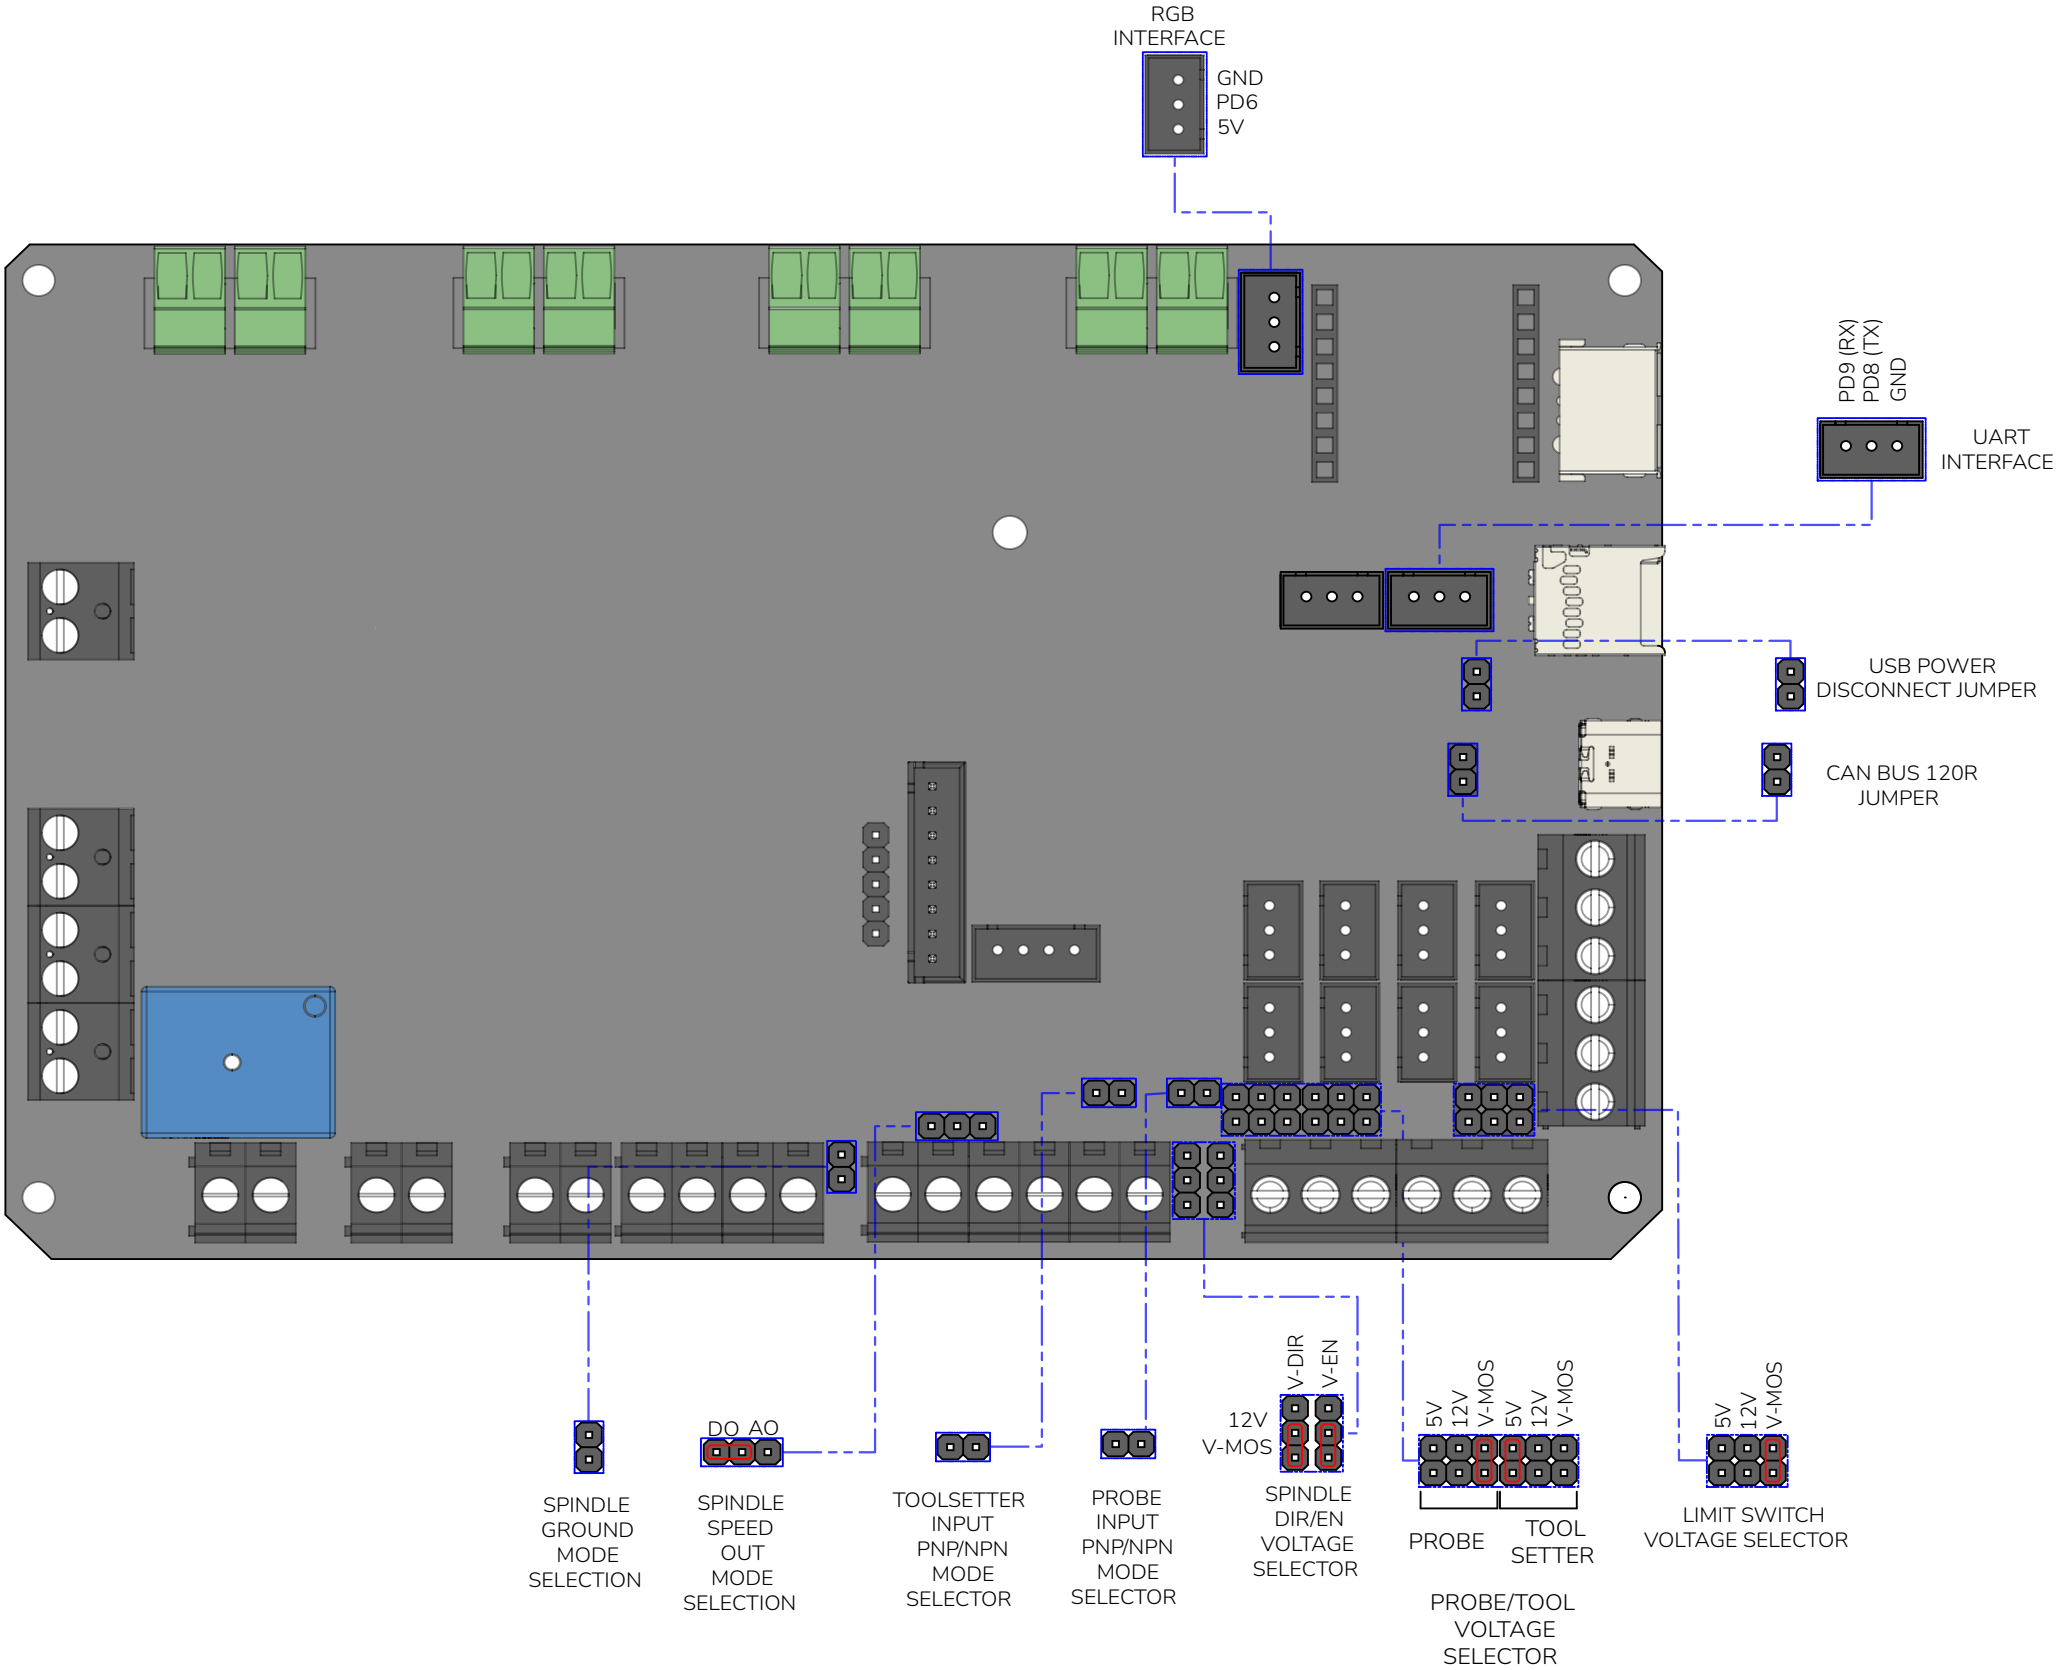

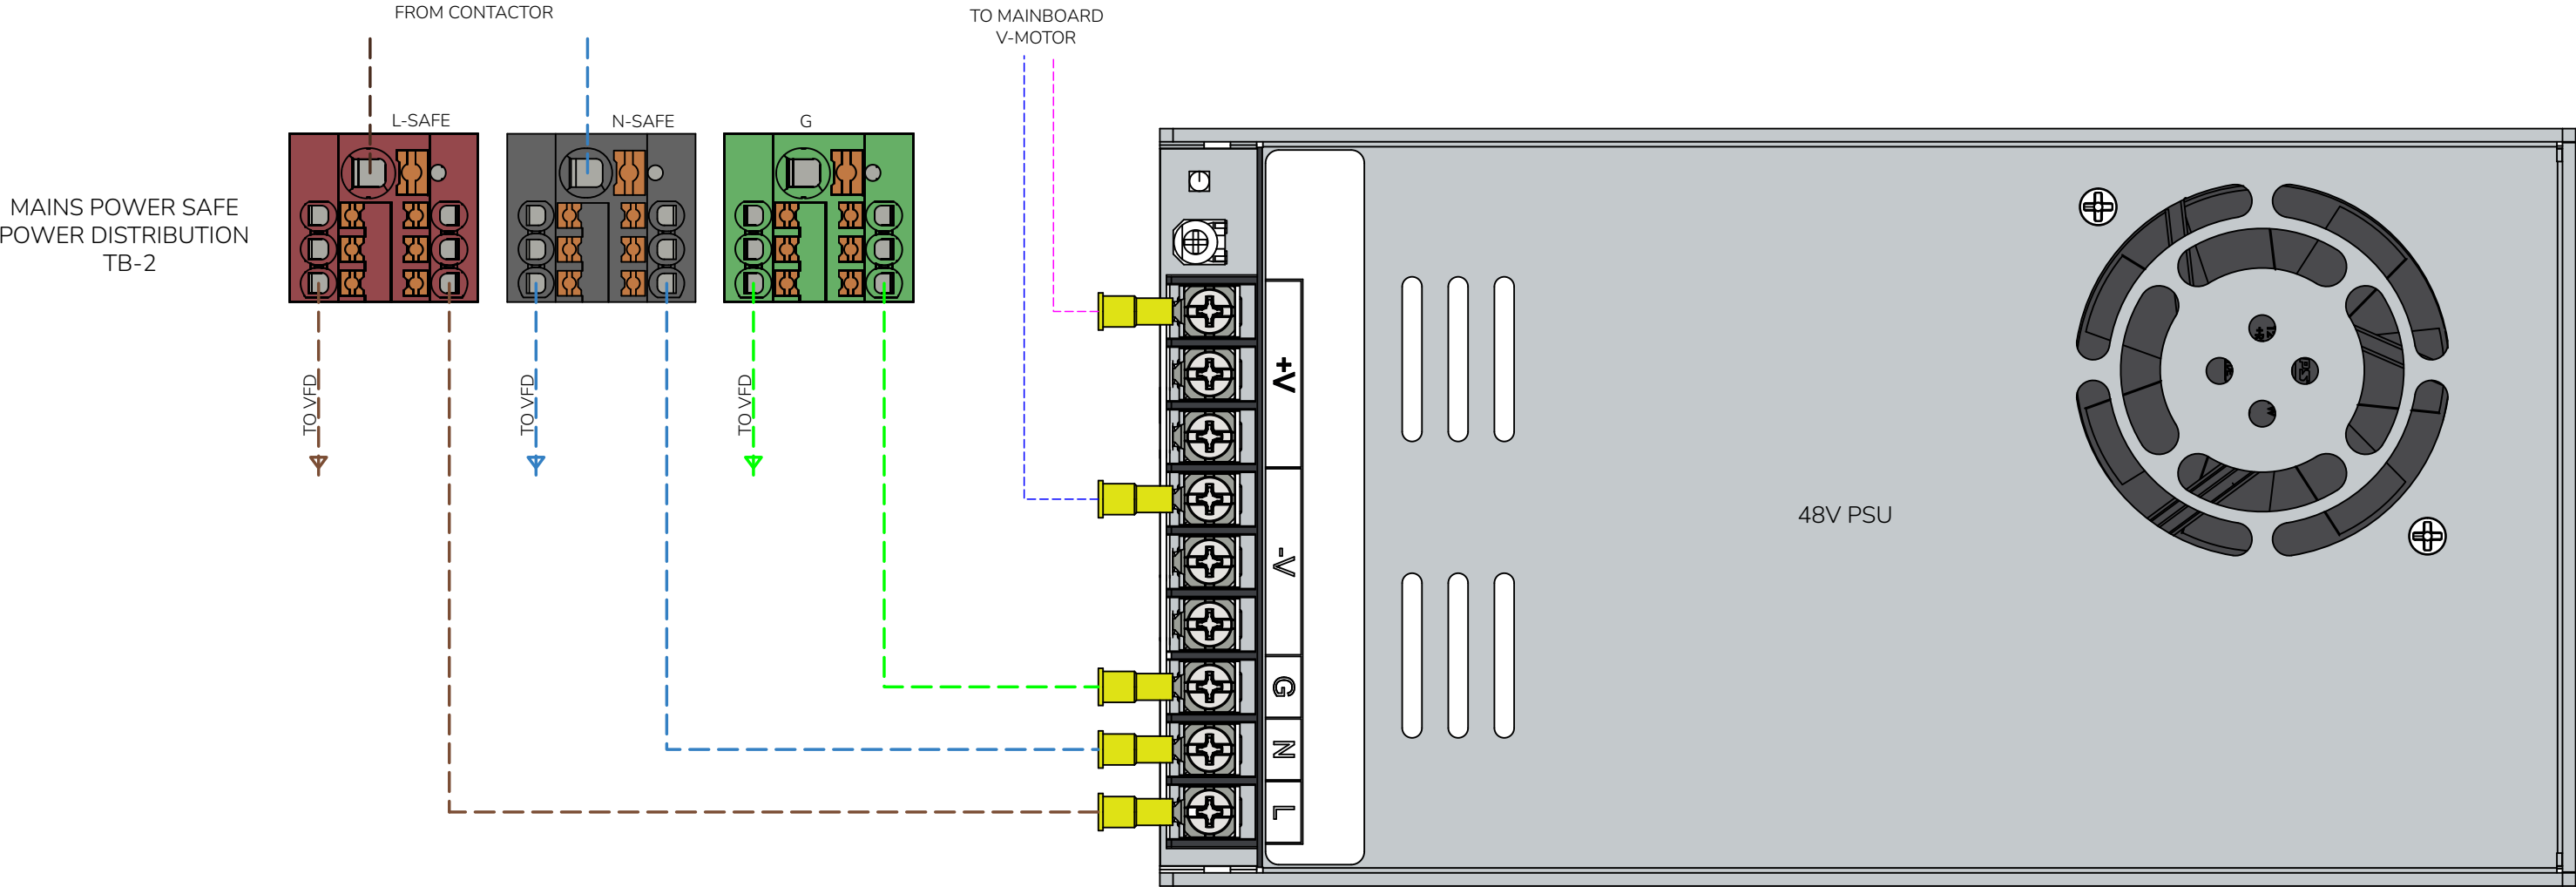

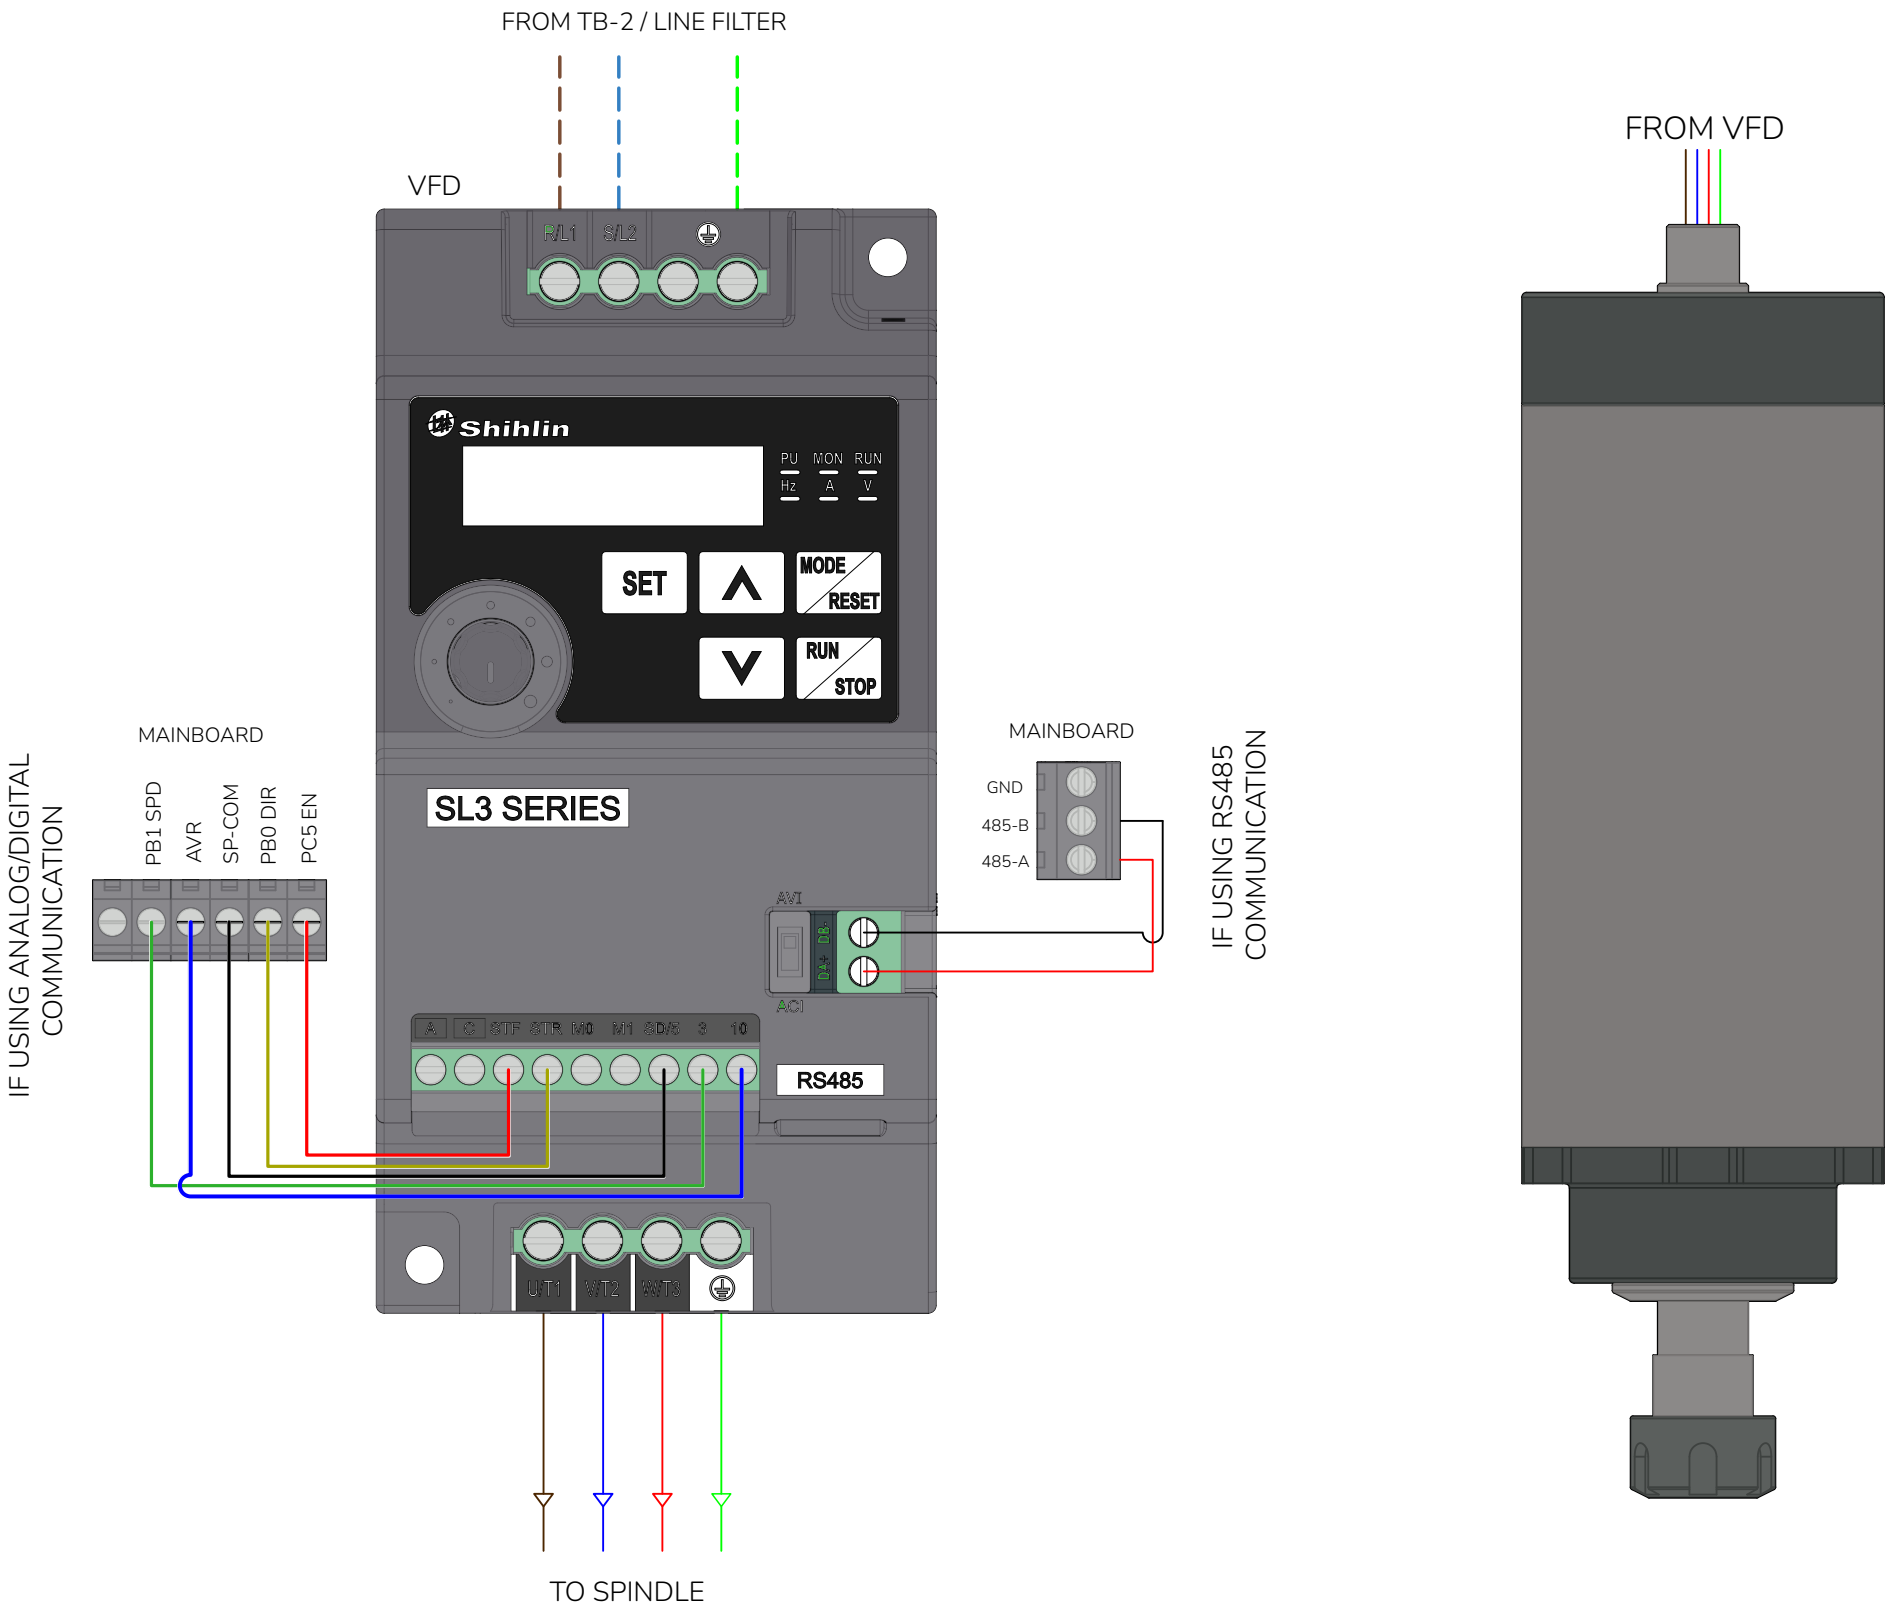


X-MOTOR

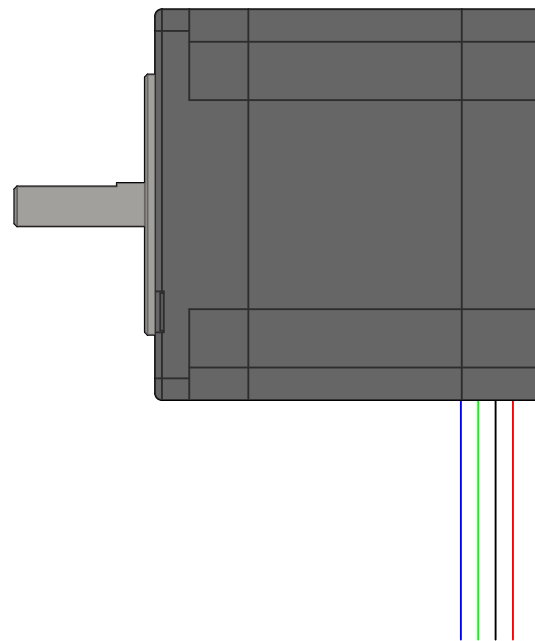


TO MAINBOARD

Y-MOTOR

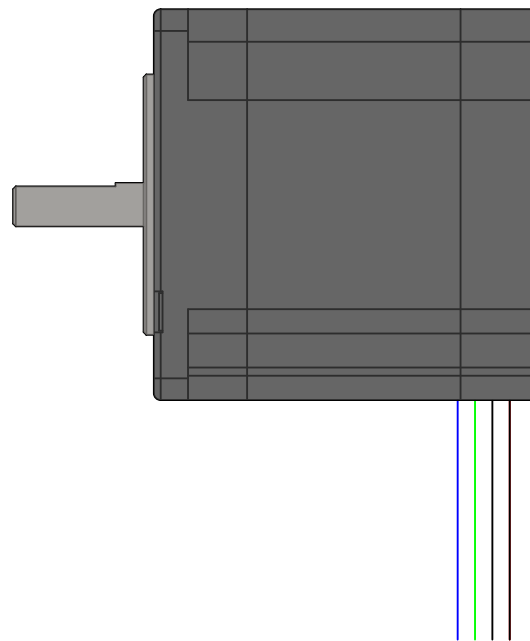

TO MAINBOARD

Z-MOTOR

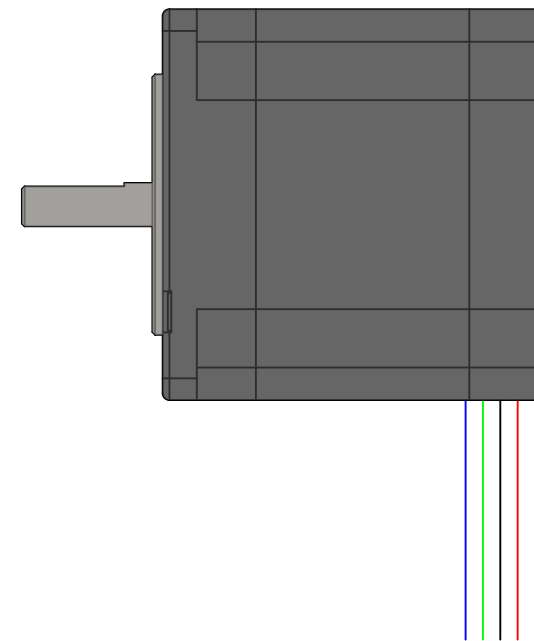




TO MAINBOARD

INDUCTIVE SENSORS

X-MIN

Y-MAX

Z-MAX

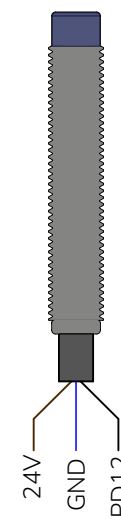
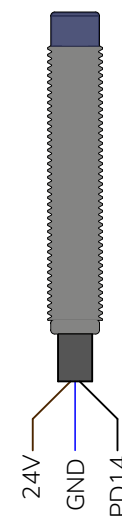
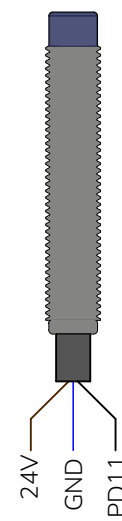


MECHANICAL SWITCHES



X-MIN



Y-MAX


Z-MAX

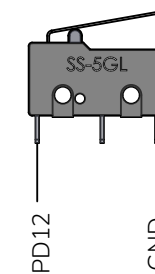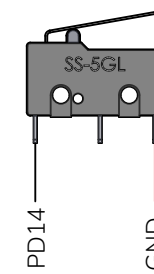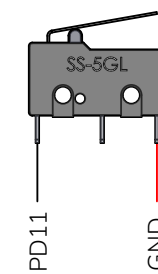


TO MAINBOARD

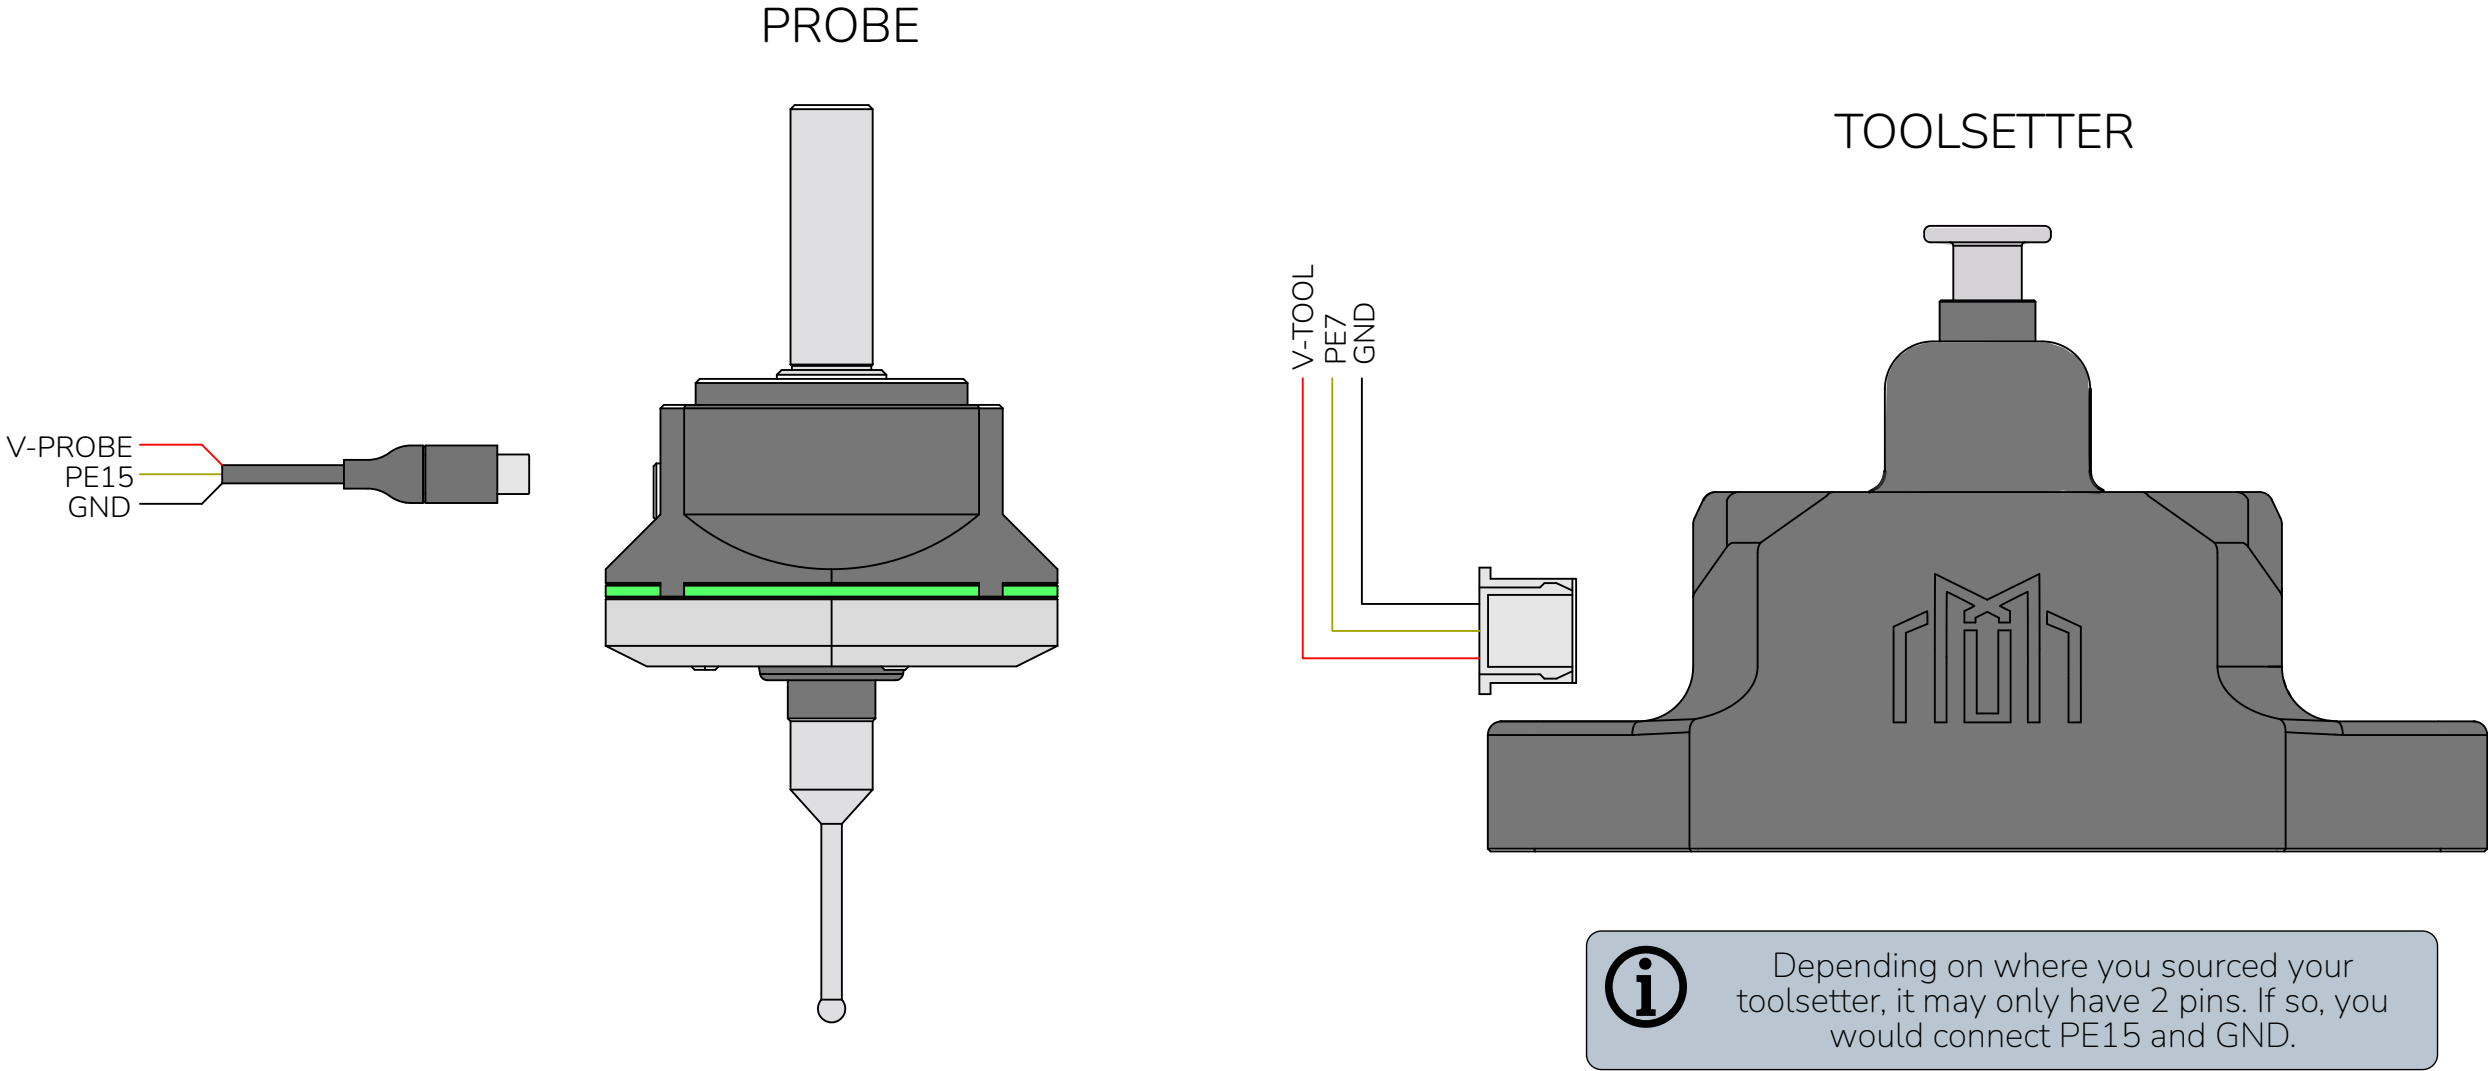

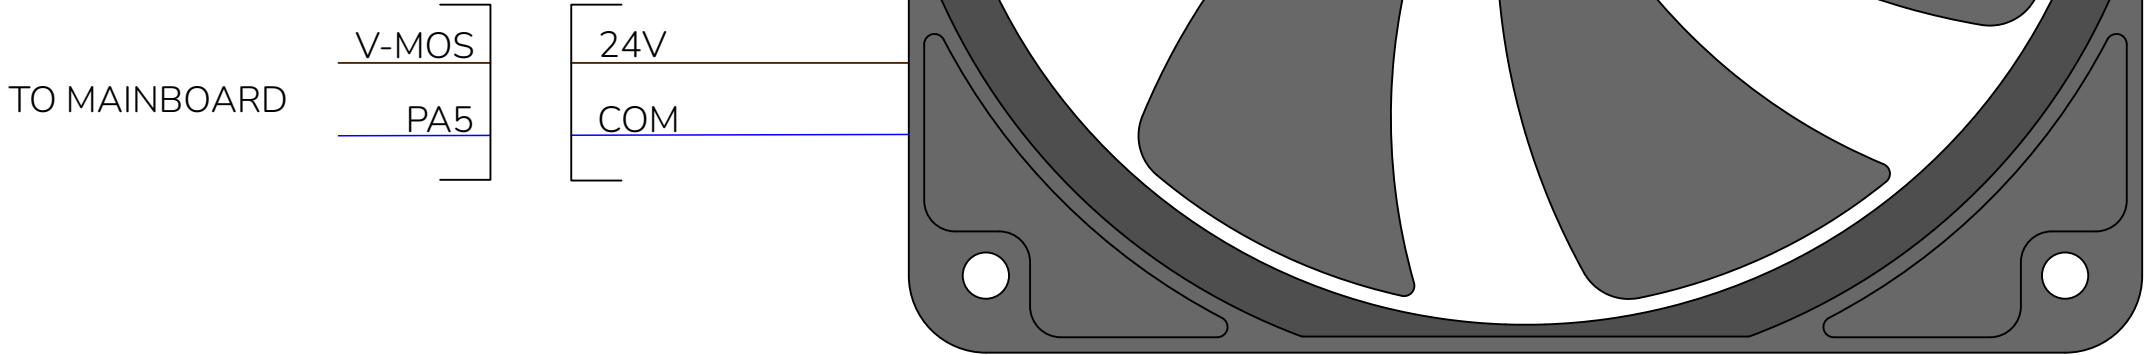



For optimal performance and reduced electrical noise, a line filter is recommended when using a spindle with a VFD. It helps minimize interference with nearby electronics and improves overall system reliability. While many users operate without issues, adding a line filter can provide extra protection against potential EMI-related problems.

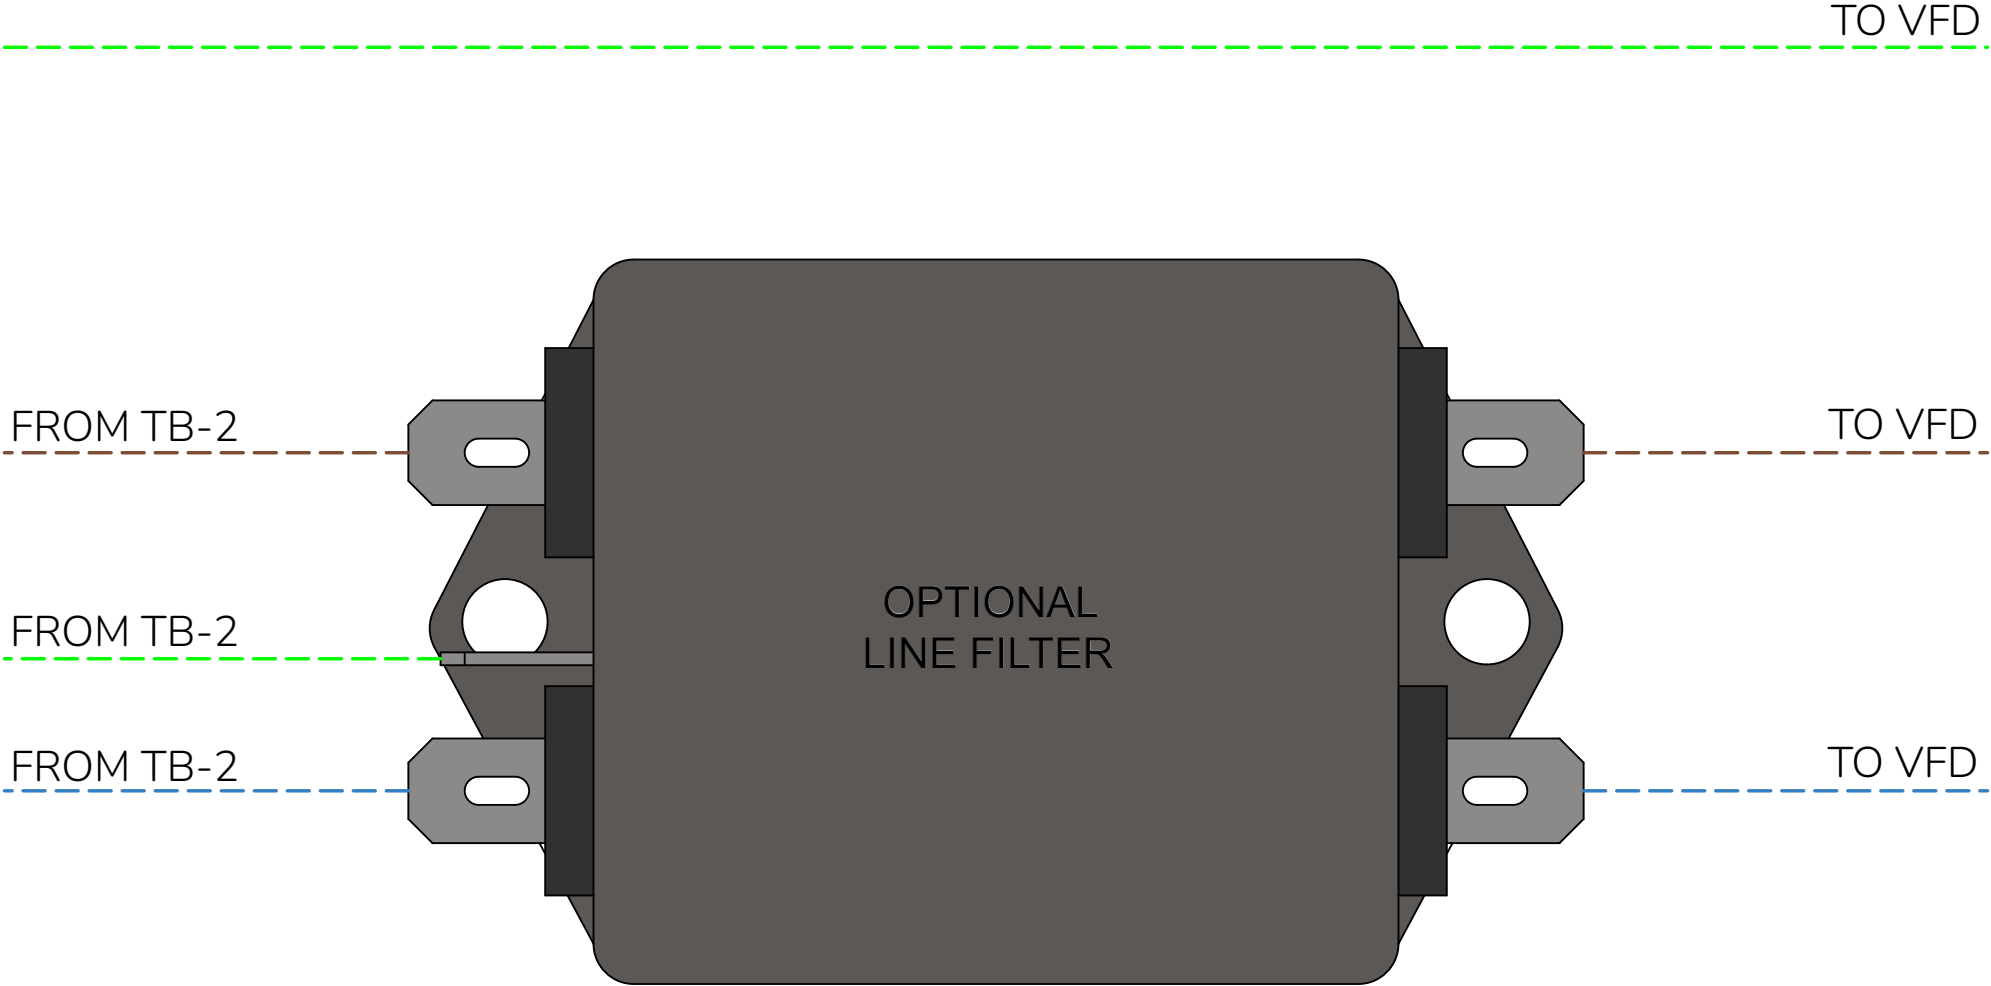

Revision 06.09.26

- Changed E-Stop circuit to X-MAX GND instead of 24V.

Revision 1.18.26

- Changed Drop Nut dimensions to center dims
- Fixed Typo on Page 9 (Assembly → Assemble)
- Added Keystone Insert info
- Moved E-stop signals to Endstop
- Imported the right version wiring diagram