




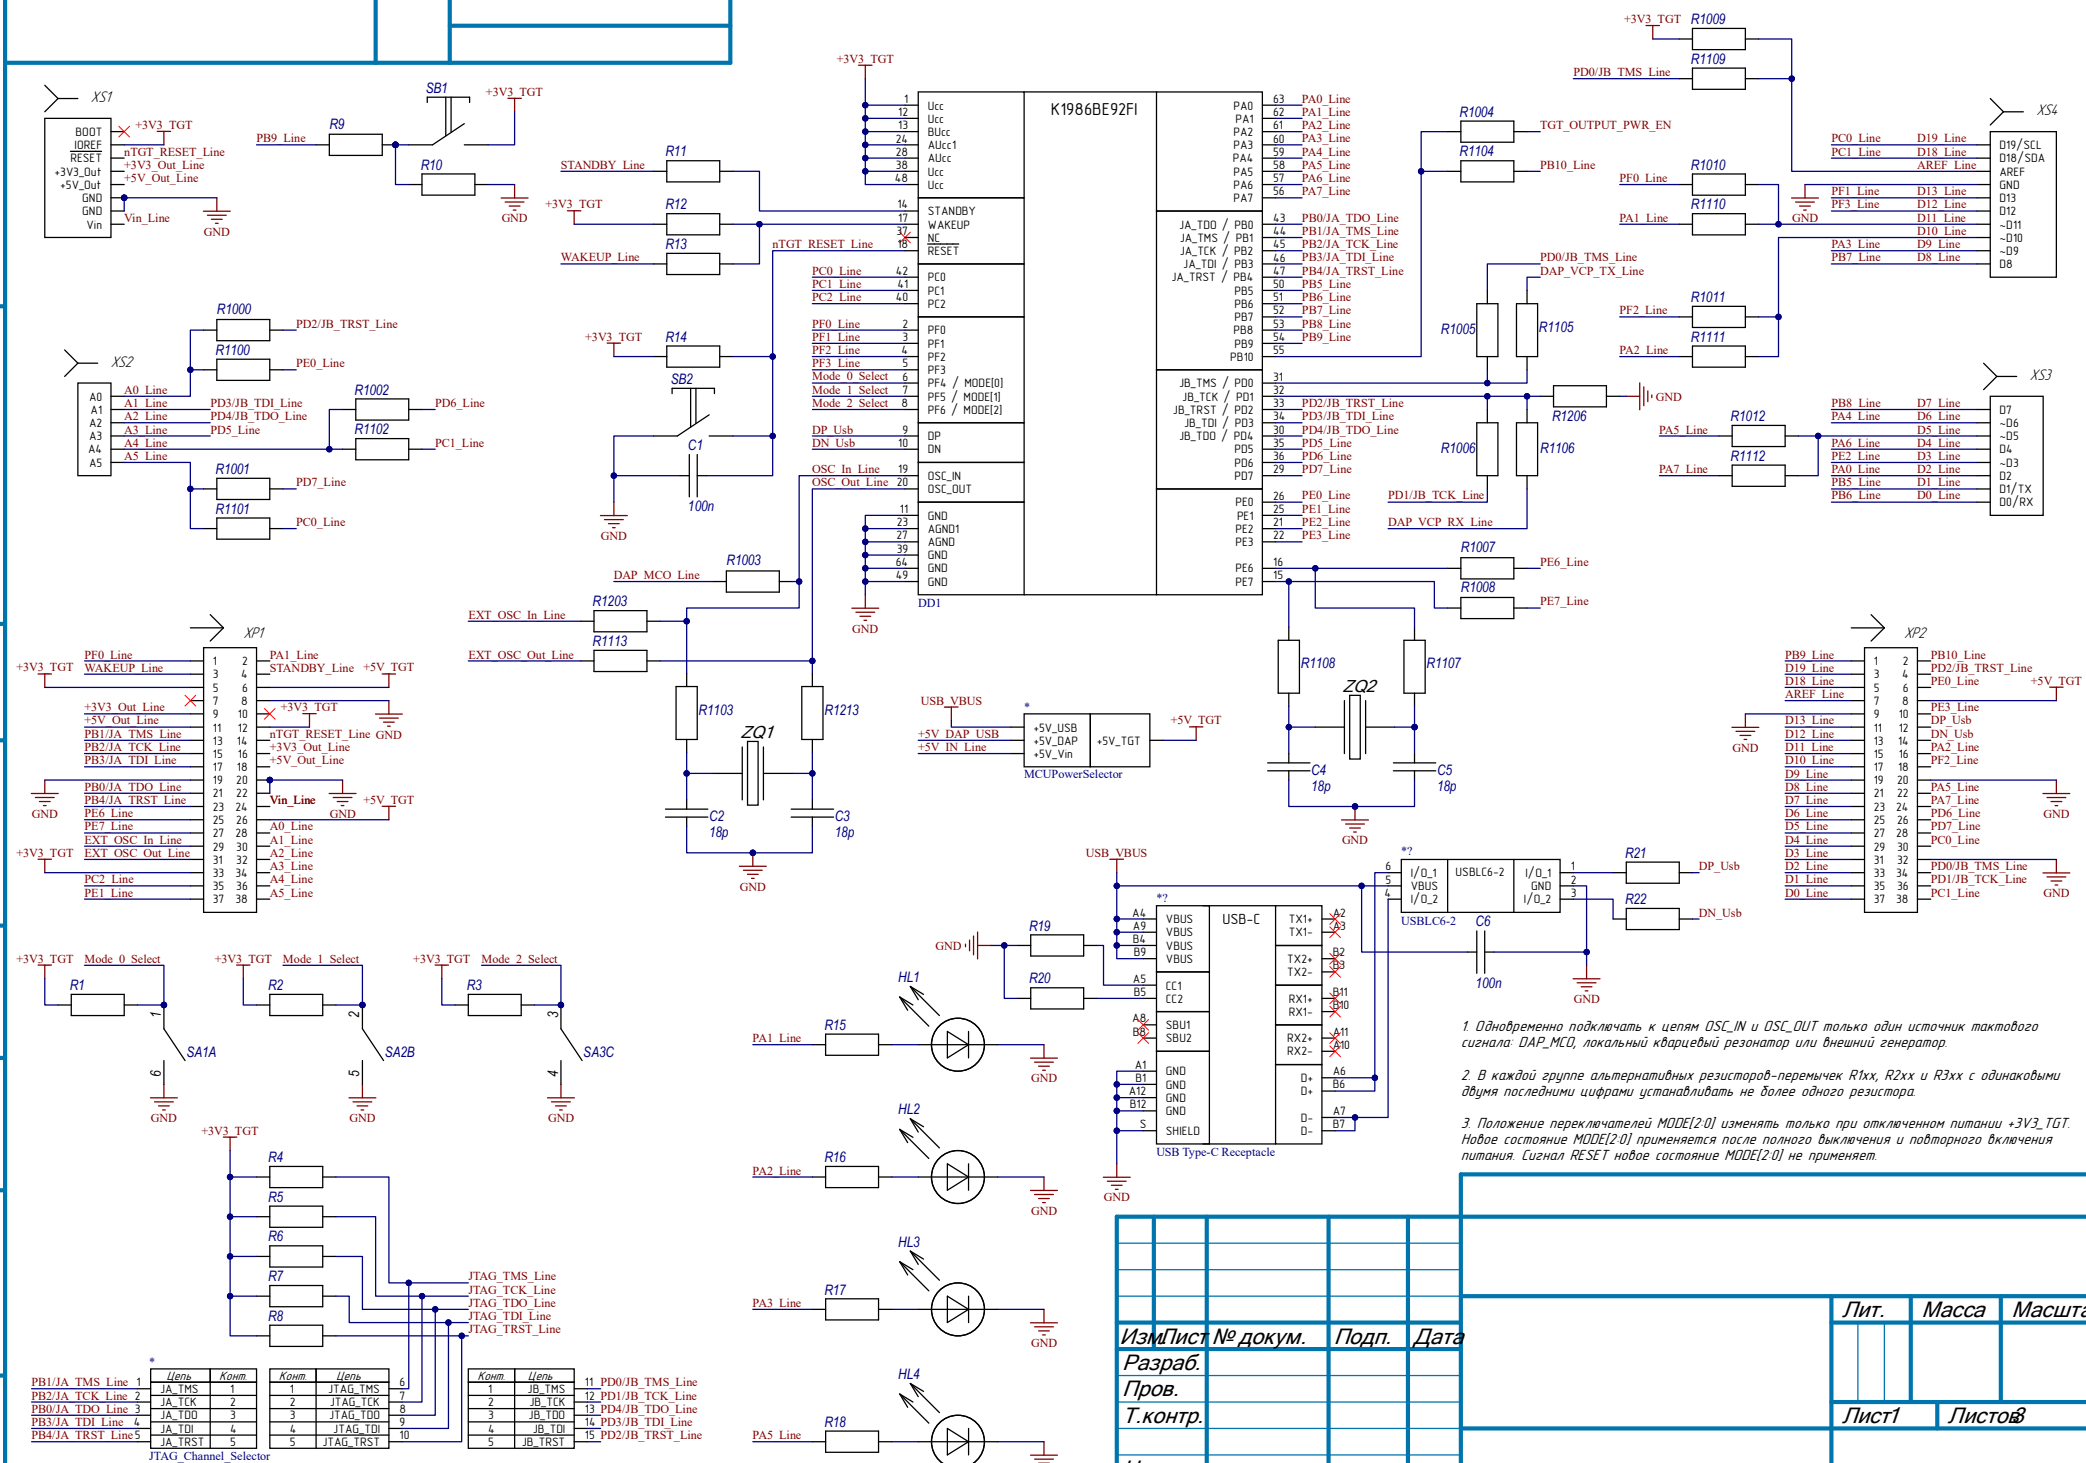

The schematic diagram illustrates the power management circuit for the K1986. It features two linear voltage regulators. The first regulator, labeled 'Linear voltage regulator', has its input (Vin) connected to USB_DAP_VBUS through a 1uF capacitor (C112) and its output (Vout) connected to +3V3_DAP through a 4.7uF capacitor (C113). The second regulator, also labeled 'Linear voltage regulator', has its input (Vin) connected to +5V_DAP_OUT through a 1uF capacitor (C115) and its output (Vout) connected to +3V3_DAP_OUT through a 4.7uF capacitor (C116). A TPS2553-1 IC is used for current limiting, with its IN FAULT pin connected to USB_DAP_VBUS, its OUT ILM pin connected to +3V3_DAP, and its EN pin connected to DAP_TARGET_PWR_EN. The circuit also includes a diode (VD101) connected to USB_DAP_VBUS, a diode (VD102) connected to +3V3_DAP, and a diode (VD103) connected to +3V3_DAP_OUT. A 1uF capacitor (C111) is connected to USB_DAP_VBUS, and a 22uF capacitor (C114) is connected to +3V3_DAP. A 120 ohm resistor (R120) is connected to USB_DAP_VBUS, and a 120 ohm resistor (R122) is connected to +3V3_DAP. A 120 ohm resistor (R121) is connected to DAP_TARGET_PWR_EN. A 100 ohm resistor (HL100) is connected to USB_DAP_VBUS.

Изм.Тист	№ докум.	Подп.	Дата
Разраб.			
Пров.			
Т.контр.			
Н.контр.			
Утв.			

Лит.	Масса	Масштаб
Лист3	Листов	