




Phantom QA results for / fbirn_out/ses-64ch_func-bold_acq-cmrrme_task-tsnr.xml, slice 35

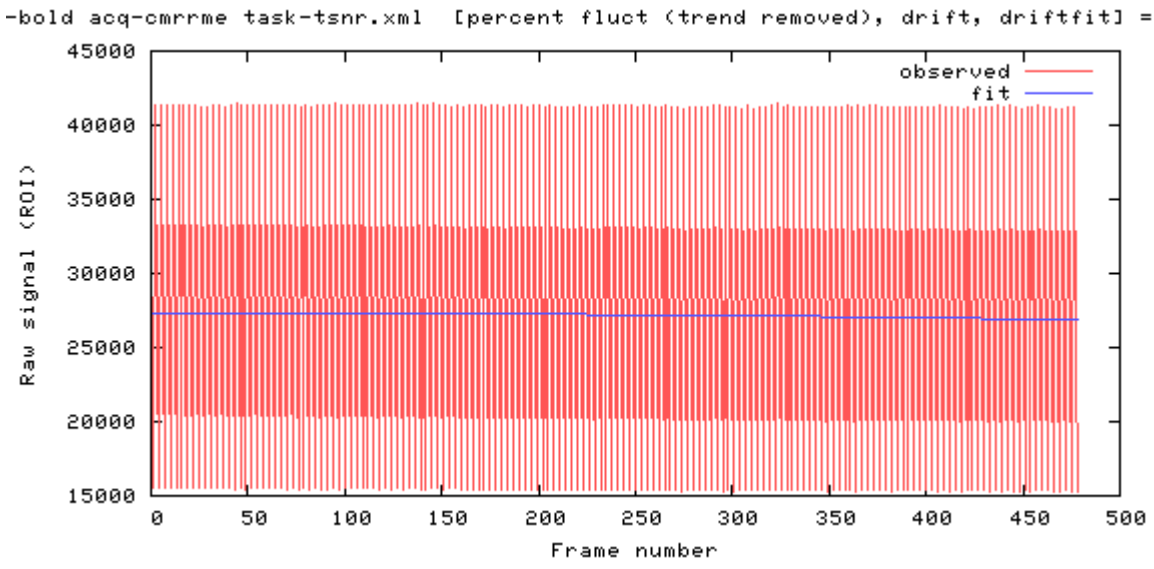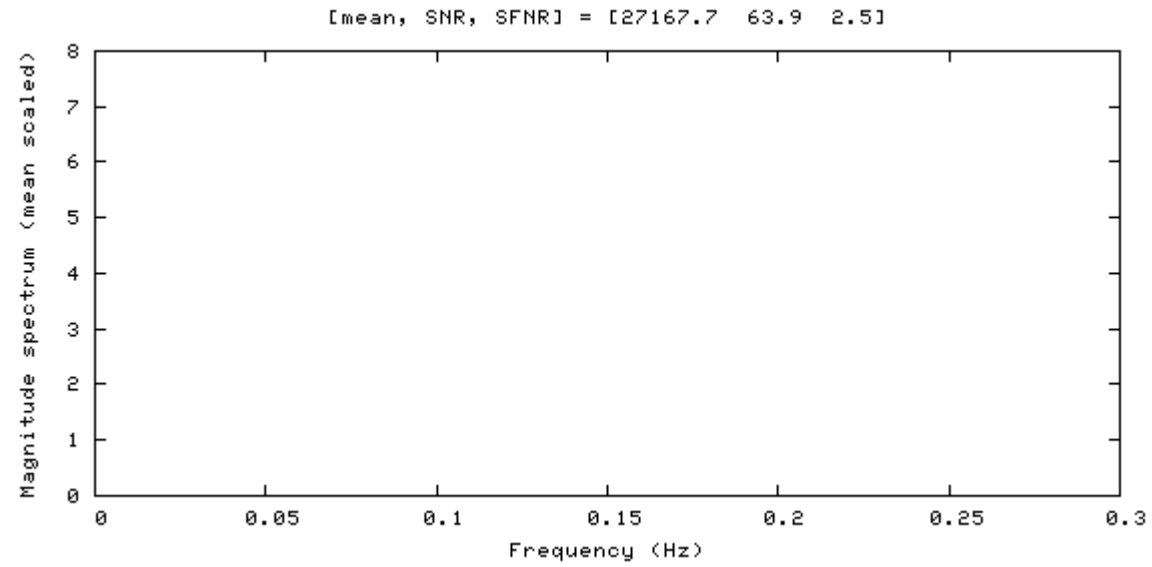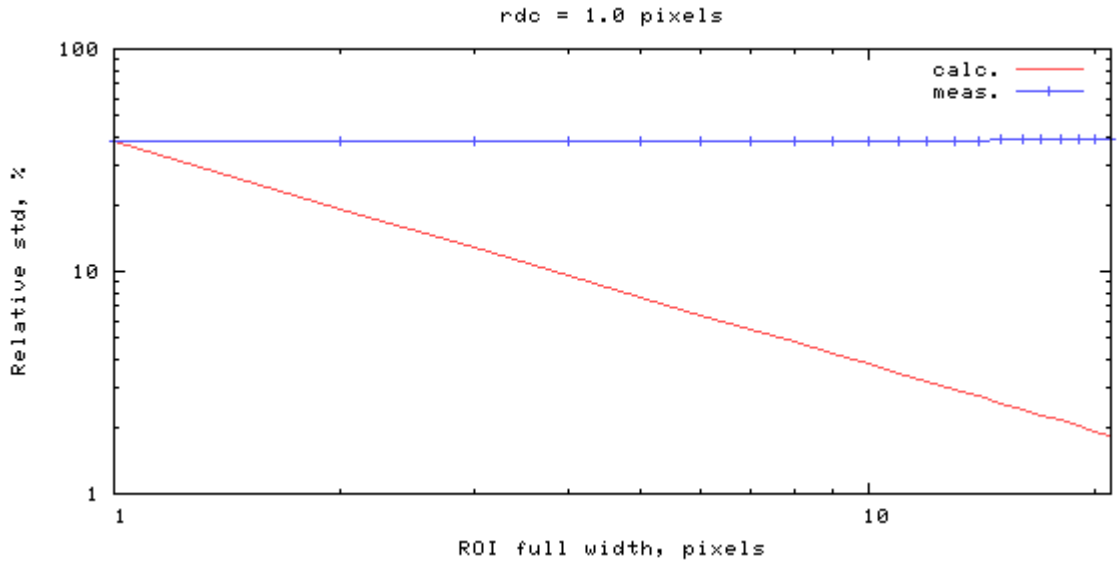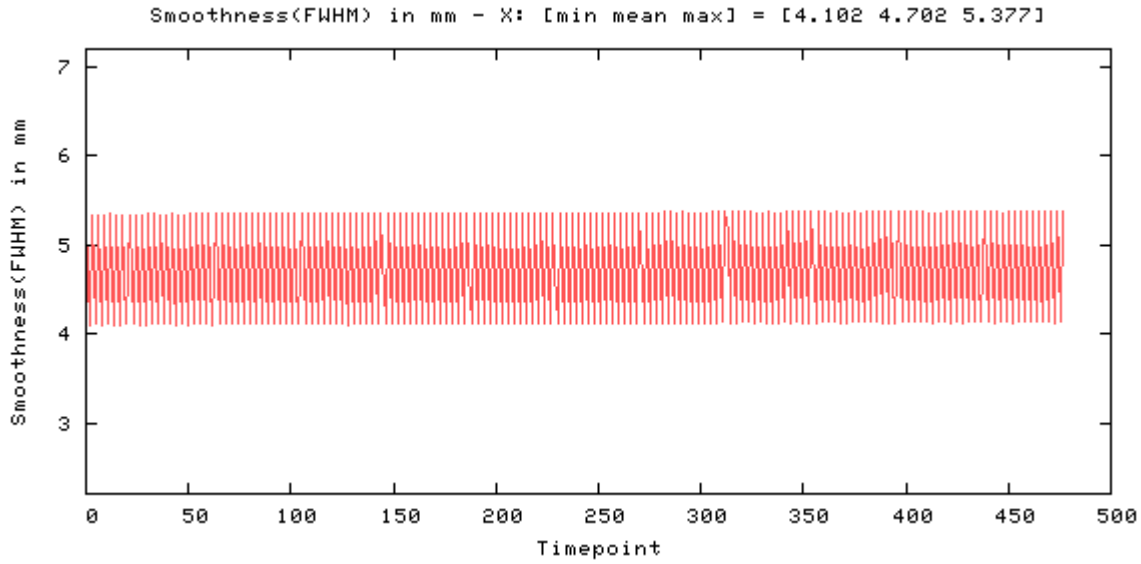


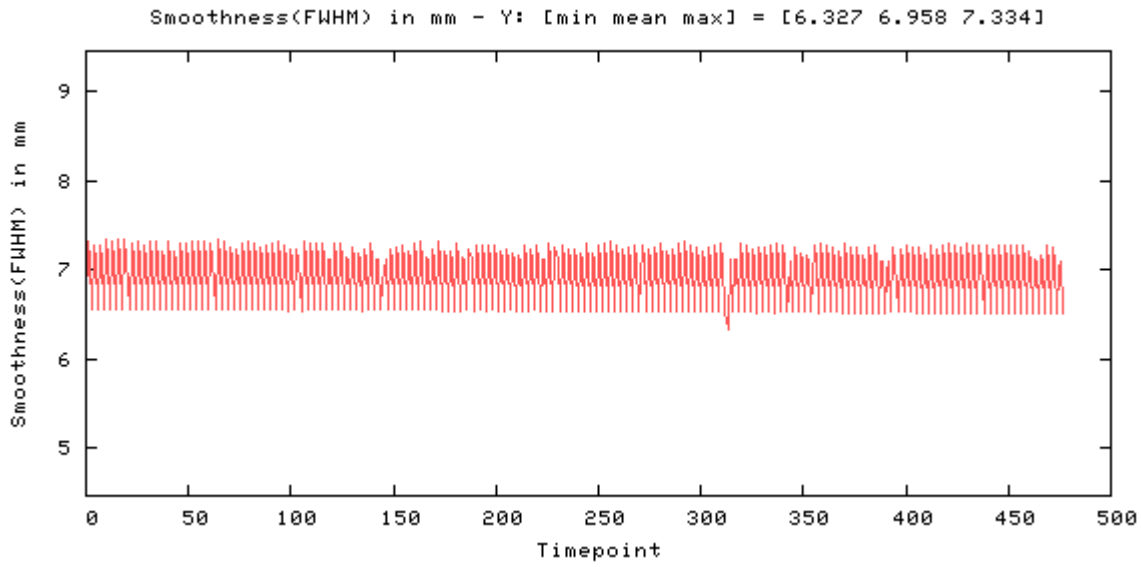




rdc = 1.0 pixels
calc.
meas.
Relative std, %
100
10
1
1
10
ROI full width, pixels



Smoothness(FWHM) in mm - X: [min mean max] = [4.102 4.702 5.377]
Smoothness(FWHM) in mm
7
6
5
4
3
0
50
100
150
200
250
300
350
400
450
500
Timepoint



Smoothness(FWHM) in mm - Y: [min mean max] = [6.327 6.958 7.334]
Smoothness(FWHM) in mm
9
8
7
6
5
0
50
100
150
200
250
300
350
400
450
500
Timepoint

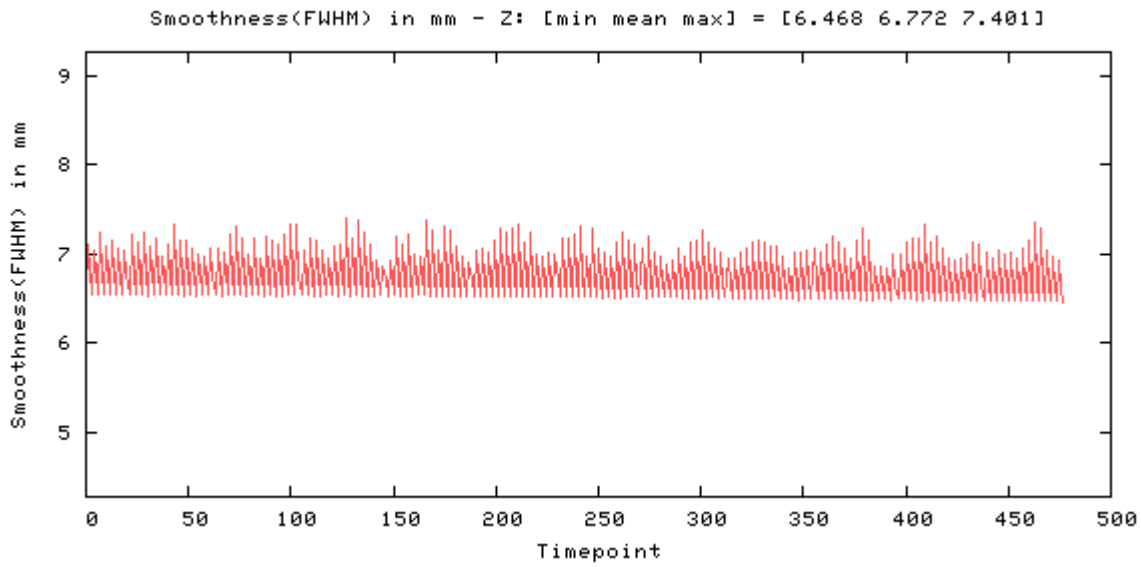
Smoothness(FWHM) in mm - Z: [min mean max] = [6.468 6.772 7.401]
Smoothness(FWHM) in mm
Timepoint

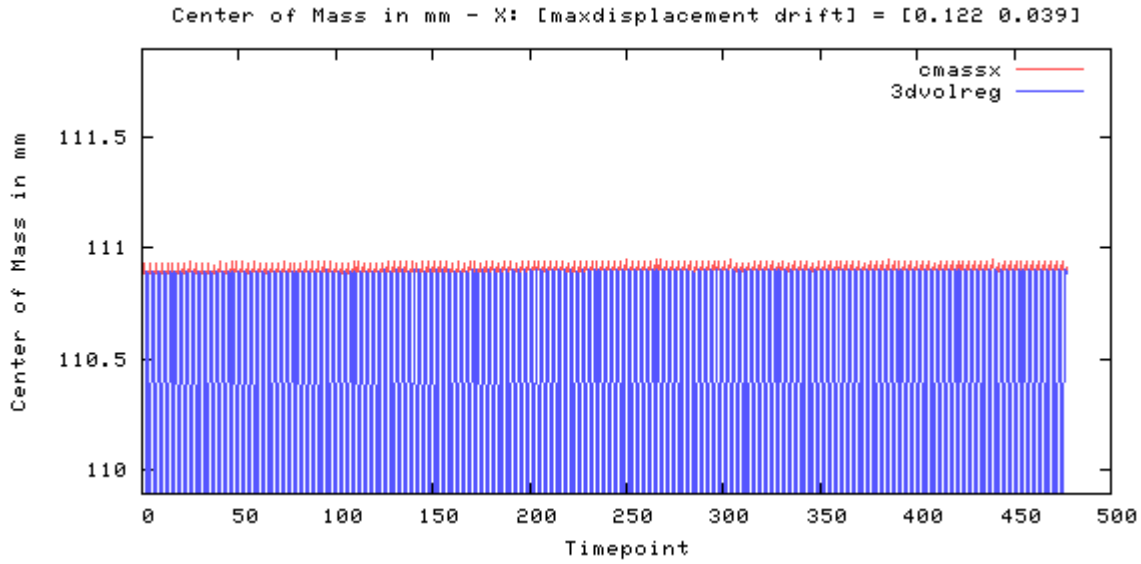
Center of Mass in mm - X: [maxdisplacement drift] = [0.122 0.039]
cmassx
3dvolreg
Center of Mass in mm
Timepoint

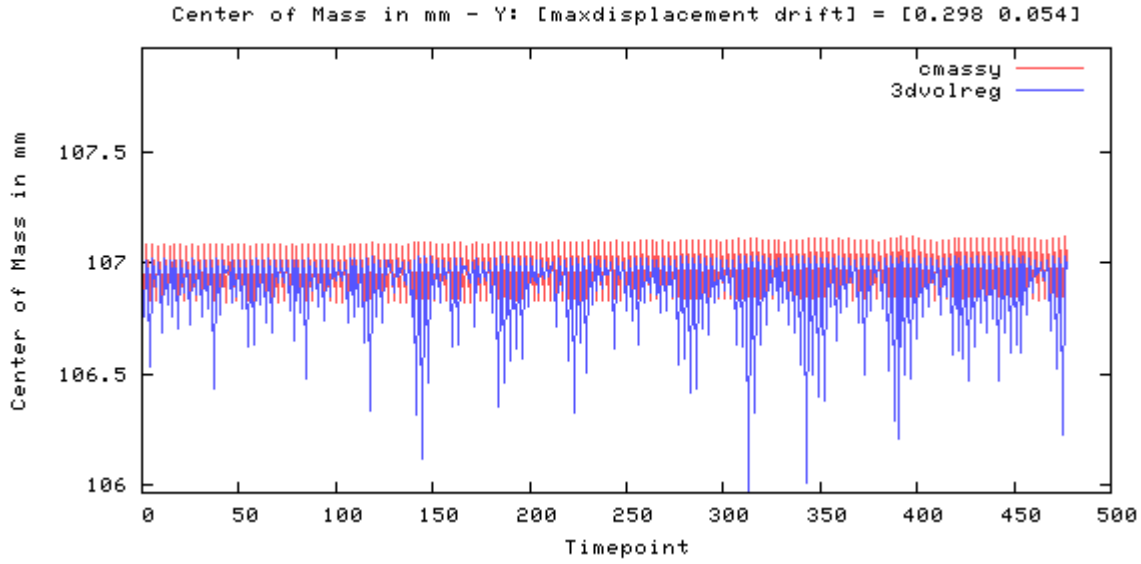
Center of Mass in mm - Y: [maxdisplacement drift] = [0.298 0.054]
cmassy
3dvolreg
Center of Mass in mm
Timepoint

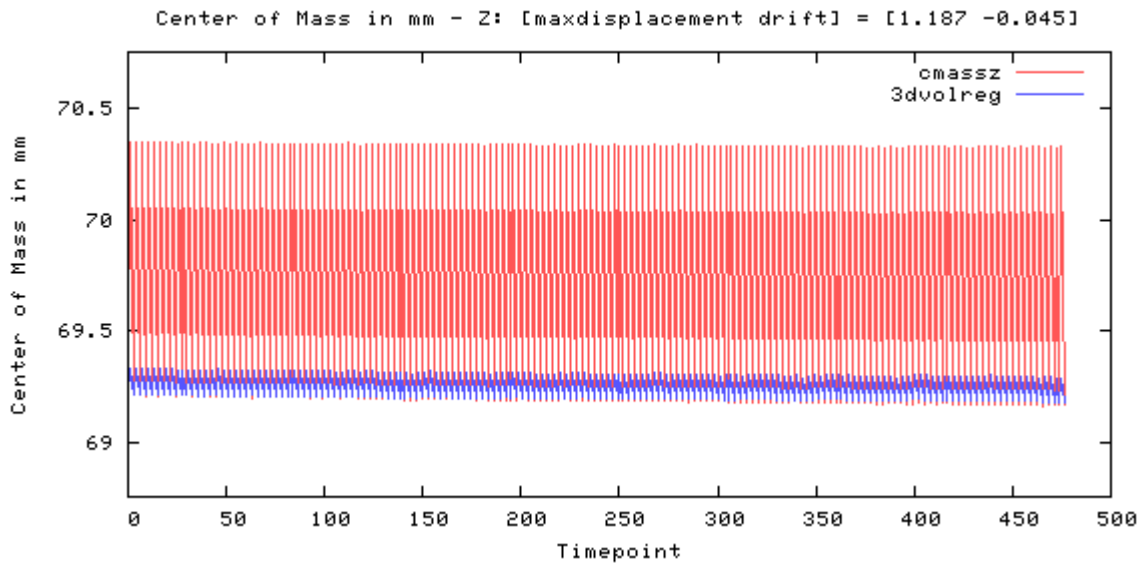


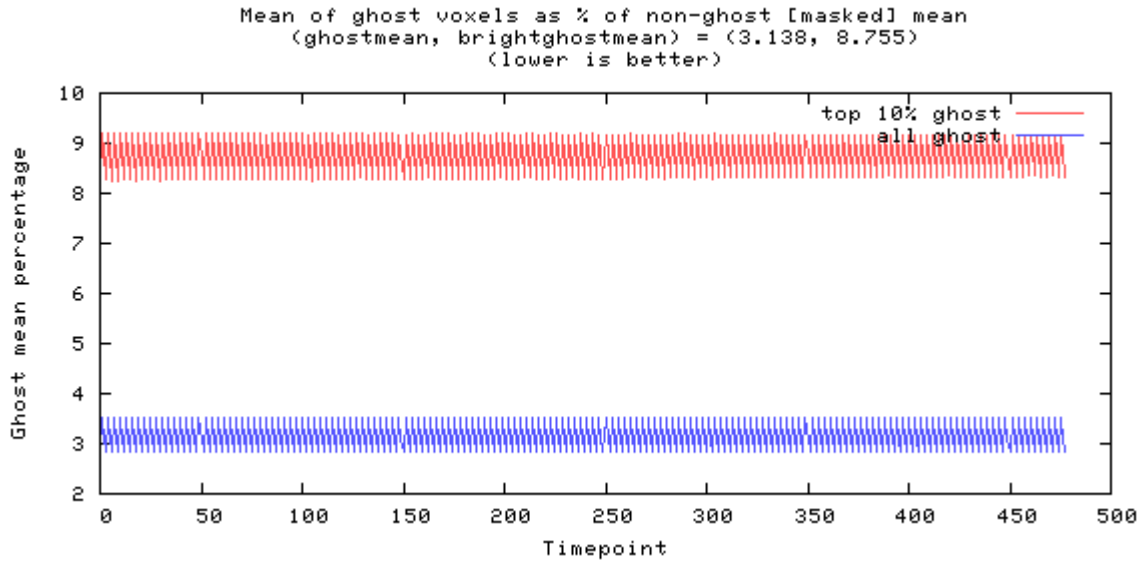

Odd-even difference image




image min: -43294, image max: 12915

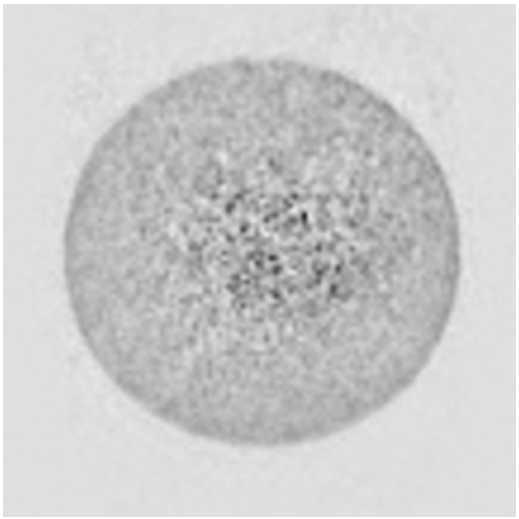

Mean image




image min: 0, image max: 38649.7

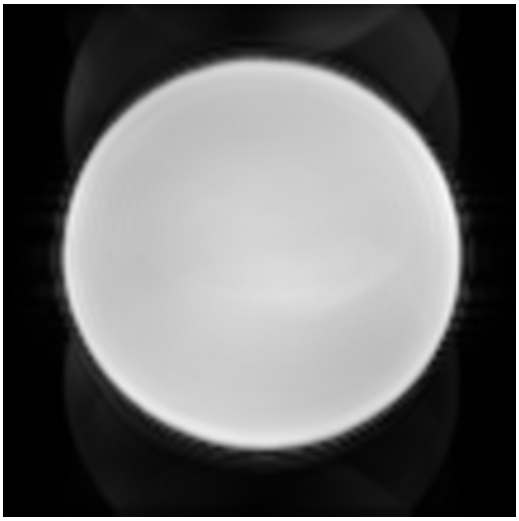

Standard Deviation image



image min: 0, image max: 13947.8

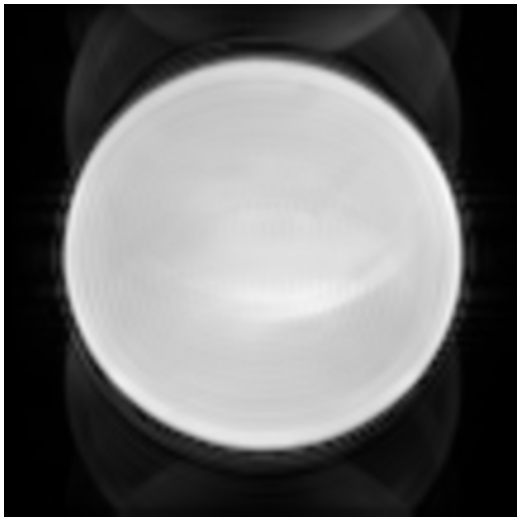

SFNR image

0 8.39259

image min: 0, image max: 11.0025



Acquisition parameters

dimensions	108x108x72x480
spacing	2.03704mmx2.03704mmx2mmx0ms
gap	0mmx0mmx0mmx0ms
scanner	AWP213018
psdname	
examnumber	847307d4-ec84-45
studyid	Stability_20261005
seriesnumber	19
runnumber	1
magneticfield	3

description	ses-64ch_func-bold_acq-cmrrme_task-tsnr
scandate	2026-10-05
scantime	11:29:27
tr	1720
te	13.4 37.84 62.28 13.4 37.84 62.28 13.4 37.84 62.28

	13.4 37.84 62.28 13.4 37.84 62.28 13.4 37.84 62.28

complexImageComponent	MAGNITUDE
acquisitionContrast	UNKNOWN
mrAcquisitionType	2D
numAverages	1
spacingBetweenSlices	2
echoTrainLength	40
percentSampling	100
percentPhaseFieldOfView	100
scannerSerialNumber	213018
softwareVersions	syngo MR XA61
inPlanePhaseEncodingDirection	COLUMN
variableFlipAngleFlag	N
contentQualification	RESEARCH
acquisitionDuration	307.60500000000002
resonantNucleus	1H
applicableSafetyStandardAgency	IEC
acquisitionNumber	1
instanceNumber	1
numTemporalPositions	160
imageComments	Not for diagnostic use, Unaliased MB4/ PE4/LB SENSE1
samplesPerPixel	1
photometricInterpretation	MONOCHROME2
numberOfFrames	72
rows	108
columns	108
bitsAllocated	16
bitsStored	16
highBit	15
lossyImageCompression	00