Phantom QA results for /fbirn_out/ses-32ch_func-bold_acq_cmrrme_task-tsnr.xml, slice 23

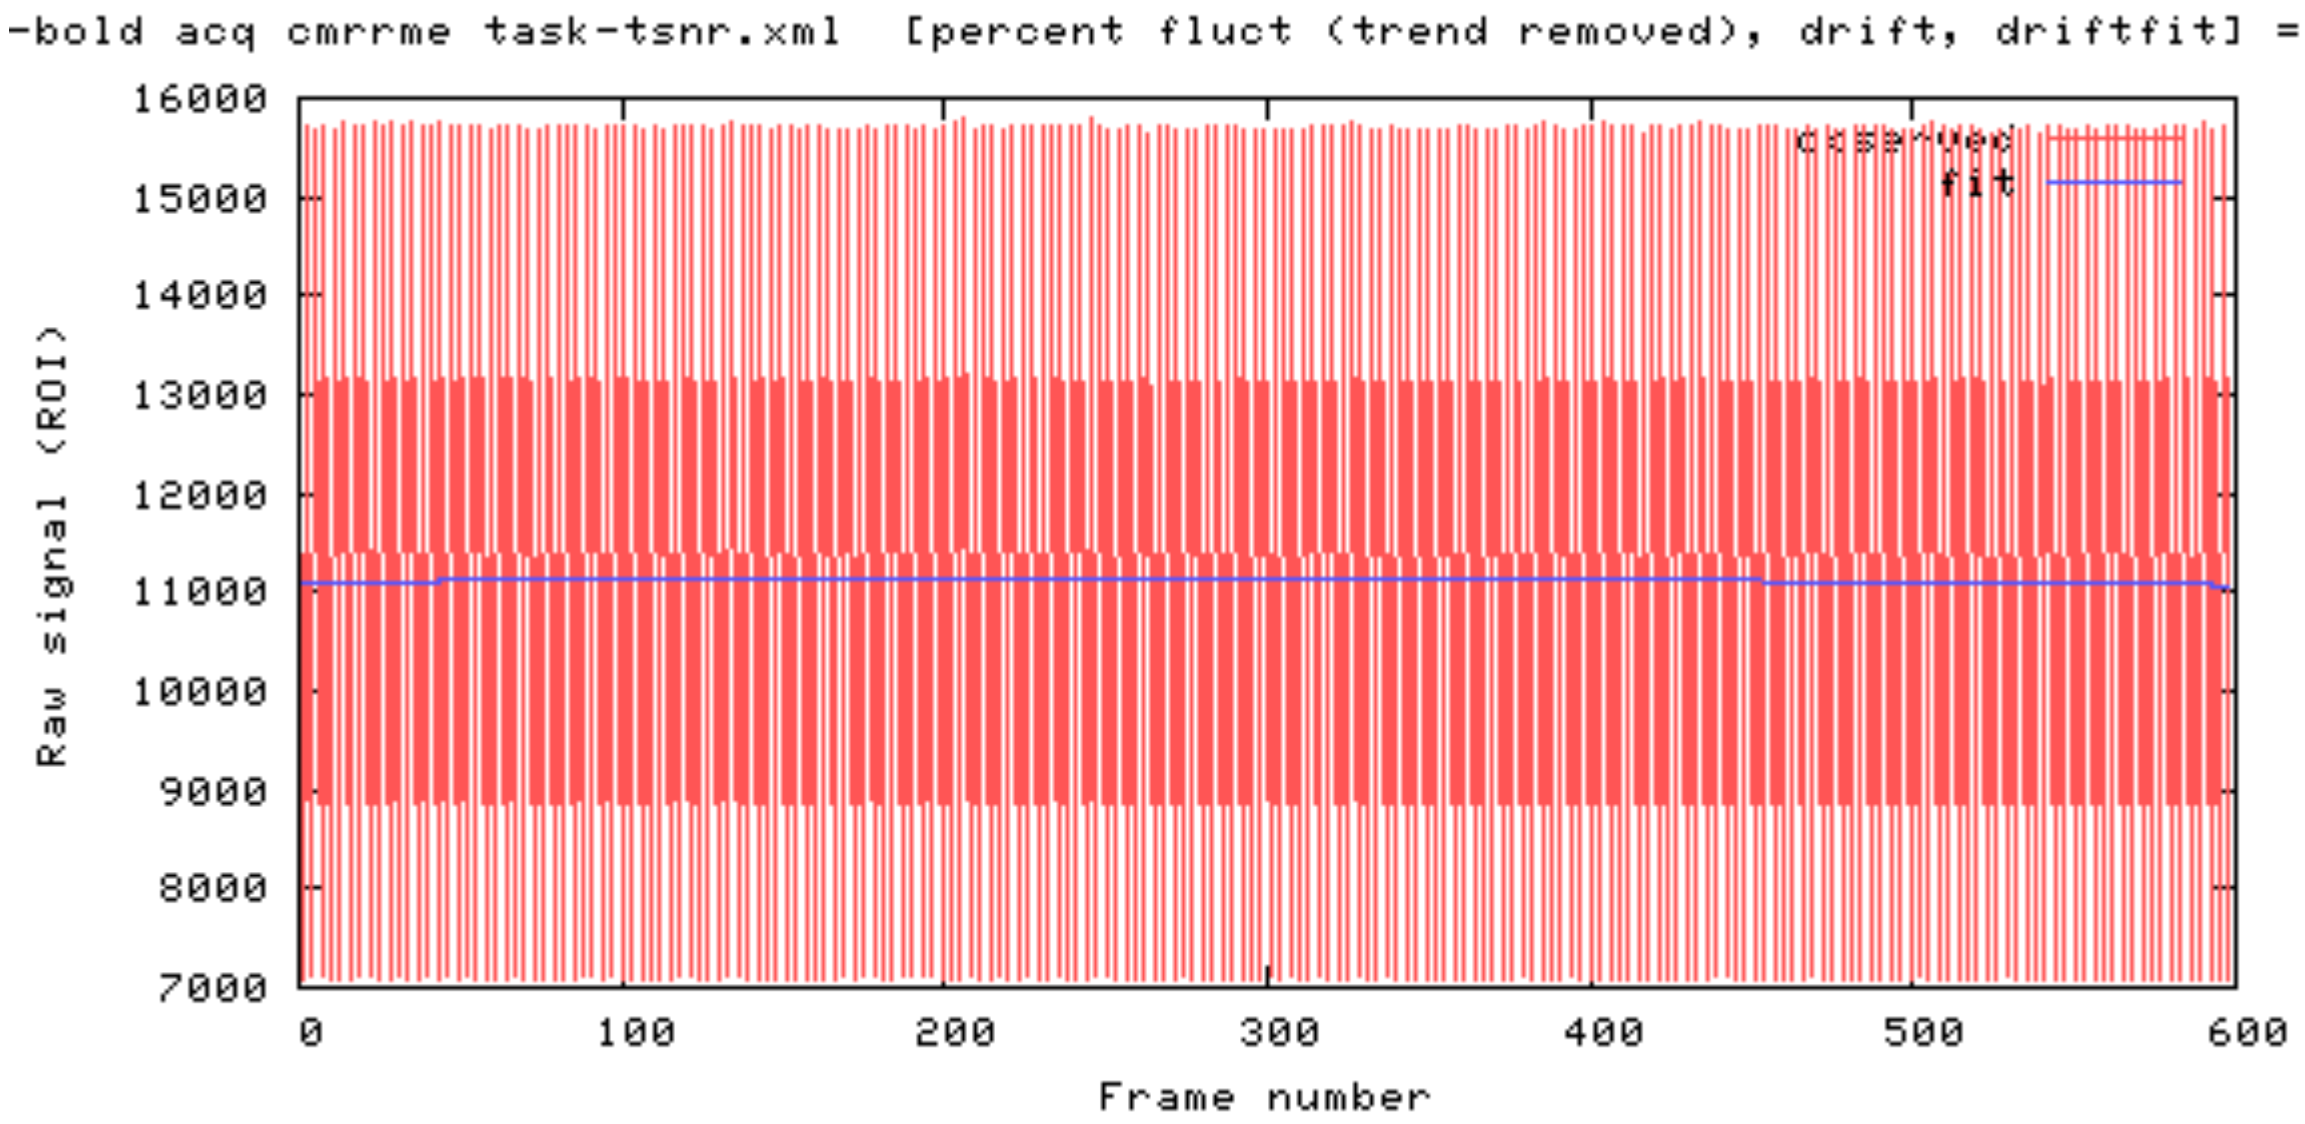

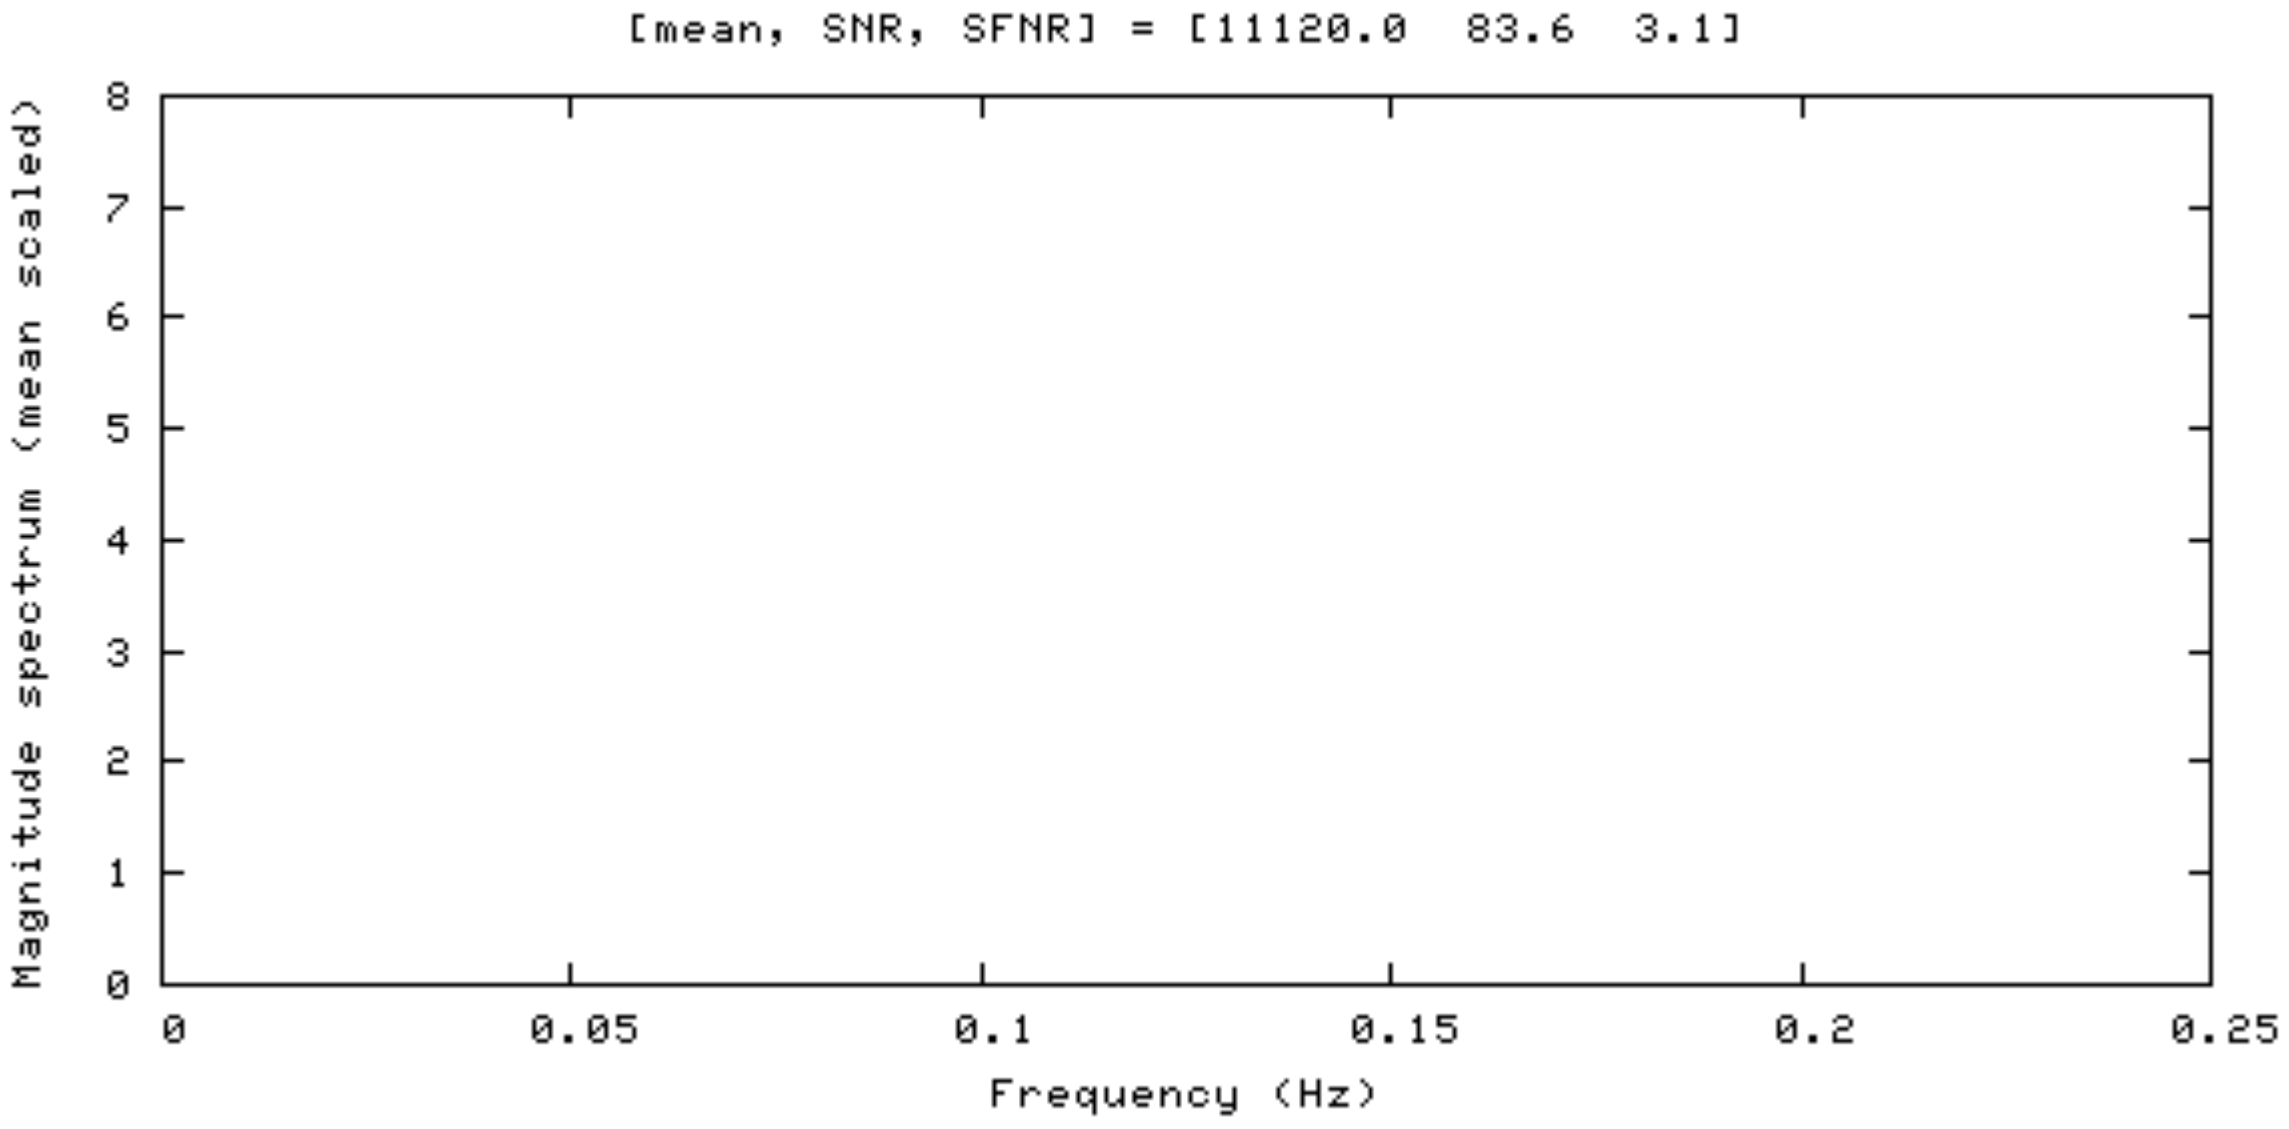

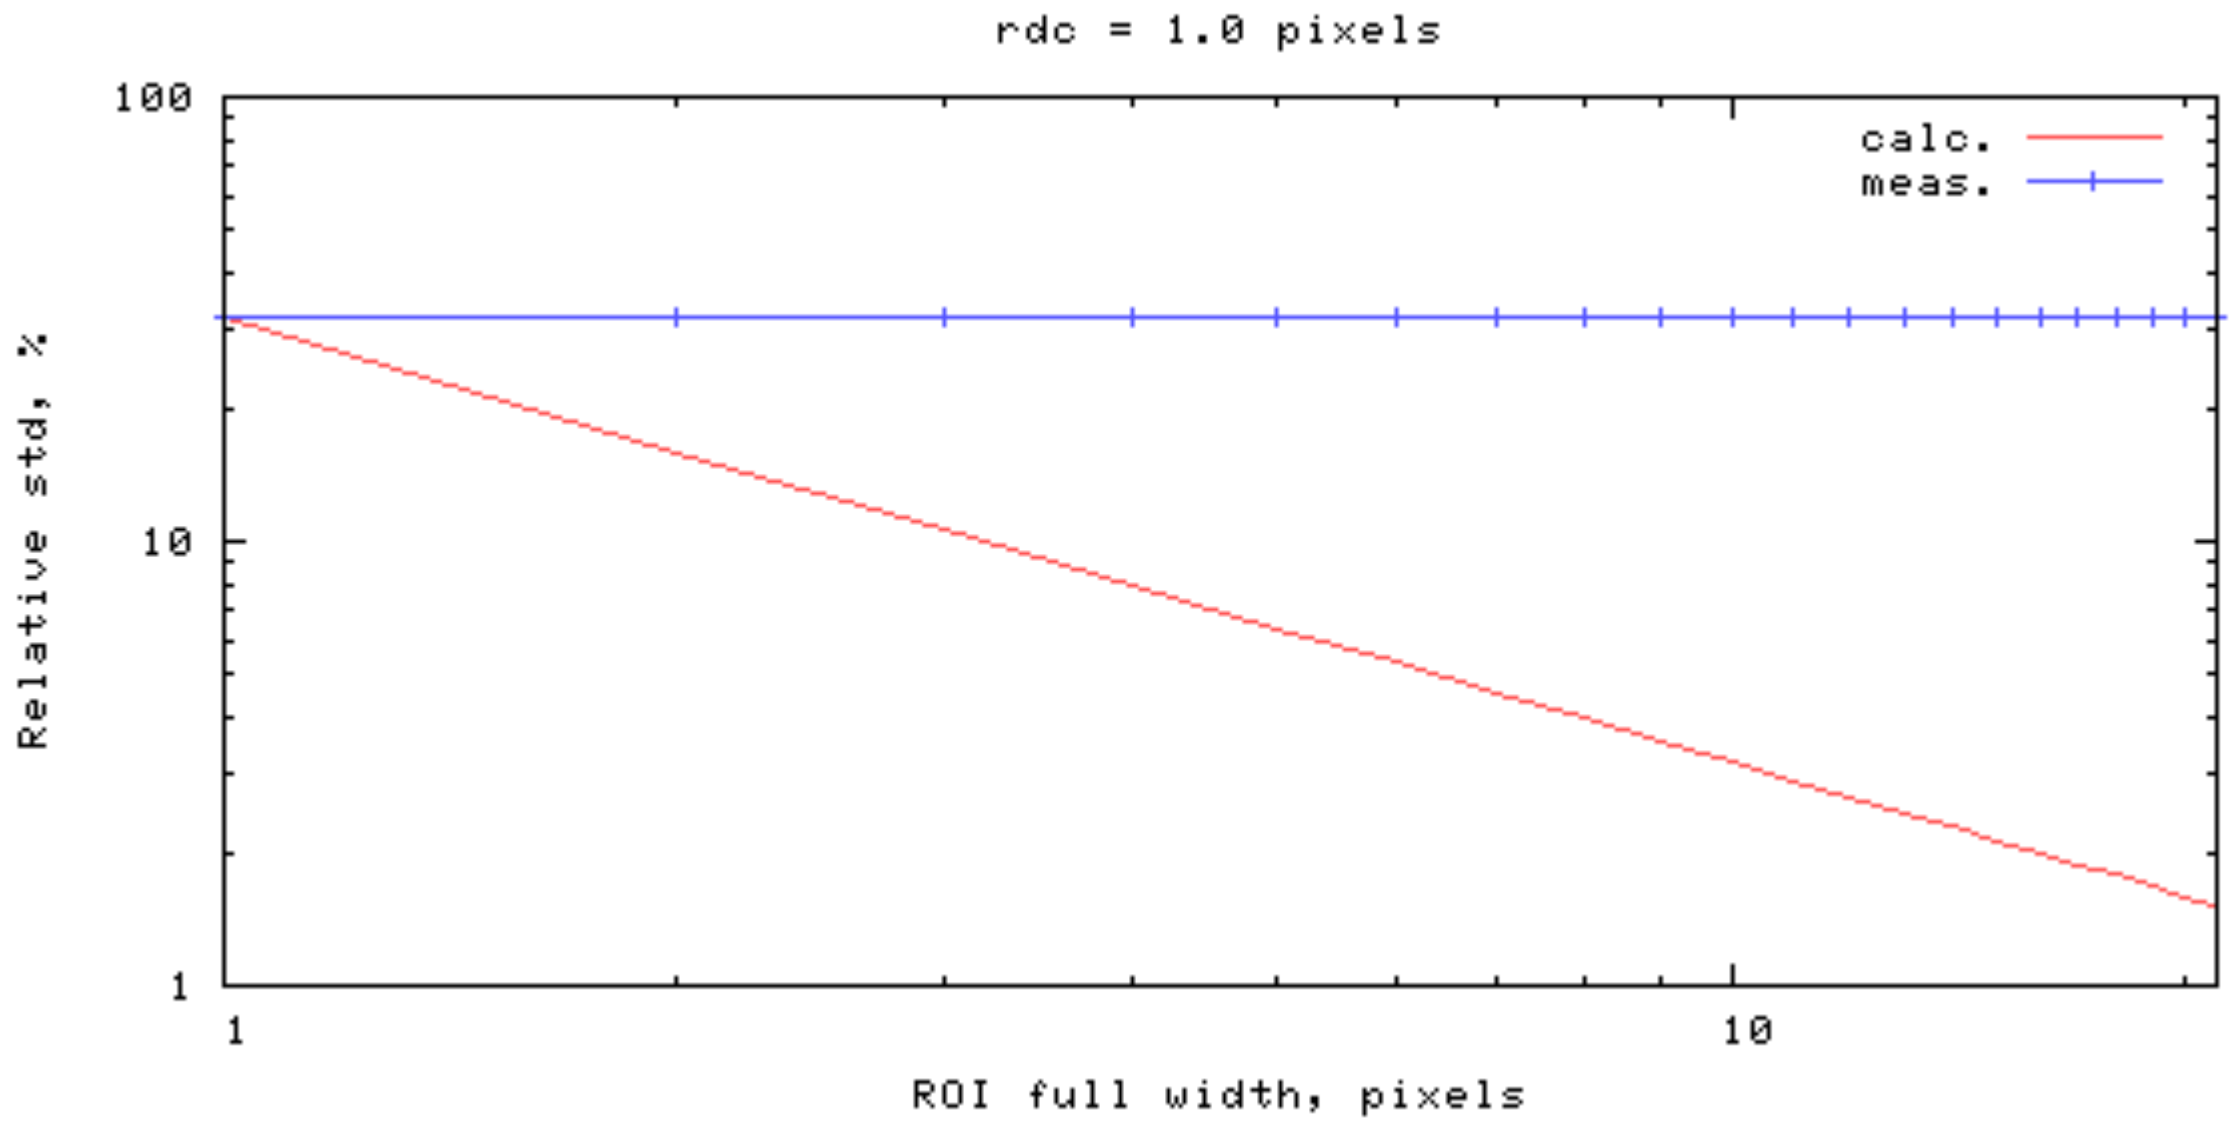
rdc = 1.0 pixels
calc.
meas.
Relative std, %
100
10
1
1
10
ROI full width, pixels

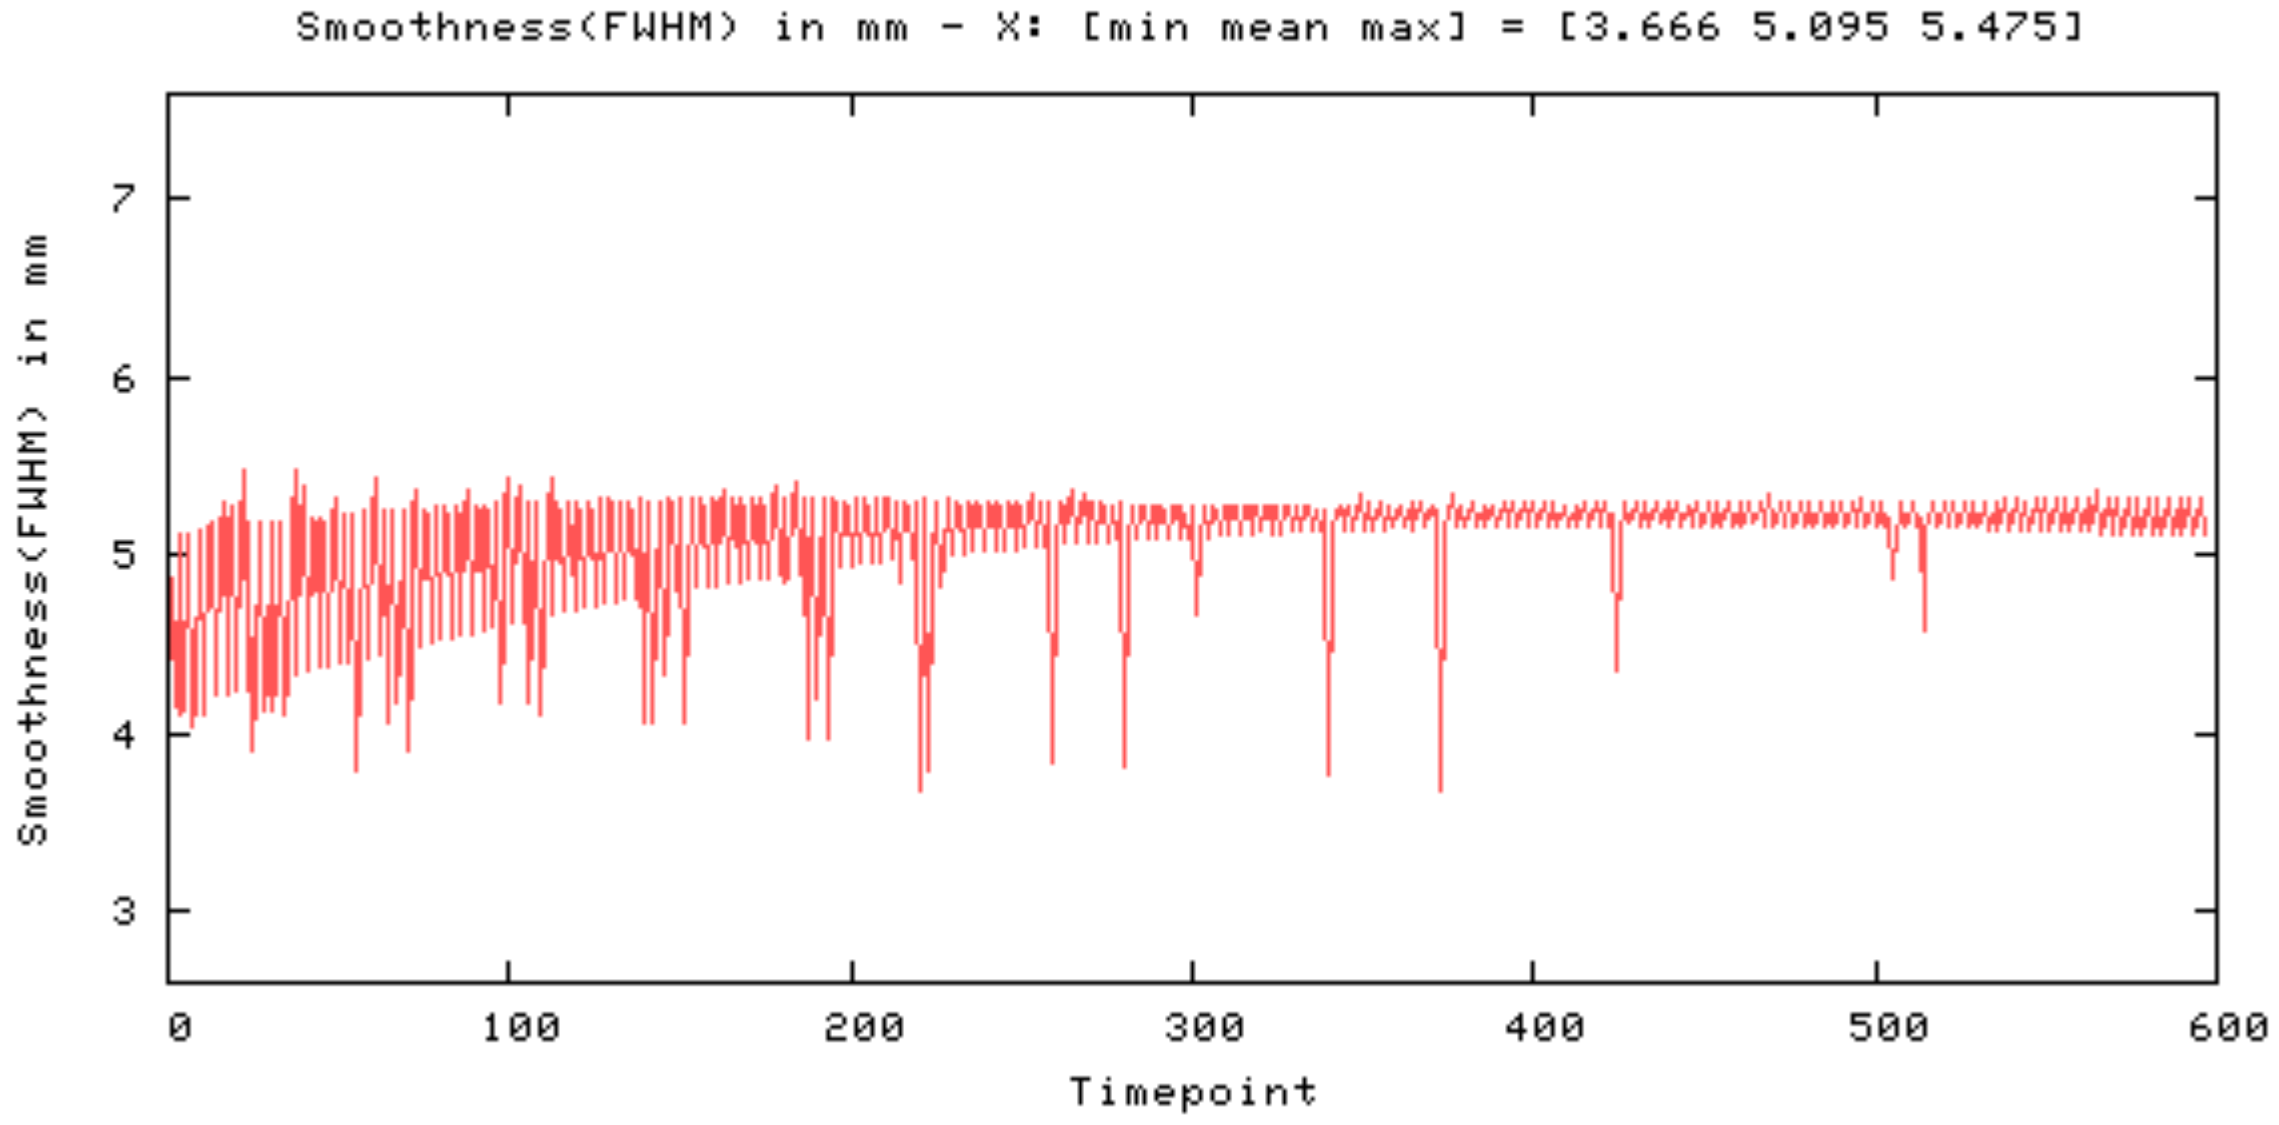
Smoothness(FWHM) in mm - X: [min mean max] = [3.666 5.095 5.475]
Smoothness(FWHM) in mm
7
6
5
4
3
0
100
200
300
400
500
600
Timepoint

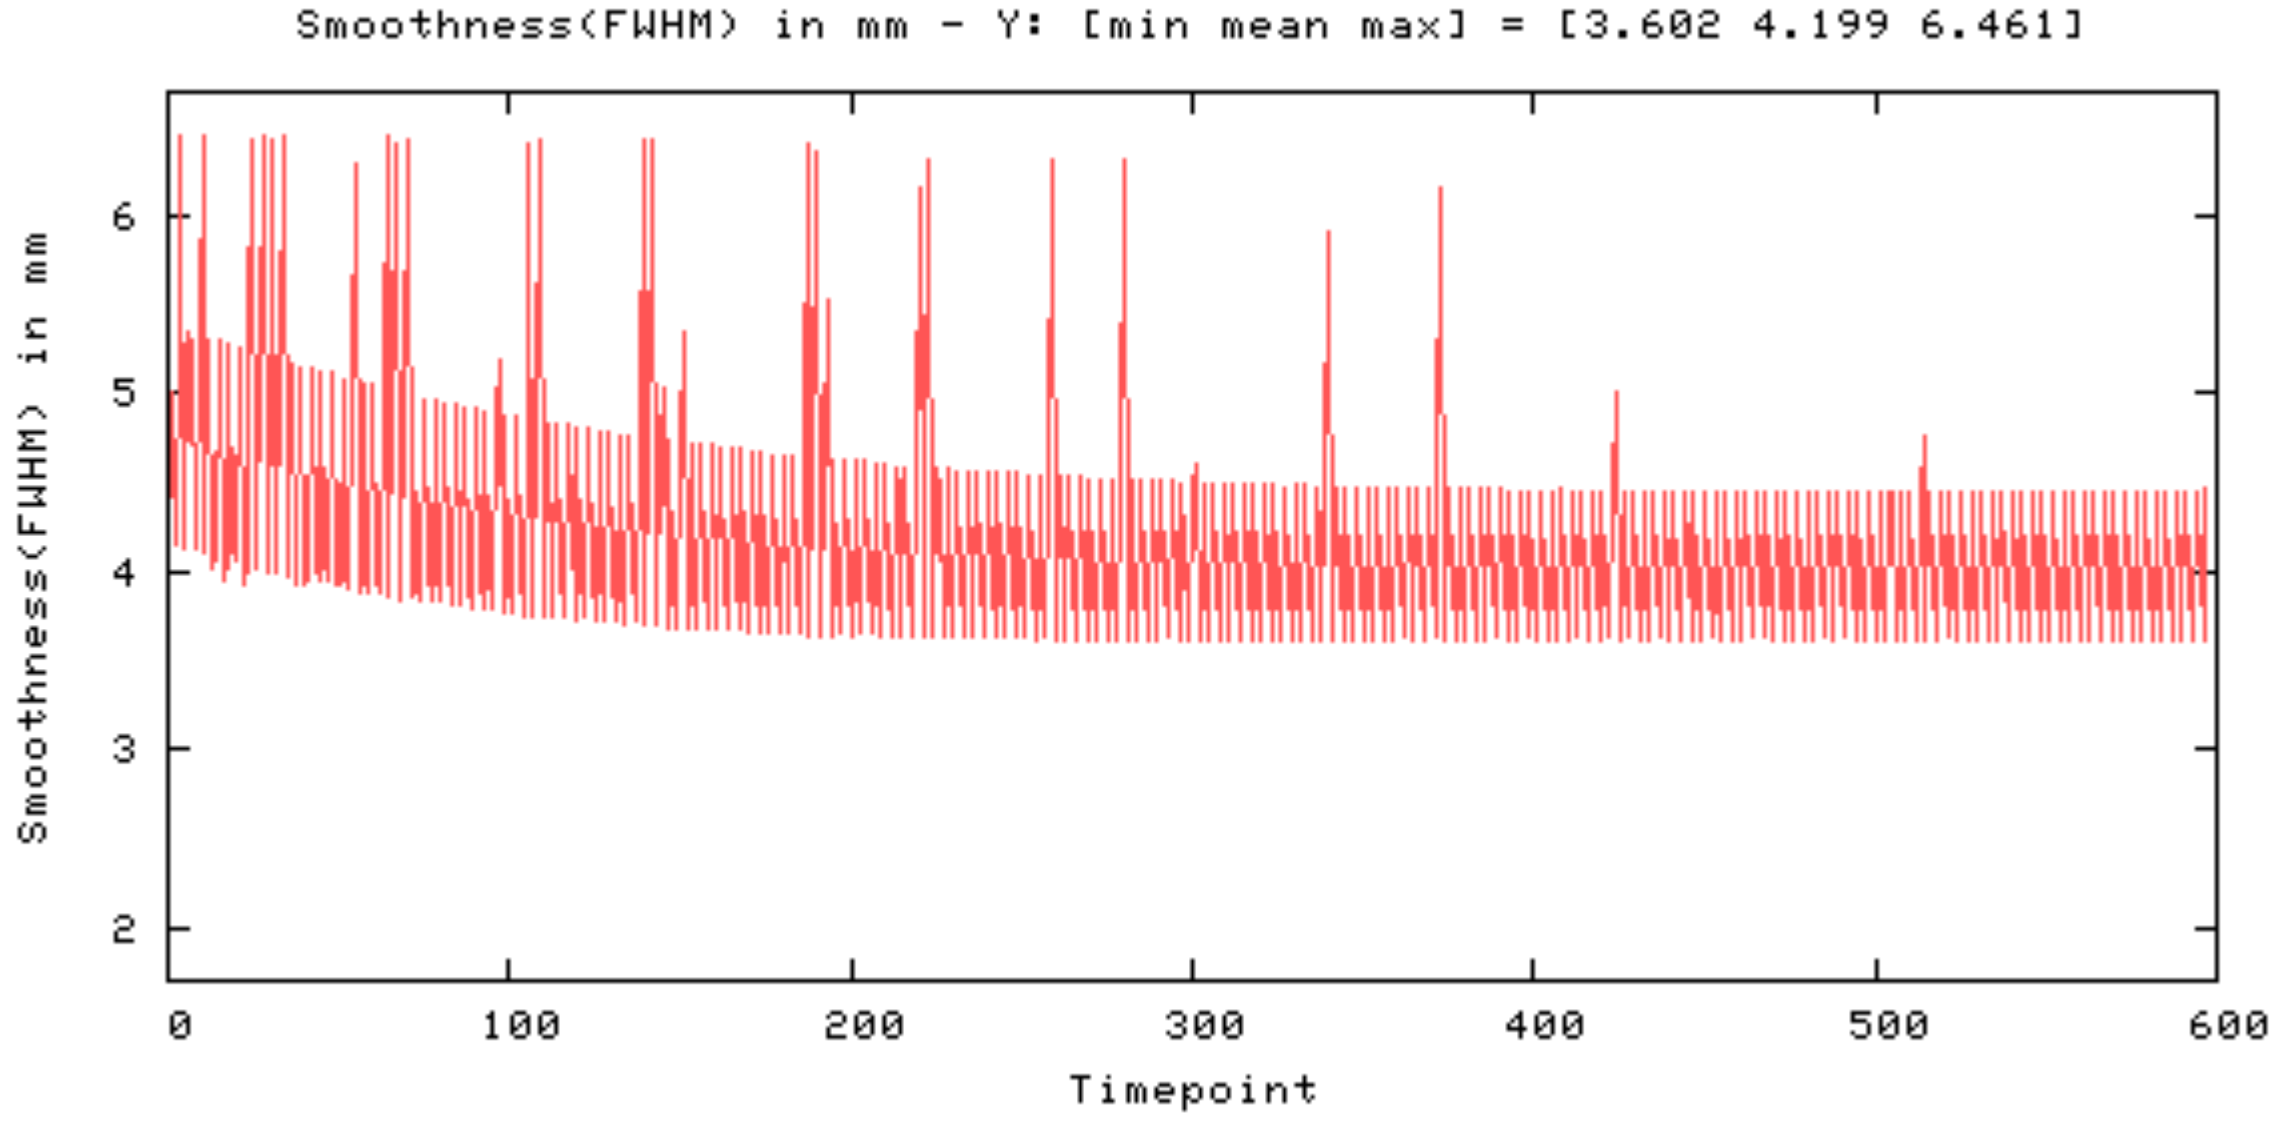
Smoothness(FWHM) in mm - Y: [min mean max] = [3.602 4.199 6.461]
Smoothness(FWHM) in mm
6
5
4
3
2
0
100
200
300
400
500
600
Timepoint

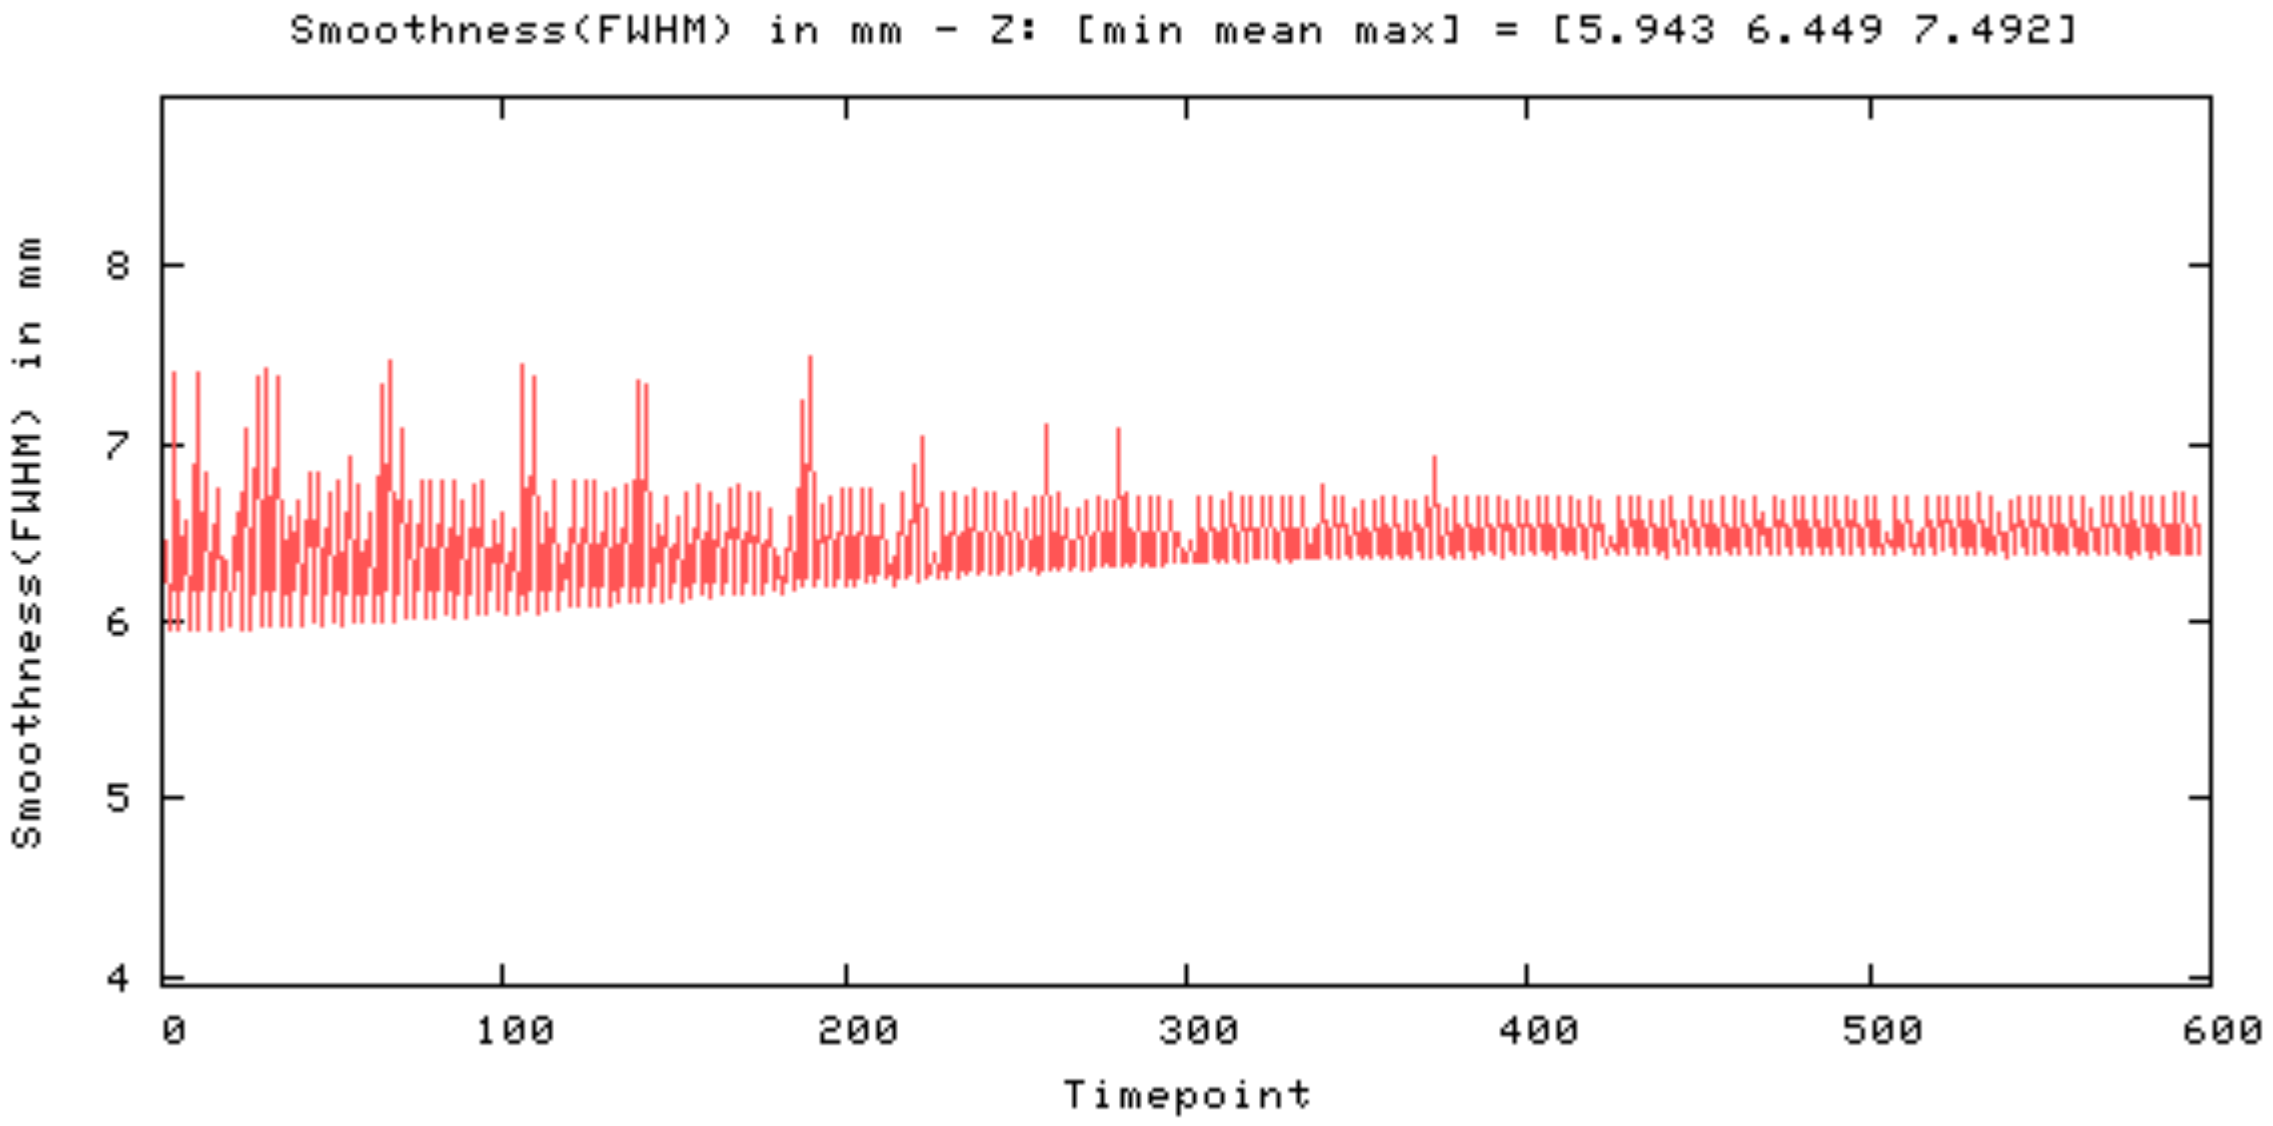
Smoothness(FWHM) in mm - Z: [min mean max] = [5.943 6.449 7.492]

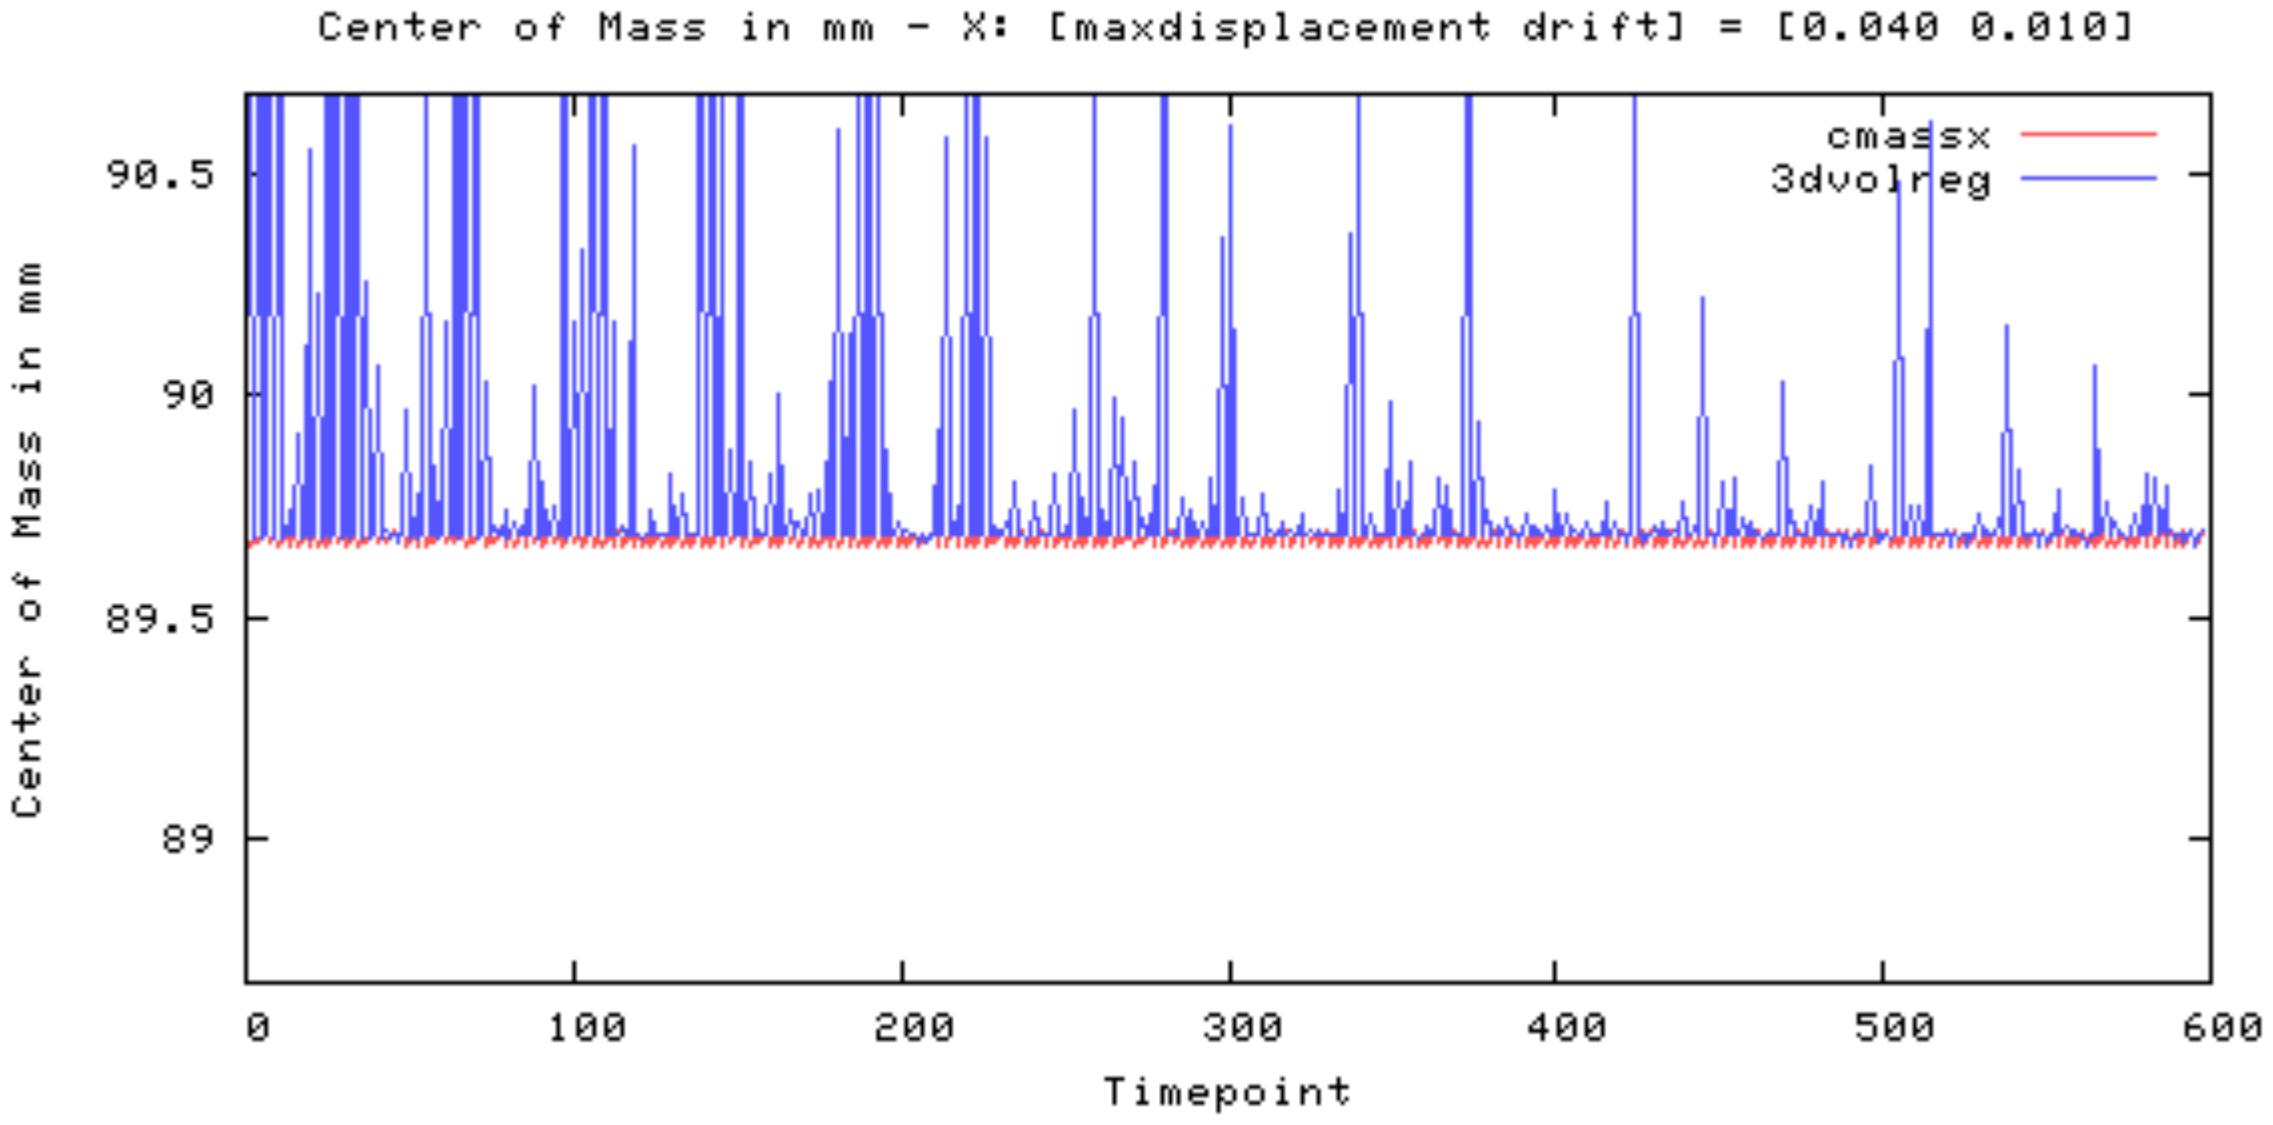
Center of Mass in mm - X: [maxdisplacement drift] = [0.040 0.010]

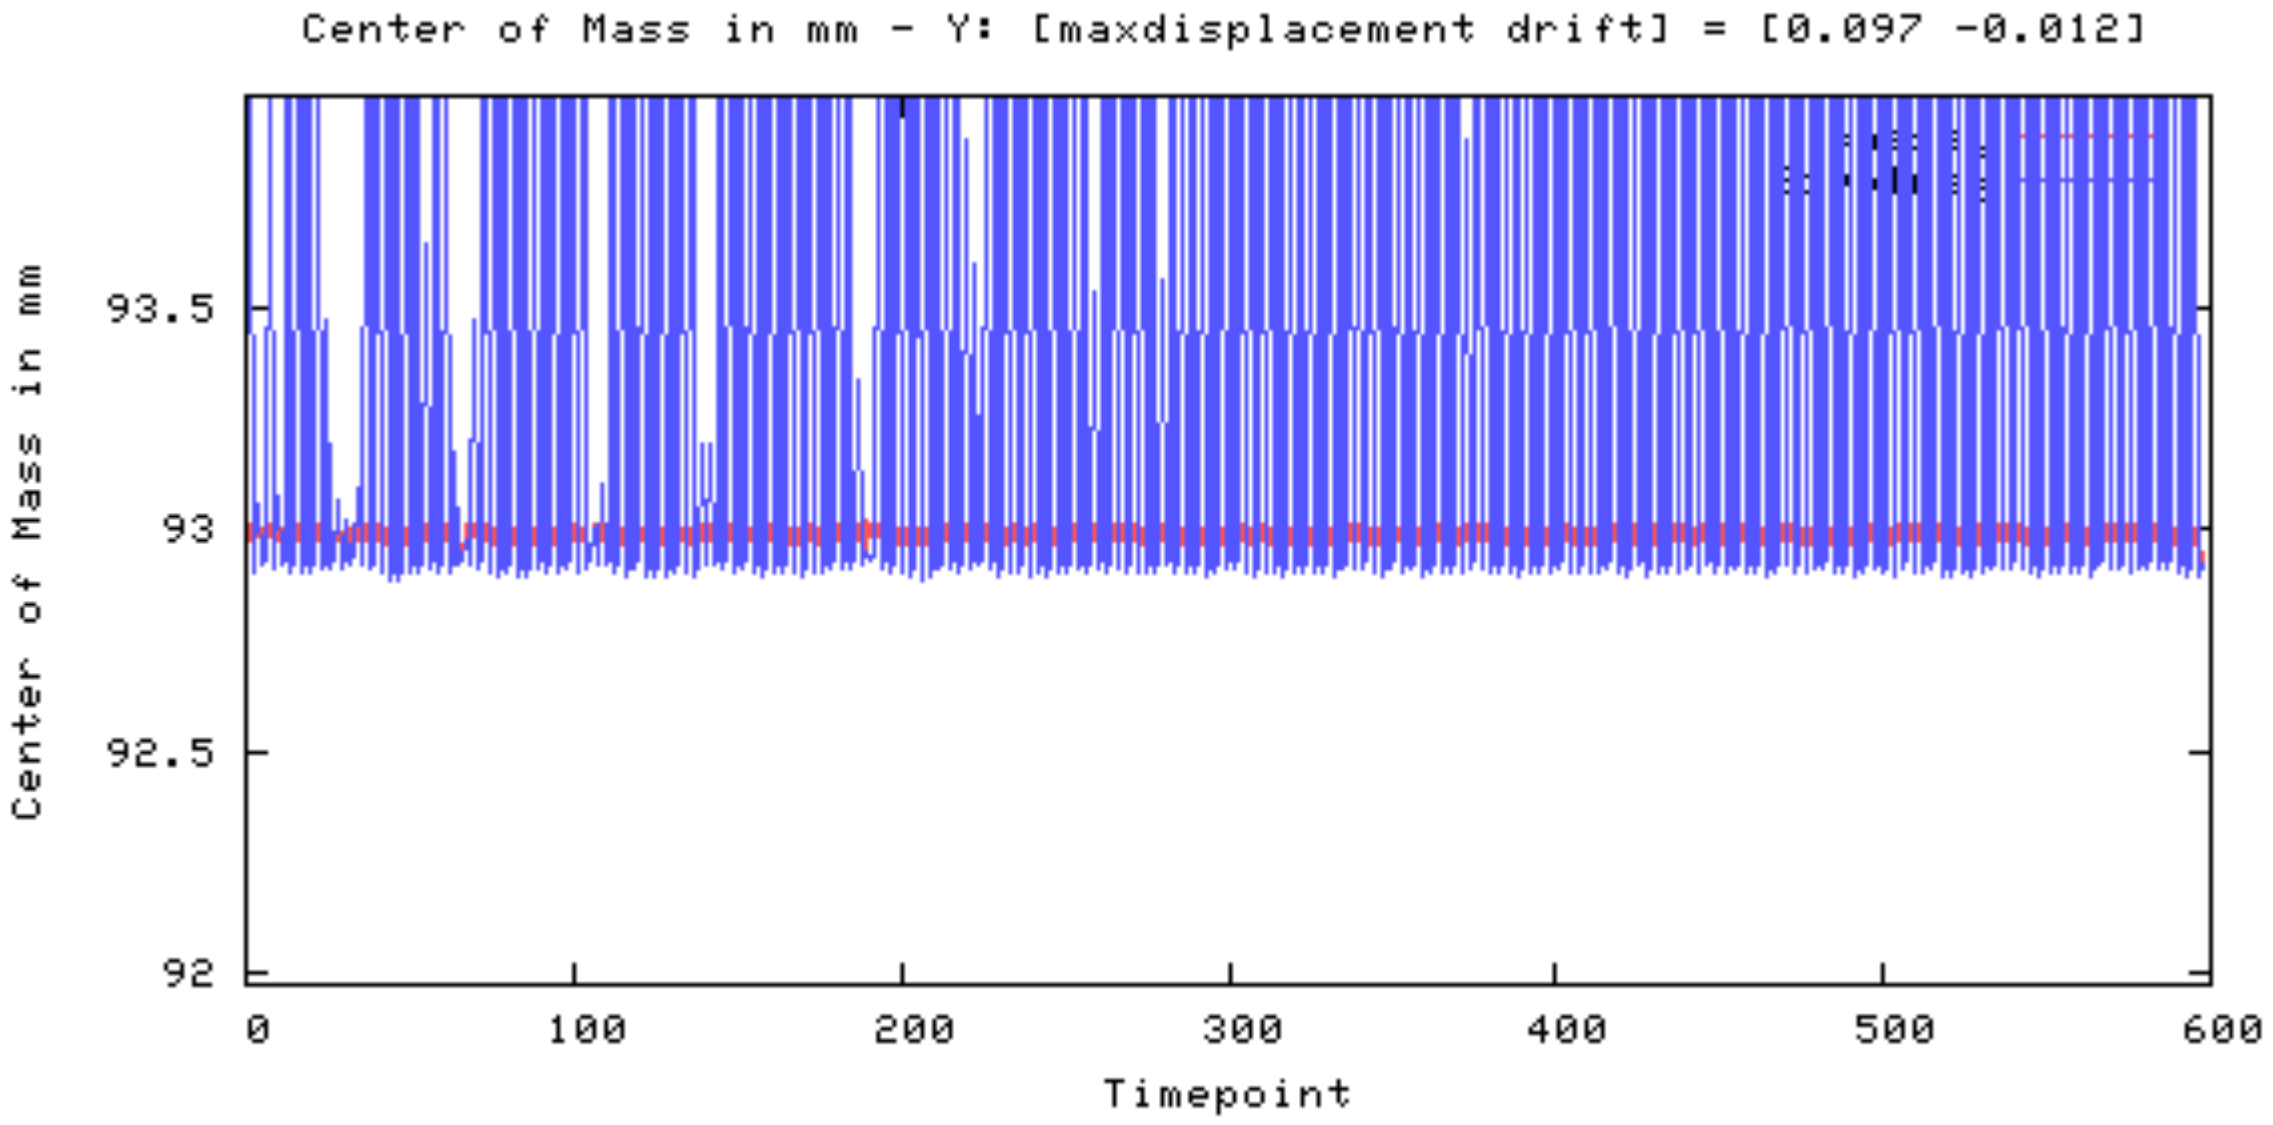
Center of Mass in mm - Y: [maxdisplacement drift] = [0.097 -0.012]

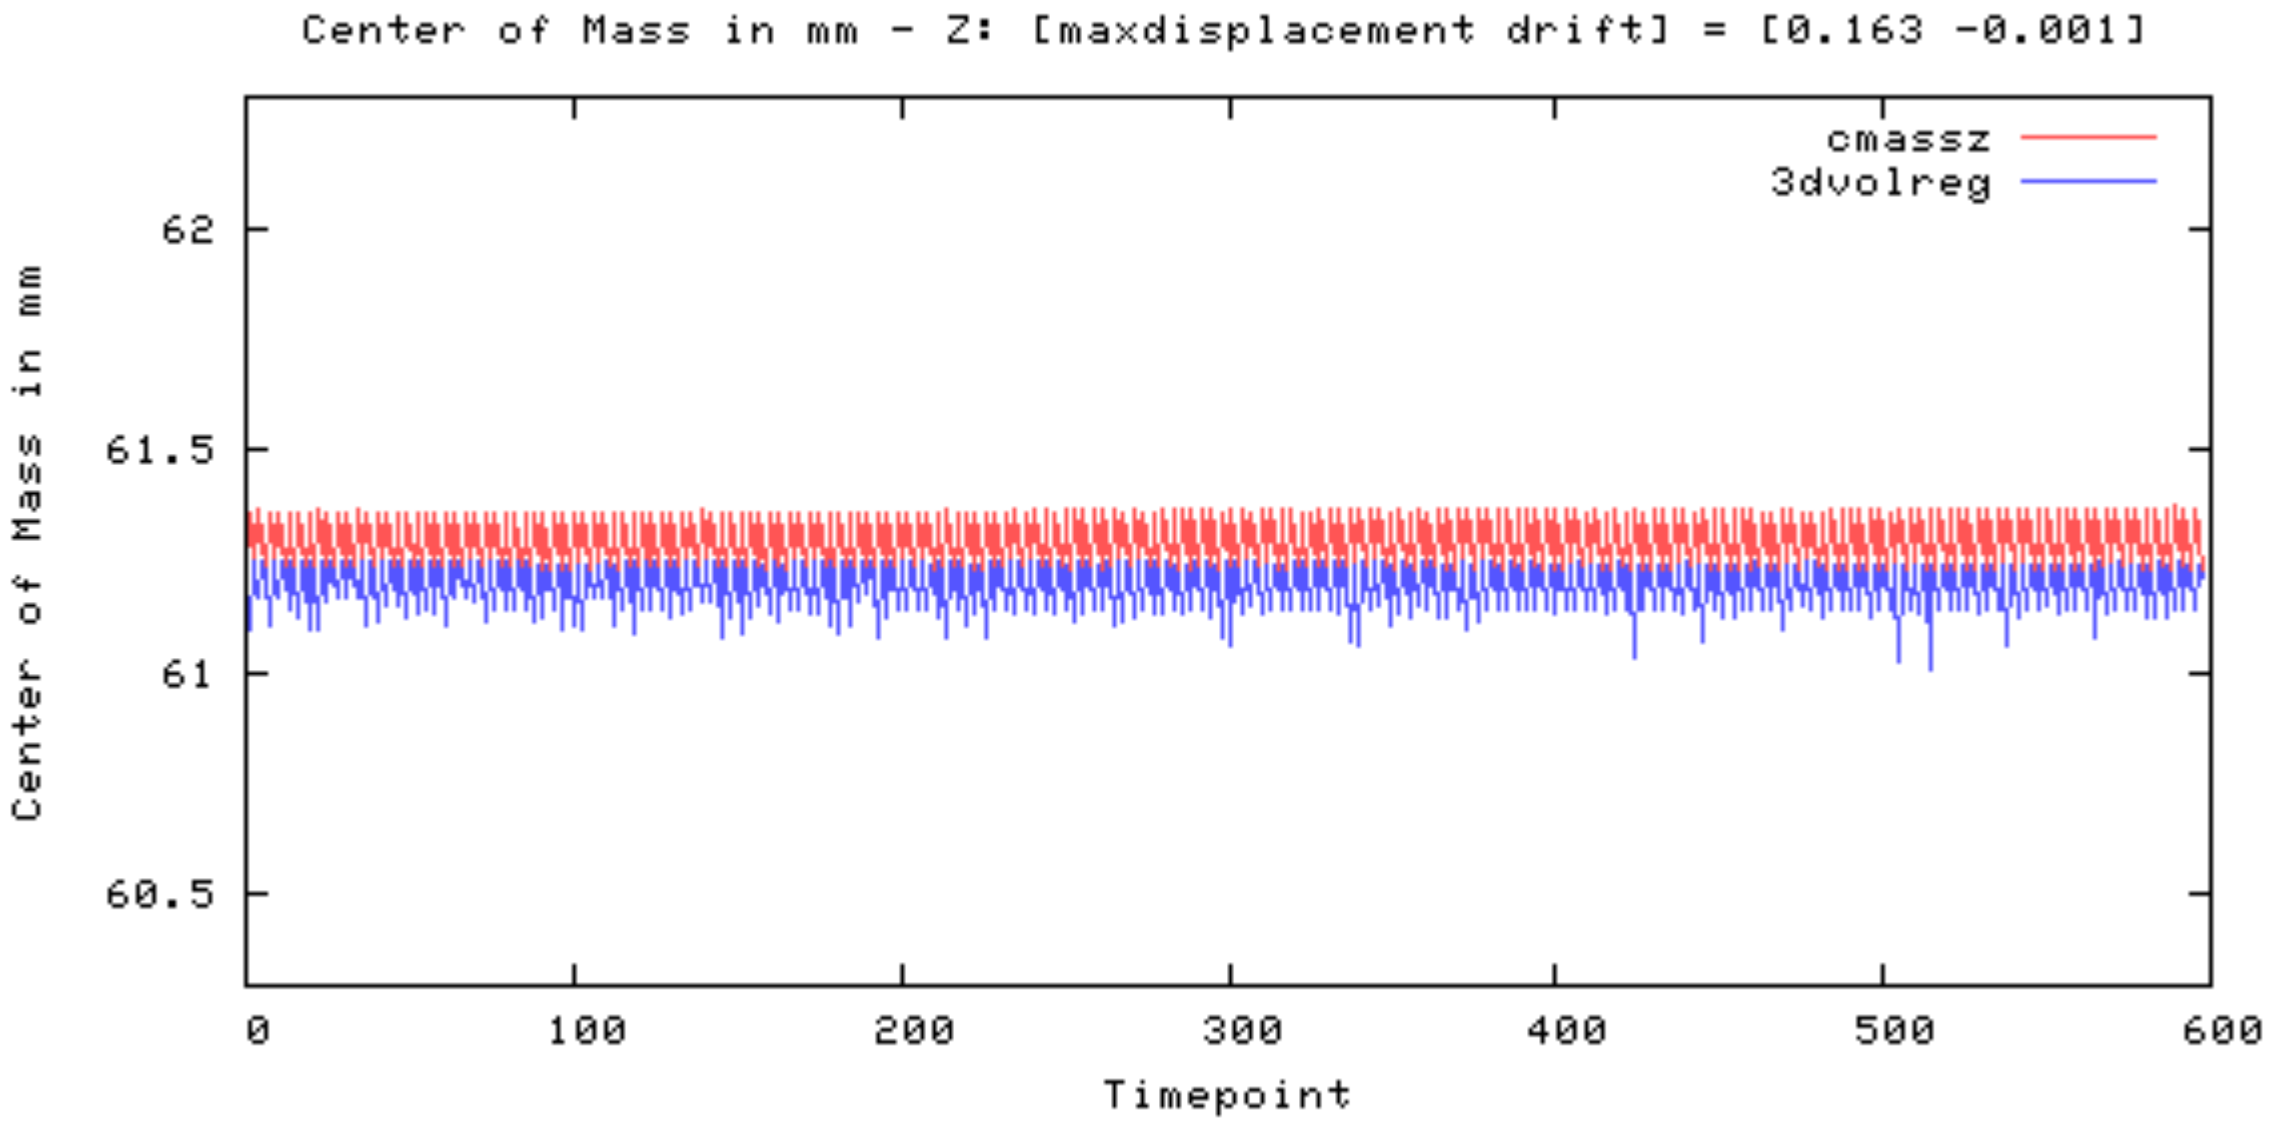

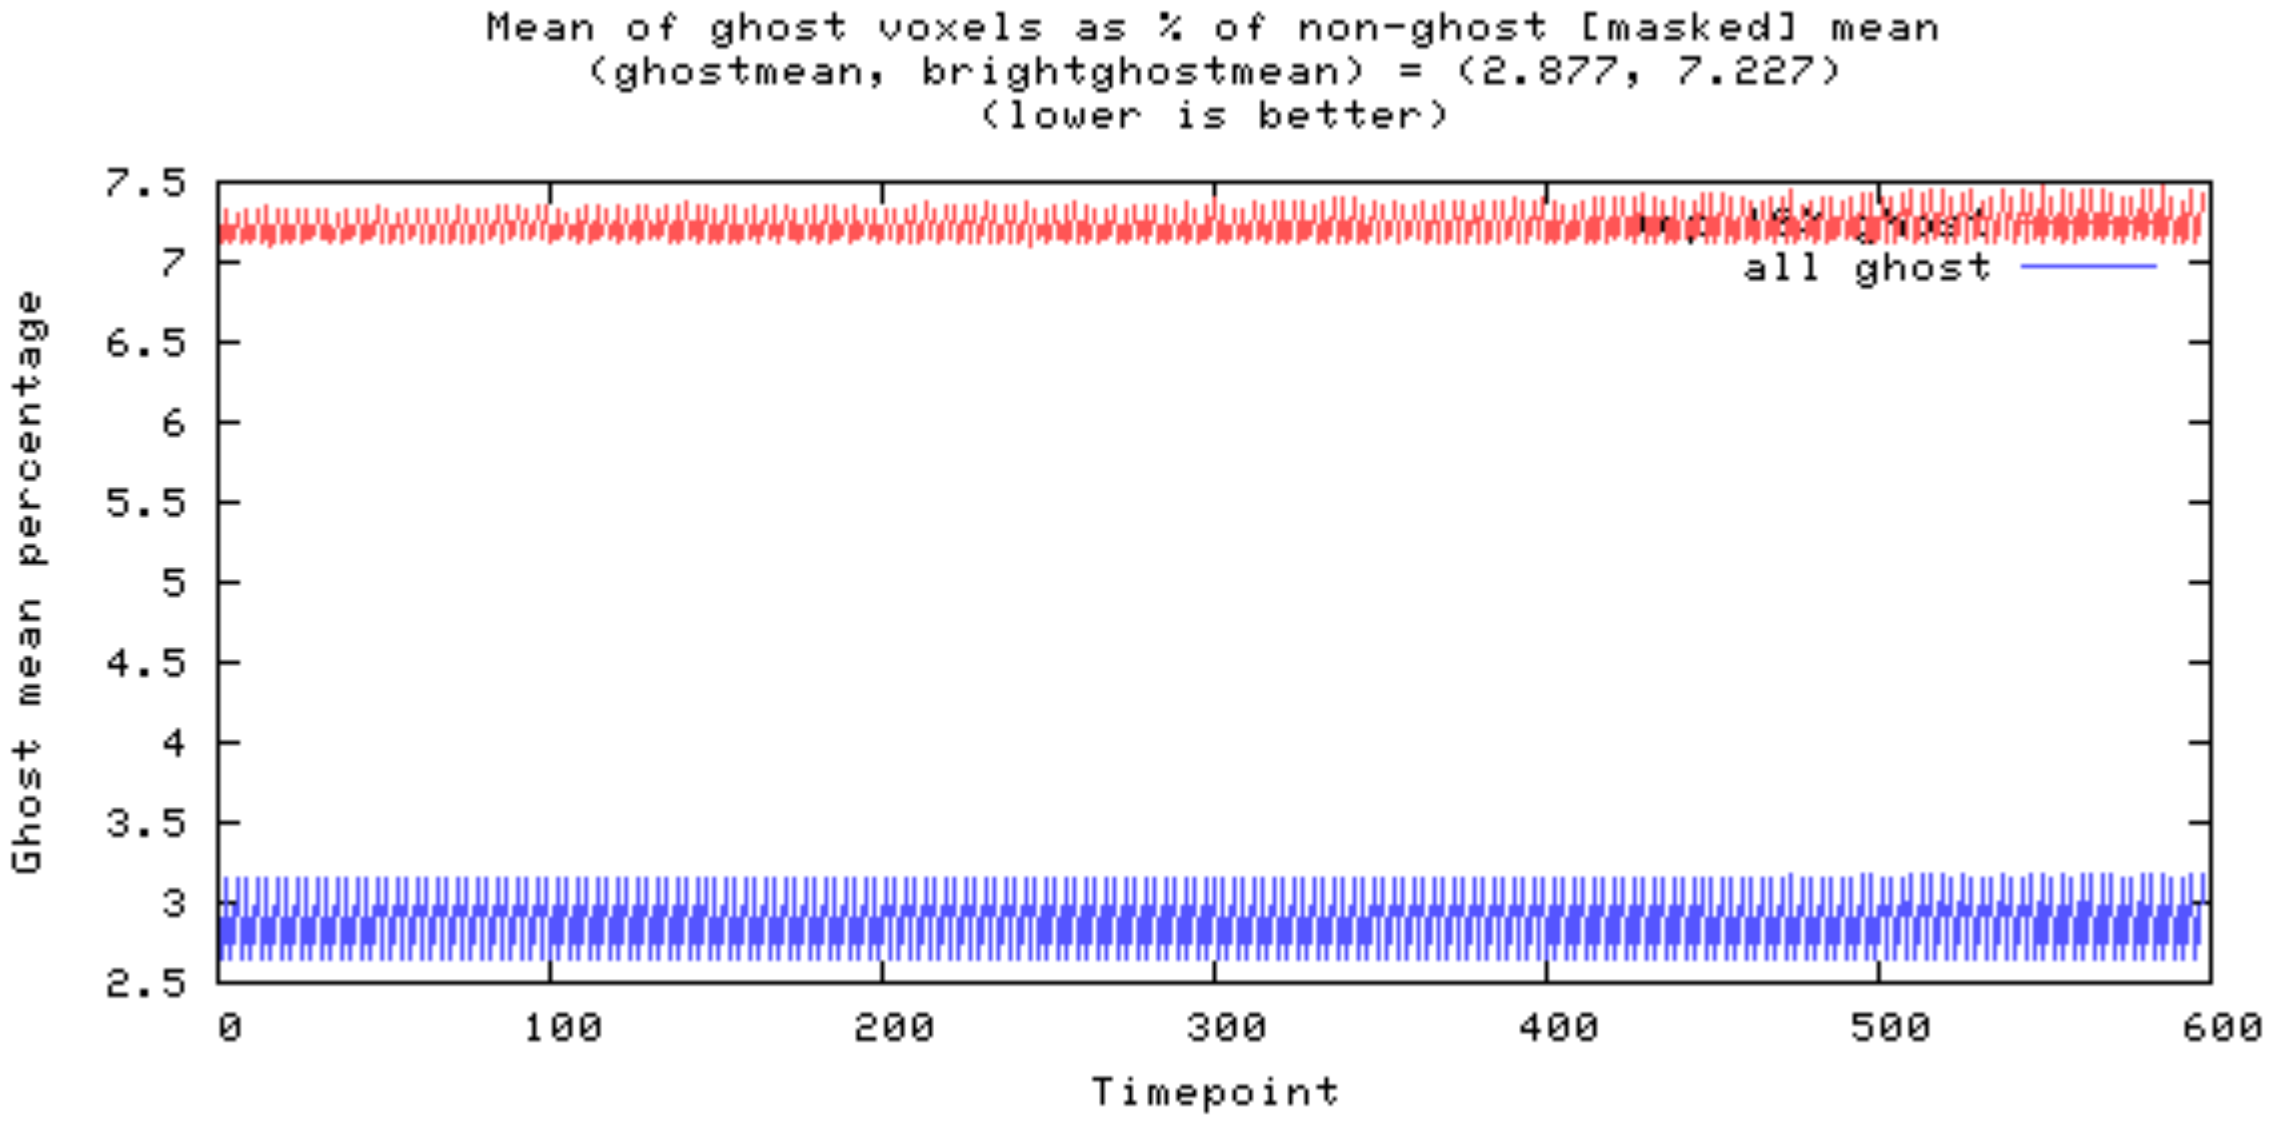

Odd-even difference image

image min: -15185, image max: 4609

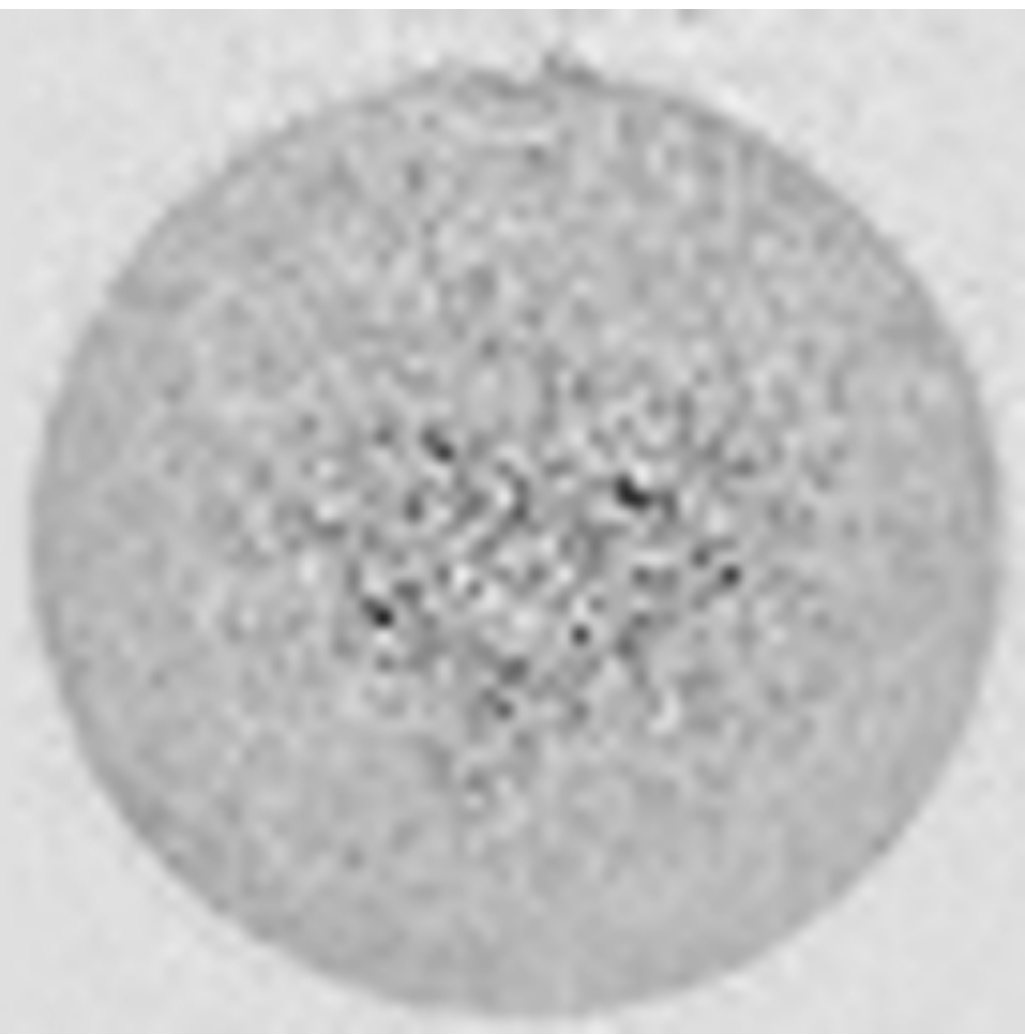

Mean image

image min: 0, image max: 16032.8

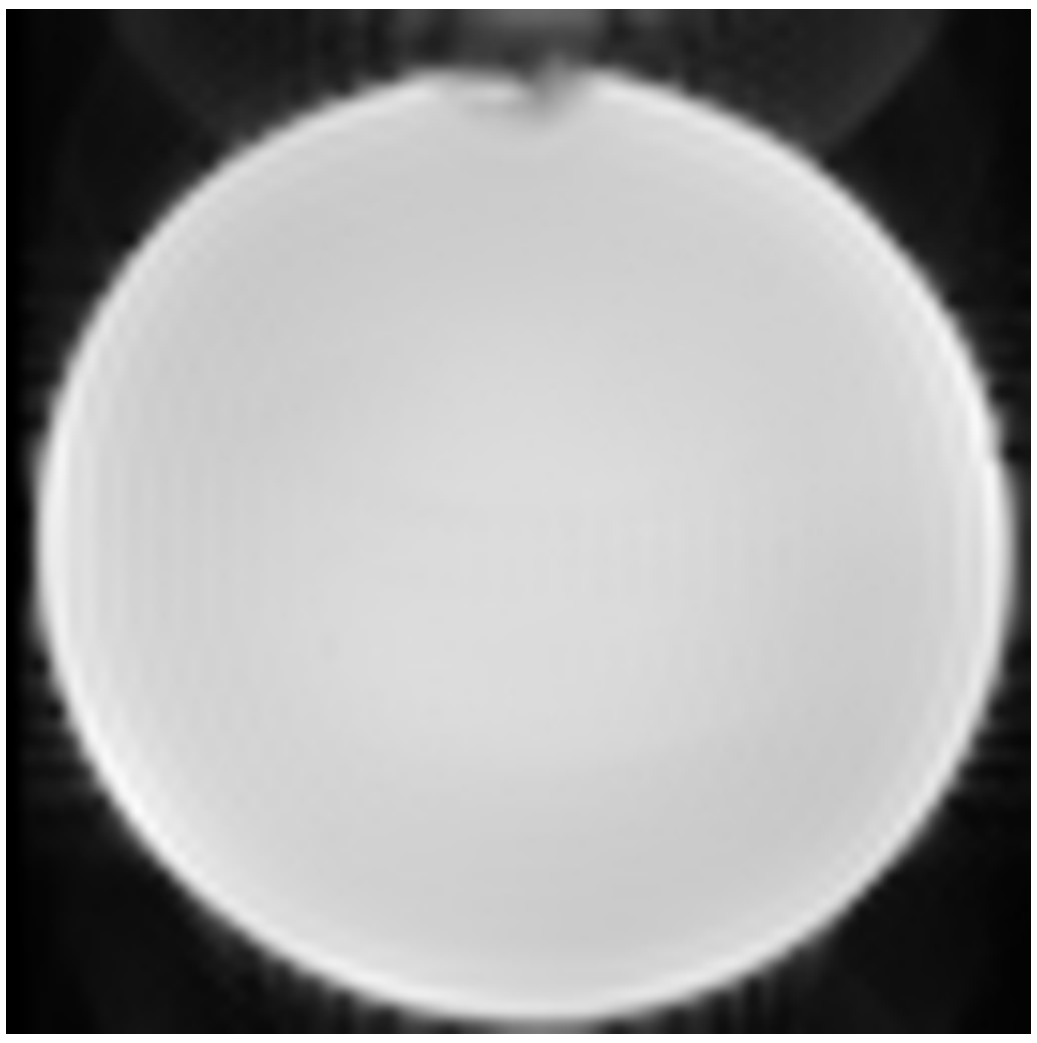

Standard Deviation image

image min: 0, image max: 5574.24

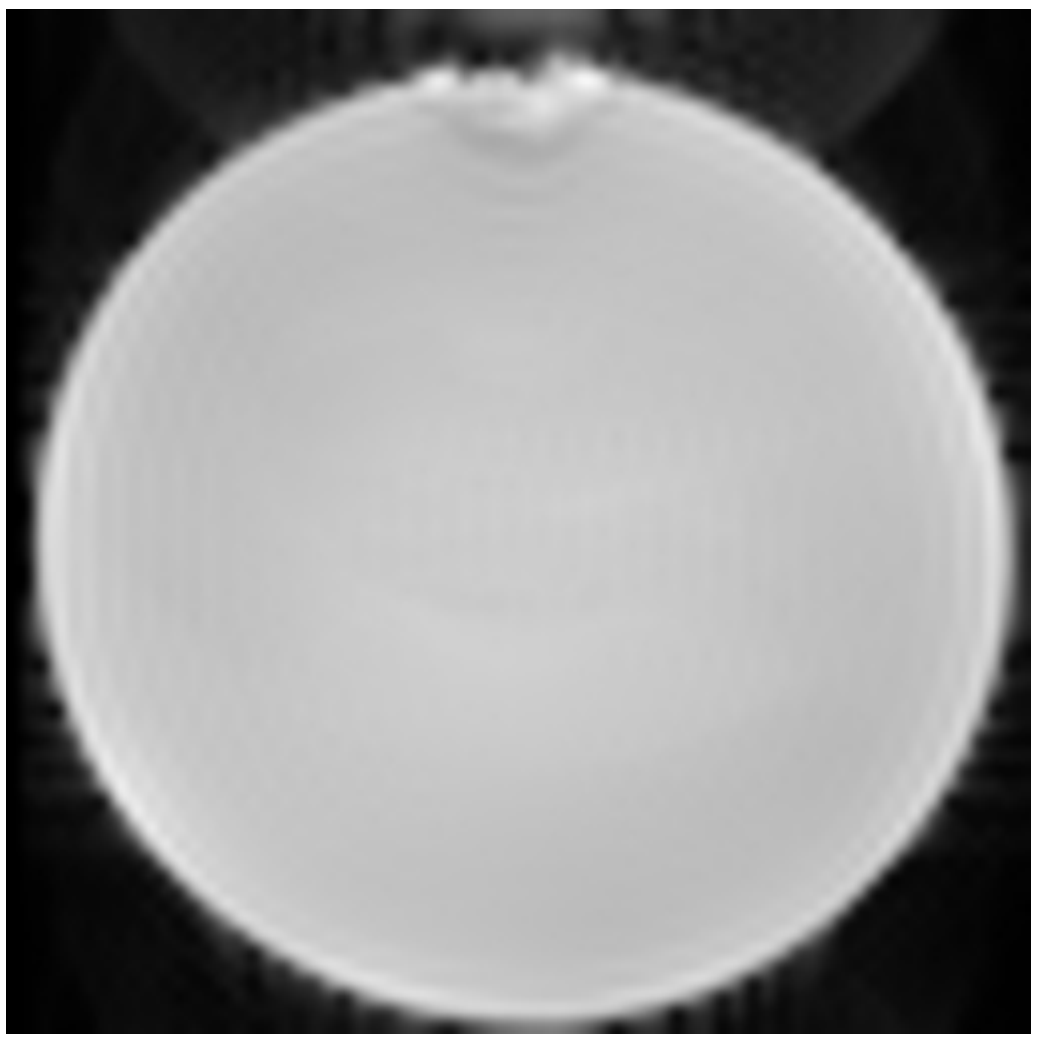

SFNR image



image min: 0, image max: 17.8153

Acquisition parameters

dimensions	68x68x48x600
spacing	2.64706mmx2.64706mmx2.6mmx0ms
gap	0mmx0mmx0mmx0ms
scanner	AWP213018
psdname	
examnumber	31ad03b6-d380-44
studyid	Stability_20261028
seriesnumber	25
runnumber	1
magneticfield	3

description	ses-32ch_func-bold_acq_cmrrme_task-tsnr
scandate	2026-10-28
scantime	11:27:40
tr	2000
te	14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24

	56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06 14.4 35.24 56.06
operator	
flipangle	79
prescribedslicespacing	2.6
frequencydirection	1
receivecoilname	Head_32
transmitcoilname	Body

institution	THE UNIVERSITY OF PENNSYLVANIA
examdescription	ACTIVE KIRWAN
scanner	AWP213018
scannermanufacturer	Siemens Healthineers
scannermodelname	MAGNETOM Cima.X
protocolname	ses-32ch_func-bold_acq_cmrrme_task-tsnr
institutionaddress	Grays Ferry Ave. BLDG 250 STE 140 3401,Philadelphia,69 - KEYSTONE,US,19146
institutionaldepartmentname	MindCORE Neuroimaging Suite 140
acquisitiondatetime	20261028112738.870000
frametype	ORIGINAL
pixelpresentation	MONOCHROME
volumetricproperties	DISTORTED
volumebasedcalculationtechnique	NONE
compleximagecomponent	MAGNITUDE
acquisitioncontrast	UNKNOWN
mracquisitiontype	2D
numaverages	1
spacingbetweenslices	2.6
echotrainlength	33
percentsampling	100
percentphasefieldofview	100
scannerserialnumber	213018
softwareversions	syngo MR XA61
inplanephaseencodingdirection	COLUMN
variableflipangleflag	N
contentqualification	RESEARCH
acquisitionduration	421.89699999999999
resonantnucleus	1H
applicablesafetystandardagency	IEC
acquisitionnumber	1
instancenumber	1
numtemporalpositions	200
imagecomments	Not for diagnostic use, Unaliased MB2/PE4/LB
samplesperpixel	1
photometricinterpretation	MONOCHROME2
numberofframes	48
rows	68
columns	68

bitsallocated	16
bitsstored	16
highbit	15
lossyimagecompression	00