RAPPLON BELT SOLUTION PROVIDER

Ammeraal Beltech

LOGISTICS

MAIL SORTING



DRAGBAND CONVEYOR
GENERAL HANDLING



FOOD

CANNING

RAPPLON® HPFB
MU SWITZERLAND



PAPER PRODUCTION
PAPER CONVERTING

PRINTING
PRINT FINISHING

BOXFOLDING
FOLDER GLUER



CORRUGATOR
FLEXO FOLDER GLUER

TUBE/CORE WINDER

CONTACT
MU SWITZERLAND



TEXTILE



WOOD



POWER
TRANSMISSION

TECHNICAL
SPECIFICATIONS



SPLICING
INSTRUCTIONS

Please click on symbols

INTERNAL & BUSINESS ONLY

Ammeraal Beltech

RAPPLON®

Swiss made High Performance Flat Belts

January 2023

Product Management

BU Switzerland

LOGISTIC

© Ammeraal Beltech — All Rights Reserved.
Confidential and Proprietary Intellectual Property.

ROLLER DRIVE SYSTEMS

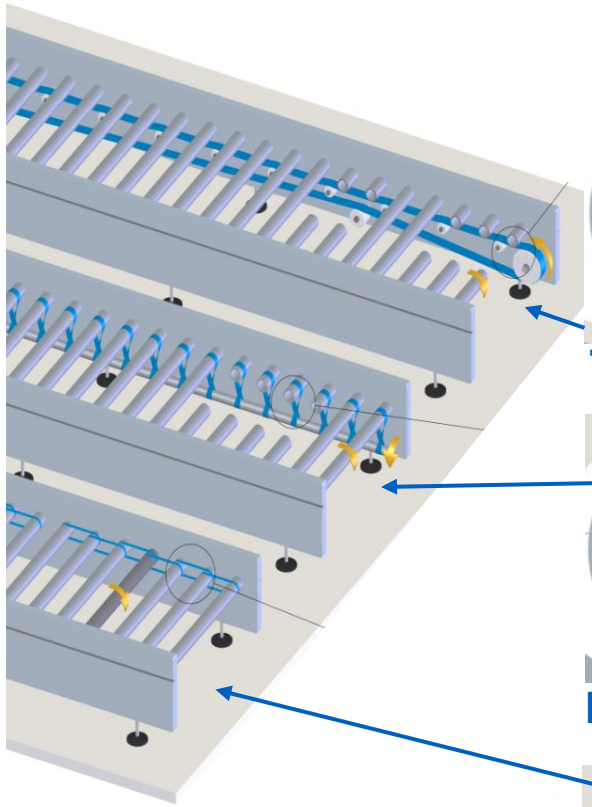



Tangential belt drive



Line shaft drive



Drum motor drive

Belt over Rollers

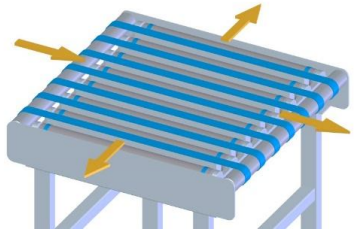

Right Angle Transfer

Curves

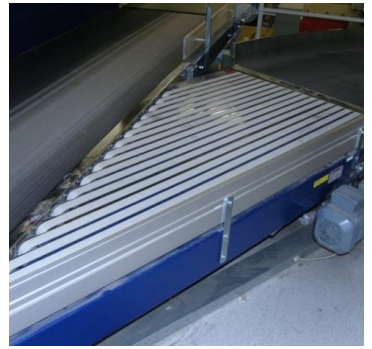

Merger/Diverter

INTERNAL & BUSINESS ONLY

TANGENTIAL BELT DRIVE

Description

Carrying rollers are driven with a flat belt.
The belt is pressed against carrying rollers by pressure rollers.

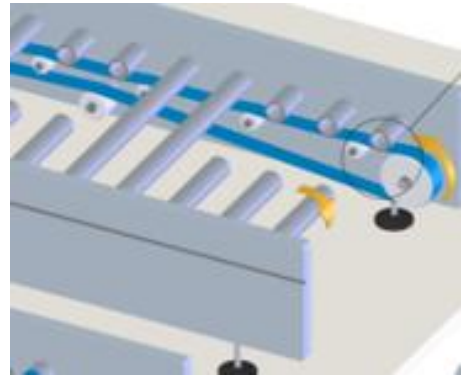

Continuous running

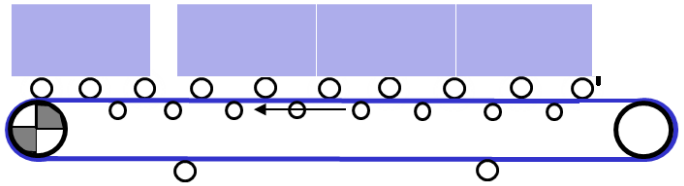

Continuous with Accumulation

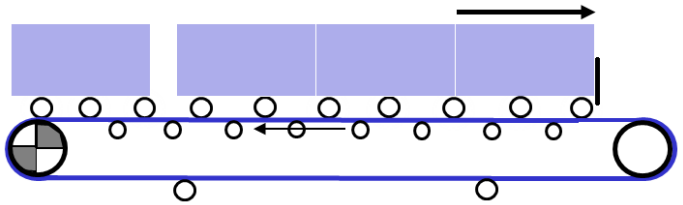

Low Pressure Accumulation

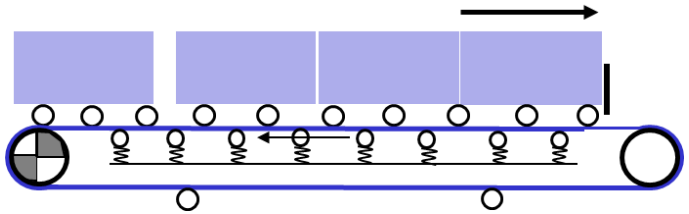

Zero Pressure Accumulation

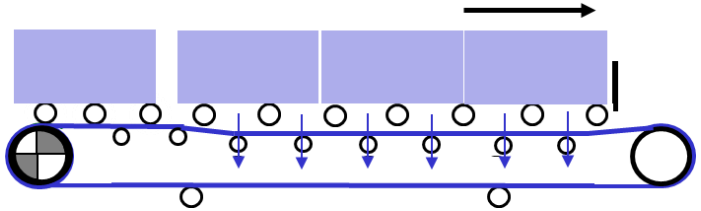

INTERNAL & BUSINESS ONLY

CONTINUOUS RUNNING SYSTEM

Continuous running full pressure

- Continuous running of carrying rollers
- No accumulation, no stops
- Pressure rollers can be fixed

Continuous running

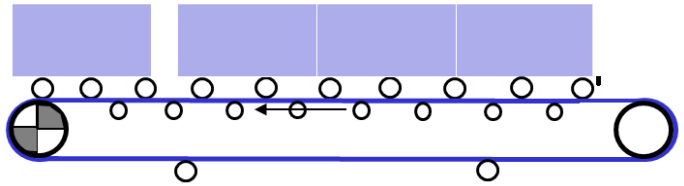

Flat belts with high friction rubber covers recommended

FBGG054607 GG E05.14 FFQ
FBGG054614 GG E08.20 RRQ
FBGG054659 GG E10.30 RRQ
FBGG054655 GG E15.20 RFQ
FBGG054656 GG E15.25 RFQ
FBGG054657 GG E15.30 RFQ
FBGG054667 GG E18.25 RFQ
FBGG054668 GG E18.30 RFQ
FBGG054680 GG A50.30 RRQ

There is an equal range of Classic items available.

INTERNAL & BUSINESS ONLY

CONTINUOUS RUNNING WITH ACCUMULATION

Continuous running with some accumulation

- Continuous running of carrying rollers
- No accumulation, no stops
- Pressure rollers can be fixed

Continuous with Accumulation

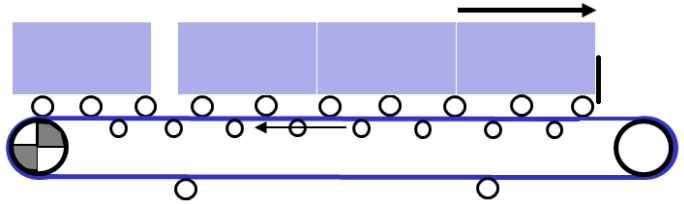

Flat belts with medium friction rubber covers recommended

FBUU05567 UU A80.45 RRQ
FBUU05568 UU E15.16 RFQ
FBUU05765 UU E15.20 RFQ
FBUU05762 UU E15.30 RFQ
FBUU05763 UU E18.20 RRQ
FBUU05764 UU E18.30 RRQ

INTERNAL & BUSINESS ONLY

LOW PRESSURE ACCUMULATION

Low pressure accumulation

- Spring loaded pressure rollers can release while accumulating
- Belt continuous to run while accumulating

Low Pressure Accumulation

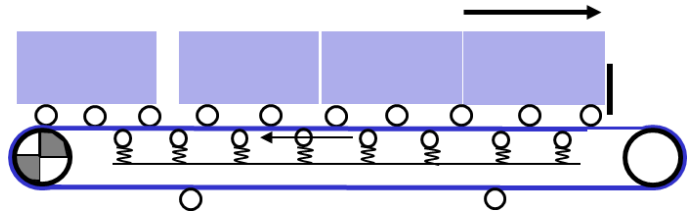

Flat belts with high friction on drive pulley, low friction on carrying roller recommended

FBTG054575 TG E10.20 RQ

FBTG054576 TG E15.30 RQ

FBGT054577 TG E15.35 RQ

FBGT054701 GT S02 RC

FBGT054702 GT S04 RC

FBGT054703 GT S06 RC

FBGT054704 GT S09 FC

INTERNAL & BUSINESS ONLY

ZERO PRESSURE ACCUMULATION

Zero pressure

- Devices separate pressure rollers from the carrying rollers during accumulation process
- Pressure roll lifting device can be operated mechanically, pneumatically or electromechanically
- Different sections of the roller conveyor can be independently engaged or disengaged

Flat belts with high friction covers recommended

FBGG054607 GG E05.14 FFQ
FBGG054614 GG E08.20 RRQ
FBGG054659 GG E10.30 RRQ
FBGG054655 GG E15.20 RFQ
FBGG054656 GG E15.25 RFQ
FBGG054657 GG E15.30 RFQ
FBGG054667 GG E18.25 RFQ
FBGG054668 GG E18.30 RFQ
FBGG054680 GG A50.30 RRQ

There is an equal range of Classic items available.

Zero Pressure Accumulation

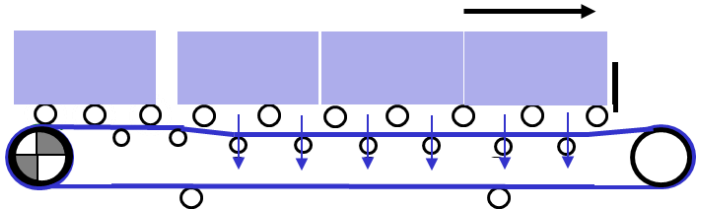

LINE SHAFT DRIVES

Description

The rollers are driven by half crossed drive belts over a line shaft.

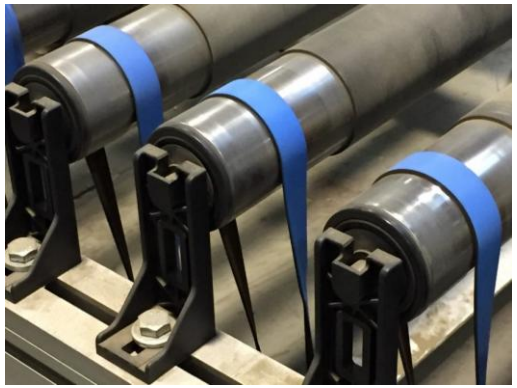

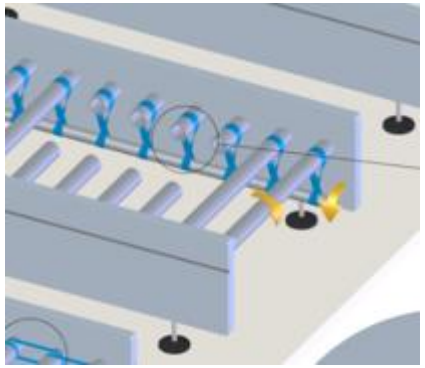

Elastic flat belts with high friction covers recommended

FBGG054263 GG N22 RFQ

FBGG054608 GG N27 RFQ

KEY POINTS

FEATURES BENEFITS

TECHNICAL SPECIFICATIONS

RAPPLON®

Swiss made High Performance Flat Belts

INTERNAL & BUSINESS ONLY

DRUM MOTOR DRIVES

Description

Drum(s) with a motor inside. These drums are driving other rollers with belts.

Flat belts, Round or V Belts can be used.

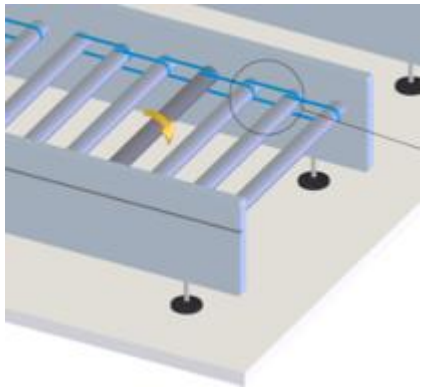

Elastic flat belts with high or medium friction covers recommended

FBUU054564 UU N06 RFQ HG
FBUU054772 UU N12 RFQ
FBUU054773 UU N22 RFQ
FBGG054263 GG N22 RFQ
FBGG054608 GG N27 RFQ

CURVES

Description

The flat belt drives the conical carrying rollers at the inner radius.

The belt is lifted by a tilted roll at the inner radius edge.

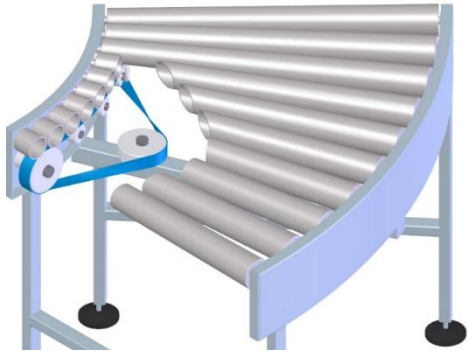

Curve drive

Flat belts with high friction covers recommended

FBGG054614 GG E08.20 RRQ

FBGG054655 GG E15.20 RFQ

KEY POINTS

FEATURES BENEFITS

TECHNICAL SPECIFICATIONS

INTERNAL & BUSINESS ONLY

MERGER / DIVERTER

Description

The Merge Roller merges two conveyor lines together.
The Diverter takes away the material from one line to another.
The zones of the merge/diverter roller conveyor are directly and independently controlled.

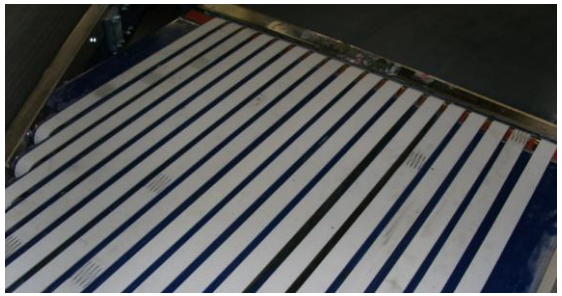

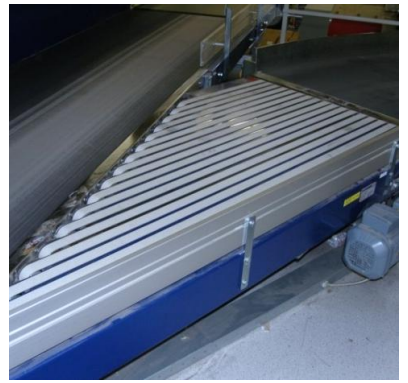

Merger/Diverter

Elastic Flat belts with low friction covers recommended on drum motor systems

FBTU054572 TU N20 FQ
FBTT054573 TT N20 Q

Flat belts with low or high friction covers recommended

FBTG054624 TG E04.12 RQ
FBTT054598 TT E09.18 Q
FBGG054614 GG E08.20 RRQ
FBGG054655 GG E15.20 RFQ

KEY POINTS
FEATURES BENEFITS
TECHNICAL SPECIFICATIONS

INTERNAL & BUSINESS ONLY

RIGHT ANGLE TRANSFER RAT

Description

The Right-Angle Transfer can replace a radius conveyor, creating a gently 90-degree and allows a compact system layout.

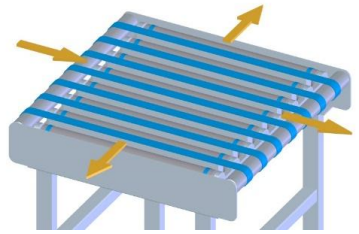

Right Angle Transfer

Flat belts recommended

FBGG054655 GG E15.20 RFQ
FBGG054656 GG E15.25 RFQ
FBGG054659 GG E10.30 RRQ
FBTG054576 TG E15.30 RQ
FBTG054577 TG E15.35 RQ
FBTU054572 TU N20 FQ
FBGG054263 GG N22 RFQ

BELT OVER ROLLERS

Description

Modular conveyor system for handling cases, trays, or parcels in high throughput distribution. Individually controlled belt sections.

Elastic flat belts with medium friction covers recommended

FBUU054771 UU N06 RFQ
FBUU054564 UU N06 RFQ HG
FBUU054772 UU N12 RFQ
FBUU054773 UU N22 RFQ
FBUU054775 UU N12 RFQ F1
FBTU054572 TU N20 FQ
FBTT054573 TT N20 Q

INTERNAL & BUSINESS ONLY

KEY POINTS TO BE AWARE OF

- Thickness is a crucial factor
- Strength is a crucial factor
- Cross Reference List can be used as Guide line
- Calculate optimal solutions with E-RAPPCALC

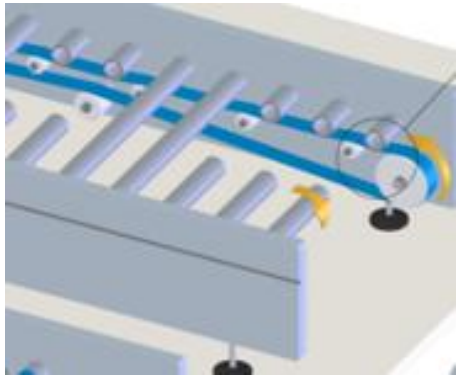

Ask your Product Manager for support with E-RAPPCALC.

INTERNAL & BUSINESS ONLY

KEY POINTS TO BE AWARE OF

Half crossed drive

- Strength is a crucial factor
- No take up system
- No reverse drive possible
- Keep pulley diameter as large as possible.
- Pulleys must be cylindrical, not crowned.
- Cross Reference List can be used as Guide line

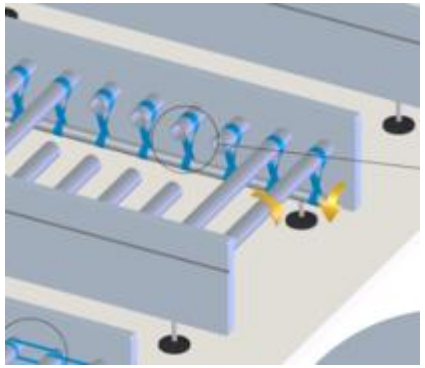

More details regarding drive design can be found in our Engineering Guide lines.

KEY POINTS TO BE AWARE OF

The optimal tension of Elastic belts depend on:

- Belt dimensions
- Machine design
- Goods to be transported

The chart indicate the maximum transport weight
According belt type and tension.

More details regarding Elastic Belts can be found in our Engineering Guidelines.

Belt type / Belt width		50mm	100mm	200mm	300mm	400mm	600mm	750mm	1000mm	1200mm
Recommended elongation		3%	2.5%	2%	1.5%	1%	1%	0.5%	0.5%	0.5%
FBUU054771	UU N06 RFQ	1,5kg	2,5kg	4,1kg	4,6kg	4,1kg	6,1kg	3,8kg	5,1kg	6,1kg
FBUU054532	UU N06 RFQ FG	1,5kg	2,5kg	4,1kg	4,6kg	4,1kg	6,1kg	3,8kg	5,1kg	6,1kg
FBUU054564	UU N06 RFQ HG	1,5kg	2,5kg	4,1kg	4,6kg	4,1kg	6,1kg	3,8kg	5,1kg	6,1kg
FBUU054550	UU N06 RFQ FG HG	1,5kg	2,5kg	4,1kg	4,6kg	4,1kg	6,1kg	3,8kg	5,1kg	6,1kg
FBUU054563	UU N08 RFQ FG blue	2,0kg	3,4kg	5,4kg	6,1kg	5,4kg	8,2kg	5,1kg	6,8kg	8,2kg
FBUU054543	UU N08 RFQ FG white	2,0kg	3,4kg	5,4kg	6,1kg	5,4kg	8,2kg	5,1kg	6,8kg	8,2kg
FBUU054775	UU N12 RFQ	3,0kg	5,1kg	8,2kg	9,2kg	8,2kg	12,2kg	7,6kg	10,2kg	12,2kg
FBUU054775	UU N12 RRQ F1	3,0kg	5,1kg	8,2kg	9,2kg	8,2kg	12,2kg	7,6kg	10,2kg	12,2kg
FBUU054533	UU N12 RFQ FG	3,0kg	5,1kg	8,2kg	9,2kg	8,2kg	12,2kg	7,6kg	10,2kg	12,2kg
FBUV054774	UV N12 FQ	3,0kg	5,1kg	8,2kg	9,2kg	8,2kg	12,2kg	7,6kg	10,2kg	12,2kg
FBUU054562	UU N16 SPSQ FG	4,1kg	6,8kg	10,9kg	12,2kg	10,9kg	16,3kg	10,2kg	13,6kg	16,3kg
FBUU054534	UU N17 RFQ FG	4,3kg	7,2kg	11,6kg	13kg	11,6kg	17,3kg	10,8kg	14,4kg	17,3kg
FBTU054572	TU N20 FQ	5,1kg	8,5kg	13,6kg	15,3kg	13,6kg	20,4kg	12,7kg	17kg	20,4kg
FBTT054573	TT N20 FQ	5,1kg	8,5kg	13,6kg	15,3kg	13,6kg	20,4kg	12,7kg	17kg	20,4kg
FBUU054773	UU N22 RFQ	5,6kg	9,3kg	15kg	16,8kg	15kg	22,4kg	14kg	18,6kg	22,4kg
FBUU054535	UU N22 RFQ FG	5,6kg	9,3kg	15kg	16,8kg	15kg	22,4kg	14kg	18,6kg	22,4kg

KEY POINTS TO BE AWARE OF

The optimal tension of Elastic belts depend on:

- Belt dimensions
- Machine design
- Power to transmit

The chart indicate the tension range based on belt width.

Belt width	Recommended elongation	Maximum elongation
< 50 mm	3 %	6 %
50 — 100 mm	2.5 %	5 %
100 — 200 mm	2 %	4 %
200—400 mm	1.5 %	2 %
400 — 600 mm	1 %	1.5 %
600 — 1200 mm	0.5 %	1 %

More details regarding Elastic Belts can be found in our Engineering Guidelines.

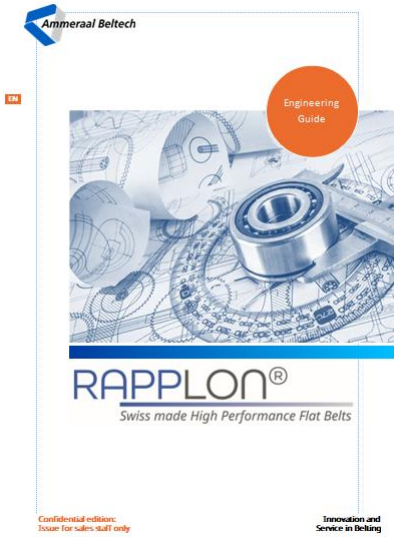

FEATURES & BENEFITS

Ammeraal Beltech

Feature	Advantage	Benefit
High modulus fabric tensile member	Extremely flexible	Lowest energy consumption
XNBR rubber	Abrasion and wear resistant	Extended service life
No elongation, dimensional stable	no re-tensioning necessary	Just fit and forget
QuickSplice	Quick and simple splicing with QSP-Tools	Safe joint, perfectly aligned, everybody can splice
Sophisticated belt design	Great performance on all equipment	Lowest energy consumption
Permanently antistatic	Prevent accumulation of dust	Highest possible efficiency
RAPPLON E-RappCalc®	Calculate best performing belt	High efficiency at lowest cost

INTERNAL & BUSINESS ONLY

FEATURES & BENEFITS FBUU054567 UU A80.45 RRQ

Features	Benefits
High E-Modulus Fabric	Avoid stretching out – no re-tensioning
Fabric design	No cords (competitors) coming loose and getting wrapped around pulleys
Splicing Tools	Complete All-in-one fabrication tool set with QSP60LF+ & MFT60
Splicing time	Fastest joining time in the market – half of the time regarding competition

Winding up of tensile member cords on pressure rollers - Not acceptable!

All-in-one fabrication tool set with QSP60LF+ & MFT60

INTERNAL & BUSINESS ONLY

FEATURES & BENEFITS ELASTIC

Feature	Advantage	Benefit
Homogeneous material	Extremely elastic	no tensioning system necessary
XNBR rubber and PU covers	Abrasion and wear resistant	Extended service life
No elongation, dimensional stable	no re-tensioning necessary	Just fit and forget
QuickSplice	Quick and simple splicing with QSP-Tools	Safe joint, perfectly aligned, everybody can splice
Sophisticated belt design	Great performance on all equipment	Lowest energy consumption
Permanently antistatic	Prevent accumulation of dust	Highest possible efficiency
RAPPLON E-RappCalc®	Calculate best performing belt	High efficiency at lowest cost

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBUU054567 UU A80.45 RRQ

Ammeraal Beltech

Heavy Duty Roller Drive Belts

Polyurethane cover material:
- Wear resistant
- Allows accumulations
- Easy and strong QuickSplice joint

Rough structure cover on both sites

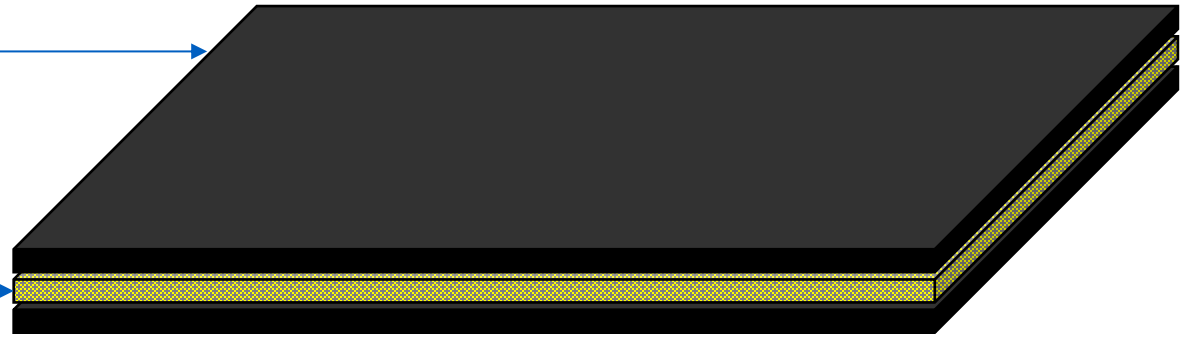

Aramid fabric tensile member:
- Extremely flexible
- Very low energy consumption
- Dimensional stable
- Insensitive to moisture
- Limited edge fraying

QuickSplice belts with Aramid fabric as tension member:
- Exact belt thickness over joint area
- Fast replacement
- No running direction to be observed
- High strength possible also with small pulley diameter
- Failure-free joining system
- Shorter take-ups
- Permanently anti-static

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: QUICKSPLICE PU COVER

Light Roller Drive Belts

Polyurethane cover material:
- Wear resistant
- Allows accumulations
- Easy and strong QuickSplice joint

Different structures available:
Rough and Fine

Polyester fabric tensile member:
- Extremely flexible
- Very low energy consumption
- Dimensional stable
- Insensitive to moisture

QuickSplice belts with Polyester as tension member:
- Exact belt thickness over joint area
- Fast replacement
- No running direction to be observed
- High strength possible also with small pulley diameter
- Failure-free joining system
- Shorter take-ups
- Permanently anti-static

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: QUICKSPLICE RUBBER COVER

Rubber cover material:
- Constant high friction
- Highly abrasion resistant
- Resistant to oil and fat
- Long service life
- Differential colours for easy and safe fitting

Different structures available:
Rough and Fine

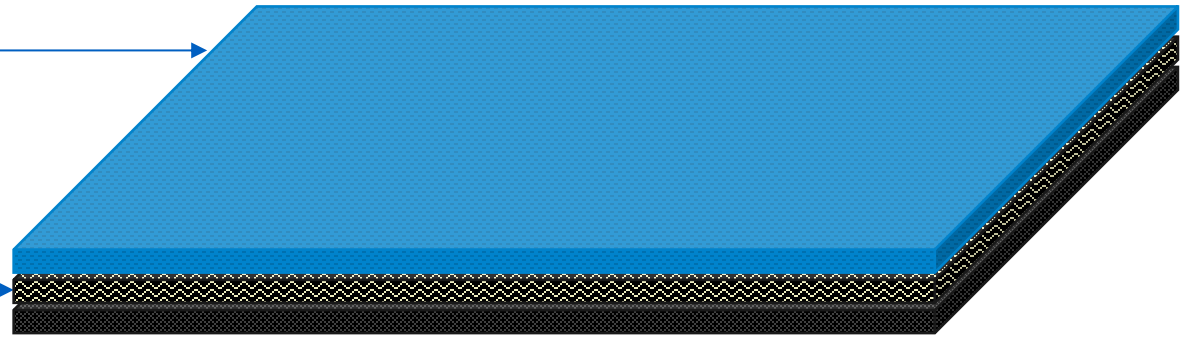

Polyester fabric tensile member:
- Extremely flexible
- Very low energy consumption
- Dimensional stable
- Insensitive to moisture

QuickSplice belts with Polyester as tension member:
- Exact belt thickness over joint area
- Fast replacement
- No running direction to be observed
- High strength possible also with small pulley diameter
- Failure-free joining system
- Shorter take-ups
- Permanently anti-static

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: CLASSIC RUBBER COVER

Rubber cover material:
- Constant high friction
- Highly abrasion resistant
- Resistant to oil and fat
- Long service life
- Differential colours for easy and safe fitting

Different structures available:
Rough and Fine

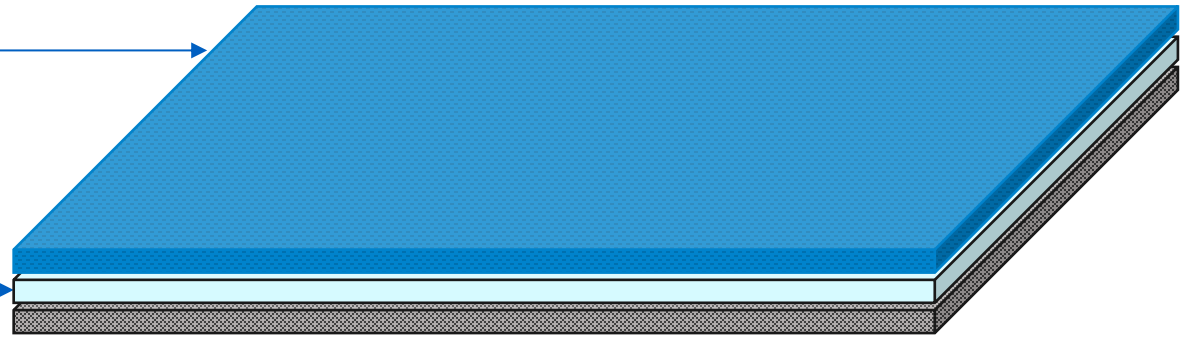

Polyamide foil tensile member:
- Very flexible
- High edge stability
- Dimensional stable

Classic belts with PA-Foil as tension member:
- Absorbing high loads and torques
- Permanently anti-static
- No tracking guides required

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: BLACK ELASTIC BELTS

Completely made from extruded Polyurethane:
- No edge fraying as there is no fabric
- Easy clean-ability

Antistatic coating

High elastic Polyurethane:
- No edge fraying as there is no fabric reinforcement
- Low load on shafts and bearings
- Simple tracking

Splicing:
- Quick and reliable with QuickSplice Tools
- No glue involved

INTERNAL & BUSINESS ONLY

Ammeraal Beltech

RAPPLON®

Swiss made High Performance Flat Belts

January 2023

Product Management

BU Switzerland

MAILSORTING

© Ammeraal Beltech — All Rights Reserved.
Confidential and Proprietary Intellectual Property.

MAILSORTING

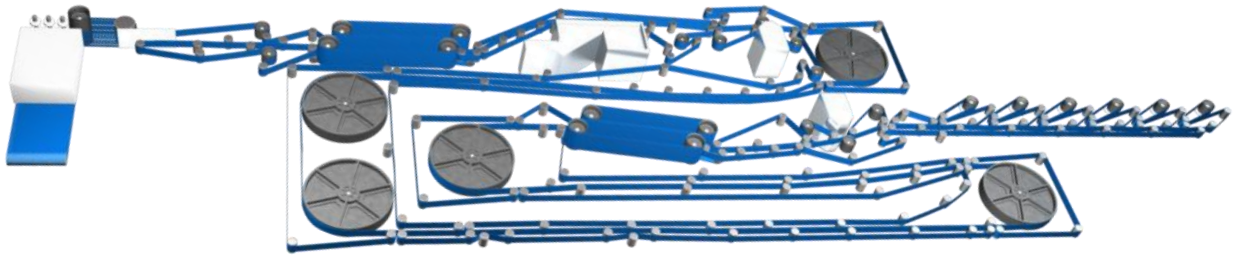

MAIL SORTER SECTIONS

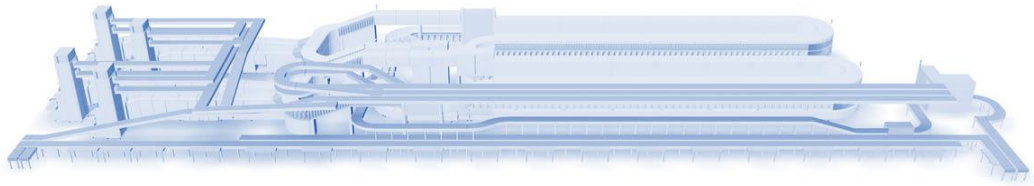

SIEMENS OMS

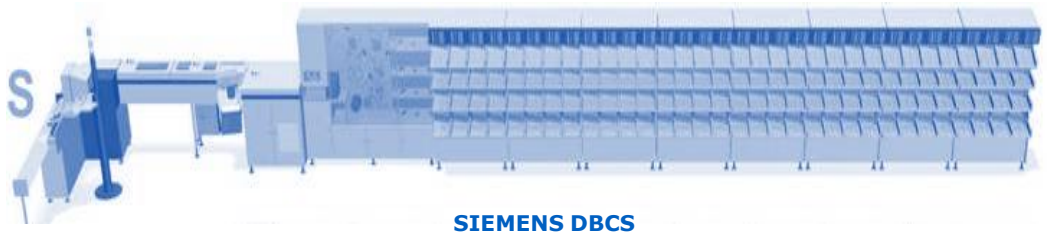

SIEMENS DBCS

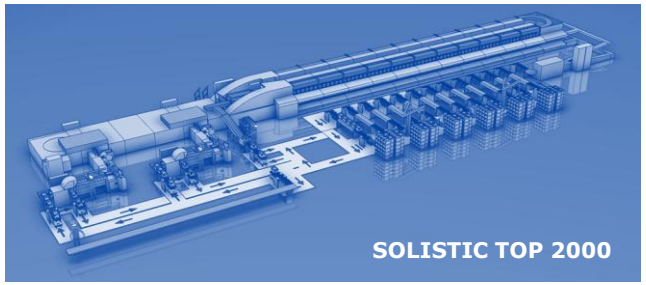

SOLISTIC TOP 2000

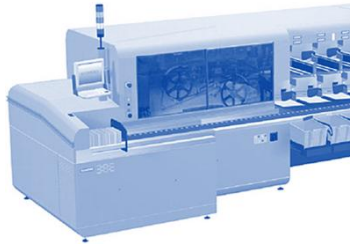

SIEMENS CRS3000 & CSS3000

SIEMENS IRV 3000

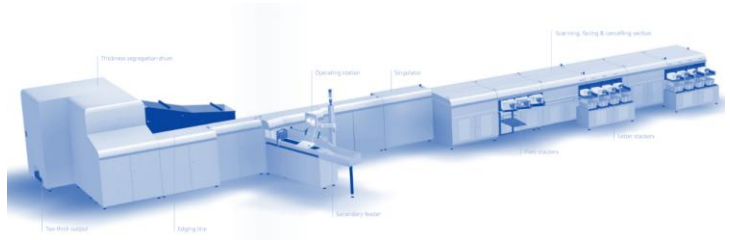

SIEMENS CFC 3004

INTERNAL & BUSINESS ONLY

APPLICATION DETAILS: LETTER SORTING

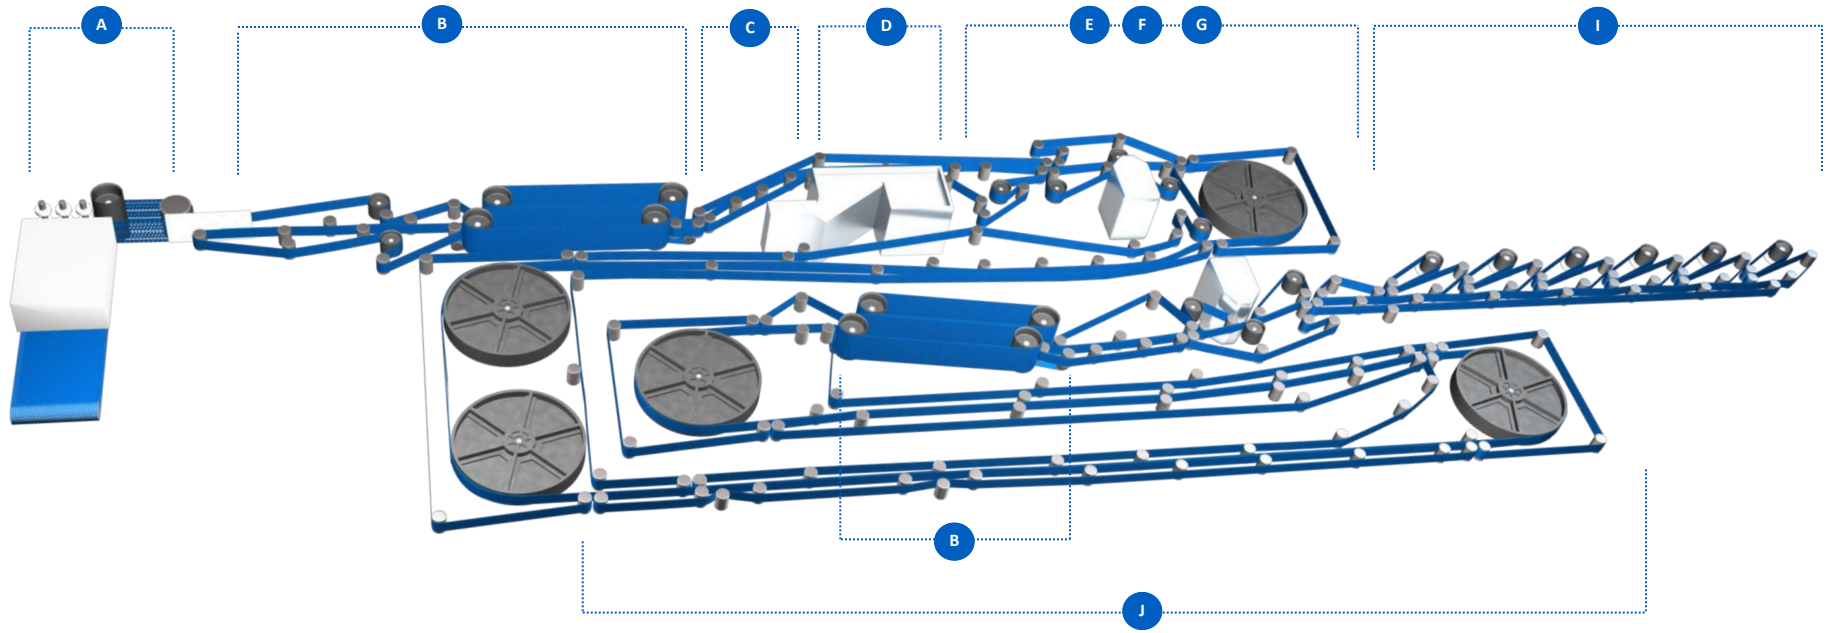

- A Feeder & Pick off
- B Transport to Leveller & Leveller
- C Format control
- D OCR Optical Character Reader
- E Video coding
- F Encoder
- G Bar code reader
- H Tier feeder
- I Stacker
- J Delay section

INTERNAL & BUSINESS ONLY

PICK OFF

Description

The pick-off belts pick the letter in front and accelerate to approx. 3.8m/s

Acceleration from zero Defines a constant gap between single letters of 70-100mm

Actual belt designs are usually vacuum supported

Flat belts with high friction covers recommended

FBGG054614 GG E08.20 RRQ + NRC040 red (Engineered belt)

INTERNAL & BUSINESS ONLY

LEVELLER

Description

Levelling of the mail pieces to their bottom edges, securing defined level/distance to the deck of the bottom side of letter.

Flat belts with high friction covers recommended

FBGG054583 GG E03.14 FFQ	Transport Belt
FBGG054607 GG E05.14 FFQ	Transport Belt
FBGG054585 GG N15 FFQ black	Leveller Belt

INTERNAL & BUSINESS ONLY

FORMAT CONTROL

Description

Sorts out unsuitable mail which is:
- too large
- too stiff
- perhaps too thick

Main purpose: Preventing from damage of elements on the subsequent processing course.

Flat belts with high friction covers recommended

FBGG054583 GG E03.14 FFQ	Transport Belt
FBGG054607 GG E05.14 FFQ	Transport Belt

INTERNAL & BUSINESS ONLY

OPTICAL CHARACTER READER

Ammeraal Beltech

Description

Reads the entire address inclusive Zip-Code:
- handwritings
- typescripts
- any characters

Flat belts with high friction covers recommended

FBGG054583 GG E03.14 FFQ	Transport Belt
FBGG054607 GG E05.14 FFQ	Transport Belt

INTERNAL & BUSINESS ONLY

DELAY SECTION

Description

The delay section runs the letters during approx. 8 sec in a number of loops. During this delay of time, a trained person is typing the zip code or address manually into the system, if it was not automatically readable before.

Flat belts with high friction covers recommended

FBGG054583 GG E03.14 FFQ	Transport Belt
FBGG054607 GG E05.14 FFQ	Transport Belt

TIER FEEDER

Description

At the entry of the tier feeder, the mail pieces are turned into a horizontal position to carry the letters to the second level.

Flat belts with high friction covers recommended

FBGG054583 GG E03.14 FFQ	Transport Belt
FBGG054607 GG E05.14 FFQ	Transport Belt

INTERNAL & BUSINESS ONLY

STACKER

Description

Stacking is done on 2 levels for increased capacity, small footprint, better ergonomics.

Flat belts with high friction covers recommended

FBUV054774 UV N12 RFQ Stacker Belt

SIEMENS CFC 3004

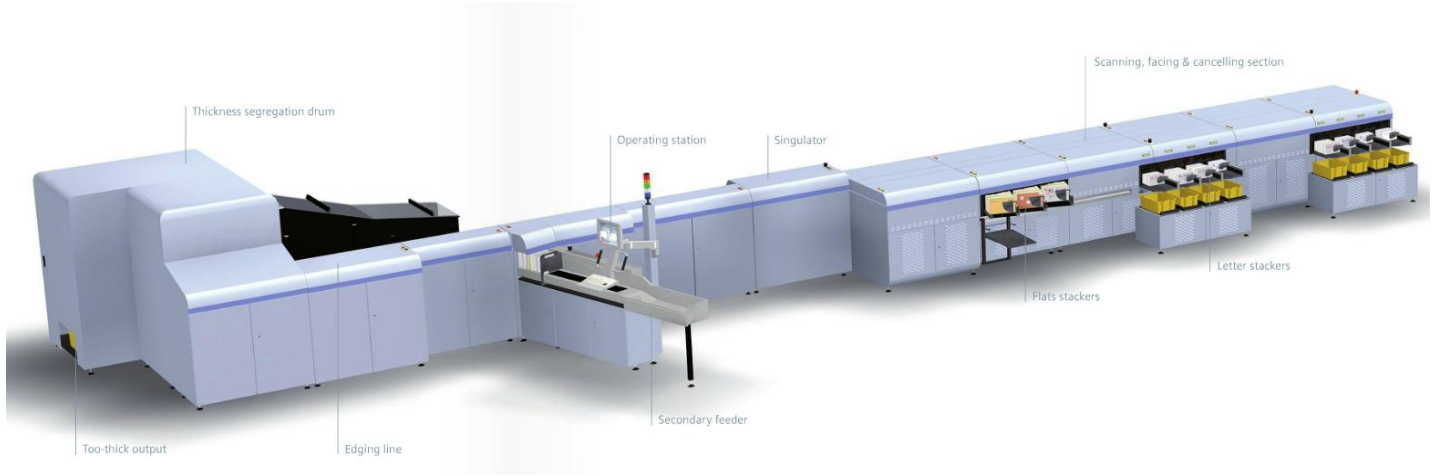

Section	AB Code	Type
Feeder	FBUV054774	UV N12 FQ
Culler	FBGG054614	GG E08.20 RRQ
Vertical belts (Pick-off/Leveller)	FBUV054770	UV E06.20 FQ
Transport belt	FBGG054583	GG E03.14 FFQ
Shaker belt	FBGG054263	GG N22 RFQ
Drive belt	FBUU054564	UU N06 RFQ HG

FEATURES
BENEFITS

INTERNAL & BUSINESS ONLY

SIEMENS IRV 3000

Section	AB Code	Type
Leveller	FBGG054585	GG N15 FFQ HC
Transport belt	FBGG054583	GG E03.14 FFQ
Drive belt	FBGG054614	GG E08.20 RRQ
Turn over belt	FBGG054585	GG N15 FFQ HC

FEATURES
BENEFITS

INTERNAL & BUSINESS ONLY

SIEMENS CRS3000 & CSS3000

Section	AB Code	Type
Leveller	FBGG054585	GG N15 FFQ HC
Transport belt	FBGG054583	GG E03.14 FFQ
Drive belt	FBGG054614	GG E08.20 RRQ
Delivery conveyor		Ropanex EX 10/2 0+02 (PU) black AS

FEATURES
BENEFITS

INTERNAL & BUSINESS ONLY

SIEMENS DBCS FINAL SORTER

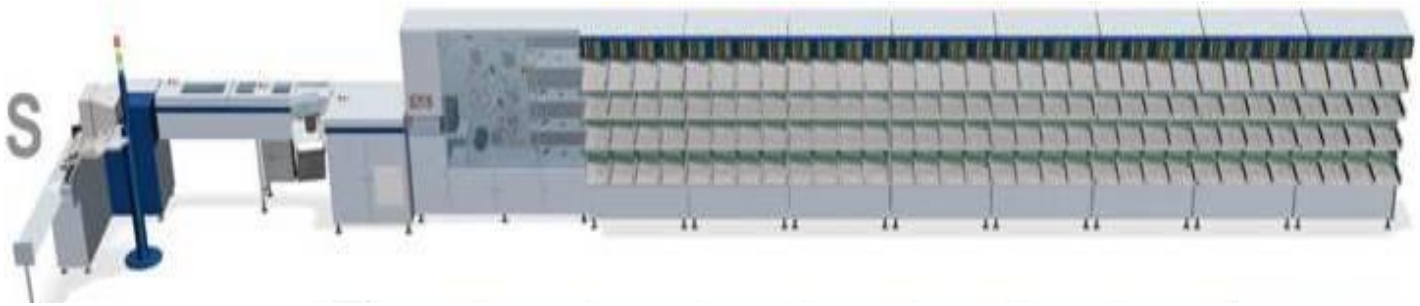

Section	AB Code	Type
Standard transport belt	FBGG054583 FBGG054607	GG E03.14 FFQ GG E05.14 FFQ
Elastic transport belt	FBGG054263 FBGG054608 FBUV054774	GG N22 RFQ GG N27 RFQ UV N12 RFQ
Stacker belt	FBUV054774	UV N12 RFQ

FEATURES
BENEFITS

INTERNAL & BUSINESS ONLY

SIEMENS OMS

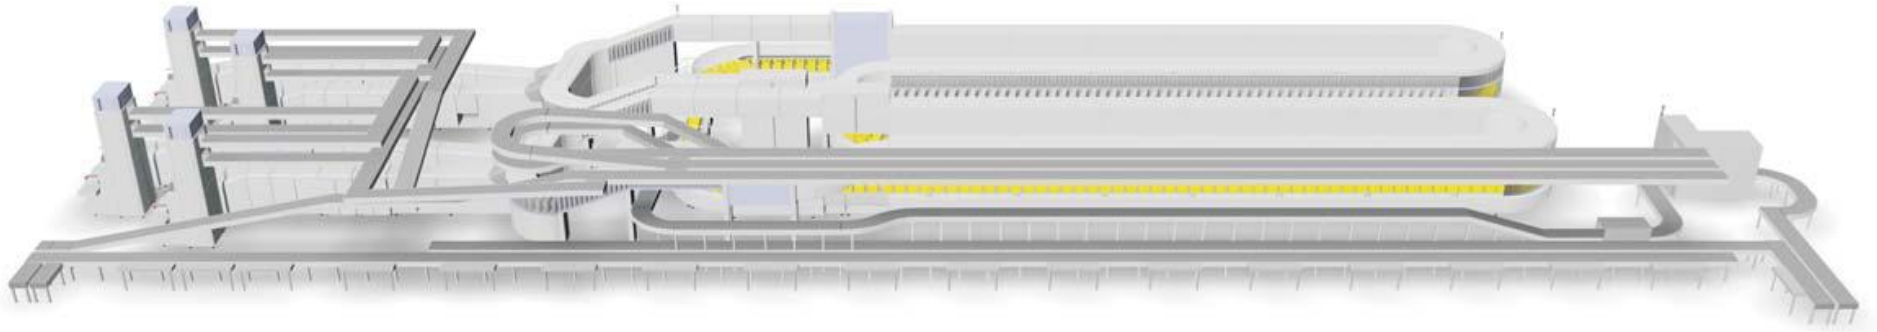

AB Code	Description	Section
FBGG054614	GG E08.20 RRQ + NR040	Feeder belt (perforated)
	Multi V-Belt Poly-V-PJ 1194 covered + PLS 035 red	Feeder section
FBTT054752	TT S02.10 C	Bottom belt for leveller
FBGG054263	GG N22 RFQ	Transport belt
	Flexam EX 10/2 0+0.5 black AS	Transport belt
	EM 8/2 0+0 anthrazit plus Celloflex	Brake belt
	Uni SNB m2 20% blue	Transport of boxes

FEATURES
BENEFITS

INTERNAL & BUSINESS ONLY

FLAT SORTING SOLYSTIC TOP 2000

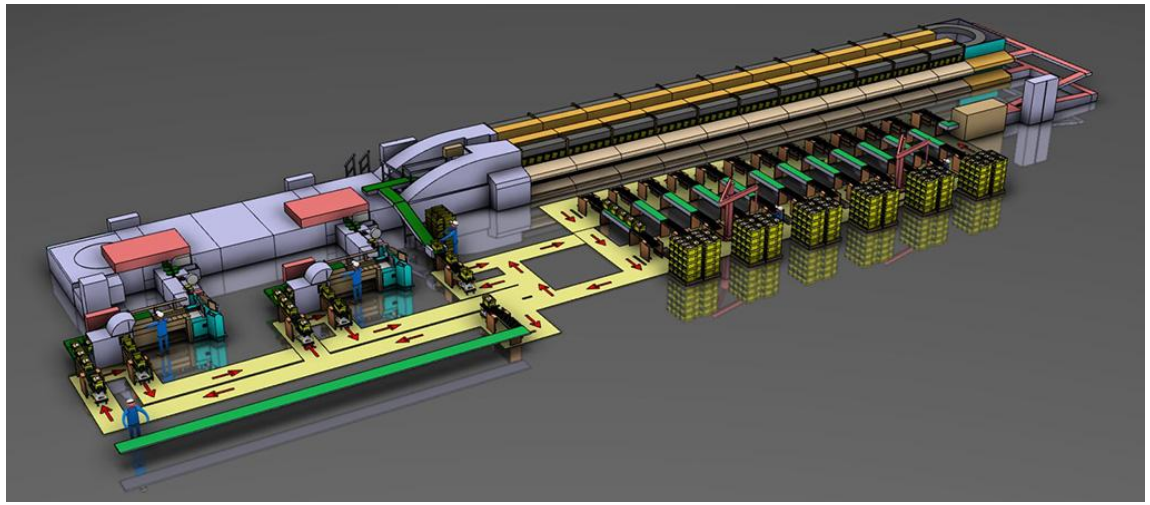

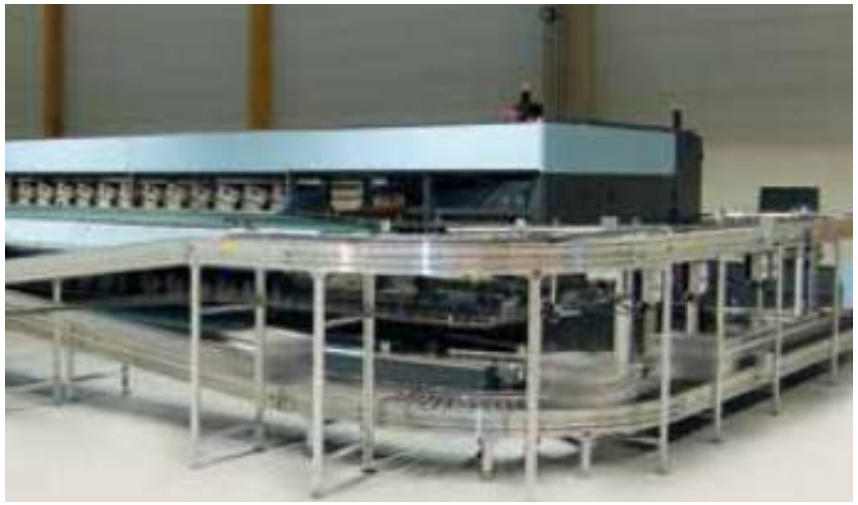

Section	AB Code	Type
Standard transport belt	FBGG054607	GG E03.14 FFQ
Elastic transport belt	FBGG054263	GG N22 RFQ
Pick off belt	FBTG054261	TG S04.12 RC
Small drive belts for pick off	FBGG054738	GG S04.17 RFC

FEATURES
BENEFITS

INTERNAL & BUSINESS ONLY

KEY POINTS: BELT SELECTION

Ammeraal Beltech

Article	Type	Transport	Pick off	Leveller	Format control	OCR	Delay section	Encoder	Bar code reader	Tier feeder	Stacker	Flat sorter	
54261	TG S04.12 RC					■		■	■			■	
54263	GG N22 RFQ						■				■	■	
54772	UU N12 RFQ				■								
54774	UV N12 FQ						■				■		
54583	GG E03.14 FFQ	■		■	■	■	■	■	■	■			*Post-2009*
54585	GG N15 FFQ black			■		■							
54607	GG E05.14 FFQ	■		■	■	■	■	■	■	■		■	*Pre-2009*
54614	GG E08.20 RRQ		■										*with NR040*
54624	TG E04.12 RQ					■		■	■				
54771	UU N06 RFQ			■									*Bottom belt*
54738	GG S04.17 RFC											■	

54774	UV N12 FQ	CFC	Siemens: Vertical belts (Pick off / Leveller)
54583	GG E03.14 FFQ	CFC	Siemens: Transport belt
54572	TU N20 FQ	CFC	Siemens: Shaker belt
54614	GG E08.20 RRQ	CFC	Siemens: Drive belt
54585	GG N15 FFQ	CFC	NEC and Toshiba

INTERNAL & BUSINESS ONLY

KEY POINTS: OEM RELATIONSHIP

RAPPLON Belt solutions are developed together with OEM`s and are initially equipped on Siemens, Solystic and others.

Items like 54583 GG E03.14 FFQ, 54585 GG N15 FFQ or 54774 UV N12 FQ have been developed from scratch to ensure best performance at lowest energy consumption.

TEST BENCH BASED ON STACKER MODULE FROM SIEMENS

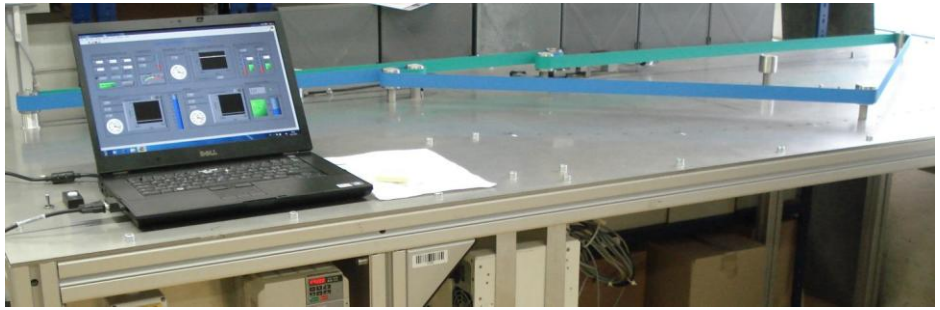

UNIQUE TEST BENCH TO DEVELOP 54583 GG E03.14 FFQ FOR SIEMENS

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBGG054583 GG E03.14 FFQ

Increasing speed and low noise in letter sorting

Permanently antistatic properties are very important, otherwise releasing of the letter is difficult.

Fine rubber structure (top and bottom):
- High grip
- Abrasion resistant
- Flexible

Polyester tensile member
- Dimensional stable
- Low sensitivity to humidity
- Highly flexible
- Low energy consumption

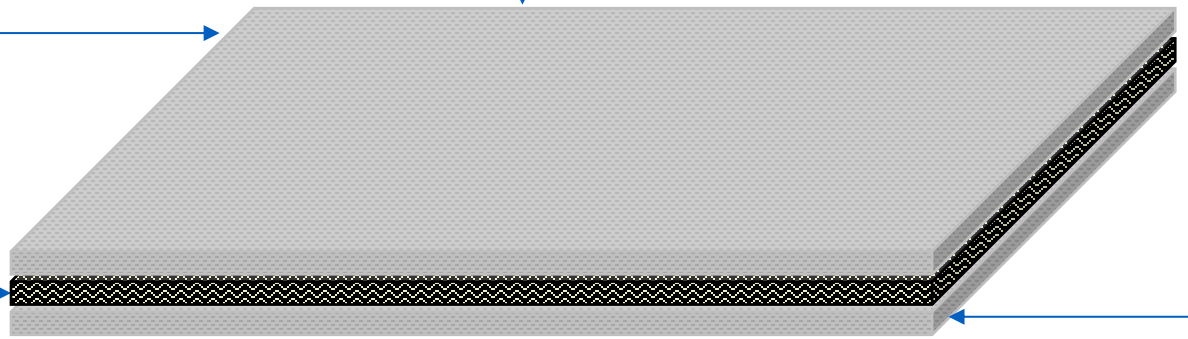

Multipurpose letter transport:
- Lowest operating noise level
- No ink smearing
- No damage of mail piece
- Firm vertical holding of mail piece
- Straight and firm tracking
- No elongation = no re-tensioning necessary

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBUV054774 UV N12 FQ

Gentle and efficient processing of mail pieces

Elastic belt without tensile member:
- Quick splice joining
- No running direction

Fleece top cover:
- Ensures non-marking of mail piece
- No ink smearing
- Abrasion resistant

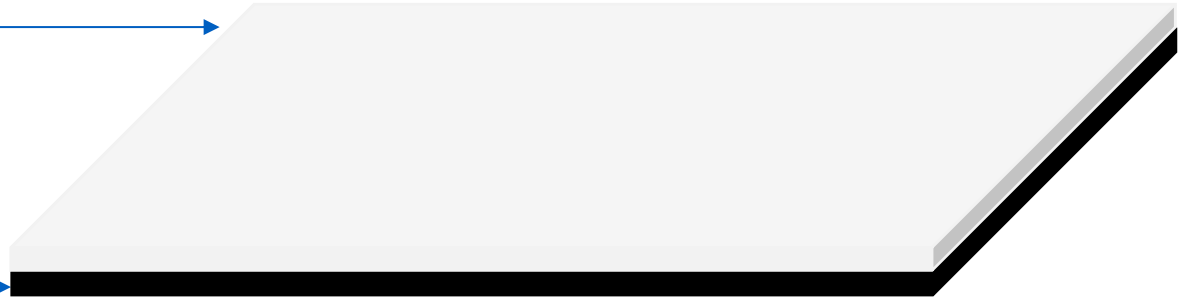

High elastic Polyurethane:
- No edge fraying
- Low load on shafts and bearings
- Simple tracking
- Material lies flat and follows pulley shape

Two belts with speed difference transport letters around bull wheels:
- Special fleece cover on one side compensates the speed difference.
- Compensation of different letter thickness over 10mm, because of high elastic belt.
- No damage of envelopes and its contents
- QuickSplice: joining within 6 minutes

INTERNAL & BUSINESS ONLY

FEATURES & BENEFITS

Ammeraal Beltech

Mailsorting provides a large potential for all kind of belting products. High Performance Flat Belts are the solution for the most demanding processes of a sorter and work as a door opener for all product groups of Ammeraal Beltech.

Feature	Advantage	Benefit
PES-Fabric with high E-Modulus	No elongation	no re-tensioning necessary
Highest flexible tension member	Highest possible energy saving	Less operational costs
Engineered for hi-speed	Improved productivity	Highest sorting capacities
XNBR rubber cover	Firm vertical holding of mail pieces	Reliable transport at any time
XNBR rubber cover	Highly wear resistant	Long service life
Fine structure	Significant noise reduction	Pleasant working environment
Fleece cover	Gentle mail piece handling	No waste/marks on paper
State of the art products	Approved by the market leader of mail sorting equipment	Mail sorter runs reliable with a max. output guarantee.
QuickSplice joining method	Quick and simple splicing by QSP-Tools	Safe joint, everybody can splice

INTERNAL & BUSINESS ONLY

Ammeraal Beltech

RAPPLON®

Swiss made High Performance Flat Belts

January 2023

Product Management

BU Switzerland

Drag Band Conveyor

Smooth transport of workpiece carriers

© Ammeraal Beltech — All Rights Reserved.
Confidential and Proprietary Intellectual Property.

APPLICATION DETAILS

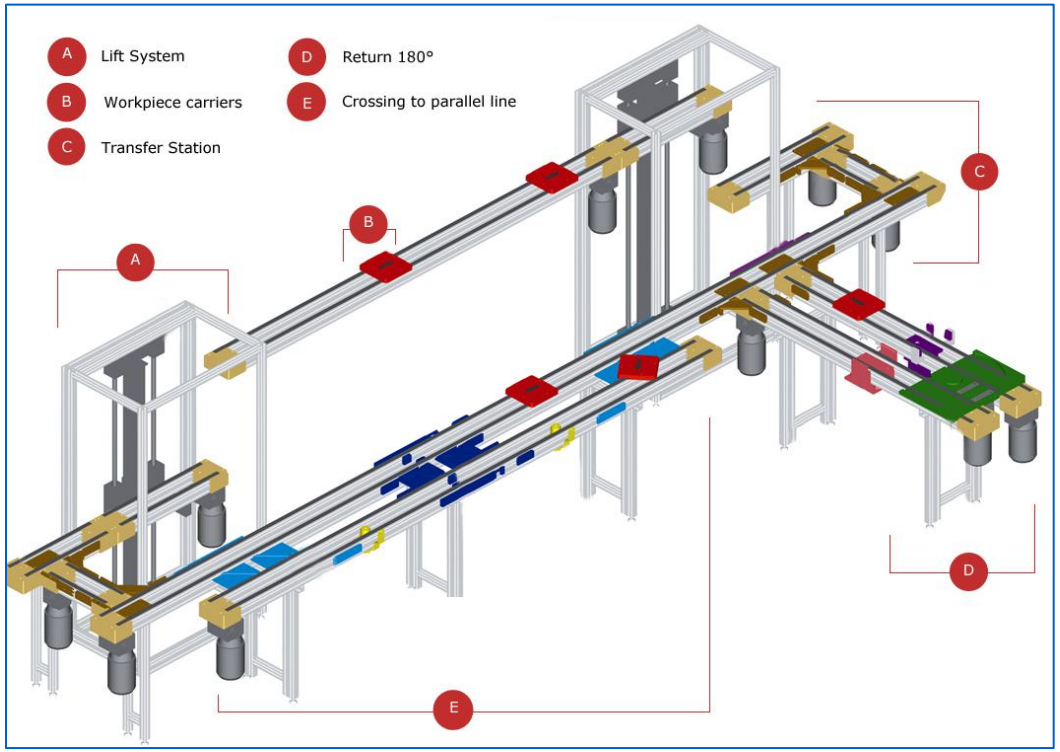

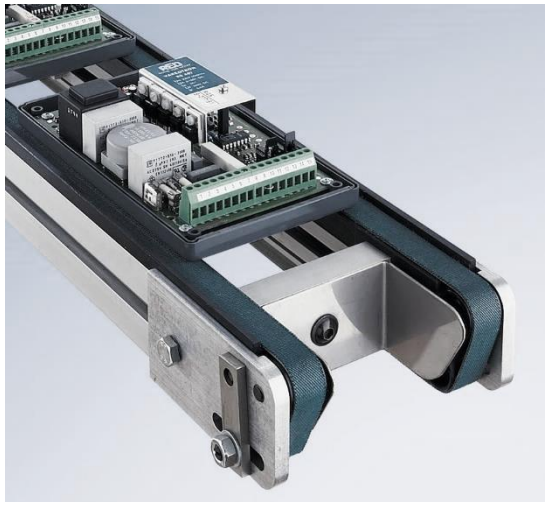

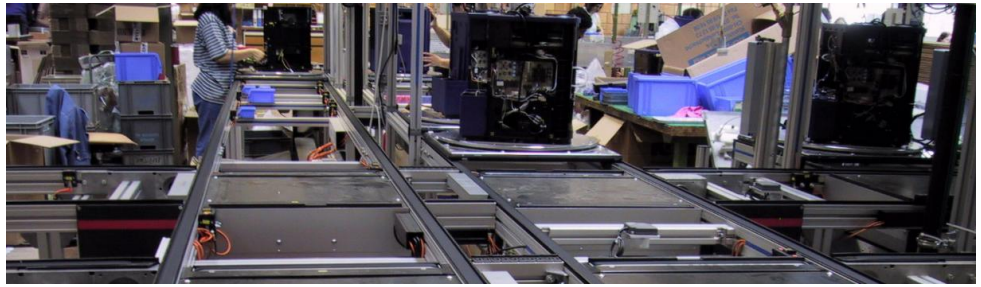

DRAG BAND CONVEYOR

Description

The workpiece carriers rest on the parallel arranged and continuously running belts. Separators or stoppers release or stop the movement of the carriers and the belts slide under it. The workpieces will be transported from one working station to the other.

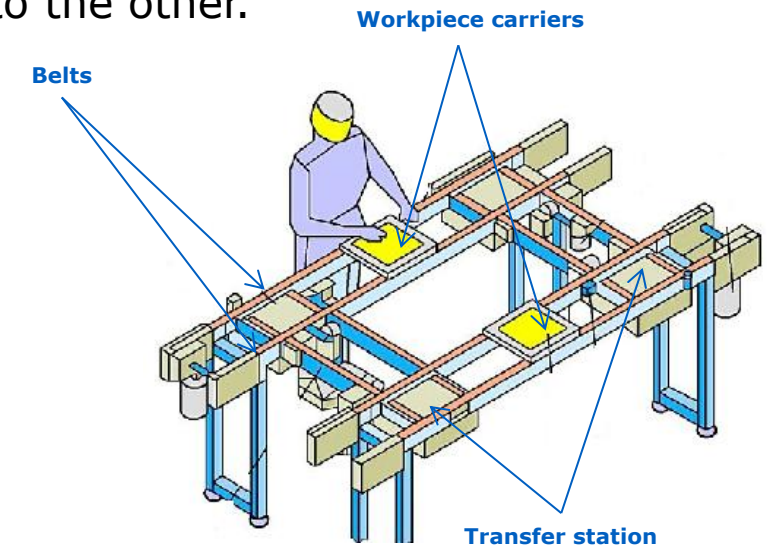

Flat belts with low friction covers recommended

FBTT054752 TT S02.10 C
FBTT054251 TT S04.12 C black
FBTT054250 TT S09.16 C
FBTT054249 TT S15.23 C
FBTT054599 TT E05.11 Q
FBTG054624 TG E04.12 RQ
FBTG054269 TG S04.12 RC

INTERNAL & BUSINESS ONLY

APPLICATION DETAILS

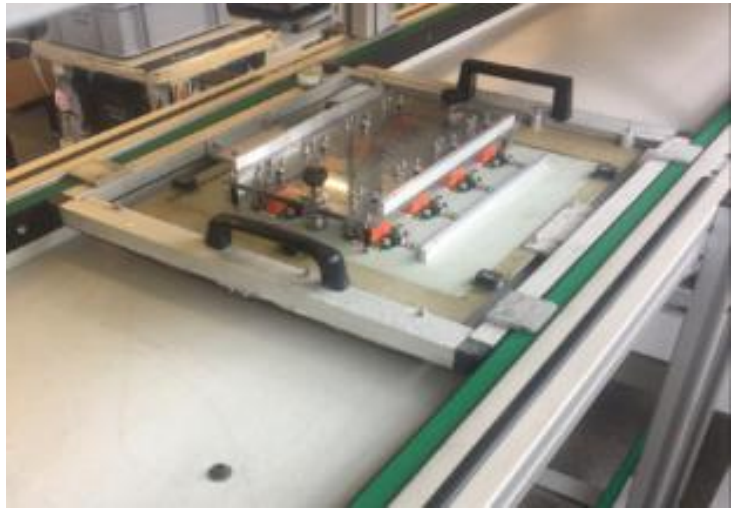

Transport of a circuit board to the soldering bath

Drag Band Conveyor in a commisioning center

180° / 90°Deflection of workpieces

INTERNAL & BUSINESS ONLY

CUSTOMER BENEFITS

Feature	Advantage	Benefit
PA and PE tensile member	Very flexible	Lowest energy consumption
No elongation, dimensional stable	no re-tensioning necessary	Just fit and forget
High edge resistance	No edge fraying	Long service life
High quality fabric covers	Abrasion and wear resistant	Extended service life
Constant low coefficient friction on Top side	Continuous running of the belt, smooth transport of the carriers	Simple equipment design No extensive construction necessary
Constant low coefficient friction on Bottom side	Belt runs between guide rails	Simple tracking
QuickSplice for Polyester belts	Quick and simple splicing with QSP-Tools	Safe joint, perfectly aligned, everybody can splice
Permanently antistatic	Prevent accumulation of dust	Highest possible efficiency

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: TT ITEMS WITH POLYAMIDE

Energy-efficient and smooth transport of workpieces

Polyamide fabric cover for best performance
- Low friction
- Abrasive resistant
- Long service life

Polyamide foil tensile member:
- Very flexible
- High edge stability
- Dimensional stable

Polyamide fabric cover for best performance
- Low friction
- Abrasive resistant
- Long service life

Permanently antistatic

Splicing:
Classic skived and glued

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: TT E05.11 Q

Energy-efficient and smooth transport of workpieces

Polyester fabric cover
- Low friction
- Abrasive resistant
- Long service life

Polyester fabric tensile member:
- Extremely flexible
- Dimensional stable

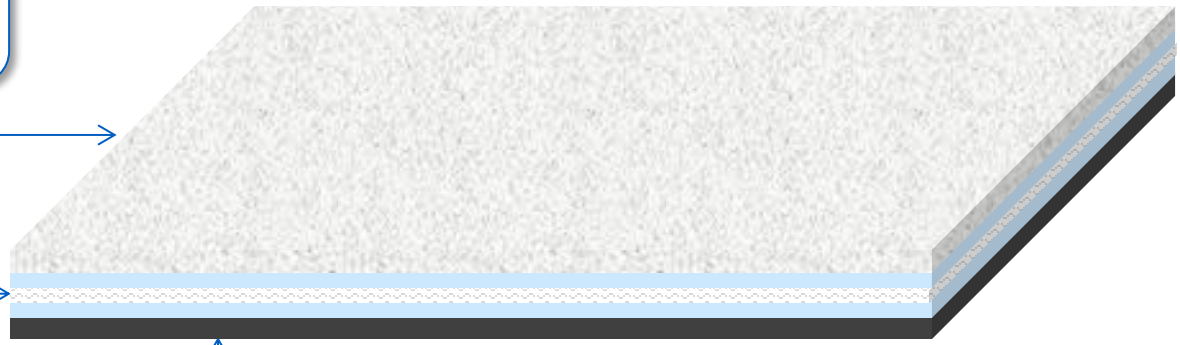

Polyester fabric cover
- Low friction
- Abrasive resistant
- Long service life

Permanently antistatic

Splicing:
Quick and reliable with QuickSplice Tools
No glue involved

INTERNAL & BUSINESS ONLY

WE MAKE YOUR
BUSINESS MOVE

Ammeraal Beltech

RAPPLON®

Swiss made High Performance Flat Belts

January 2023

Product Management

BU Switzerland

FOOD INDUSTRY

Training Module

© Ammeraal Beltech — All Rights Reserved.
Confidential and Proprietary Intellectual Property.

INTRODUCTION

RAPPLON HPFB offer a range of elastic belts for the food industry.

DOUGH DIVIDER/SPREADER

CHECK WEIGHER

METAL DETECTOR

SLICER

PROCESS/TRANSPORT

METAL DETECTABLE BELT

MANIFOLD

PROCESS/TRANSPORT PACKED FOOD

Ammeraal Beltech member
European Hygienic Engineering & Design Group

Food Grade belts comply with
EC 1935/2004, EU 10/2011 and FDA standards

INTERNAL & BUSINESS ONLY

DOUGH DIVIDER / SPREADER BELT

Description

Spreader belts are used in a set of belts – all running on one drive shaft.

The belts transport batches of dough from the dosing feeder to the next process.

Each belt is running in a different angle – therefore they are named finger spreading belts

Belt tension on Dough dividers are usually 0.5% max.

Flat belts with medium friction covers recommended
FBUU054562 UU N16 SP5Q FG

INTERNAL & BUSINESS ONLY

CHECK WEIGHER

Ammeraal Beltech

Description

An automatic checkweigher incorporates a series of conveyor belts.

Typically, there are three belts:

- Infeed belt
- weigh belt
- reject belt

Flat belts with medium friction covers recommended

FBUU054532 UU N06 RFQ FG
FBUU054533 UU N12 RFQ FG
FBUU054534 UU N17 RFQ FG
FBUU054535 UU N22 RFQ FG

METAL DETECTOR

Description

Contamination of food by metal shards from broken processing machinery during the manufacturing process is a major safety issue in the food industry. Metal detectors for this purpose are widely used and integrated into the production line.

Flat belts with medium friction covers recommended
FBUU054543 UU N08 RSQ FG white
FBUU054563 UU N08 RSQ FG blue

INTERNAL & BUSINESS ONLY

SLICER

Description

Meat slicers use elastic belts to shingle and transport slices before packing.

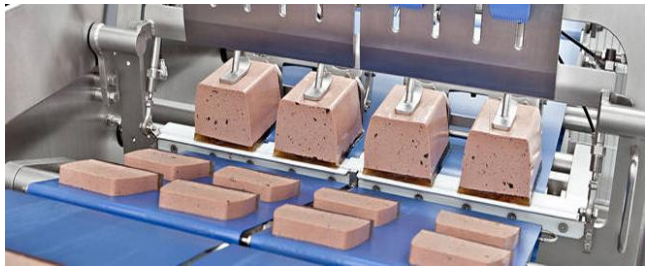

Flat belts with medium friction covers recommended

FBUU054532 UU N06 RFQ FG
FBUU054533 UU N12 RFQ FG
FBUU054534 UU N17 RFQ FG
FBUU054535 UU N22 RFQ FG

INTERNAL & BUSINESS ONLY

TRANSPORT/PROCESSING

Description

Transport and process applications in food industry request often short elastic belts as there is no take up system.

Flat belts with medium friction covers recommended

FBUU054532 UU N06 RFQ FG
FBUU054533 UU N12 RFQ FG
FBUU054534 UU N17 RFQ FG
FBUU054535 UU N22 RFQ FG

INTERNAL & BUSINESS ONLY

METAL DETECTABLE BELT

Ammeraal Beltech

Description

Contamination of food by broken belt pieces during the manufacturing process is a safety issue in the food industry.

Food safety requires metal detectable belts and at the same with the needed elasticity and sizes.

Flat belts with medium friction covers recommended
FBUU054800 UU N10 RFQ FG MD

INTERNAL & BUSINESS ONLY

MANIFOLD

Description

Elastic items can also be used as manifolds –connecting sleeves.

The elastic manifold separates the fixed tube from the vibrating machine part and ensure a long service life of this connection.

Various belt types of the elastic food grad range can be used. Please check if antistatic is demanded or not before offering a solution.

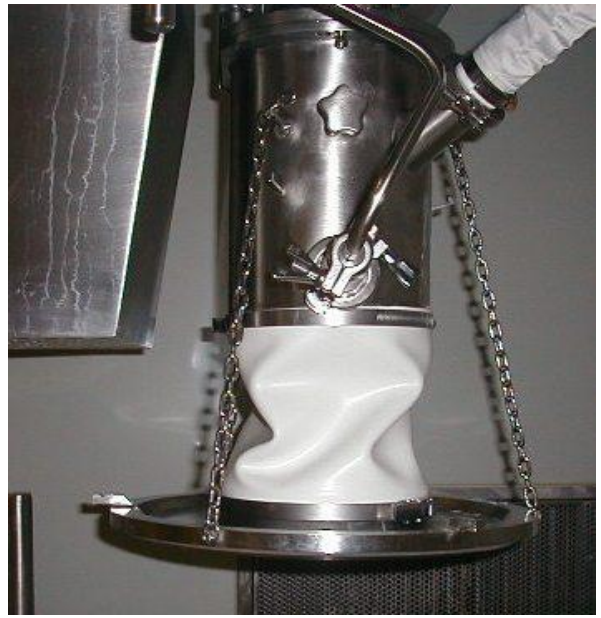

Application example 54543 UU N08 RSQ FG

Flat belts with medium friction covers recommended

FBUU054532 UU N06 RFQ FG
FBUU054533 UU N12 RFQ FG
FBUU054534 UU N17 RFQ FG
FBUU054535 UU N22 RFQ FG

SLIDER BED TRANSPORT

Description

Transporting goods over slider beds demand always a belt with a low coefficient of friction on the running side. This is offered by a fabric bottom side with most plied synthetic belts. What if the belt should be elastic and run over slider bed?

We can offer a perfect solution for packed food.

Application example 54543 UU N08 RSQ FG

Flat belts with low friction covers recommended
FBTU054572 TU N20 FQ

INTERNAL & BUSINESS ONLY

KEY POINTS: TENSIONING

Ammeraal Beltech

Tensioning of elastic belts

Elastic belts show a wide range of recommended working tension. The optimal tension depend on:

- Belt dimension
- Machine design
- Goods to be transported

The various possibilities regarding applications and belt dimensions cannot be covered by specific rules. Nevertheless, for the combination of belt width and working tension the chart below can be used as a guideline based on experiences.

Belt width	Recommended elongation	Maximum elongation
< 50 mm	3 %	6 %
50 — 100 mm	2.5 %	5 %
100 — 200 mm	2 %	4 %
200 — 400 mm	1.5 %	2 %
400 — 600 mm	1 %	1.5 %
600 — 1200 mm	0.5 %	1 %

INTERNAL & BUSINESS ONLY

KEY POINTS TENSIONING

Belt length calculation for fixed shaft

We offer a calculation tool which helps to calculate belt length and tension of elastic belts with different tensile strength — without changing the shaft load.

Just fill in the required belt data of the current (competitor) item and compare it with the RAPPLON® belt type. Even belts with different K-value (for example 2% compared to 6%) can be calculated with this tool.

Belt length calculation for fixed shafts

	Step 1: Fill in all white fields	Step 2: Fill in all white fields	Step 3: Get the results on the green fields
	Current item	New item	Converted length & tension
Belt Description	Competitor XY	UU N08 RFQ FG	UU N08 RFQ FG
Length in mm	2750		2742
Width in mm	300	300	300
K-Value in N/mm	1.2	0.8	1.066666667
K-Value in %	8	6	8
ε=Tension in % to be applied	2		2.25
Steel tape length (tensioned)	2805	2805	2805
Resulting shaft load in N (for comparison)	1440	0	1440

choose either a change in dimension or in tension and not both of them

Note:
- choose either a change in dimension or in tension and not both of them (green fields)
- the data have to be entered with dots instead of semicolon/comma as it would not calculate.
- consider that RAPPLON® data sheets shows k1% for classic/quicksplice belts an k6% for elastic belts.
- calculate Power Transmission belts with E-Rappcalc® always. This calculation software provides clear indications on how the belt mus be tensioned to guarantee trouble-free running.

calculated % value in relation to current item

INTERNAL & BUSINESS ONLY

CUSTOMER BENEFITS

Feature	Advantage	Benefit
Homogenous food grade material	Easy clean-ability, no edge fraying	Highest hygienic standard. No bacteria source
No lifting of edges	Belt material lay flat	No dough remnants under belt
No elongation	no re-tensioning necessary	just fit and forget
High elasticity	Low load on shafts and bearings	Simple tracking, easy on bearings
Splicing	Quick and simple splicing with QSP-Tools	Safe joint, everybody can splice

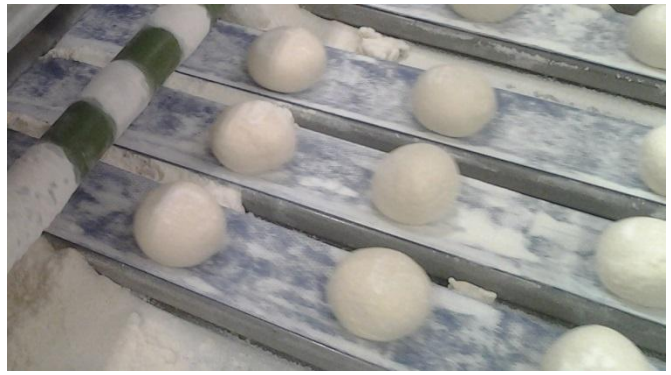

INTERNAL & BUSINESS ONLY

REFERENCES / SUCCESS STORIES

Ammeraal Beltech

Customer:	Bertschi Bakery
Application:	Carry out formed bread buns / Dough Divider
Machine/OEM:	Bread roll lines/ Fortuna DE

Background and Challenges:

Tracking of belts: Former elastic belts have 10 longitudinal groves to keep the belt on track.

Hygiene / Food safety -> Felt belt as original equipment

Long replacement time and high price from OEM

Solution:

FBUU054562 UU N16 SP5Q FG

INTERNAL & BUSINESS ONLY

REFERENCES / SUCCESS STORIES

Ammeraal Beltech

Customer:	Hilcona
Application:	Transport of precooked fresh pasta products
Machine/OEM:	Microwave oven / Omag DE

Background and Challenges:

Former belts are 1-ply PU-synthetic belts

Always to replace all belts at one time

Often tracking problem with damaged belts / Difficulties belt tracking

1 take up roll for all 35 belts

Solution:

FBUU054533 UU N12 RFQ FG

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBUU054532-54535
UU Nxx RFQ FG

Ammeraal Beltech

Improve hygiene and reduce maintenance during installation and service

Completely made from extruded Polyurethane:
- No bacteria because of homogenous Food Grade material
- No edge fraying as there is no fabric

Different structures available:
- Easy clean-ability

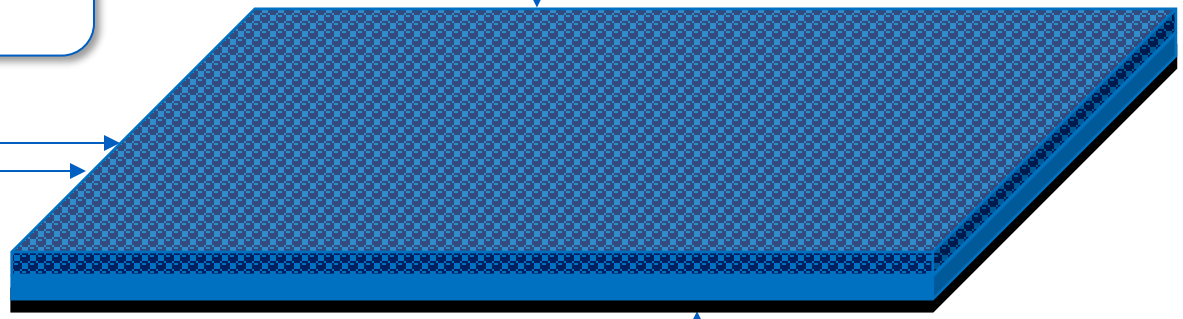

AS coating:
- Antistatic and Food Grade approved
- Additional safety in dusty environment

High elastic Polyurethane:
- Low load on shafts and bearings
- Simple tracking
- Material lay flat and follows slider shape

Splicing:
- Quick and reliable with QuickSplice Tools
- No glue involved

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBUU054543/54563
UU N08 RFQ FG blue (or white)

Ammeraal Beltech

Improve hygiene and reduce maintenance during installation and service

Completely made from extruded Polyurethane:
- No bacteria because of homogenous Food Grade material
- No edge fraying as there is no fabric

Different structures available:
- Easy clean-ability

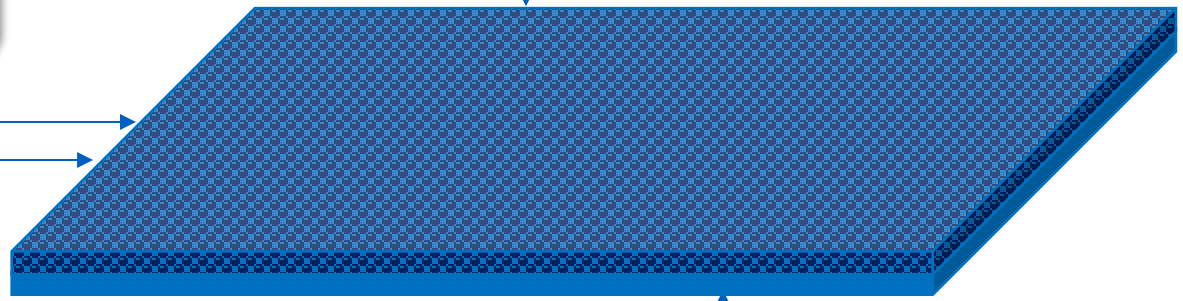

No antistatic layer to allow use in metal detectors

High elastic Polyurethane:
- Low load on shafts and bearings
- Simple tracking
- Material lay flat and follows slider shape

Splicing:
- Quick and reliable with QuickSplice Tools
- No glue involved

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBUU054562 UU N16 SP5Q FG

Improve hygiene and reduce maintenance during installation and service

Completely made from extruded Polyurethane:
- No bacteria because of homogenous Food Grade material
- No edge fraying as there is no fabric

P5 structure:
- excellent release properties of dough
- Hold flour to avoid sticking of dough remnants

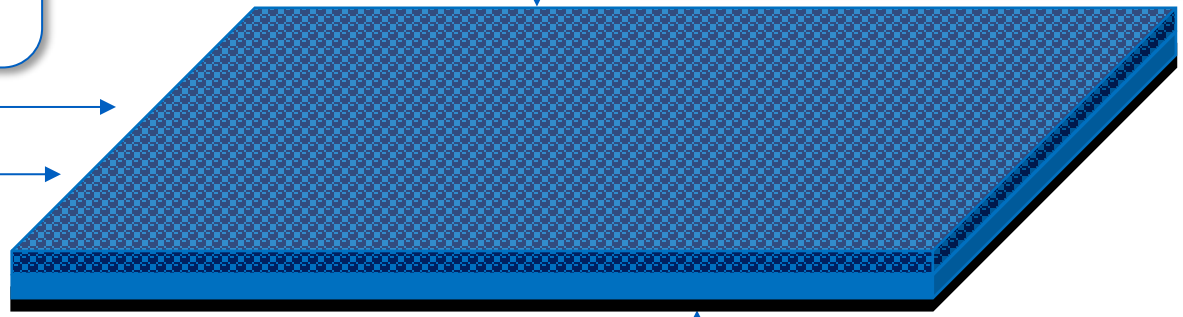

AS coating:
- Antistatic and Food Grade approved
- Additional safety in dusty environment

High elastic Polyurethane:
- Low load on shafts and bearings
- Simple tracking
- Material lay flat and follows slider shape

Splicing:
- Quick and reliable with QuickSplice Tools
- No glue involved

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBUU054550 UU N06 RFQ HG FG

Ammeraal Beltech

Improve hygiene and reduce maintenance during installation and service

Completely made from extruded Polyurethane:
- No bacteria because of homogenous Food Grade material
- No edge fraying as there is no fabric
- Easy clean-ability

High Grip Top Surface

AS coating:
- Antistatic and Food Grade approved
- Additional safety in dusty environment

High elastic Polyurethane:
- No edge fraying as there is no fabric reinforcement
- Low load on shafts and bearings
- Simple tracking
- Material lay flat and follows slider shape

Splicing:
- Quick and reliable with QuickSplice Tools
- No glue involved

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBUU054572 TU N20 FQ

Reduce maintenance during installation and service

High elastic Polyurethane:
- Low load on shafts and bearings
- Simple tracking
- Material lay flat and follows slider shape

Fine top surface:
- Medium friction
- Easy clean-ability

Polyamid fabric green:
- Extremely low coefficient of friction
- Wear resistant
- Running over slider belts made from all kind of material

Splicing:
- Quick and reliable with QuickSplice Tools
- No glue involved

INTERNAL & BUSINESS ONLY

WE MAKE YOUR
BUSINESS MOVE

Ammeraal Beltech

RAPPLON®

Swiss made High Performance Flat Belts

January 2023

Product Management

BU Switzerland

CANNING

© Ammeraal Beltech — All Rights Reserved.
Confidential and Proprietary Intellectual Property.

CAN PRODUCTION LINE

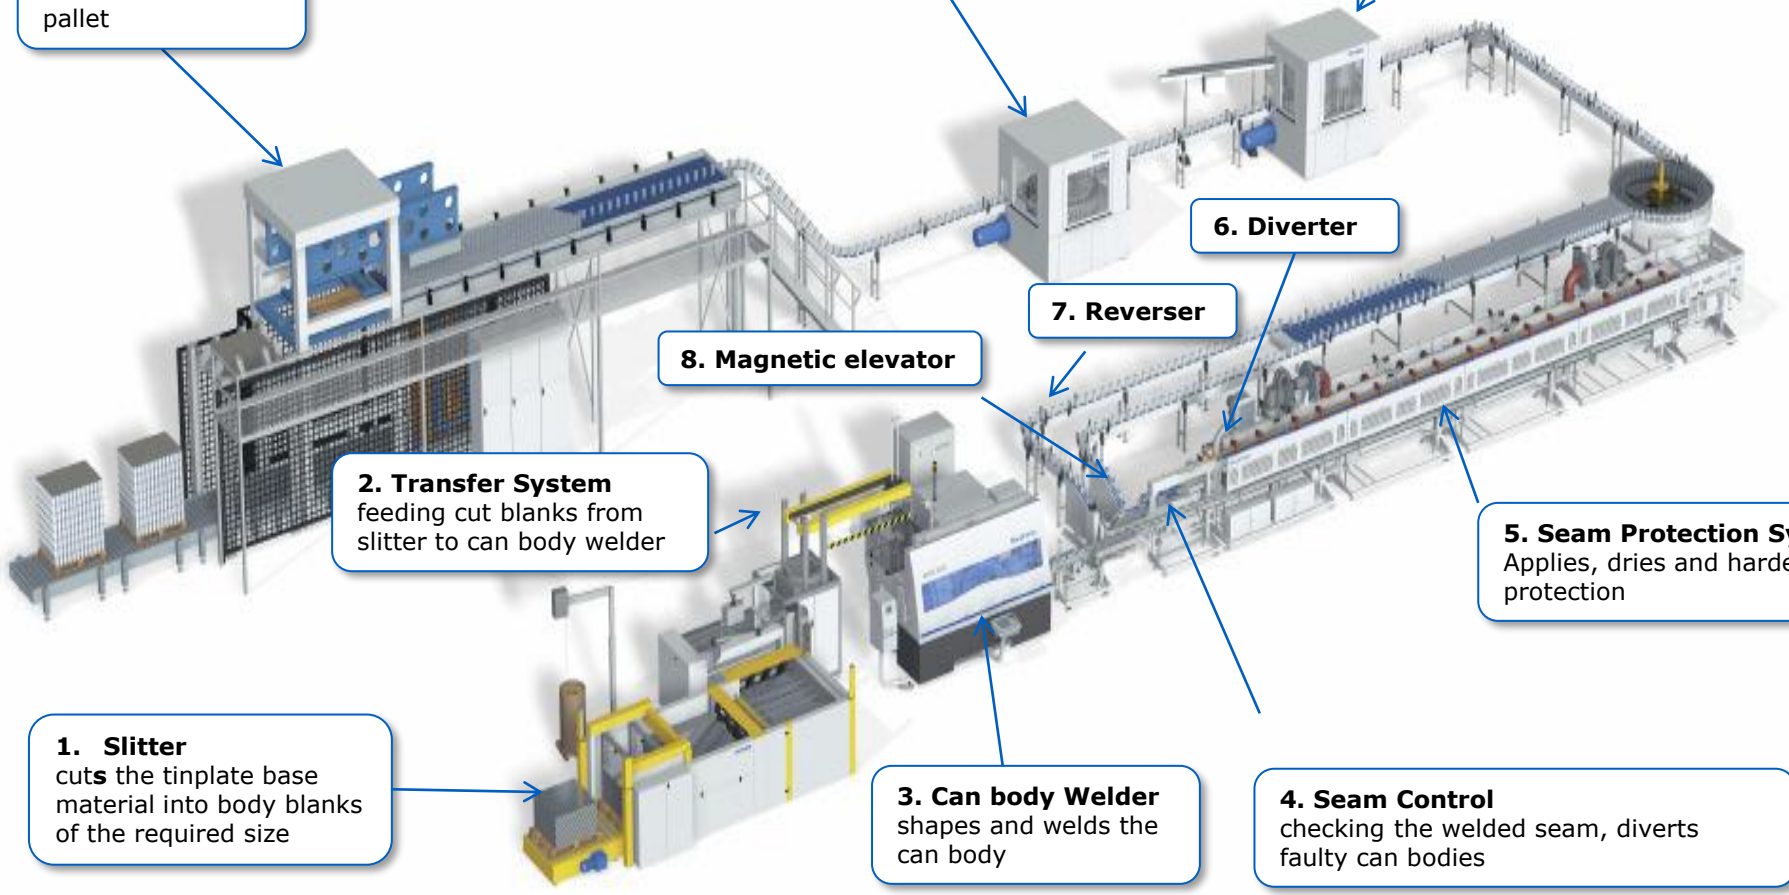

1. Slitter
cut**s** the tinplate base material into body blanks of the required size

2. Transfer System
feeding cut blanks from slitter to can body welder

3. Can body Welder
shapes and welds the can body

4. Seam Control
checking the welded seam, diverts faulty can bodies

5. Seam Protection System
Applies, dries and hardens the seam protection

6. Diverter

7. Reverser

8. Magnetic elevator

9. Body former
gives the can body its final shape and seams either bottom or top to the can body

10. Leak detector
checks the can with air pressure

11. Palletizer
stacks cans onto a pallet

INTERNAL & BUSINESS ONLY

SLITTER

Description

The slitter cuts the metal sheets into body blanks of the required size. Flat belts transport the sheets through the rotated cutting blades, first length wise afterwards crosswise.

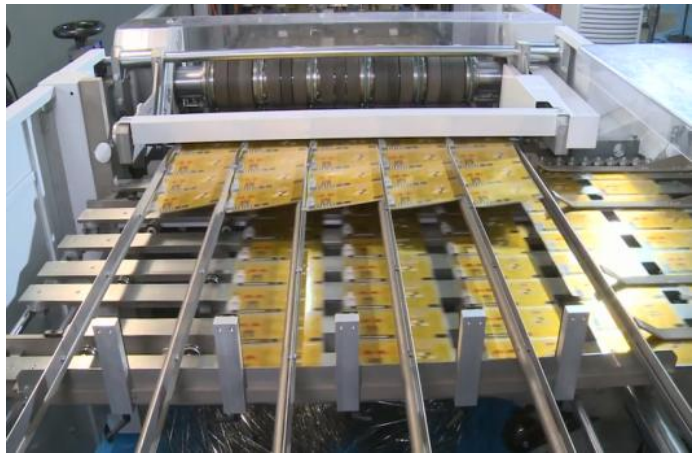

Flat belts with high friction top cover recommended

FBTG054261 TG S04.14 RC	Transport Belt
FBTG054624 TG E04.12 RQ	Transport Belt

INTERNAL & BUSINESS ONLY

CAN BODY WELDER

Description

In the can body welder, the body blanks get their cylindrical shape, and the overlapped seam is welded.

Flat belts with high friction top cover recommended

FBGG054145 GG S06.40 RRC green	Transport Belt
FBGG054781 GG S06.40 RRC FG	Transport Belt

INTERNAL & BUSINESS ONLY

SEAM CONTROL

Ammeraal Beltech

Description

The seam is controlled by a camera, in case of a fault the can body is sorted out by an ejector.

Flat belts with high friction top cover recommended

FBGT054703 GT S06 RC Transport Belt

KEY POINTS

FEATURES BENEFITS

TECHNICAL SPECIFICATIONS

INTERNAL & BUSINESS ONLY

SEAM PROTECTION SYSTEM

Ammeraal Beltech

Description

The next step in the manufacture of a quality can is the application of a durable protective layer to the inner and outer seams.

Hot air burners cure the protective powder coating or liquid lacquering layer.

Heat resistant conveyor belt recommended

KEY POINTS

FEATURES BENEFITS

TECHNICAL SPECIFICATIONS

INTERNAL & BUSINESS ONLY

DIVERTER

Ammeraal Beltech

Description

Every second can body is diverted to a second line, this increases the distance between the cans which is necessary to position the can body for further processing.

Flat belts with high friction top cover recommended

FBGT054703 GT S06 RC Transport Belt

INTERNAL & BUSINESS ONLY

REVERSER

Description

The Reverser is a 90 degrees angel transport which transport the can horizontally around the corner.

Flat belts with high friction top cover recommended

FBGT054718 TG S09.60 RC Transport Belt

INTERNAL & BUSINESS ONLY

MAGNETIC ELEVATOR

Ammeraal Beltech

Description

The magnetic elevator transport the cans in upright position.

Flat belts with high friction top cover recommended

FBGT054624 TG E04.12 RQ Transport Belt
FBTG054525 TG P03.12 FC Transport Belt

BELT RANGE OVERVIEW

Ammeraal Beltech

Article	Type	1. Slitter	2. Transfer system	3. Can body welder	4. Seam protection	5. Curing system	6. Diverter	7. Reverser (90°)	8. Magnet transport	9. Body former	10. Tester	11. Palletizer
FBTG054261	TG S04.14 RC	■										
FBGG054145	GG S06.40 RRC			■								
FBGG054781	GG S06.40 RRC FG			■								
577391	Ropanyl EM 8/2 00+02 d'green M2 AS FG				■							
	Heat resitant conveyorbelt					■						
FBGT054703	GT S06 RC						■					
FBTG054267	TG P07.40 RC						■					
FBTG054718	TG S09.60 RC							■				
FBTG054624	TG E04.12 RQ								■			
FBTG054525	TG P03.12 RC								■			
	No belt required		■							■	■	■

INTERNAL & BUSINESS ONLY

FEATURES & BENEFITS CLASSIC RANGE

Ammeraal Beltech

Feature	Advantage	Benefit
High modulus Polyamide foil tensile member	Shock absorbing, easy on bearings	Easy installation and tracking
Extremely high edge resistance	No edge fraying	Long service life, no hygienic issues
XNBR rubber covers	Wear resistant	Extended service life
Excellent grip of covers	Safe transport at high speed	Increased output per hour
Food grade rubber covers	No contamination of cans	Ideal for sensitive packaging of food
High elasticity	Low load on shafts and bearings	Simple tracking, easy on bearings
Rigid belt design	No limitations regarding condition of machine	Just fit and forget

INTERNAL & BUSINESS ONLY

FEATURES & BENEFITS QUICKSPLICE RANGE

Feature	Advantage	Benefit
High modulus Polyester fabric tensile member	Extremely flexible	Lowest energy consumption
High edge resistance	No edge fraying	Long service life, no hygienic issues
New thermoplastic foil	Low self-heating ability	Longer service life of rubber, energy efficient Reliable splicing
XNBR rubber covers	Wear resistant	Extended service life
Excellent grip of covers	Safe transport at high speed	Increased output per hour
Food grade rubber covers	No contamination of boxes	Ideal for sensitive packaging of food
No elongation, dimensional stable	no re-tensioning necessary	Just fit and forget
QuickSplice	Quick and simple splicing with QSP-Tools	Safe joint, perfectly aligned, everybody can splice
Sophisticated belt design	Great performance on well-maintained machines	Lowest energy consumption

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBTG054624 TG E04.12 RQ

XNBR Rubber cover for best performance:
- Abrasive resistant
- Long service life
- No ink smear
- Silicone- and Toluol-resistant

Polyester fabric tensile member:
- Extremely flexible
- Dimensional stable

Polyester fabric bottom cover:
- Abrasive resistant
- Low coefficient of friction

Permanently antistatic

Splicing:
- Quick and reliable with QuickSplice Tools
- No glue involved

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBTG054718 TG S09.60 RC

Ammeraal Beltech

Improved wear resistant rubber and highly flexible tension member

NBR Rubber cover material:
- Wear resistant surface
- Possible to chamfer
- Gentle surface for tin can transport

Surface:
Rough structure on rubber side

Polyamide foil tensile member:
- High edge stability
- Shock absorbing

Classic belts with PA-Foil as tension member:
- Absorbing high loads and torques
- Permanently anti-static

INTERNAL & BUSINESS ONLY

Ammeraal Beltech

RAPPLON®

Swiss made High Performance Flat Belts

January 2023

Product Management

BU Switzerland

PAPER PRODUCTION & CONVERTING

© Ammeraal Beltech — All Rights Reserved.
Confidential and Proprietary Intellectual Property.

PAPER PRODUCTION & CONVERTING

PAPER PRODUCTION LINE

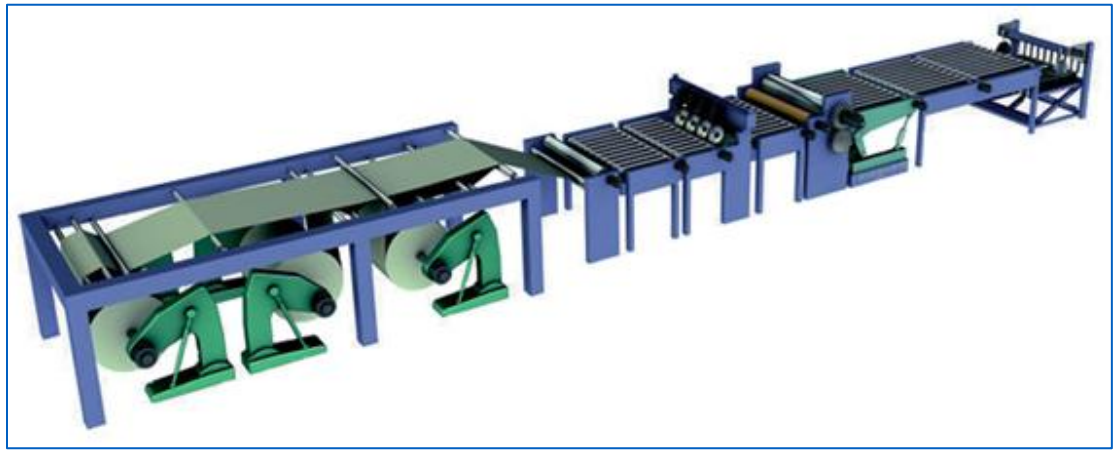

CROSS CUTTER / SHEETER

INTERNAL & BUSINESS ONLY

RECYCLING OF PULP

Ammeraal Beltech

Recycled paper and board are mixed with water and disintegrated in enormous pulpers. Pulpers are often driven by Flat Belts.

Flat belts with medium or high friction covers recommended

FBLT054047 LT S11 C	Calculation by E-RappCalc® recommended
FBLT054048 LT S15 C	Calculation by E-RappCalc® recommended
FBLT054049 LT S18 C	Calculation by E-RappCalc® recommended
FBLT054050 LT S27 C	Calculation by E-RappCalc® recommended
FBLT054051 LT S36 C	Calculation by E-RappCalc® recommended
FBGG054289 GG S11 LRC	Calculation by E-RappCalc® recommended
FBGG054297 GG S22 LRC	Calculation by E-RappCalc® recommended
FBGG054298 GG S33 LRC	Calculation by E-RappCalc® recommended

TECHNICAL SPECIFICATIONS

INTERNAL & BUSINESS ONLY

PAPER TAIL THREAD

Ammeraal Beltech

Description

A long narrow belt (approx. 700m x 50 mm) pulls/threads paper through the entire machine.
The belt may have slits or holes in a certain pitch for this job.

Flat belts with high friction covers recommended

FBGG054748 GG S15.30 RRC	Paper tail thread belt - depending on the pulleys
FBGG054749 GG S18.40 RRC	Paper tail thread belt - depending on the pulleys

TECHNICAL SPECIFICATIONS

INTERNAL & BUSINESS ONLY

CROSS CUTTER / SHEETER

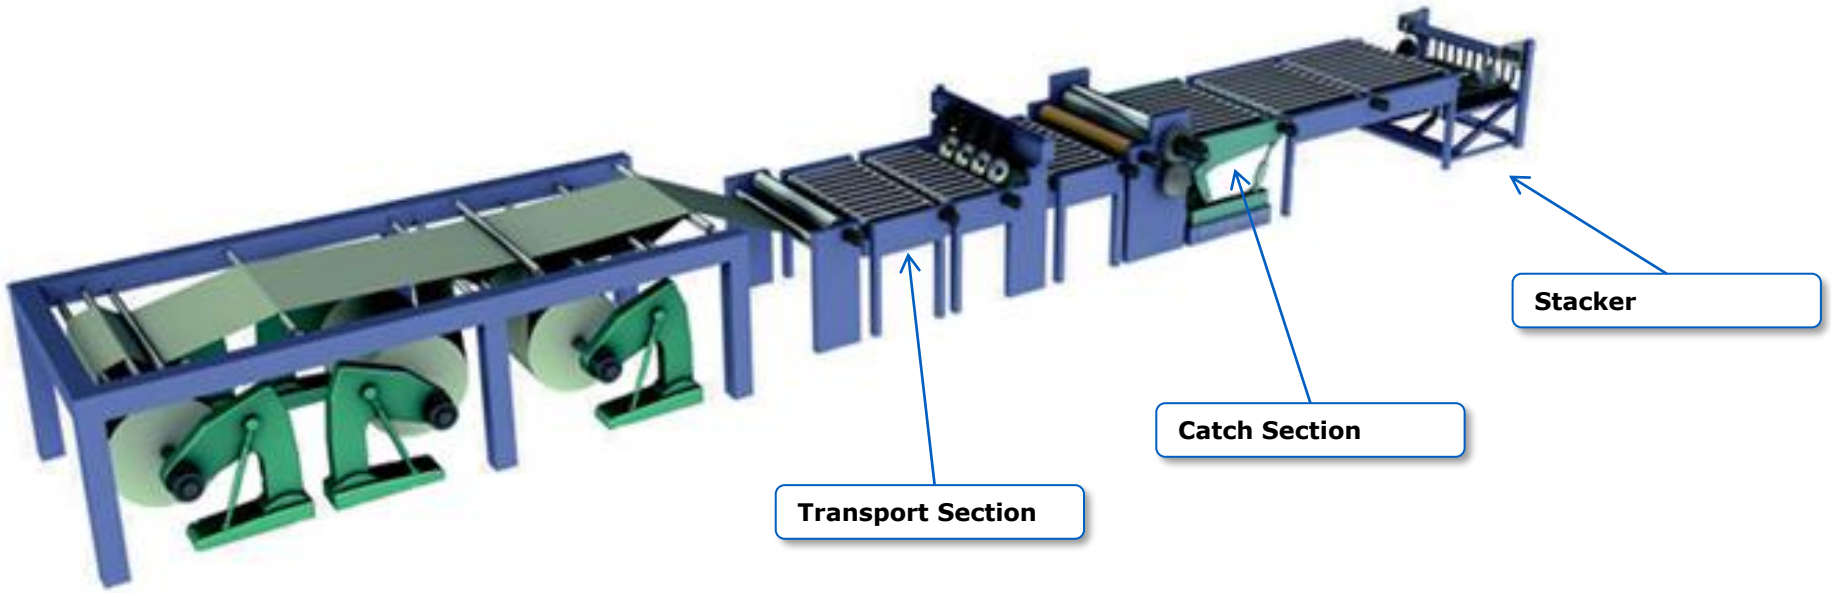

INTERNAL & BUSINESS ONLY

TRANSPORT SECTION

Ammeraal Beltech

Description

Transport the paper from unwinding station/decurler to settle the paper before slitting and cutting to size.

Flat belts with high friction covers recommended

FBGG054582 GG P01.14 FFQ	Transport section – shock absorbing properties in case of jam
FBGG054607 GG E05.14 FFQ	Transport section – wear resistant and non-marking high-grip rubber cover
FBPG054630 PG E05.12 SFQ	Transport section – wear resistant and non-marking high-grip rubber cover

CATCH SECTION

Description

Catch and clean the paper at full speed after slitting and cutting to size.

Transfer and shingling before stacking.

Flat belts with various friction covers recommended

FBTT054647 TT P02.12 Q	Catch section – used to avoid any marking
FBUV054770 UV E06.20 FQ	Catch/Overlap section – used to avoid any marking
FBGG054582 GG P01.14 FFQ	Catch/Overlap section – shock absorbing properties in case of jam
FBGG054607 GG E05.14 FFQ	Catch/Overlap section – wear resistant and non-marking high-grip rubber cover
FBPG054630 PG E05.12 SFQ	Catch/ Overlap section – wear resistant and non-marking high-grip rubber cover

INTERNAL & BUSINESS ONLY

STACKER

Description

Collect sheets and form paper stacks or reams.

Flat belts with medium friction covers recommended

FBUU054772 UU N12 RFQ	Stacker – elastic (no tensioning device necessary), gentle on paper
FBUU054773 UU N22 RFQ	Stacker – elastic (no tensioning device necessary), gentle on paper

INTERNAL & BUSINESS ONLY

OEM: BELT SOLUTION OVERVIEW

Ammeraal Beltech

OEM	ITEM	Description	Section
Jagenberg	54582 54770 54534	GG P01.14 FFQ UV E06.20 FQ UU N17 RFQ	Transport section Catch/Overlap section Stacker
E.C.H. Will	54647 54770	TT P02.12 Q UV E06.20 FQ	Transport section Transport section
Pasaban	54607 54770 54534	GG E05.14 FFQ UV E06.20 FQ UU N17 RFQ	Transport section Catch/Overlap section Stacker
Bielomatik	54582 54647	GG P01.14 FFQ TT P02.12 Q	Transport section Catch/Overlap section

INTERNAL & BUSINESS ONLY

BELT RANGE OVERVIEW / FEATURES & BENEFITS

Ammeraal Beltech

ITEM	Description	Selection
FBGG054582	GG P01.14 FFQ	Transport section – shock absorbing properties in case of jam
FBGG054607	GG E05.14 FFQ	Transport section – wear resistant and non-marking high-grip rubber cover
FBPG054630	PG E05.12 SFQ	Transport section – wear resistant and non-marking high-grip rubber cover
FBTT054647	TT P02.12 Q	Catch section – used to avoid any marking
FBUV054770	UV E06.20 FQ	Catch/Overlap section – used to avoid any marking
FBGG054582	GG P01.14 FFQ	Catch/Overlap section – shock absorbing properties in case of jam
FBGG054607	GG E05.14 FFQ	Catch/Overlap section – wear resistant and non-marking high-grip rubber cover
FBPG054630	PG E05.12 SFQ	Catch/ Overlap section – wear resistant and non-marking high-grip rubber cover
FBUU054534	UU N17 RFQ FG	Stacker – elastic (no tensioning device necessary), gentle on paper
FBUU054772	UU N12 RFQ	Stacker – elastic (no tensioning device necessary), gentle on paper
FBUU054773	UU N22 RFQ	Stacker – elastic (no tensioning device necessary), gentle on paper

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBUV054559 UV E06.20 FQ

Polyester fabric tensile member:
- Extremely flexible
- Very low energy consumption
- Dimensional stable
- Antistatic yarns

Fleece cover
- gentle handling, non marking of paper

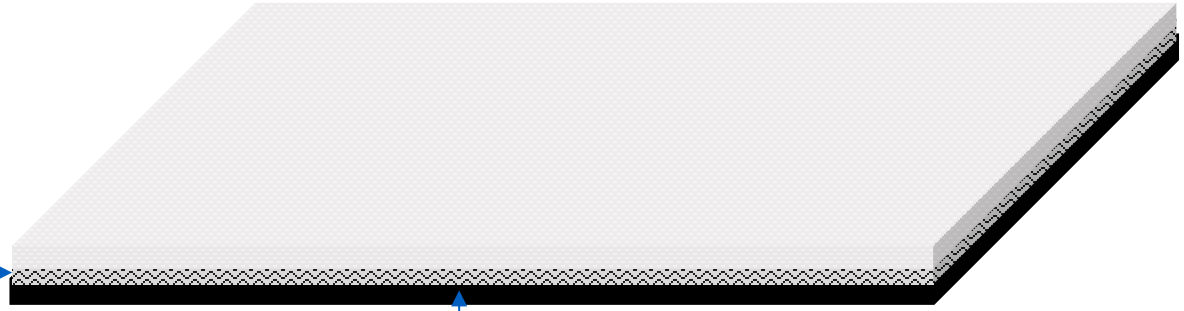

Polyurethane cover
- offers medium friction – run over slider bed
- Simple tracking

Splicing
- Quick and reliable with QuickSplice Tools
- No glue involved

INTERNAL & BUSINESS ONLY

Ammeraal Beltech

RAPPLON®

Swiss made High Performance Flat Belts

January 2023

Product Management

BU Switzerland

PRINTING
PRINT FINISHING

© Ammeraal Beltech — All Rights Reserved.
Confidential and Proprietary Intellectual Property.

PRINTING & PRINT FINISHING

SHEET FED PRINTER

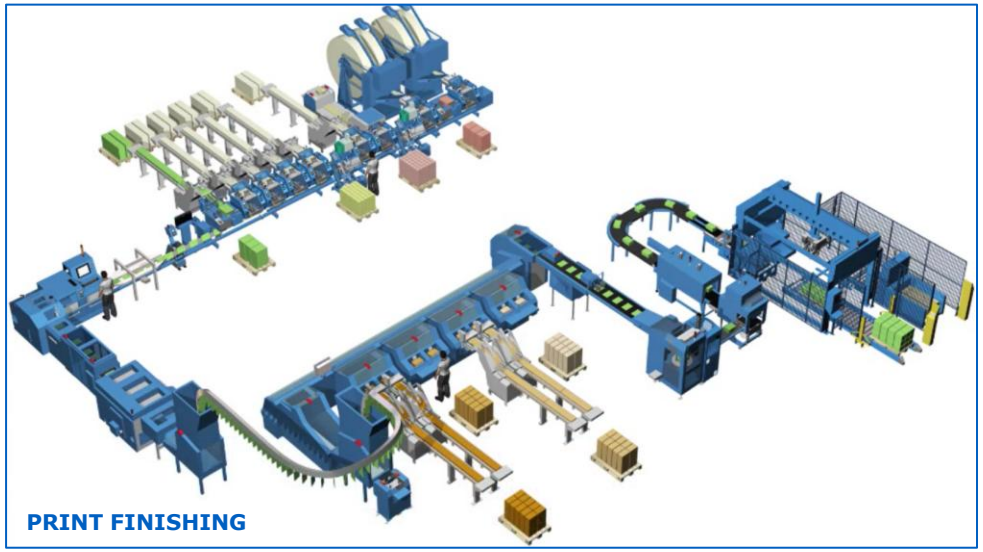

PRINT FINISHING

WEB FED PRINTER

SHEET FED PRINTING

Ammeraal Beltech

Description

Feeding the blank sheets into the printing units is done by belts; often punched with holes for vacuum support.

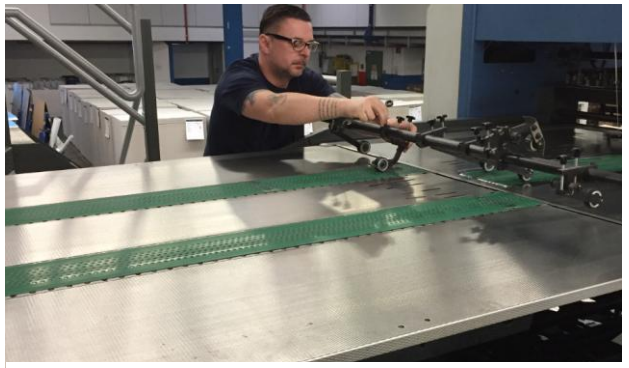

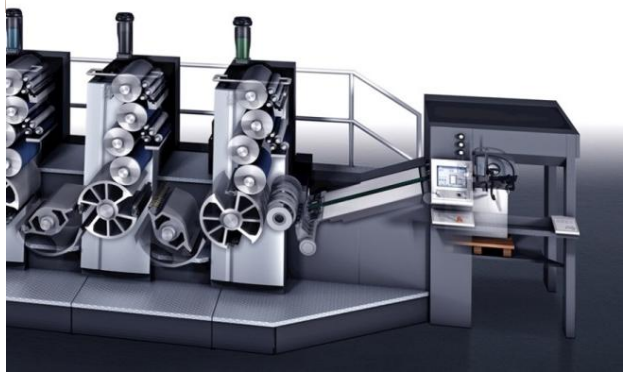

Flat belts with high friction top covers recommended

FBTG054624 TG E04.12 RQ	Feeder Belt
FBTG054269 TG S04.12 RC	Feeder Belt
FBTG054261 TG S04.14 RC	Feeder Belt

UNWINDER

Description

Mainly direct driven today. But still many unwinders where belts accelerating and decelerating the paper rolls.

Flat belts with various friction covers recommended

LL S09 up to LL S18
GG S09.22 RFC up to GG S18.40 RRC

FBGG054748 GG S15.30 RRC Goss

INTERNAL & BUSINESS ONLY

WEB FOLDER

Ammeraal Beltech

Description

Slitting, collecting, folding and stitching is done at highest speed in a web folder.

Flat belts with various friction covers recommended

FBTT054598 TT E09.18 Q	Web folder tape
FBPG054630 PG E05.12 SFQ	Web folder tape
FBTT054752 TT S02.10 C	Web folder tape
FBTT054598 TT E09.18 Q	Web folder tape

INTERNAL & BUSINESS ONLY

WEB FOLDER BELT RANGE

1. Cutter Belts
2. Transport Belts
3. Delivery Belts

1 2

ITEM	Description	OEM
FBTT054598	TT E09.18 Q	KBA magazine
FBPG054630	PG E05.12 SFQ	KBA newspaper
FBTT054752	TT S02.10 C	MAN Roland
FBTT054752	TT S02.10 C	Heidelberg
FBTT054598	TT E09.18 Q	Cerutti
FBTT054598 FBTT054752	TT E09.18 Q TT S02.10 C	Goss (cutting cylinder) Goss (folding cylinder)

3

ITEM	Description
FBTG054624	TG E04.12 RQ
FBTG054269	TG S04.12 RC
FBTG054265	TG P04.20 RC
	Plied Synthetics

INTERNAL & BUSINESS ONLY

FITTING ON SITE

- Fitting job takes 6-8 hours by 2 skilled persons (QuickSplice items)
- Good preparation of tools and material is essential
- Detailed description of preparation and job process is available as training module

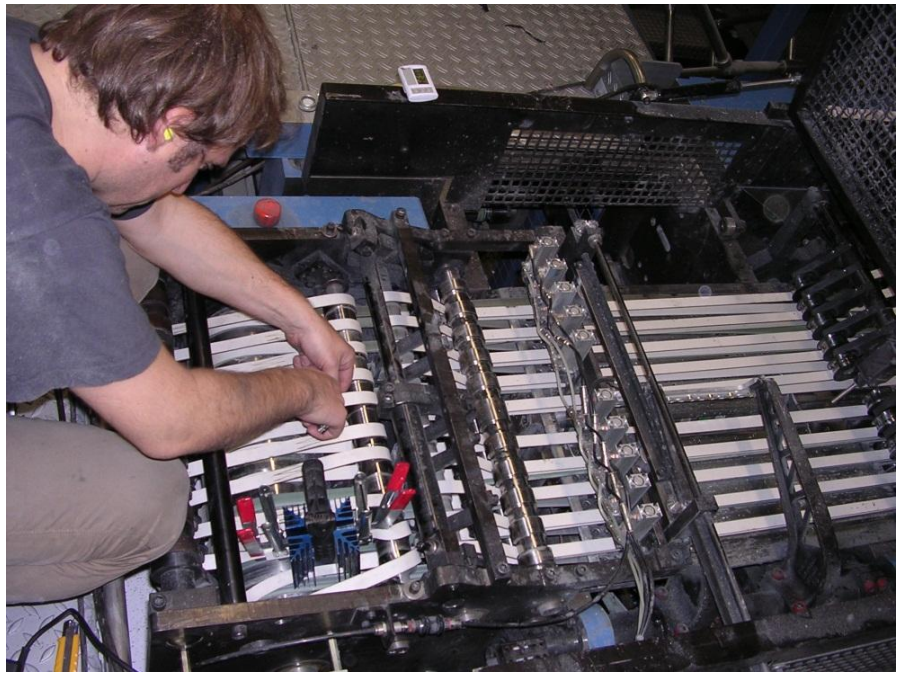

INTERNAL & BUSINESS ONLY

BENEFITS: QUICKSPLICE RANGE

Ammeraal Beltech

Feature	Advantage	Benefit
High modulus Polyester fabric tensile member	no re-tensioning necessary	Just fit and forget
High edge resistance	No edge fraying	Long service life
High quality mixed fabric cover	Wear resistant Resistant to Toluol and Silicone No ink smear Soft belt edges	Extended service life No marking of paper
Constant medium grip of covers	Safe transport at high speed	Increased output per hour
QuickSplice	Quick and simple splicing with QSP-Tools	Safe joint, perfectly aligned, everybody can splice

INTERNAL & BUSINESS ONLY

BENEFITS: CLASSIC RANGE

Feature	Advantage	Benefit
Polyamide foil tensile member	Highly flexible	Gentle to bearings and shafts
Laterally rigid	Belts lay flat	No marking of paper by edges
High edge resistance	No edge fraying	Long service life
High quality polyamide fabric cover	Wear resistant Resistant to Toluol and Silicone No ink smear	Extended service life
Constant medium grip of covers	Safe transport at high speed	Increased output per hour

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBTG054624 TG E04.12 RQ

XNBR Rubber cover for best performance:
- Abrasive resistant
- Long service life
- No ink smear
- Silicone- and Toluol-resistant

Polyester fabric tensile member:
- Extremely flexible
- Dimensional stable

Polyester fabric bottom cover:
- Abrasive resistant
- Low coefficient of friction

Permanently antistatic

Splicing:
- Quick and reliable with QuickSplice Tools
- No glue involved

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBTT054598 TT E09.18 Q

Mixed fabric cover for best performance:
- Abrasive resistant
- Long service life
- No ink smear
- Silicone- and Toluol-resistant

Polyester fabric tensile member:
- Extremely flexible
- Dimensional stable

Mixed fabric cover for best performance:
- Abrasive resistant
- Long service life
- No ink smear
- Silicone- and Toluol-resistant

Permanently antistatic

Splicing:
- Quick and reliable with QuickSplice Tools
- No glue involved

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBTT054752 TT S02.10 C

Polyamide fabric cover for best performance:
- Abrasive resistant
- Long service life
- No ink smear
- Silicone- and Toluol-resistant

Polyamide foil tensile member:
- Very flexible
- High edge stability
- Laterally rigid

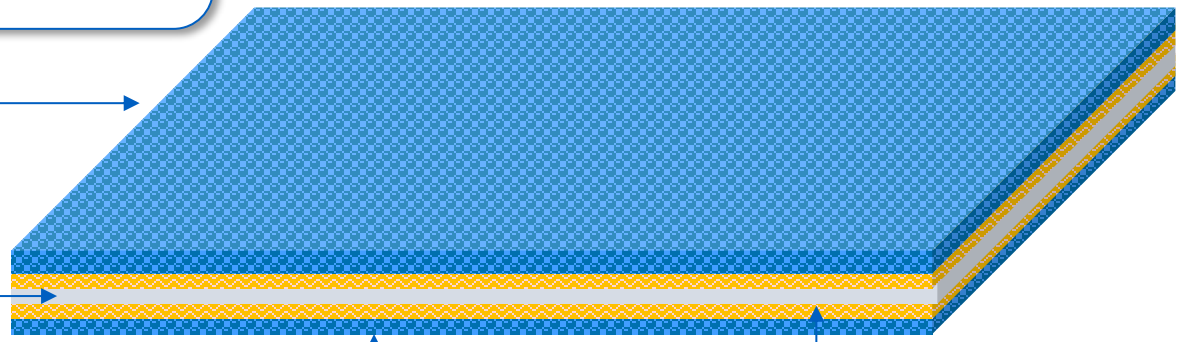

Polyamide fabric cover for best performance:
- Abrasive resistant
- Long service life
- No ink smear
- Silicone- and Toluol-resistant

Permanently antistatic

Splicing:
- Classic skived and glued

INTERNAL & BUSINESS ONLY

PRINT FINISHING

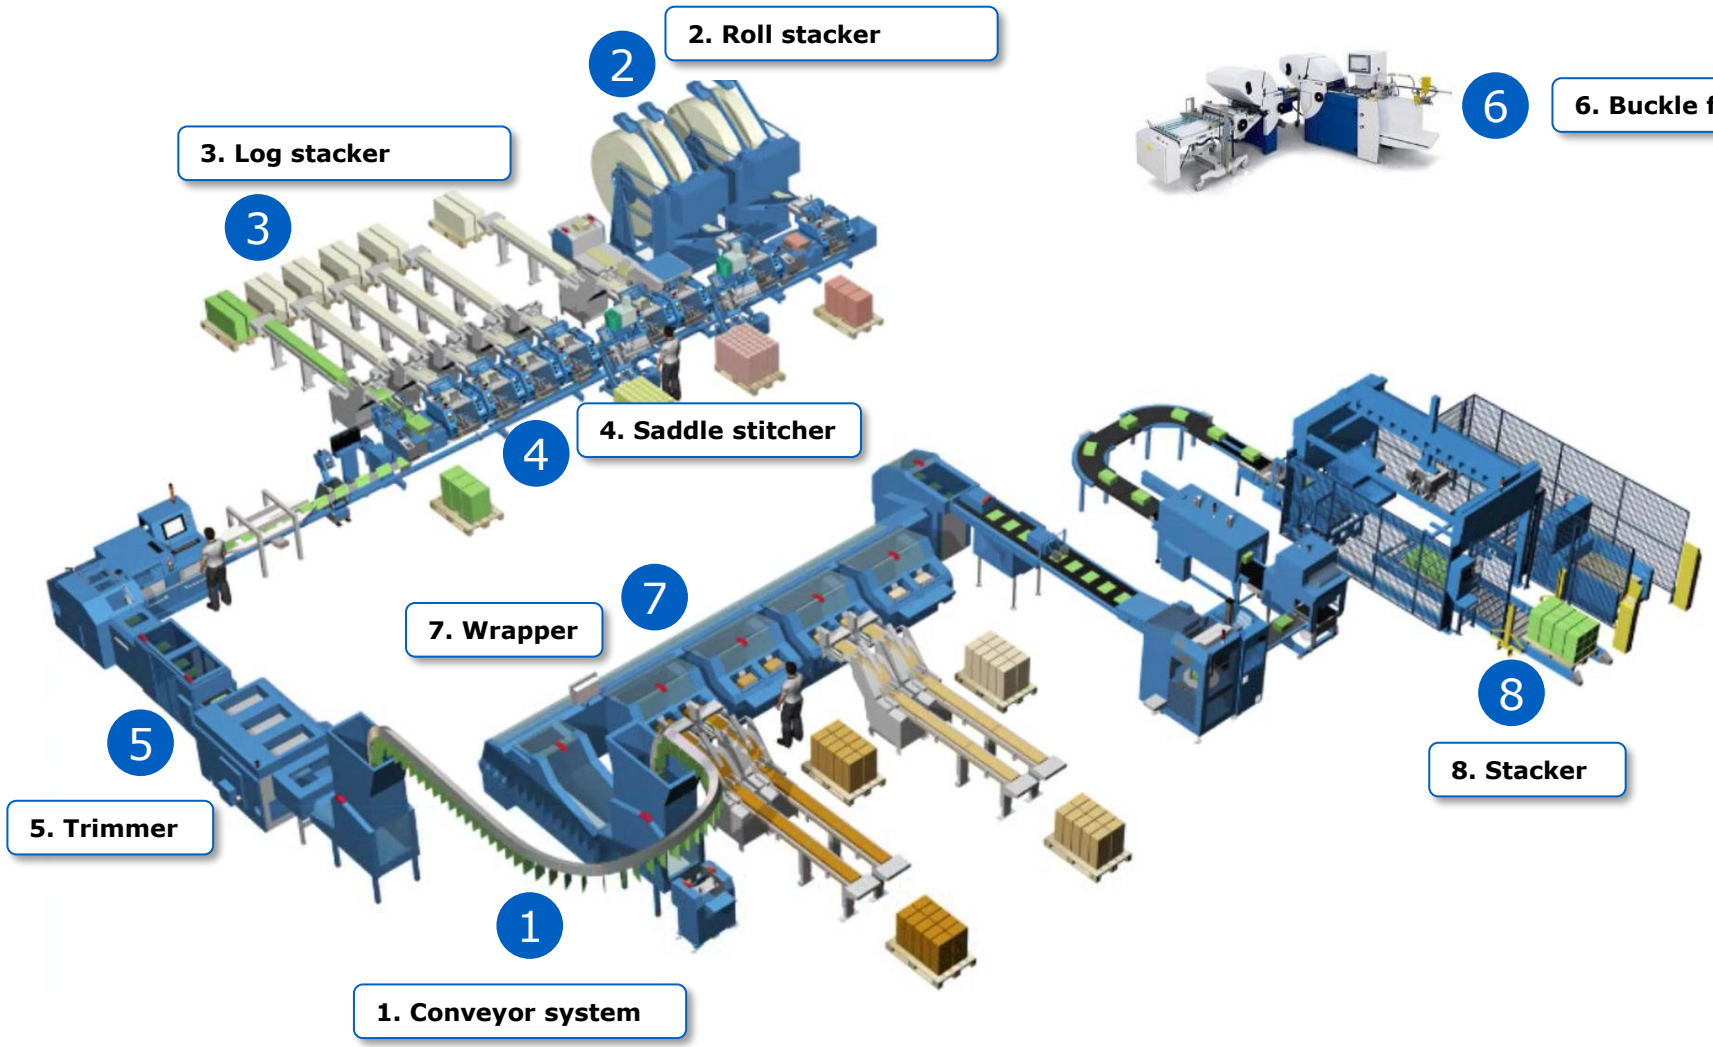

INTERNAL & BUSINESS ONLY

CONVEYOR SYSTEM

Ammeraal Beltech

Description

Printed products are conveyed across short or long distances from the printing press directly to the finishing stage.

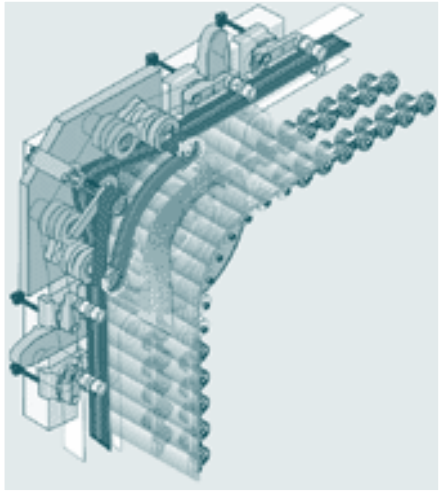

Flat belts with medium friction covers recommended

OEM	Solution	Remarks
Gämmerler	FBUU054762 UU E15.30 RFQ	Belt usually 60 mm wide equipped with V-guide, can be 100 m long
FERAG		No belts, chains with grippers only
Müller Martini		No belts, chains with grippers only

FEATURES BENEFITS

TECHNICAL SPECIFICATIONS

INTERNAL & BUSINESS ONLY

ROLL STACKER

Description

The feeder generates a shingled stream of magazines, adverts or newspapers which are then bundled into rolls on the roll stacker. Those roll stackers can be transported and stored.

Flat belts with various friction covers recommended

OEM	Equipment	Solution	Unique reasons to buy
		FBTG054624 TG E04.12 RQ	Fast joining, no elongation compared to original Classic belt
Müller Martini	Feeder	Specific PA-Foil	AB cannot offer this item
	Roll stand	FBUU054772 UU N12 RFQ	Elastic, easy splice able on site, resistant to ink and toluol
FERAG	Feeder	Specific PA-Foil	AB cannot offer this item

LOG STACKER

Description

Log stackers are the ideal connection between press delivery and efficient print finishing. Systems that enable perfect log formation and palletizing ensure a continuous production flow. Standard pallets / handling equipment can be used.

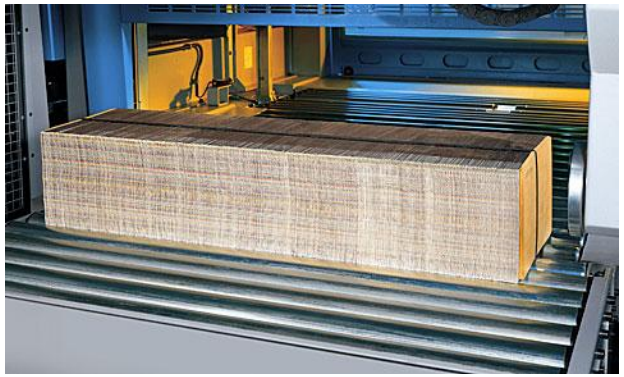

Flat belts with high friction top cover recommended

OEM	Equipment	Solution	Unique reasons to buy
Müller Martini		FBTG054624 TG E04.12 RQ	Fast joining, no elongation compared to original Classic belt

SADDLE STITCHER

Ammeraal Beltech

Description

This automation in print finishing gathers, inserts supplements and stitches with a speed of over 30,000 cycles per hour. Over 60 belts are common on Müller Martini equipment – all of them to be spliced on site.

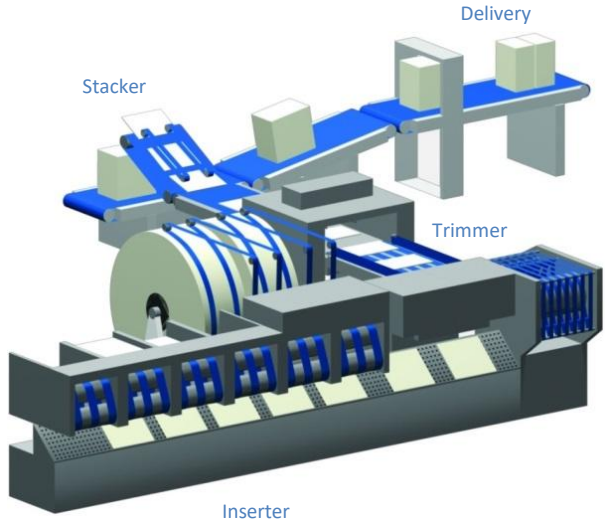

Flat belts with various friction covers recommended

OEM	Position	Solution	Unique reasons to buy
Müller Martini	Transport	FBTG054624 TG E04.12 RQ	Fast joining, no elongation compared to original equipped belt
	Inserter	FBTG054624 TG E04.12 RQ	Fast joining, no elongation compared to original equipped belt
FERAG		FBUU054772 UU N12 RFQ	Elastic, easy splice able on site, resistant to ink and toluol

INTERNAL & BUSINESS ONLY

TRIMMER

Description
Precise trimming of magazine and other products.

Flat belts with various friction covers recommended
FBTT054601 TT P02.12 Q

PRODUCT DESIGN
KEY POINTS
FEATURES BENEFITS
TECHNICAL SPECIFICATIONS

INTERNAL & BUSINESS ONLY

BUCKLE FOLDER

Ammeraal Beltech

Description

Folding single sheets. Often you find endless woven belts which can be replaced by QuickSplice items. The sheet is carried on machine tapes from an automatic feeder and rollers force the sheet into a fold-plate which is adjustable to the length of the fold.

Flat belts with various friction covers recommended

OEM	Solution	Unique reasons to buy
Heidelberg	FBTT054647 TT P02.12 Q	Fast joining – less downtime, wear resistant
Boewe	FBGG054263 GG N22 RFQ	Elastic, no take-up, simple splicing
MBO	FBTG054624 TG E04.12 RQ	Fast joining – less downtime, wear resistant rubber cover

WRAPPER

Description

Film-wrapping units packages newspapers into easy-to-handle single packages, including inserts. The protected newspaper reaches the reader intact and the inserted advertising does not get lost.

Flat belts with various friction covers recommended

OEM	Solution	Unique reasons to buy
Müller Martini	FBTG054624 TG E04.12 RQ	Fast joining, no elongation compared to original equipped belt
Mosca	FBTG054266 TG P07.29 RC	
SITMA	FBTG054624 TG E04.12 RQ	Fast joining, no elongation compared to original equipped Classic belt

STACKER

Description

This equipment is located at the end of a sheet-fed printing machine stacking the printing items. Compensating stacker process saddle-stiched products reliable into cross-stacked plies.

Flat belts with high grip friction top covers recommended

OEM	Solution	Unique reasons to buy
Müller Martini	FBTG054624 TG E04.12 RQ	Fast joining, no elongation compared to original equipped belt
Horizon	FBTG054624 TG E04.12 RQ	Fast joining – less downtime, wear resistant rubber cover
RECMI	FBTG054624 TG E04.12 RQ	Fast joining – less downtime, wear resistant rubber cover
MBO	FBPG054630 PG E05.12 FQ	Fast joining – less downtime, wear resistant rubber cover
Heidelberg	FBTG054624 TG E04.12 RQ	Fast joining – less downtime, wear resistant rubber cover

PRODUCT DETAILS: FBTG054624 TG E04.12 RQ

XNBR Rubber cover for best performance:
- Abrasive resistant
- Long service life
- No ink smear
- Silicone- and Toluol-resistant

Polyester fabric tensile member:
- Extremely flexible
- Dimensional stable

Polyester fabric bottom cover:
- Abrasive resistant
- Low coefficient of friction

Permanently antistatic

Splicing:
- Quick and reliable with QuickSplice Tools
- No glue involved

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBTT054647 TT P02.12 Q

Ammeraal Beltech

Polyamide fabric cover for best performance:
- Abrasive resistant
- Long service life
- No ink smear
- Silicone- and Toluol-resistant

PA fabric tensile member:
- Very flexible
- Low strength loss after running in
- Dimensional stable

Polyamide fabric cover for best performance:
- Abrasive resistant
- Long service life
- No ink smear
- Silicone- and Toluol-resistant

Permanently antistatic

Splicing:
- Quick and reliable with QuickSplice Tools
- No glue involved

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: BLACK ELASTIC BELTS

Completely made from extruded Polyurethane:
- No edge fraying as there is no fabric
- Easy clean-ability

Antistatic coating

High elastic Polyurethane:
- No edge fraying as there is no fabric reinforcement
- Low load on shafts and bearings
- Simple tracking

Splicing:
- Quick and reliable with QuickSplice Tools
- No glue involved

INTERNAL & BUSINESS ONLY

FITTING ON SITE

- Fitting job on a Müller Martini saddle stitcher take 4-6 hours by 2 skilled persons
- This is only 1/3 of the time needed when installing Classic belts
- Good preparation of tools and material is essential

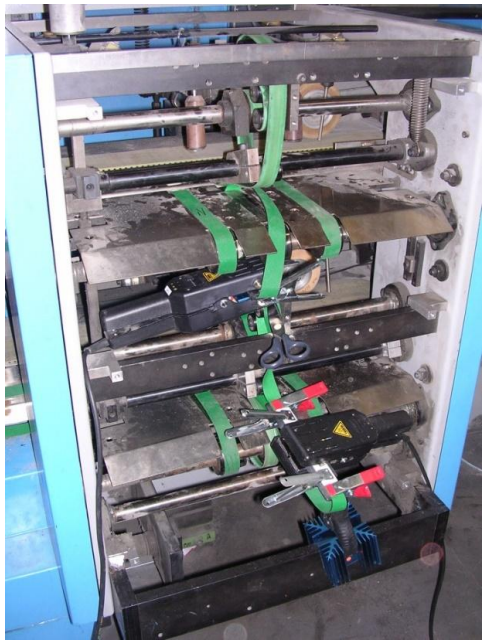

INTERNAL & BUSINESS ONLY

QUICKSPLICE

- Very easy, safe, reliable and quick joining
- No need for particular training or special crew
- Visually confirmed splices without unexpected failures
- Consistent thickness over joint area for optimal operation
- No adhesives required – clean and safe for employees
- Very slim tools to allow easy joining process also in critical areas
- Perfect alignment thanks to the guide rail system
- Bi-directional running of belts possible

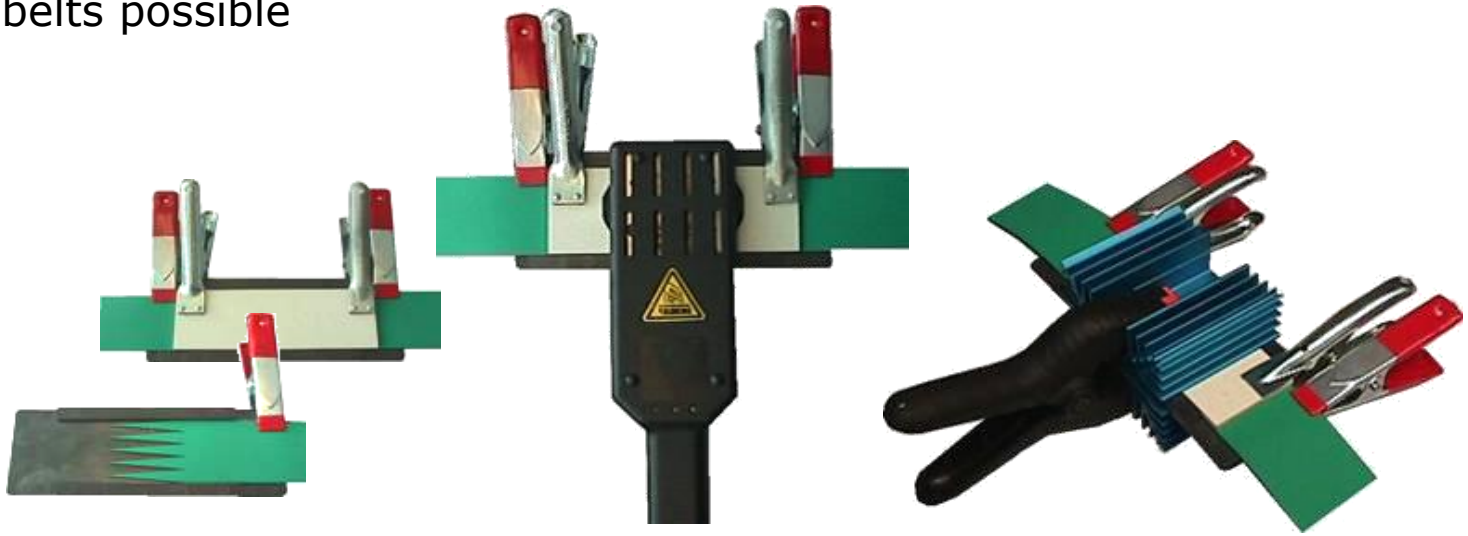

INTERNAL & BUSINESS ONLY

BENEFITS

Ammeraal Beltech

Feature	Advantage	Benefit
High modulus fabric tensile member	no re-tensioning necessary	Just fit and forget
High edge resistance	No edge fraying	Long service life
High quality mixed fabric cover	Wear resistant Resistant to Toluol and Silicone No ink smear Soft belt edges	Extended service life No marking of paper
Constant medium grip of covers	Safe transport at high speed	Increased output per hour
High elasticity *(*elastic items)*	Low load on shafts and bearings	Simple tracking, easy on bearings
QuickSplice	Quick and simple splicing with QSP-Tools	Safe joint, perfectly aligned, everybody can splice

INTERNAL & BUSINESS ONLY

Ammeraal Beltech

RAPPLON®

Swiss made High Performance Flat Belts

January 2023

Product Management

BU Switzerland

BOXFOLDING

© Ammeraal Beltech — All Rights Reserved.
Confidential and Proprietary Intellectual Property.

BOXFOLDING

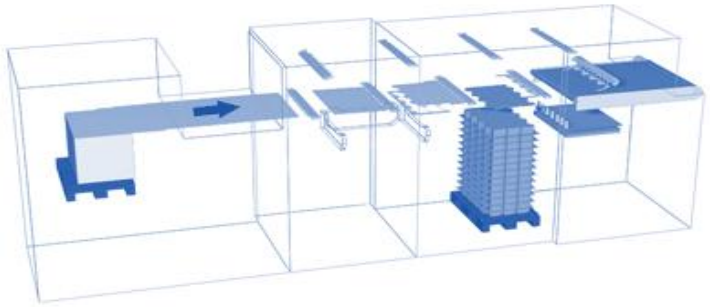

DIE CUTTER

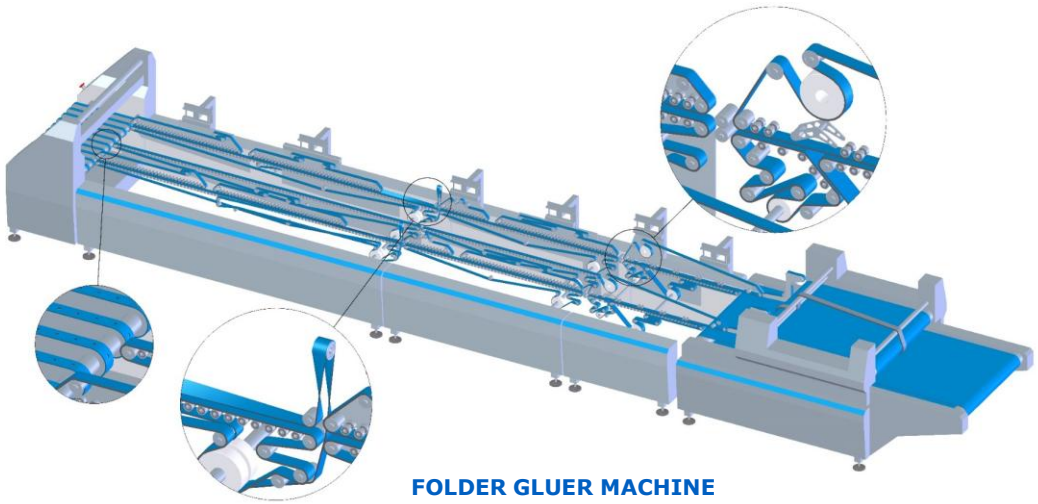

FOLDER GLUER MACHINE

AUTOMATIC PACKER

INTERNAL & BUSINESS ONLY

DIE CUTTER

Description

Transport of sheets from the pile to the punching unit by belts.

The waste fall down on a standard conveyor belt – sometimes over 100 meters long, collecting waste of several die-cutters.

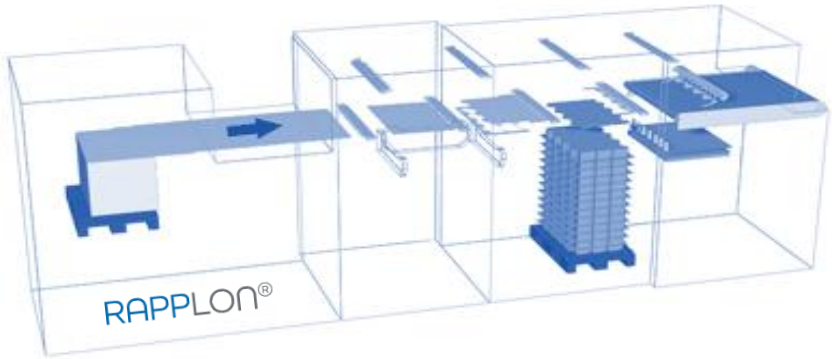

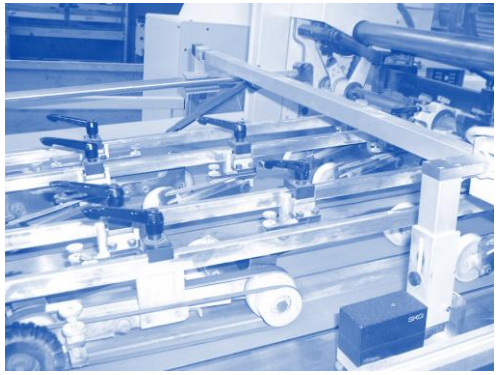

Flat belts with low friction on bottom recommended

FBTG054624 TG E04.12 RQ

FBTG054624 TG E04.12 RQ perforated for vacuum support

TECHNICAL SPECIFICATIONS

INTERNAL & BUSINESS ONLY

FOLDER GLUER MACHINE

INTERNAL & BUSINESS ONLY

FEEDER

Description

The forward moving feeder belts pull the pile of blanks towards the main gauge, which is precisely adjustable vertically, and draw the bottom blank of the pile in direction of the pre-breaker.



FEEDER

Flat belts with high friction covers recommended

FBGT054705 GT S04.25 RC + NRC 040 red	(Engineered belt)
Ultrafeed 500 Food Grade	(Engineered belt)

TECHNICAL SPECIFICATIONS

INTERNAL & BUSINESS ONLY

PRE-BREAKER BELTS

Description

The Pre-Braker fold (pre-breaks) flaps precisely at their creases. The folding process requires, that the folder belts are twisted around their longitudinal axis (torsion).

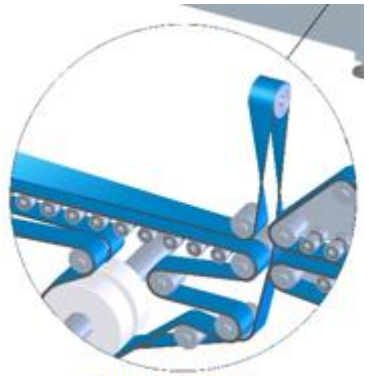
PRE-BREAKER

Flat belts with high friction covers recommended

FBGG054783 GG S04.30 RRC FG	Folder/Transport belt - Asia
FBGG054784 GG S04.40 RRC FG	Folder/Transport belt - Asia
FBGG054274 GG S06.30 RRC green	Folder/Transport belt – Classic – Non FoodGrade
FBGG054145 GG S06.40 RRC green	Folder/Transport belt – Classic – Non FoodGrade
FBGG054275 GG S06.50 RRC green	Folder/Transport belt – Classic – Non FoodGrade
FBGG054276 GG S06.60 RRC green	Folder/Transport belt – Classic – Non FoodGrade
FBGG054780 GG S06.30 RRC FG	Folder/Transport belt – Classic – FoodGrade
FBGG054781 GG S06.40 RRC FG	Folder/Transport belt – Classic – FoodGrade
FBGG054782 GG S06.55 RRC FG	Folder/Transport belt – Classic – FoodGrade
FBGG054659 GG E10.30 RRQ FG	Folder/Transport belt – QuickSplice – FoodGrade
FBGG054660 GG E10.40 RRQ FG	Folder/Transport belt – QuickSplice – FoodGrade
FBGG054662 GG E10.55 RRQ FG	Folder/Transport belt – QuickSplice – FoodGrade

INTERNAL & BUSINESS ONLY

FOLDER GLUER BELTS

Description

The basic function is comparable with the function of the pre-breaker, however, folding of flaps takes place on the left and on the right-hand side by means of 2 folder belts. The flaps are not opened again after folding.

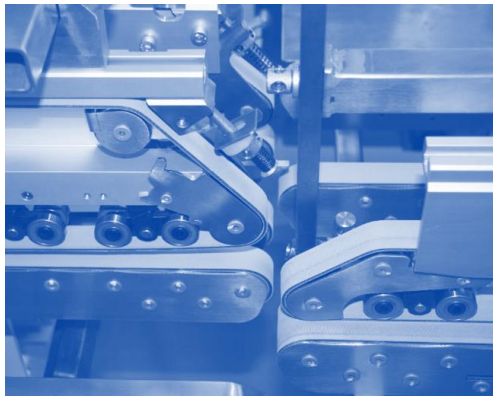

Flat belts with high friction covers recommended

FBGG054783 GG S04.30 RRC FG	Folder/Transport belt - Asia
FBGG054784 GG S04.40 RRC FG	Folder/Transport belt - Asia
FBGG054274 GG S06.30 RRC green	Folder/Transport belt – Classic – Non FoodGrade
FBGG054145 GG S06.40 RRC green	Folder/Transport belt – Classic – Non FoodGrade
FBGG054275 GG S06.50 RRC green	Folder/Transport belt – Classic – Non FoodGrade
FBGG054276 GG S06.60 RRC green	Folder/Transport belt – Classic – Non FoodGrade
FBGG054780 GG S06.30 RRC FG	Folder/Transport belt – Classic – FoodGrade
FBGG054781 GG S06.40 RRC FG	Folder/Transport belt – Classic – FoodGrade
FBGG054782 GG S06.55 RRC FG	Folder/Transport belt – Classic – FoodGrade
FBGG054659 GG E10.30 RRQ FG	Folder/Transport belt – QuickSplice – FoodGrade
FBGG054660 GG E10.40 RRQ FG	Folder/Transport belt – QuickSplice – FoodGrade
FBGG054662 GG E10.55 RRQ FG	Folder/Transport belt – QuickSplice – FoodGrade

INTERNAL & BUSINESS ONLY

TRANSFER/EJECTOR

Description

The ejector section separate folded items with quality issues. At full production speed the upper finger devices push the carton between two lower belts which eject the carton in a bin. The tremendous amount of flexings of the very short ejector belt result in constant high belt temperatures of over 55°C in an ambient environment.

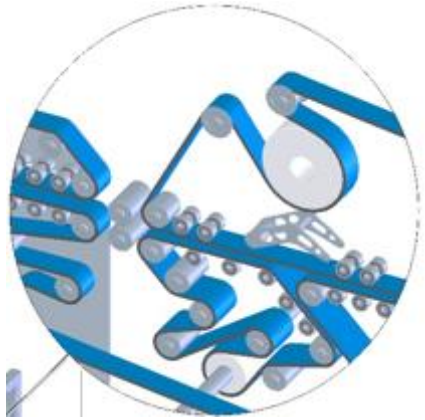

TRANSFER/EJECTOR

Flat belts with high friction covers recommended

FBGG054145 GG S06.40 RRC green	Folder/Transport belt – Classic – Non FoodGrade
FBGG054781 GG S06.40 RRC FG	Folder/Transport belt – Classic – FoodGrade
FBGG054660 GG E10.40 RRQ FG	Folder/Transport belt – QuickSplice – FoodGrade

INTERNAL & BUSINESS ONLY

DELIVERY/PRESS

Description

The glued boxes are become pressed between these 2 belts while transferring to the delivery section.

Often truly endless woven belts or leather covered belts are used - expensive solutions with limited service-life.

FBUV054770 UV E06.20 FQ is an excellent solution, a door opener at low price.

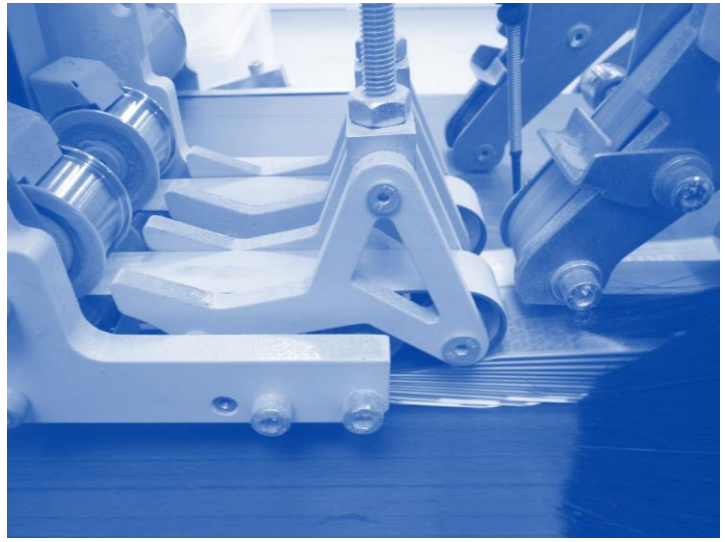

Flat belts with low friction covers recommended

FBUV054770 UV E06.20 FQ	Transfer section
Ropanol EX 10/2 black+FBS 160+G003-SS-1500W Fastener	Compression belt
Plied synthetic belts	Conveyor belt

AUTOMATIC PACKER

Ammeraal Beltech

Description

The folded and pressed boxes are packed after the delivery/compressing section. In place of manual packaging into dispatch boxes or manual bundling, the boxes are counted, packed or bundled automatically.

Elastic flat belts with high or medium friction covers recommended

FBGG054780	GG S06.30 RRC FG	Outer 90° transfer belt, Classic
FBLT054045	LT S06 C	Inner 90° transfer belt Classic
FBGG054659	GG E10.30 RRQ FG	Outer 90° transfer belt, QuickSplice
FBUV054770	UV E06.20 FQ	Inner 90° transfer belt QuickSplice
FBGT54705	GT S04.25 RC+NRS040red	Transport belts
FBGG54780	GG S06.30 RRC FG	Outer 90° transfer belt, Classic

KEY POINTS: BELT SELECTION

It is easy to define the correct RAPPLON® belt in the Boxfolding Industry by asking 3 questions:

1. Food Grade or Non Food Grade?
2. QuickSplice or Classic?
3. Thickness of the belt? *Note: Europe and Asia mainly use 3 & 4 mm belts.*
   5 & 6 mm or 5.5 mm are still in use in North America.

Assistance / Rule of thumbs	Classic	QuickSplice
Folder Gluer built before year 2000	✖	
Folder Gluer equipment from year 2000 onwards		✖
Folder Gluer machine in bad shape, not well maintained	✖	
Customer purchases endless fabricated belts	✖	✖
Customer purchases slab material, fabricate by himself		✖
Customer produces boxes for food or pharma industry	Food grade ✖	Food Grade ✖

INTERNAL & BUSINESS ONLY

KEY POINTS: TENSIONING

Ammeraal Beltech

Classic range
Most folder gluers in the market are initially equipped with Classic Polyamide belts.
When replacing, operators tension them by experiences and feelings.
Once measuring you will find a range of 0.5 to 1.2% in most cases. This is not an issue for Classic belts as they offer a wide range of elongation.

QuickSplice range
Belts with fabric tensile members are more sensitive/risky to over tension and should not run beyond 0.5% elongation.

We recommend to inform customers:
- Data sheets
- Discuss/inform operators
- Mark fabricated belts

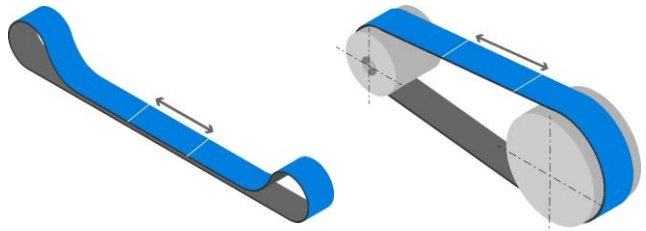

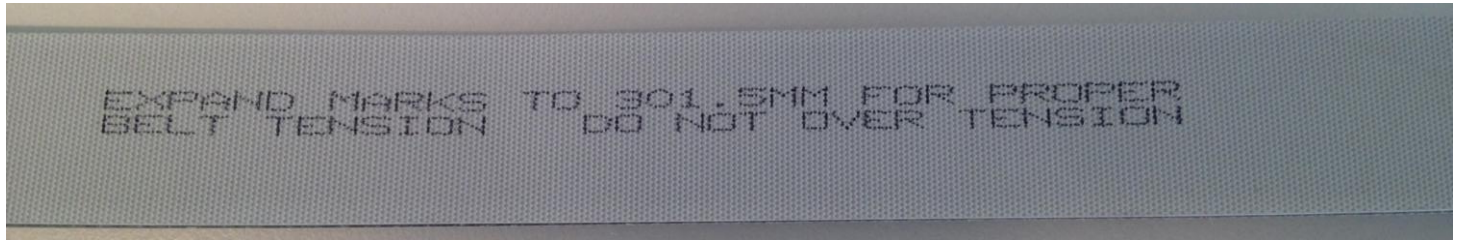

KEY POINTS: BELT WIDTH

Ammeraal Beltech

Bobst used flanged pulleys in the past to hold the belts in place.
In order to reduce costs, the wavy shaped guide rails became standard on most machines - very challenging for the belt edges.
The original belt width defined by Bobst is equal to the free space between the guide rails.
This does not leave any room for tracking or fabrication tolerances.

We recommend to fabricate belts by 1-2 mm narrower than specified – especially the lower transport belts.

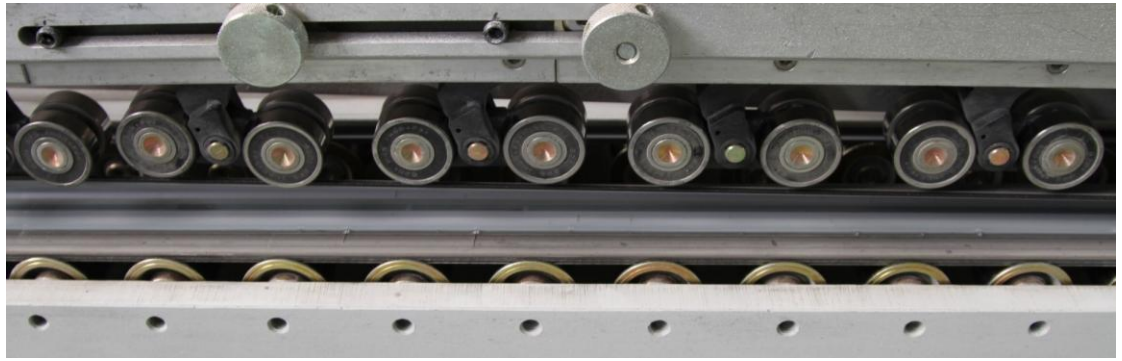

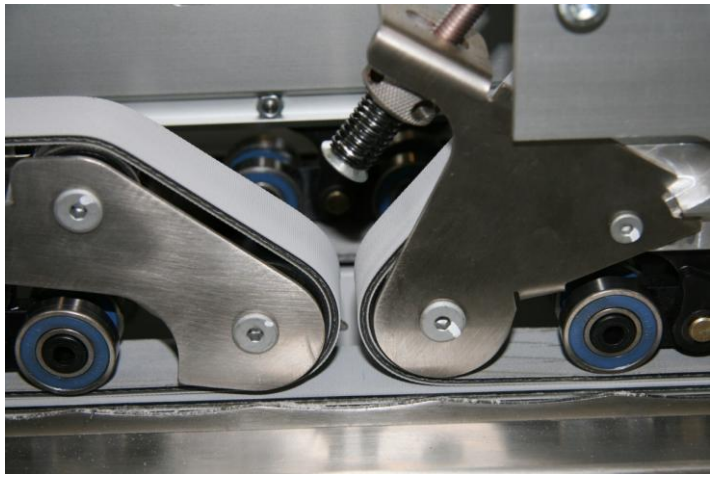

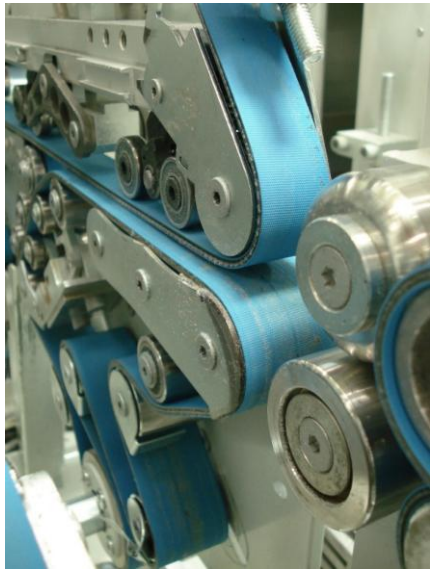

INTERNAL & BUSINESS ONLY

KEY POINTS: RUBBER COVER

Ammeraal Beltech

Our entire folder gluer range is made from carboxylated XNBR-rubber foil in equal thickness.
Folder gluer belts have to match standardised thicknesses and therefore the belt design is different.

Classic range
Here the “filler” material is made from NBR rubber - less expensive and more elastic (crack resistant).

QuickSplice range
Here the “filler” material is thermoplastic foil which is also required for the splice method.

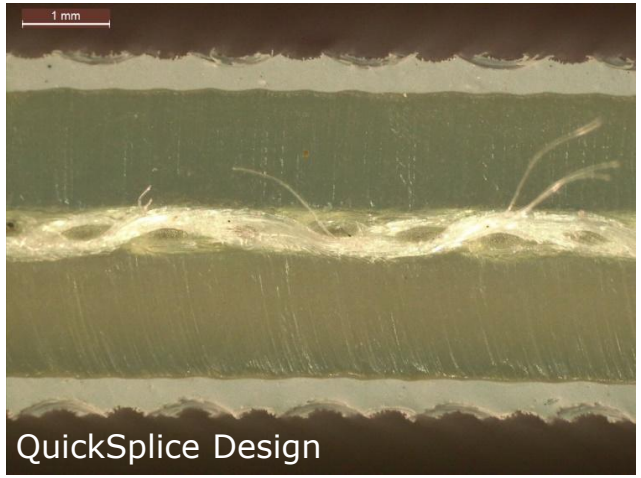

QuickSplice Design

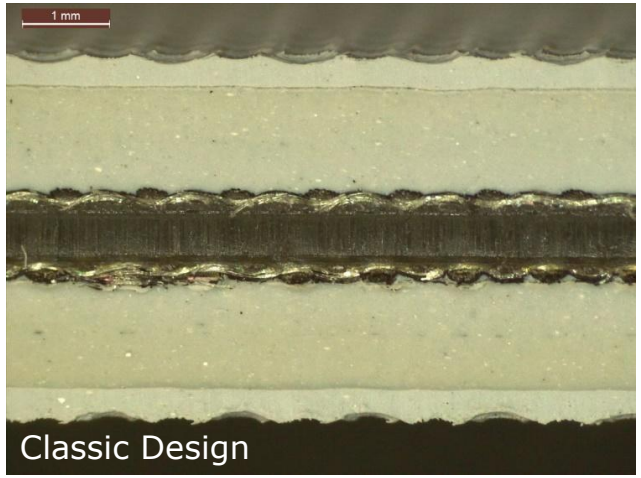

Classic Design

INTERNAL & BUSINESS ONLY

KEY POINTS: SPEED

RAPPLON® Folder gluer belts have no limitations regarding speed. We have customers who run RAPPLON® folder gluer belts up to 700m/min or 12 m/s without any issues.

Some competitors set speed limitations:

- The “traditional” version with a traction layer consisting of PA foil and PA fabrics. These types are joined by gluing (using the Thermofix joining system). The belts are suitable for machine speeds of up to 600 m/min.
- More sophisticated types that feature a thermoplastic foil traction layer combined with polyamide fabrics, allowing adhesive-free joining (using the Flexproof method). These belts are suitable for machine speeds of up to 300 m/min.

habasit

INTERNAL & BUSINESS ONLY

KEY POINT: MECHANICAL FASTENER

Issues with mechanical fasteners	Reason / Remarks
Failing fasteners damage cartons twisted sections	Fasteners not recommended in

Comparison of splice strength with different splice methods

Usually with a proper made finger splice the splice strength is around 50% of the virgin material.

Mechanical fasteners show a much lower splice strength, are unreliable and might be used for an immediate emergency case only.

Typical marks /damages caused by mechanical fasteners

Example of splice strength with different joining methods		
Item	FBTG054787	TG E08.70 P6Q
Splice method	Breaking stress Mpa	Elongation at Break
Material only (for benchmarking)	18.1	20%
Overlap splice according joining instructions	3.05	13%
Mechanical fastener	2.3	11%

KEY POINTS: BELTING LIST

There are machine lists and spare parts catalogues showing belt dimensions and thickness which is always of assistance.
Please always double check with your customer that the machine section the belts are referring is still original as customers sometime modify or upgrade their equipment.

FOLDER

ALPINA **MASTERFOLD 75/110/130/145**

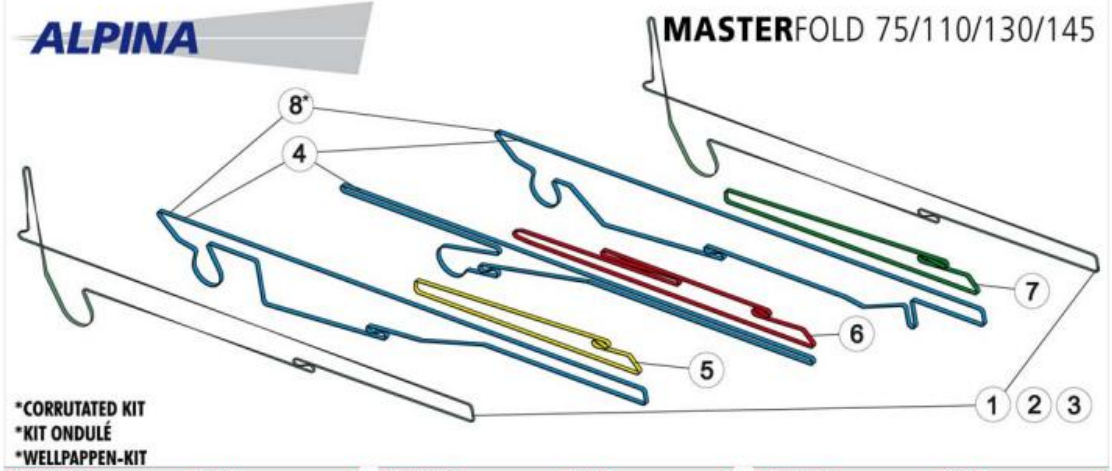

*CORRUTATED KIT
*KIT ONDULÉ
*WELLPAPPEN-KIT

Description	Part No.	€ Price Each
① 25 / 3 x 7350 mm	BSA1104319500	63,34
② 12 / 3 x 7350 mm	BSA1104319700	31,94
③ 48 / 3 x 7350 mm	BSA1104310700	116,77
④ 25 / 4 x 8180 mm	BSA1104309000	87,07
⑤ 25 / 3 x 3570 mm	BSA1104308600	34,89
⑥ 25 / 3 x 5770 mm	BSA1104308900	51,07
⑦ 25 / 3 x 3970 mm	BSA1104308700	37,64
⑧ 48 / 4 x 8180 mm	BSA1104310200	163,05

SPLICING PROCESS: QUICKSPLICE

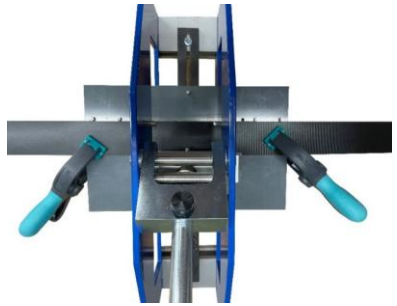

Punching → Preparation → Heating → Cooling ~15min

Splice area of 54659 GG E10.40 RRQ FG

Splicing Onsite on Bobst Expertfold

INTERNAL & BUSINESS ONLY

FEATURES & BENEFITS CLASSIC RANGE

Ammeraal Beltech

Feature	Advantage	Benefit
High modulus Polyamide foil tensile member	Shock absorbing, easy on bearings	Easy installation and tracking
Extremely high edge resistance	No edge fraying	Long service life, no hygienic issues
XNBR rubber covers	Wear resistant	Extended service life
Excellent grip of covers	Safe transport at high speed	Increased output per hour
Food grade rubber covers	No contamination of boxes	Ideal for sensitive packaging for food or pharmaceutical
High elasticity	Low load on shafts and bearings	Simple tracking, easy on bearings
Rigid belt design	No limitations regarding condition of the folder gluer	Just fit and forget

INTERNAL & BUSINESS ONLY

FEATURES & BENEFITS QUICKSPLICE RANGE

Feature	Advantage	Benefit
High modulus Polyester fabric tensile member	Extremely flexible	Lowest energy consumption
High edge resistance	No edge fraying	Long service life, no hygienic issues
New thermoplastic foil	Low self-heating ability	Longer service life of rubber, energy efficient Reliable splicing
XNBR rubber covers	Wear resistant	Extended service life
Excellent grip of covers	Safe transport at high speed	Increased output per hour
Food grade rubber covers	No contamination of boxes	Ideal for sensitive packaging for food or pharmaceutical
No elongation, dimensional stable	no re-tensioning necessary	Just fit and forget
QuickSplice	Quick and simple splicing with QSP-Tools	Safe joint, perfectly aligned, everybody can splice
Sophisticated belt design	Great performance on well-maintained machines	Lowest energy consumption

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBGG054274 GG S06.30 RRC

XNBR Carboxylated rubber cover
- Excellent grip to carton and paper
- Abrasive resistant
- No glazing
- Long service life

Rough surface structure
- Cope with paper dust

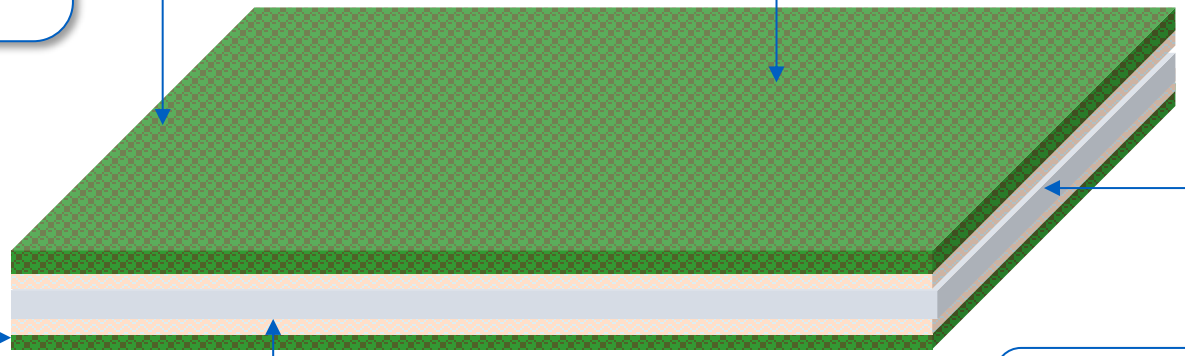

Polyamide foil tensile member
- Very flexible
- High edge stability

Fabric layer
- Permanently antistatic

Splicing
- Classic skived and glued

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBGG054781 GG S06.40 RRC FG

Ammeraal Beltech

XNBR Carboxylated rubber cover
- Food Grade approved rubber
- Excellent grip to carton and paper
- Abrasive resistant
- No glazing
- Long service life
- Free of phthalates, Latex, Nitrosamine

Rough surface structure
- Cope with paper dust

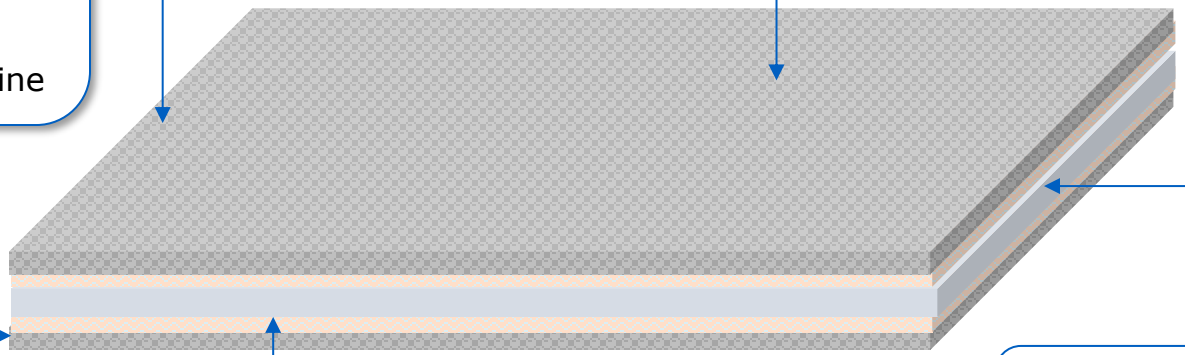

Polyamide foil tensile member
- Very flexible
- High edge stability

Fabric layer
- Permanently antistatic

FDA

Food Grade belts comply with
EC 1935/2004, EU 10/2011 and FDA standards

Splicing
- Classic skived and glued

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBGG054659 GG E10.30 RRQ FG

Ammeraal Beltech

XNBR Carboxylated rubber cover
- Food Grade approved rubber
- Excellent grip to carton and paper
- Abrasive resistant
- No glazing
- Long service life
- Free of phthalates, Latex, Nitrosamine

Rough surface structure
- Cope with paper dust

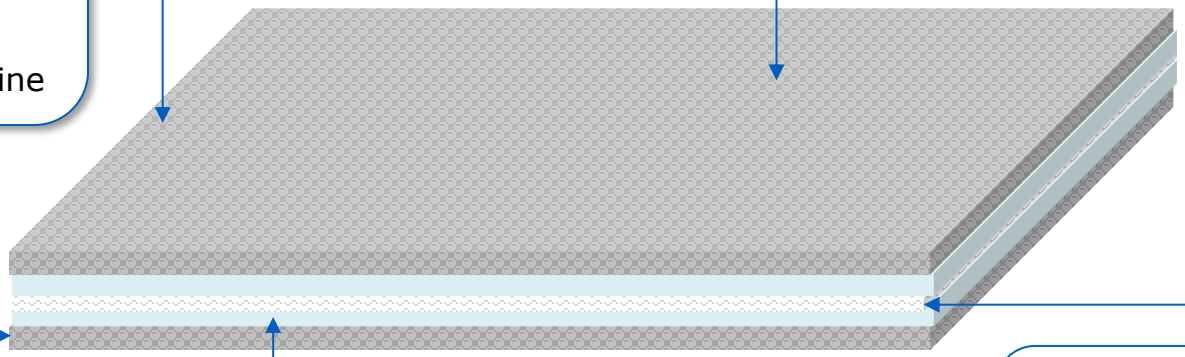

Polyester fabric tensile member:
- Extremely flexible
- Very low energy consumption
- Dimensional stable
- Antistatic yarns

Thermoplastic foil
- Highly flexible
- Low self heating ability
- Extended temperature resistance

Splicing
- Quick and reliable with QuickSplice Tools
- No glue involved

FDA

Food Grade belts comply with
EC 1935/2004, EU 10/2011 and FDA standards

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBUV054559 UV E06.20 FQ

Polyester fabric tensile member:
- Extremely flexible
- Very low energy consumption
- Dimensional stable
- Antistatic yarns

Fleece cover
- gentle handling, non marking of paper

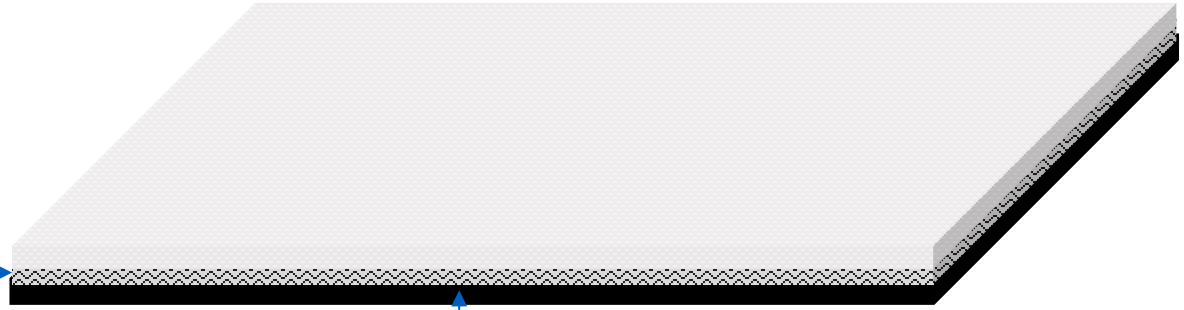

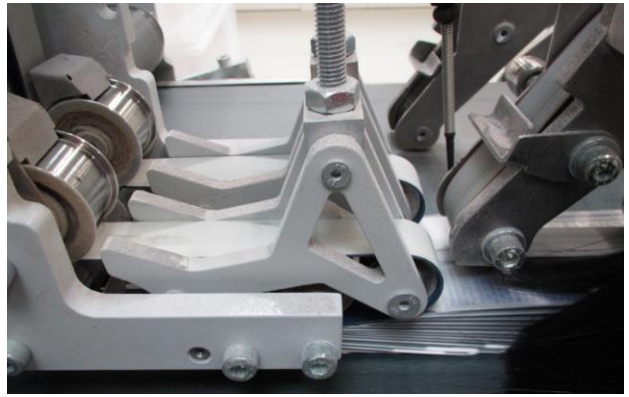

Polyurethane cover
- offers medium friction – run over slider bed
- Simple tracking

Splicing
- Quick and reliable with QuickSplice Tools
- No glue involved

RAPPLON® UV E06.20 FQ is the perfect replacement for the expensive truly endless woven belts or the delaminating leather covered belts in the transfer section.

- Fleece cover for gentle handling, non marking of boxes
- Longer service life due to higher flexibility
- No cover material delamination

INTERNAL & BUSINESS ONLY

Ammeraal Beltech

RAPPLON®

Swiss made High Performance Flat Belts

JUNE 2025

Product Management

BU Switzerland

CORRUGATED BOARD

© Ammeraal Beltech — All Rights Reserved.
Confidential and Proprietary Intellectual Property.

CORRUGATED BOARD INDUSTRY

CORRUGATOR MACHINE

FLEXO FOLDER GLUER MACHINE
CASE MAKER

INTERNAL & BUSINESS ONLY

BRIDGE RAISER BELTS

Description

Transport of paper at 90°C and 90% humidity.

ZIPLINK belt with low friction covers recommended
ZLFA056427 Fabric EZP 10/1 01+0 natural

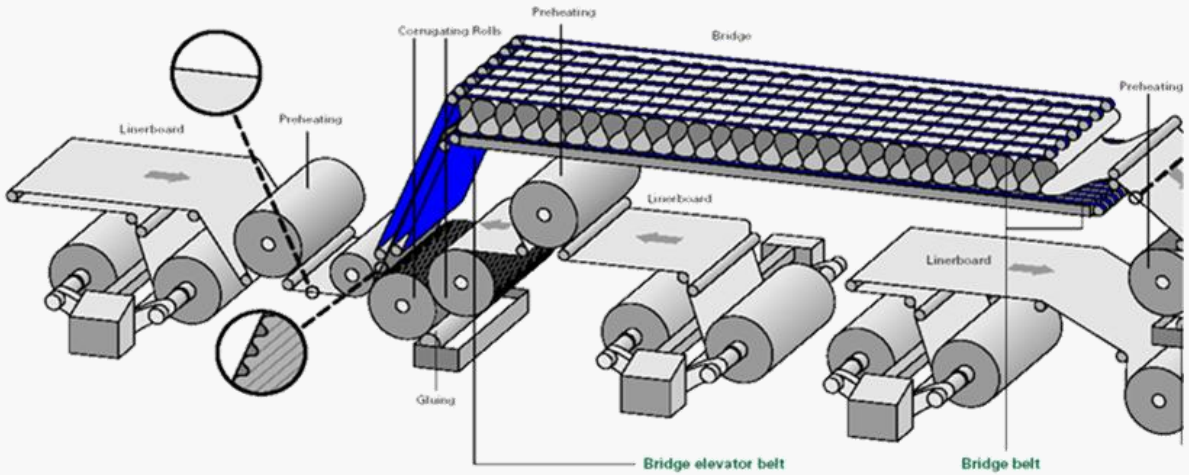

PRODUCT DESIGN
KEY POINTS
FEATURES BENEFITS
TECHNICAL SPECIFICATIONS

BRIDGE RAISER ZLFA056427 Fabric EZP 10/1 01+0 natural

Cotton fabric on transport side
- Smooth and gentle transport surface
- Wear resistant cotton fabric
- Proven to resist environmental temperatures of 90°C at high humidity.

Splice method
The integrated spiral allow joining withing minutes without use of chemicals or electricity. A simple kit of standard tools can be offered.

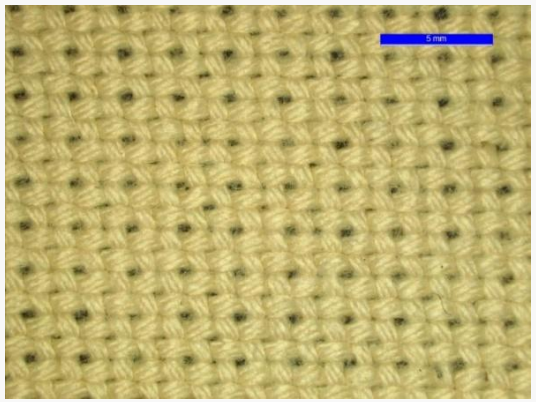

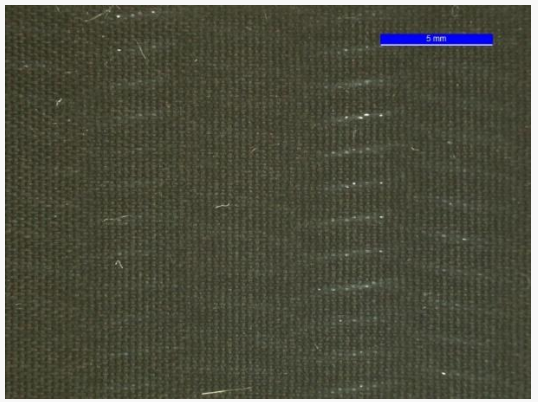

Integrated spiral / Tensile member
- Very flexible
- High edge stability
- Allows easy joining

Black rubber on bottom side
- Positive grip on rollers

BENEFITS ZLFA056427 Fabric EZP 10/1 01+0 natural

- Constant coefficient of friction during the entire lifetime
- Positive control of relative movement between paper and belt
- Non marking surfaces, ideal for sensitive paper
- Proven to run at 90°C and 90% humidity
- Dimensional stability — no re-tensioning
- Long service life
- ZIPLINK joining - reducing down time

The simple installation along with the reliable performance convincing customers.

ZLFA056427 Fabric EZP 10/1 01+0 Black CR in action on Fosber S/Line 420

FLEXO FOLDER GLUER

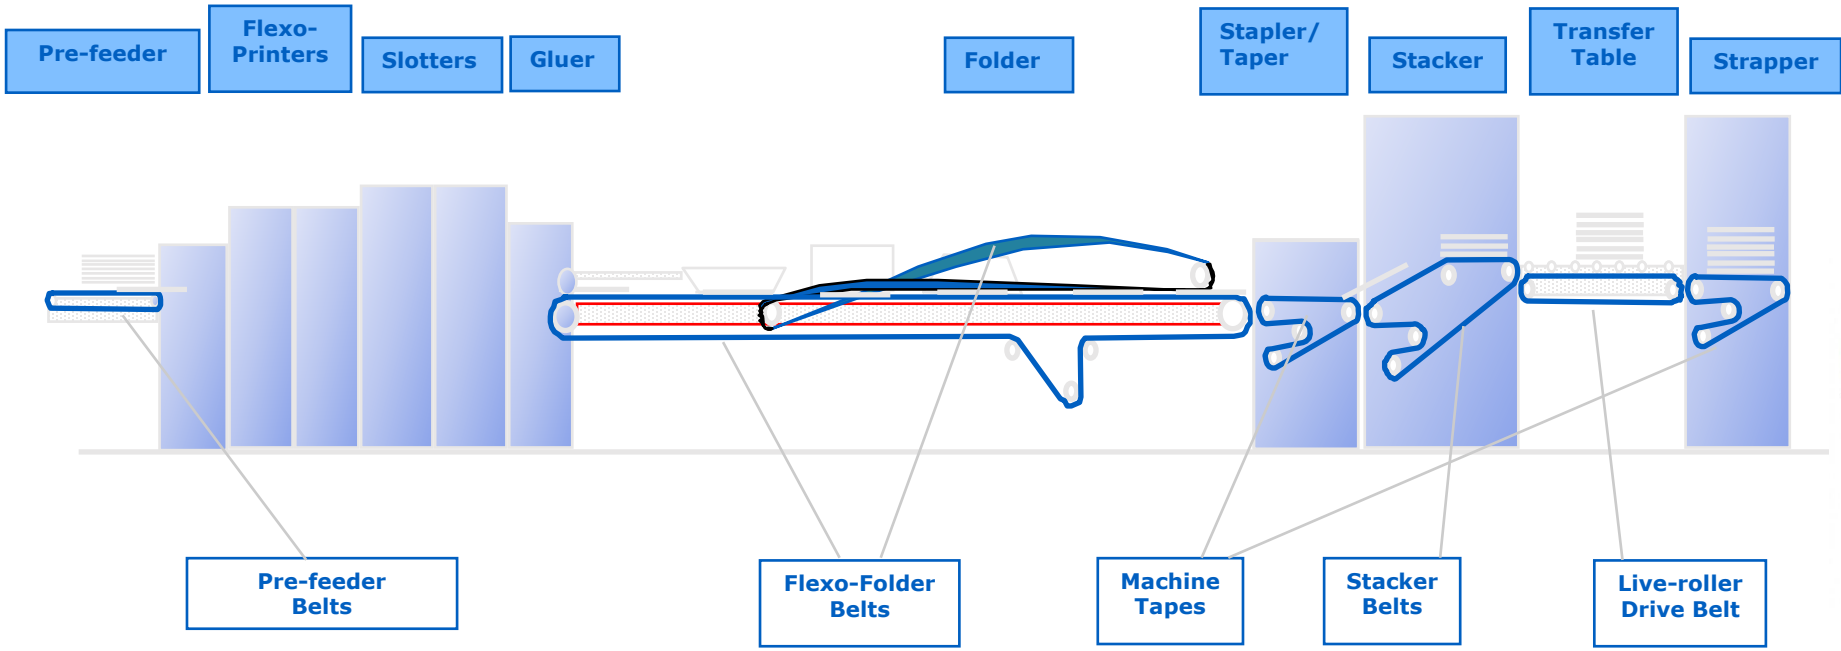

FEEDER BELTS / STRAPS

Description

Feeding the blanks, often perforated for vacuum support

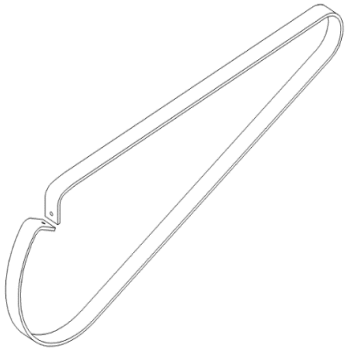

Feeder Strap old design

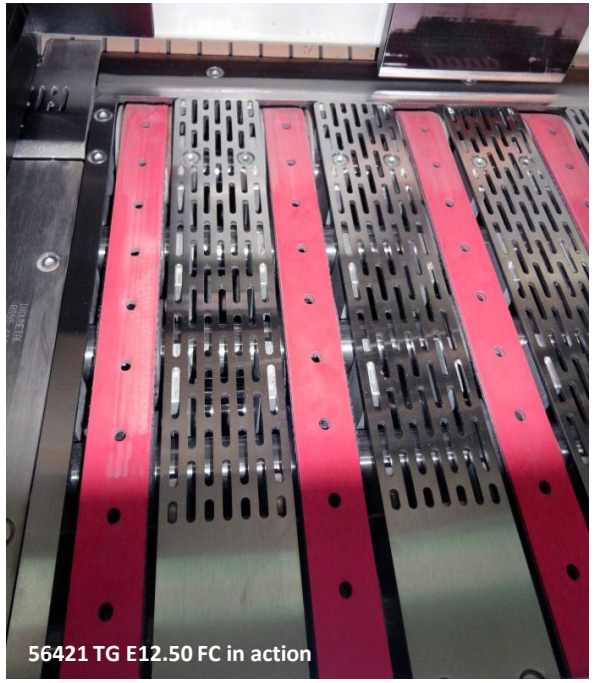

Flat belts with high friction cover recommended

FBTG056420 TG E12.65 FC
FBTG056421 TG E12.50 FC

INTERNAL & BUSINESS ONLY

FOLDER BELTS

Description

Transport and folding flaps.

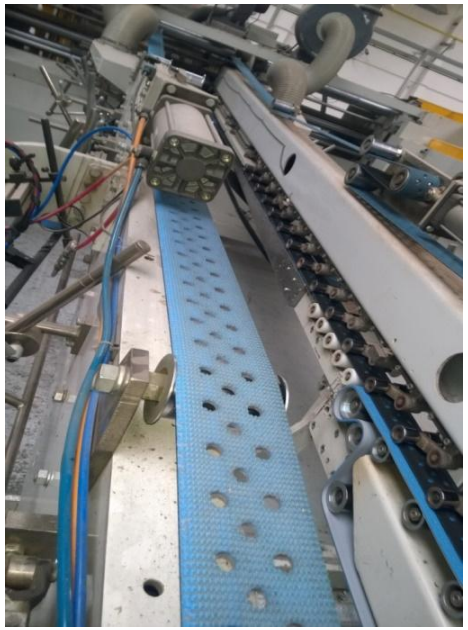

Flat belts with high friction covers recommended

FBGG054274 GG S06.30 RRC green	Folder belt non-Food Grade
FBGG054145 GG S06.40 RRC green	Folder belt non-Food Grade
FBGG054275 GG S06.50 RRC green	Folder belt non-Food Grade
FBGG054276 GG S06.60 RRC green	Folder belt non-Food Grade
FBGG054780 GG S06.30 RRC FG	Folder belt Food Grade
FBGG054781 GG S06.40 RRC FG	Folder belt Food Grade
FBGG054782 GG S06.55 RRC FG	Folder belt Food Grade
FBGG054789 GG S06.60 RP6C	
FBGG054790 GG S06.70 RP6C	
FBTG054787 TG E08.70 P6Q	
FBTG054788 TG S06.65 P6C	
FBTG056420 TG E12.65 FC	

Ziplink items
FBIG056422 (560122) NR EZP 10/1 01+32 red
FBIG056423 (560239) NR EZP/M 10/2 01+32 red CR HR

MACHINE TAPES

Description

Machine tape for Staplers, Tapers, Strappers

Flat belts with high friction cover recommended
54265 TG P04.20 RC
54266 TG P04.29 RC

INTERNAL & BUSINESS ONLY

STACKER BELTS

Description

Counting/stacking of printed and folded (flat) boxes. Two designs: Understacker and Upstacker. Final process in Corrugated board converting–any damage to the product is of high cost!

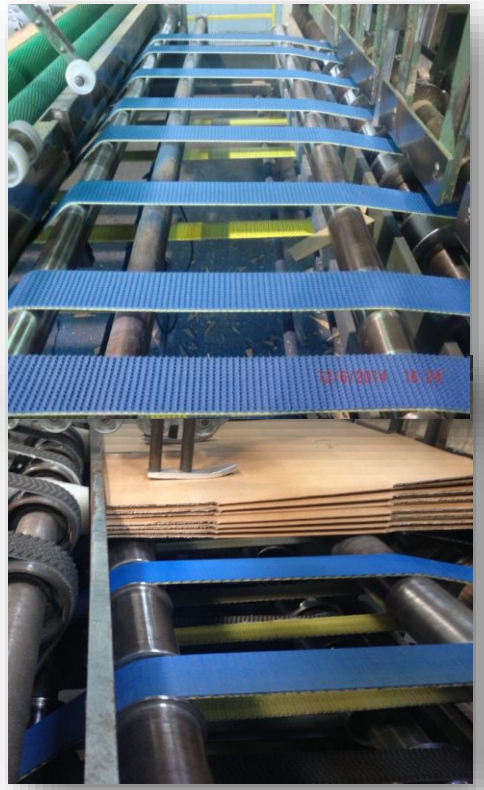

Flat belts with high friction covers recommended

FBGG054789 GG S06.60 RP6C
FBGG054790 GG S06.70 RP6C
FBGG054662 GG E10.55 RRQ

560208 Nitrile BX EZP 10/1 01X + 05 blue/yellow

INTERNAL & BUSINESS ONLY

KEY POINT: MECHANICAL FASTENER

Issues with mechanical fasteners	Reason / Remarks
Failing fasteners damage cartons twisted sections	Fasteners not recommended in

Comparison of splice strength with different splice methods

Usually with a proper made finger splice the splice strength is around 50% of the virgin material.

Mechanical fasteners show a much lower splice strength, are unreliable and might be used for an immediate emergency case only.

Typical marks /damages caused by mechanical fasteners

Example of splice strength with different joining methods		
Item	FBTG054787	TG E08.70 P6Q
Splice method	Breaking stress Mpa	Elongation at Break
Material only (for benchmarking)	18.1	20%
Overlap splice according joining instructions	3.05	13%
Mechanical fastener	2.3	11%

BENEFITS: 54790 GG S06.70 RP6C

Feature	Advantage	Benefit
High modulus Polyamide foil tensile member	Shock absorbing, easy on bearings	Easy installation and tracking
Extremely high edge resistance	No edge fraying	Long service life
XNBR rubber cover	Wear resistant	Extended service life
Excellent grip of cover	Safe transport at high speed	Increased output per hour
Rigid belt design	No limitations regarding condition of the folder gluer	Just fit and forget

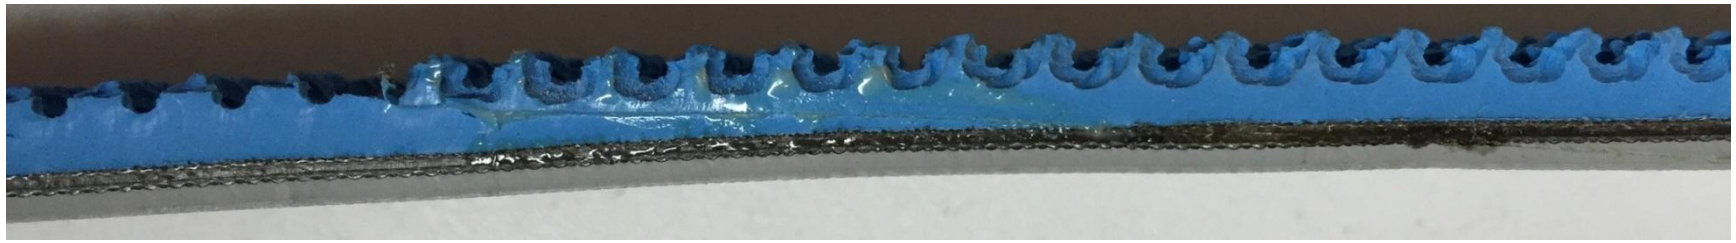

Splice area of 54790 GG S06.70 RP6C

INTERNAL & BUSINESS ONLY

CUSTOMER BENEFITS: CLASSIC RANGE

Feature	Advantage	Benefit
High modulus Polyamide foil tensile member	Shock absorbing, easy on bearings	Easy installation and tracking
Extremely high edge resistance	No edge fraying	Long service life, no hygienic issues
XNBR rubber covers	Wear resistant	Extended service life
Excellent grip of covers	Safe transport at high speed	Increased output per hour
Food grade rubber covers	No contamination of boxes	Ideal for sensitive packaging for food or pharmaceutical
High elasticity	Low load on shafts and bearings	Simple tracking, easy on bearings
Rigid belt design	No limitations regarding condition of the folder gluer	Just fit and forget

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBGG054274 GG S06.30 RRC

XNBR Carboxylated rubber cover
- Excellent grip to carton and paper
- Abrasive resistant
- No glazing
- Long service life

Rough surface structure
- Cope with paper dust

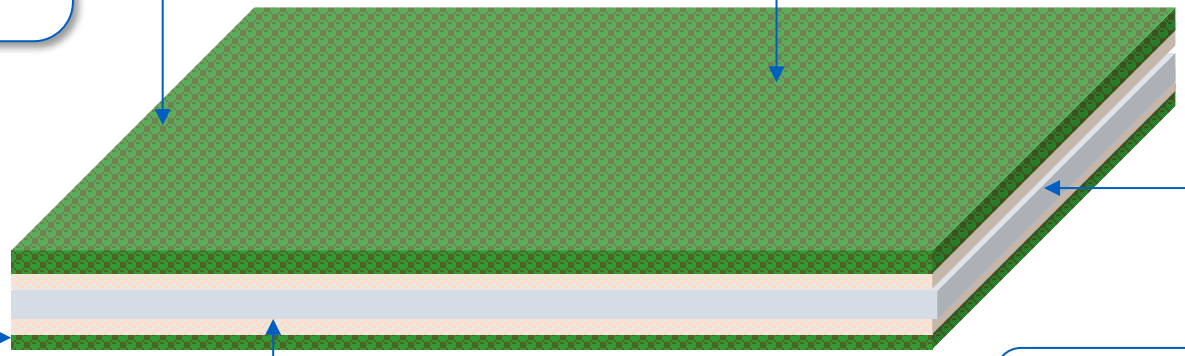

Polyamide foil tensile member
- Very flexible
- High edge stability

Fabric layer
- Permanently antistatic

Splice method
- Classic skived and glued

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBGG054780 GG S06.30 RRC FG

Ammeraal Beltech

XNBR Carboxylated rubber cover
- Food Grade approved rubber
- Excellent grip to carton and paper
- Abrasive resistant
- No glazing
- Long service life
- Free of phthalates, Latex, Nitrosamine

Rough surface structure
- Cope with paper dust

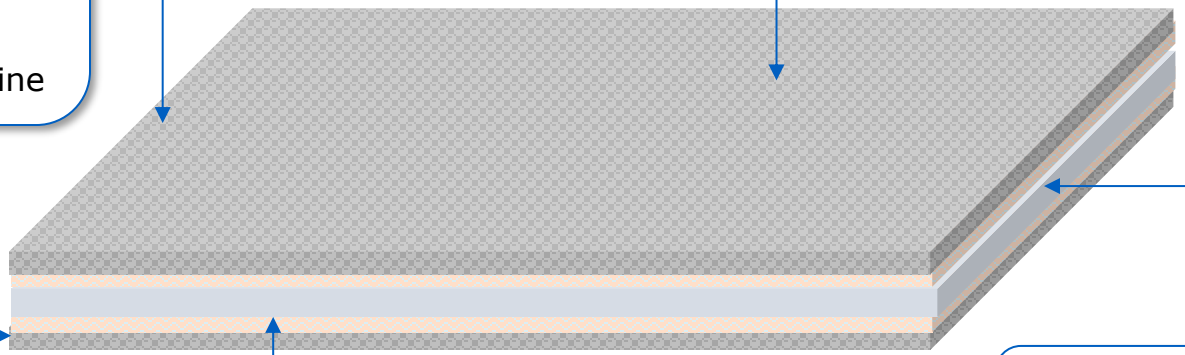

Polyamide foil tensile member
- Very flexible
- High edge stability

Fabric layer
- Permanently antistatic

FDA

Food Grade belts comply with
EC 1935/2004, EU 10/2011 and FDA standards

Splice method
- Classic skived and glued

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBGG054780 GG S06.30 RRC FG

Ammeraal Beltech

XNBR Carboxylated rubber cover
- Excellent grip to carton and paper
- Wear resistant
- No glazing
- Long service life

NBR rubber cover
- Abrasive resistant
- No glazing
- Long service life

Fabric layer
- Permanently antistatic

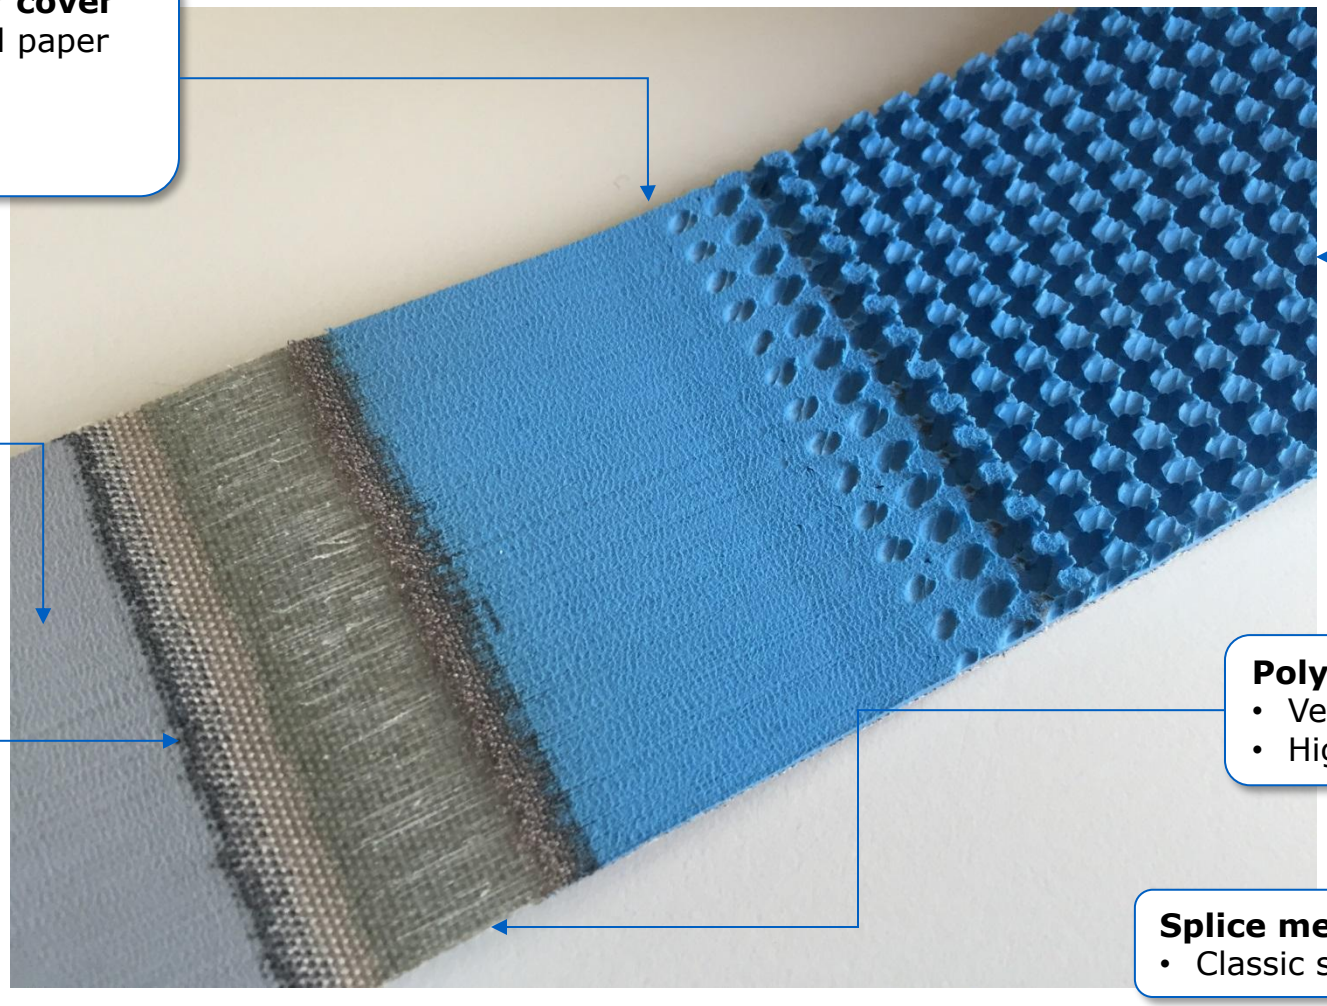

P6 structure:
- Cope with paper dust

Polyamide foil tensile member
- Very flexible
- High edge stability

Splice method
- Classic skived and glued

INTERNAL & BUSINESS ONLY

ZLNR056422 NR EZP 10/1 01+32 red

Natural rubber cover
- Excellent grip to carton and paper
- Abrasive resistant
- No glazing
- Long service life

Smooth surface structure
- High grip
- Cope with paper dust

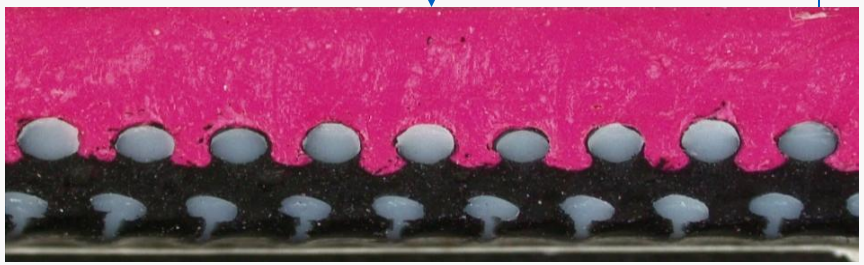

Integrated spiral / Tensile member
- Very flexible
- High edge stability
- Allows easy joining

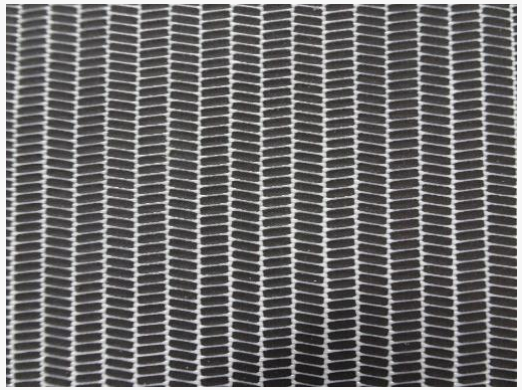

Splice method
The integrated spiral allow joining withing minutes without use of chemicals or electricity. A simple kit of standard tools can be offered.

INTERNAL & BUSINESS ONLY

ZLNR056423 NR EZP/M 10/2 01+32 red CR HR

Natural rubber cover
- Excellent grip to carton and paper
- Abrasive resistant
- No glazing
- Long service life

Smooth surface structure
- High grip
- Cope with paper dust

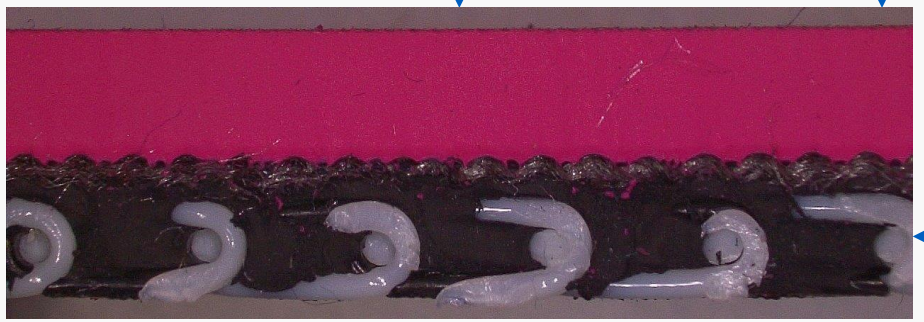

Integrated spiral / Tensile member
- Very flexible
- High edge stability
- Allows easy joining

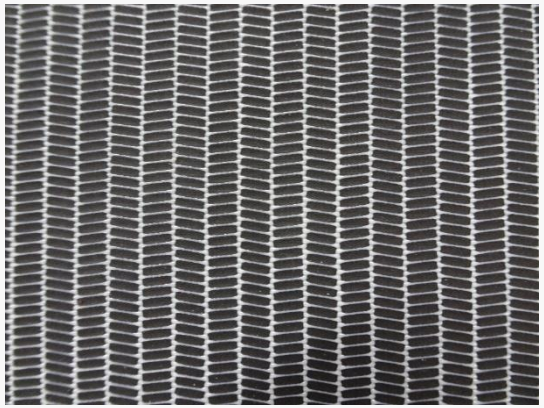

Splice method
The integrated spiral allow joining withing minutes without use of chemicals or electricity. A simple kit of standard tools can be offered.

PRODUCT DETAILS: FBTG054787 TG E08.70 P6Q

XNBR Carboxylated rubber cover
- Excellent grip to carton and paper
- Abrasive resistant
- No glazing
- Long service life

P6 Supergrip surface structure
- High grip
- Cope with paper dust

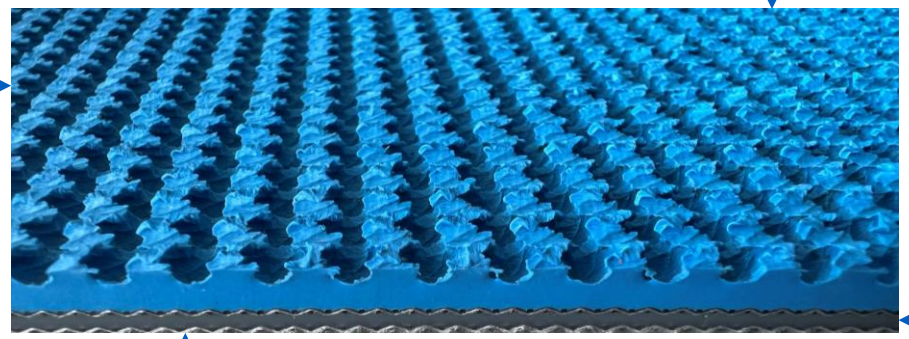



Thermoplastic
Allows melting process

Polyester fabric tensile member
- Very flexible
- High edge stability
- Dimensional stable

Splice method
can be joined with mechanical fasteners for quick replacement in emergency cases. Splice procedure with heating press is offered as well. Although a bit more time consuming, it will avoid any risks of damaging the corrugated products like mechanical fasteners can do.

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: FBTG054788 TG S06.65 P6C

XNBR Carboxylated rubber cover
- Excellent grip to carton and paper
- Abrasive resistant
- No glazing
- Long service life

P6 Supergrip surface structure
- High grip
- Cope with paper dust

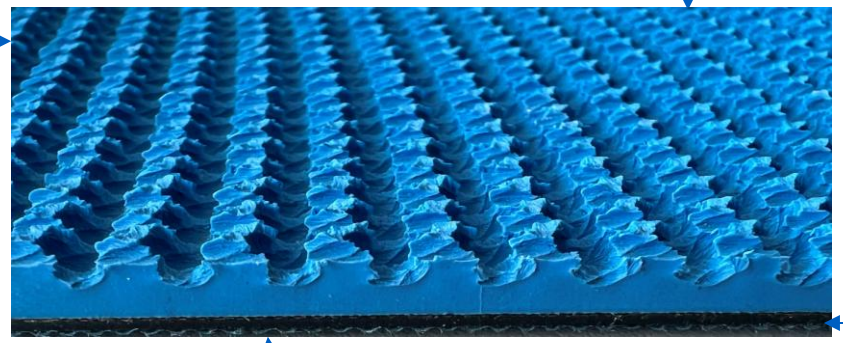

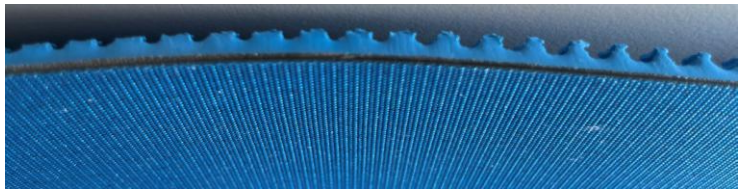

Polyamide foil tensile member
- Very flexible
- High edge stability

Polyamide fabric
- Very flexible
- High edge stability
- Dimensional stable

Splice method
spliced with a Classic wedge skive, offers a long-lasting splice solution without risking any damage to products. The belt design is suitable to run over slider beds and perforation for vacuum support is possible as well

INTERNAL & BUSINESS ONLY

Ammeraal Beltech

RAPPLON®

Swiss made High Performance Flat Belts

January 2023

Product Management

BU Switzerland

TUBEWINDER

© Ammeraal Beltech — All Rights Reserved.
Confidential and Proprietary Intellectual Property.

TUBEWINDER / COREWINDER

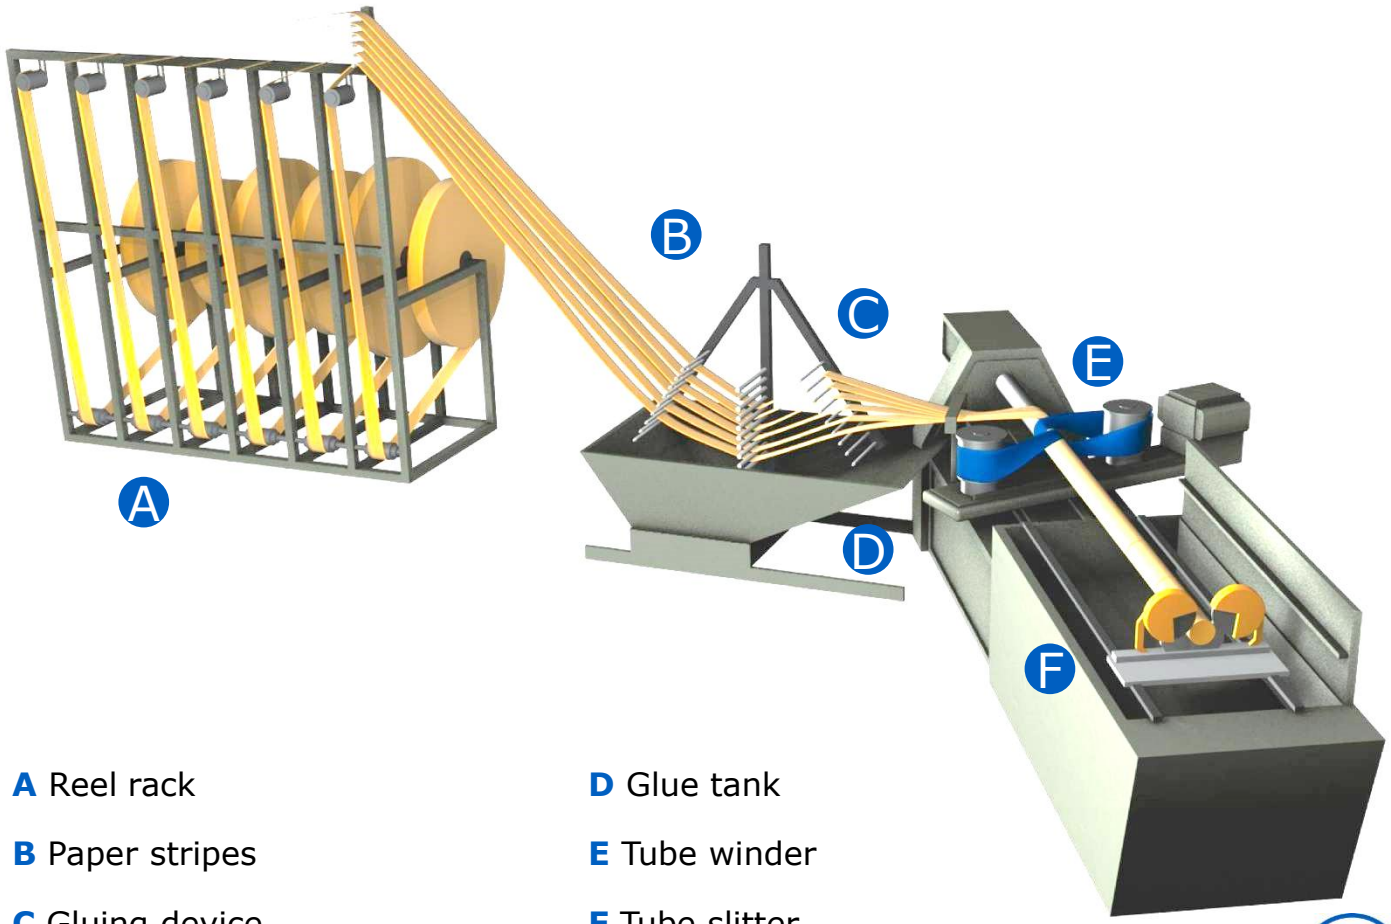

A Reel rack

B Paper stripes

C Gluing device

D Glue tank

E Tube winder

F Tube slitter

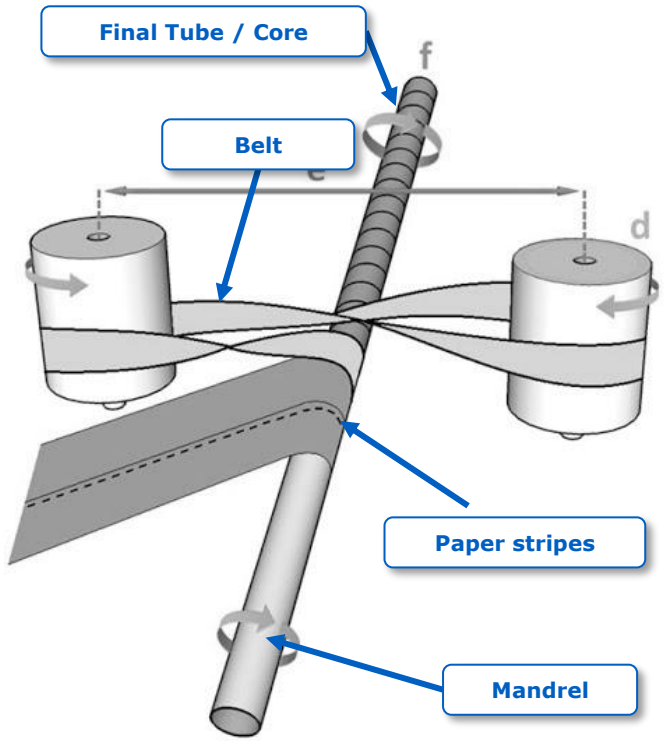

PRODUCT DESIGN
KEY POINTS
FEATURES BENEFITS
TECHNICAL SPECIFICATIONS

INTERNAL & BUSINESS ONLY

KEY POINTS: BELTS

Ammeraal Beltech

Belt selection

- Select belt solution based on tube diameters according selection chart.
- Never use the same belt for tube diameters beyond its range.
- Watch minimum core diameters (tube ID)
- Watch maximum core diameters (tube OD
- Watch drum diameters (~ min. belt diameter)
- Never run the belt without paper

Belt width

- Belt width 5 - 10 % narrower than paper width
- Belt width max. 2x mandrel diameter (2x tube ID)

Belt tension

- Avoid too high belt tensions
- Adjust belt tension after change of tube diameter

INTERNAL & BUSINESS ONLY

KEY POINTS: BELT TWISTS

Belt Twist

- Some tube winders / cores request to build twists into the belt before joining.
- Different belt portions should not touch, possibly suggest twists

AmTube belts (endless woven) can not be equipped with a twist.

Belt splice

- Always splice the belts in an angle of 90° as this offers higher splice strength for this heavy application.

No twist

180° One-Half Twist Right

180° One-Half Twist Left

360° Complete Twist Left

360° Complete Twist Right

INTERNAL & BUSINESS ONLY

KEY POINTS: BELT SELECTION

Ammeraal Beltech

The correct belt solution is defined based on core/tube diameter and its wall thickness.

Min. core inner diameter in mm	Min. core outer diameter in mm	Max. core outer diameter in mm	Max. wall thickness in mm	Min. drive drum diameter in mm	Item	Description	Tube sizes
18	20	40	2	20	FBGG054731	GG S04.14 RRC	Light and medium
30	32	50	4	40	FBGG054243	GG S07.30 RRC	Light and medium
40	50	80	6	60	FBGG054736	GG S09.30 RRC	Light and medium
40	50	120	10	80	FBGG054278	GG S11.50 RRC	Light and medium
32	40	80	2 – 8	10x belt thickness		AmTube 500	Medium and heavy
44	60	1100	4 – 16	10x belt thickness		AmTube 700	Medium and heavy

INTERNAL & BUSINESS ONLY

FEATURES & BENEFITS

RAPPLON® Flat Belts are specifically designed to master high forces with precise tracking and high load fluctuations. The shock-absorbing properties of our maintenance-free belts extend bearings lifetime substantially supporting again your goal of cost efficiency.

Feature	Advantage	Benefit
TNBR rubber cover	Excellent paper gripping cover	Efficient, precise, quality tube
	Abrasive resistant surface	Extends operational life
Polyamide foil tensile member	High strength tensile member	Absorbs shock loads
	Extremely flexible	Handles tubes as small as 20mm
	Highest possible energy saving	Considerable overall cost saving

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS

TNBR-Rubber cover material:
- Wear resistant surface
- Highly abrasion resistant
- Resistant to oil and fat
- Satisfied service life

Rough structure on both sides

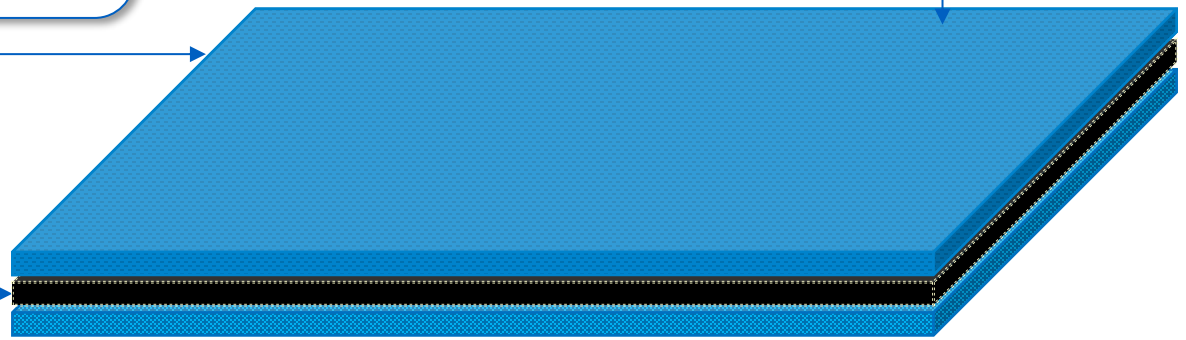

Polyamide foil tensile member:
- Very flexible
- High edge stability
- Shock absorbing

Classic belts with PA-Foil as tension member:
- Absorbing high loads and torques
- Permanently anti-static
- No tracking guides required

INTERNAL & BUSINESS ONLY

Ammeraal Beltech

RAPPLON®

Swiss made High Performance Flat Belts

January 2023

Product Management

BU Switzerland

TEXTILE

© Ammeraal Beltech — All Rights Reserved.
Confidential and Proprietary Intellectual Property.

SPINNING PROCESS

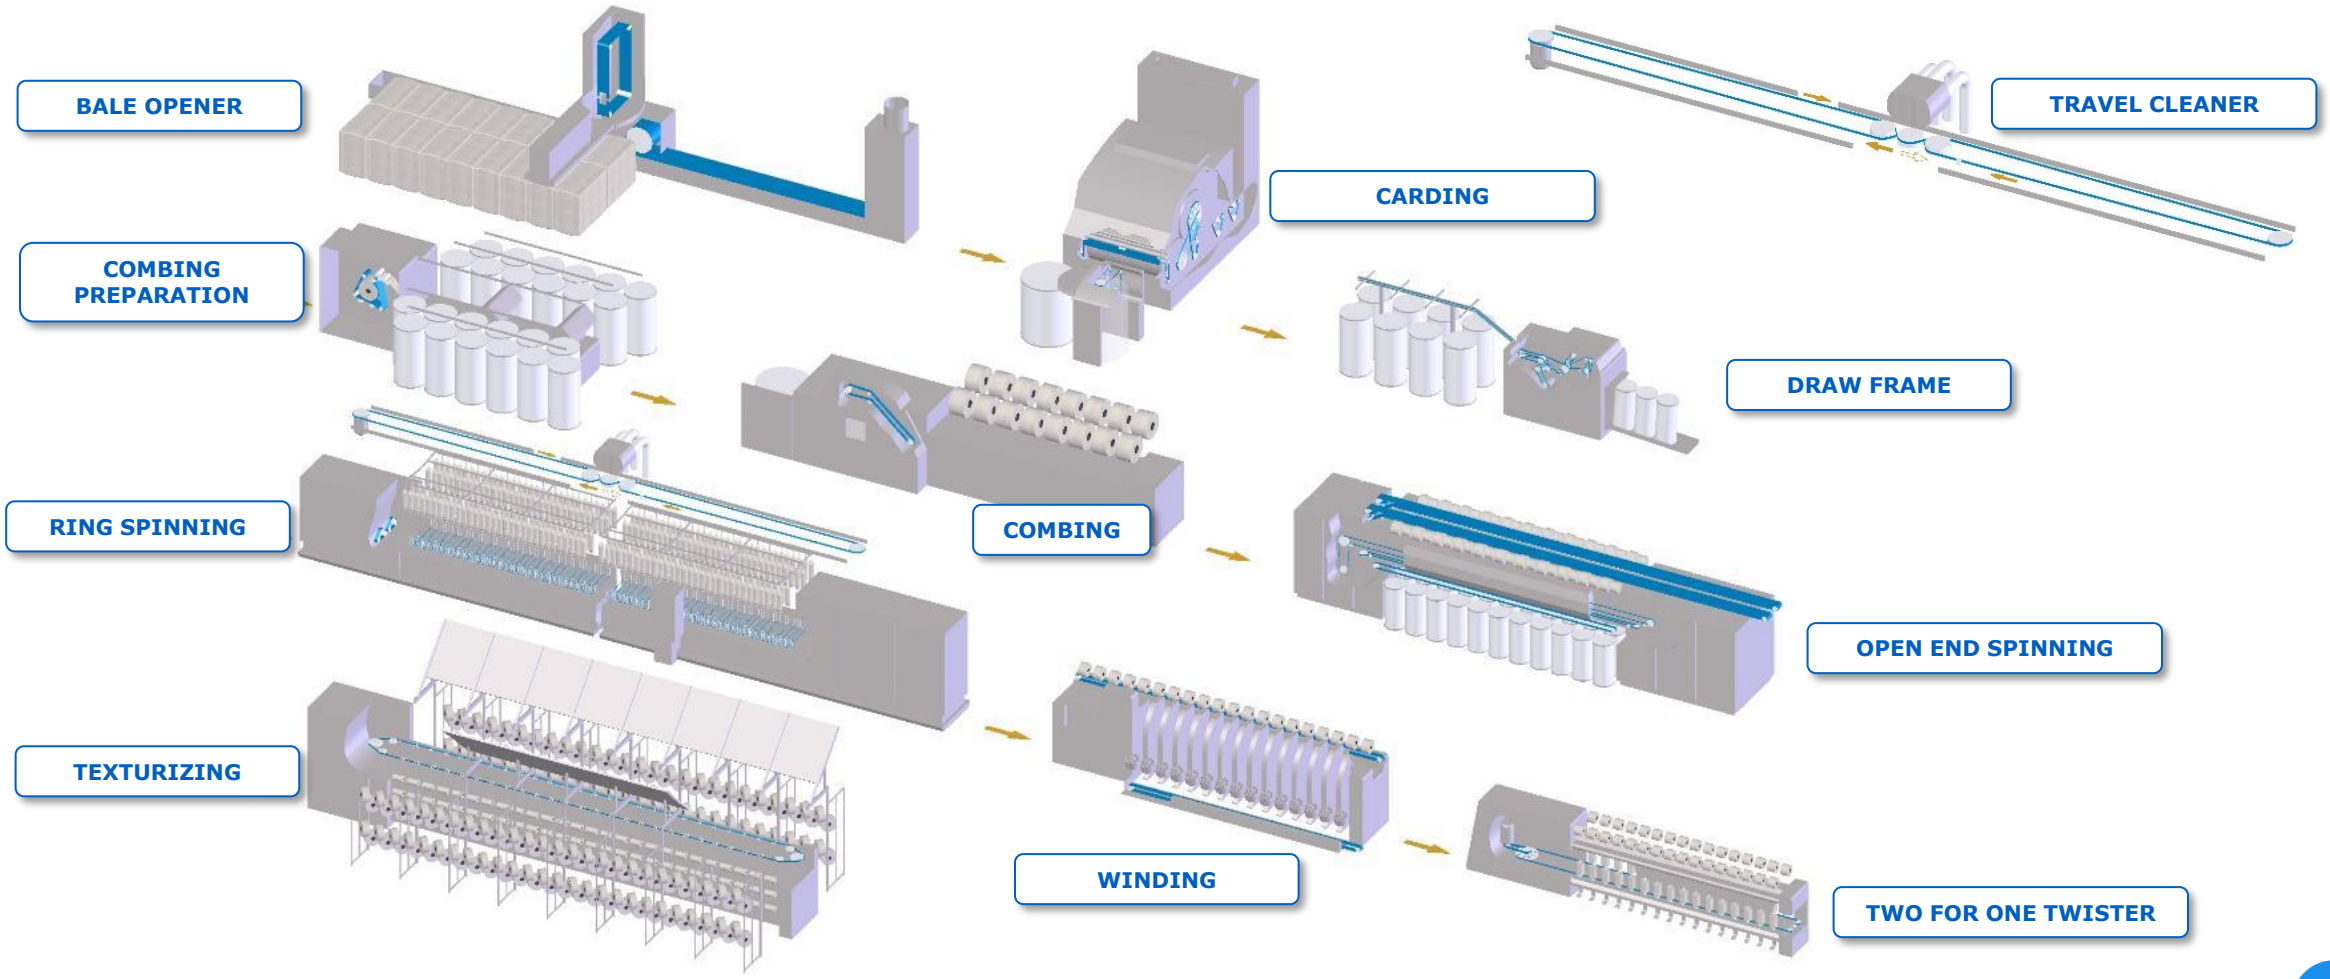

INTERNAL & BUSINESS ONLY

BALE OPENER

Description

The bale opener releases fibers lumps out of bales.

The transport channel is a vacuum chamber, to be sealed with belt material.

Specific belts are recommended

58181 PP S27 C	Cover for vacuum channel of bale opener / lateral stability
54990 PVC 16-4	Cover for vacuum channel of bale opener / 4-ply provides lateral stability

INTERNAL & BUSINESS ONLY

CARDING

Description

Various belts are installed as power transmission and sliver tapes in front, pulling the card sliver out of the machine.

Various flat belts with high or medium friction covers recommended

FBUU054551 UU N16 SSQ FG	Sliver Tape or Apron Belt / smooth surface, no fluff accumulation
FBGG054585 GG N15 FFQ HC	Sliver Tape or Apron Belt / special for chemical fibers / abrasive resistant
FBGG054729 GG S06.19 RFC green	XNBR rubber / high wear resistant
FBGG054370 GG S09.22 RRC green	XNBR rubber / high wear resistant / rough surface for self cleaning effect
FBGG054528 GG S11.25 RRC green	XNBR rubber / high wear resistant / rough surface for self cleaning effect
FBGT054703 GT S06 RC	Power Transmission
FBGT054704 GT S09 FC	Power Transmission
T26 T10 3040	Steel Cord / Timing belt

INTERNAL & BUSINESS ONLY

DRAW FRAME

Ammeraal Beltech

Description

Combining and stretching of several card slivers is the job of the draw frame.

Flat belt with high friction covers recommended

FBGG054731 GG S04.14 RRC

INTERNAL & BUSINESS ONLY

COMBING PREPARATION

Ammeraal Beltech

Description

The Omega lap machines unwind the sliver into a Lap.
During the unwinding process the belt press the lap tightly together.

Flat belt with low friction covers recommended

Not yet available

INTERNAL & BUSINESS ONLY

COMBING

Description

Only one conveyor belt is installed to transport the combed silver tape, a smooth surface avoid fiber accumulation.

Flat belt with low friction covers recommended

FBGG054735 GG S02.11 FFC Transport belt for combed fibers without fluff accumulation

INTERNAL & BUSINESS ONLY

ROVING FRAME / FLYER

Ammeraal Beltech

Description
The flyer refines the thick sliver into a thin roving.
The difference in speed of various coil diameters are often adjusted by cone drive



Flat belt with different friction covers recommended
FBLT054047 LT S11 C
FBGG054289 GG S11 LRC

PRODUCT DESIGN | KEY POINTS | FEATURES BENEFITS | TECHNICAL SPECIFICATIONS

INTERNAL & BUSINESS ONLY

RING SPINNING

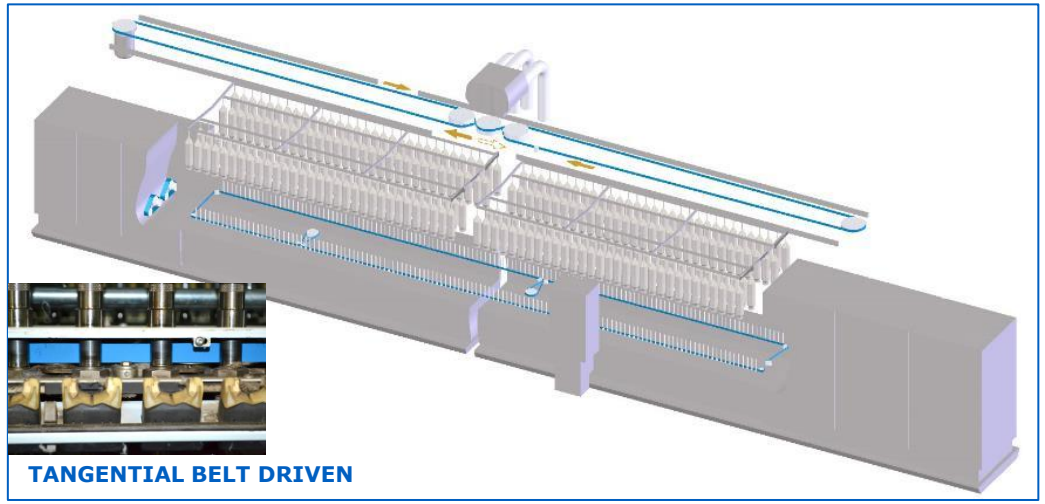

TANGENTIAL BELT DRIVEN

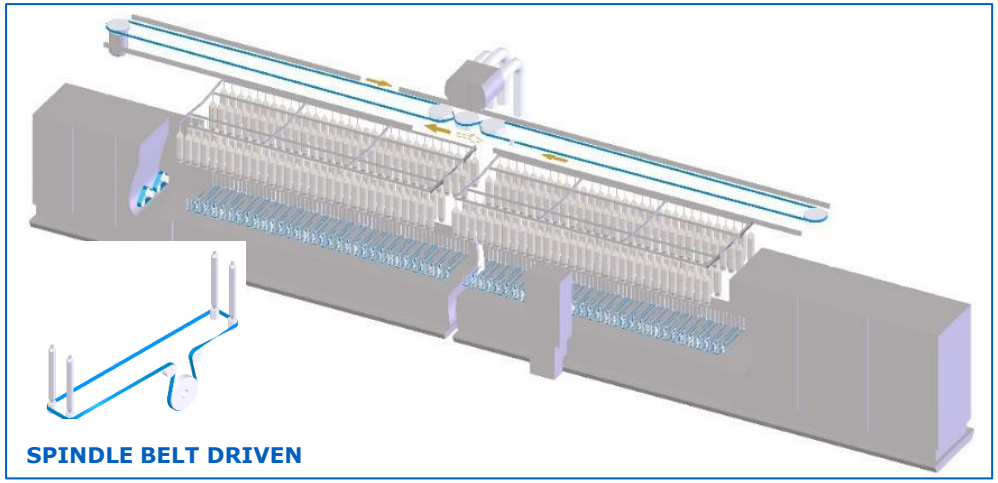

SPINDLE BELT DRIVEN

INTERNAL & BUSINESS ONLY

RING SPINNING WITH SPINDLE TAPES

Ammeraal Beltech

Description
4 spindles are driven by one flat belt.

Flat belt with different friction covers recommended

FBUT054970 UT E04.07 SQ	Spindle Tape / QuickSpice / contact AB-Singapore
FBGT054980 GT P02.05 SC	Spindle Tape / Classic type / contact AB-Singapore

KEY POINTS

FEATURES BENEFITS

TECHNICAL SPECIFICATIONS

INTERNAL & BUSINESS ONLY

RING SPINNING WITH TANGENTIAL BELTS

Ammeraal Beltech

Description

The Tangential belt is driving the spindles.
Zinser Ring-spinning machines with Omega drive system.
Marzoli Ring- Spinning machines have similar drive system but divided into sections

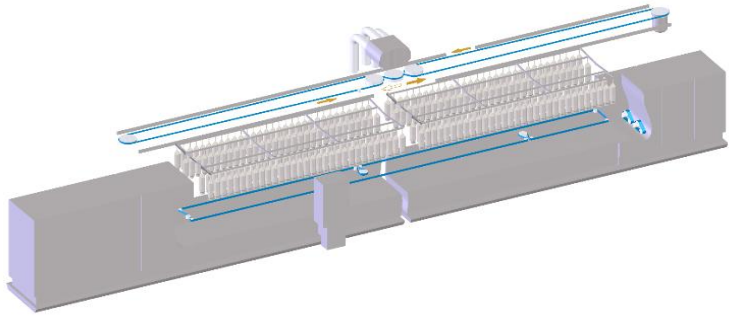

Flat belt with high friction covers recommended

FBGG054734 GG S06.18 RFC
FBGG054729 GG S06.19 RRC green

FBGG054286 GG S 15.30 RRC green	Zinser 319 / 320
FBGG054287 GG S18.34 RRC green	Marzoli NSF2

INTERNAL & BUSINESS ONLY

OPEN END-SPINNING / ROTOR SPINNING

Ammeraal Beltech

Description

The principle of rotor spinning is simpler and mainly used for course yarns.
The sliver goes direct to the rotor spinning machine.

Flat belt with high friction covers recommended

FBGG054369 GG S09.22 RRC black
FBGG054370 GG S09.22 RRC green
FBGG054528 GG S11.25 RRC green

INTERNAL & BUSINESS ONLY

TWISTING TFO

Description

Spindles in TFO’s are manly driven by flat belts which are equipped with Rubber on both side. Some machine have as primary drive a power transmission belt.

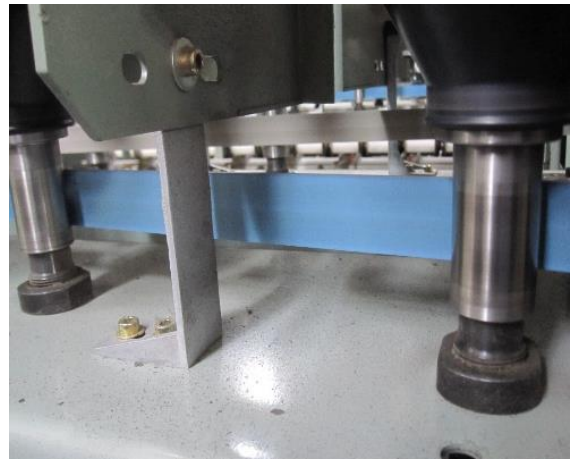

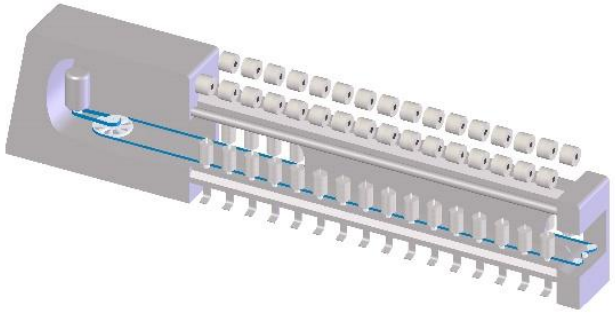

Flat belts with high friction covers recommended

FBGG054370 GG S09.22 RRC green	Tangential belt
FBGG054528 GG S11.25 RRC green	Tangential belt
FBGG054286 GG S15.30 RRC green	Tangential belt
FBGG054289 GG S11 LRC	Power Transmission
FBGG054297 GG S22 LRC	Power Transmission

INTERNAL & BUSINESS ONLY

TRAVEL CLEANER

Description

Travel cleaners or over head cleaners move back and forth on top of the spinning machines and TFO’s. The flat belt drives a fan and the air generated is blown between the spindles to keep the machine free of fibers.

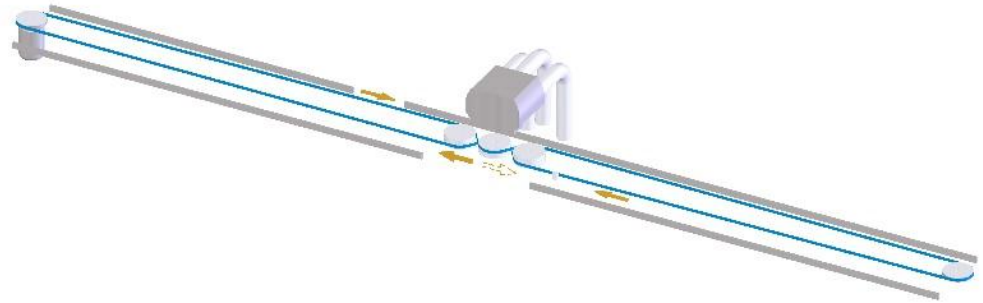

Flat belts with high friction covers recommended

FBGG054729 GG S06.19 RFC green
FBGG054734 GG S06.18 RFC
FBGG054370 GG S09.22 RRC green
FBGG054528 GG S11.25 RRC green
FBGT054703 GT S06 RC
FBGT054704 GT S09 FC

INTERNAL & BUSINESS ONLY

WINDING

Description

After spinning the yarn will be further processed on winding machines.
Older winding machines are driven by flat belts. Nowadays this application is a semi automatic process and driven by individual motors.

Flat belts with high friction covers recommended

573920 Ropanyl EM 8/2 00 + 02 white AS FG
Conveyor belt to transport the finished bobbins on top of the machines

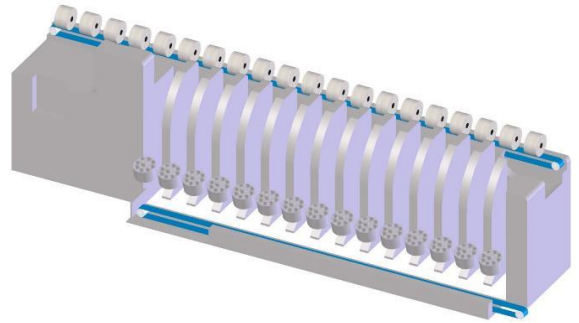

575760 Flexam EM 8/2 0+04 green AS FG
Conveyor belt to transport the cops on the bottom

INTERNAL & BUSINESS ONLY

FANCY YARN TWISTER

Ammeraal Beltech

Description

Fancy yarns are used for many textile purpose: apparel fabrics or household textiles such as curtains and upholstery. Spindles can be driven by tangential flat belt or each spindle by motor.

Flat belts with high friction covers recommended

FBGG054370 GG S09.22 RRC green	Tangential belt
FBGG054528 GG S11.25 RRC green	Tangential belt
FBGG054286 GG S15.30 RRC green	Tangential belt
FBGG054289 GG S11 LRC	Power Transmission
FBGG054297 GG S22 LRC	Power Transmission

INTERNAL & BUSINESS ONLY

COVERING

Description

Assembling or combining two or more yarns based on the core and the cover.

Spindles can be driven by tangential flat belt or each spindle by motor.

Flat belts with high friction covers recommended

FBGG054370 GG S09.22 RRC green	Tangential belt
FBGG054528 GG S11.25 RRC green	Tangential belt
FBGG054286 GG S15.30 RRC green	Tangential belt
FBGG054289 GG S11 LRC	Power Transmission
FBGG054297 GG S22 LRC	Power Transmission

INTERNAL & BUSINESS ONLY

TEXTURIZING

Description

The Ceramic discs are driven by Classic flat belt due to high temperature.

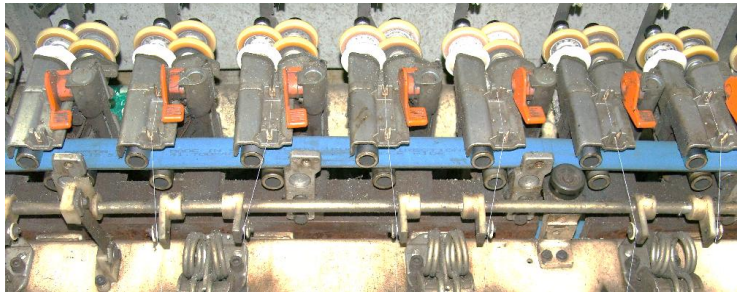

Flat belts with high friction covers recommended

FBGG054528 GG S11.25 RRC green	Tangential belt
FBGG054286 GG S15.30 RRC green	Tangential belt
FBGG054287 GG S18.34 RRC green	Tangential belt

INTERNAL & BUSINESS ONLY

CIRCULAR KNITTING

Ammeraal Beltech

Description

Circular knitting is a form of knitting that creates a seamless tube. Timing belts or polyamide flat belts are applied on top of the machine opening and closing the feed mechanism.

Flat belts with high friction covers recommended

FBGG054731 GG S04.14 RRC
FBGG054738 GG S04.17 RRC

INTERNAL & BUSINESS ONLY

TESTIMONIALS

Rifa RS 30 OE-Spinning
FBGG054370 GG S09.22 RRC

Taitan TQF 386 OE-Spinning
FBGG054369 GG S09.22 RRC
FBGG054528 GG S11.25 RRC

Weifeng WF168 Covering
FBGG054370 GG S09.22 RRC

Hongyuan HY-7 Texturing
FBGG054286 GG S15.30 RRC

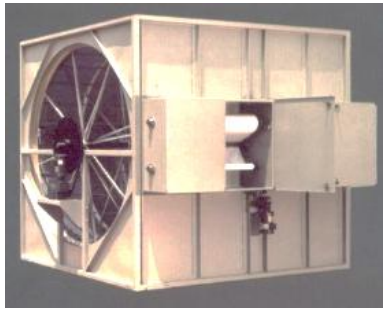

Luwa RPF filter
FBGG054286 GG S15.30 RRC

Saurer BD320
FBGG054370 GG S09.22 RRC

CARDING OEM REFERENCES

Originally installed belt type: FBUU054551 UU N16 SSQ FG

Original Trützschler

TC 7/ TC 11/ TC 15/ TC 19

Original Rieter

C60/C70/C80/

Original Lakshmi

LC363/636

INTERNAL & BUSINESS ONLY

APRON BELT 54551 UU N16 SSQ

Completely made from extruded Polyurethane:
- No edge fraying as there is no fabric
- No fiber accumulation at the edges

Both side smooth:
- Ensures no fluff and lint accumulation

High elastic Polyurethane:
- remains elastic over the entire period
- Simple tracking

AS coating:
- Antistatic to prevent the adhesion of fibers

Splicing:
- Quick and reliable with QuickSplice Tools
- No glue involved

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: CLASSIC TANGENTIAL BELT

Improved wear resistant rubber for a maximum service life

XNBR Rubber cover material with increased Shore hardness
- Highly abrasion resistant rubber
- Resistant to most oil and fat
- Extended service life

Both side Rough structured
- Minimise dust and dirt accumulation
- Self-cleaning to some extend

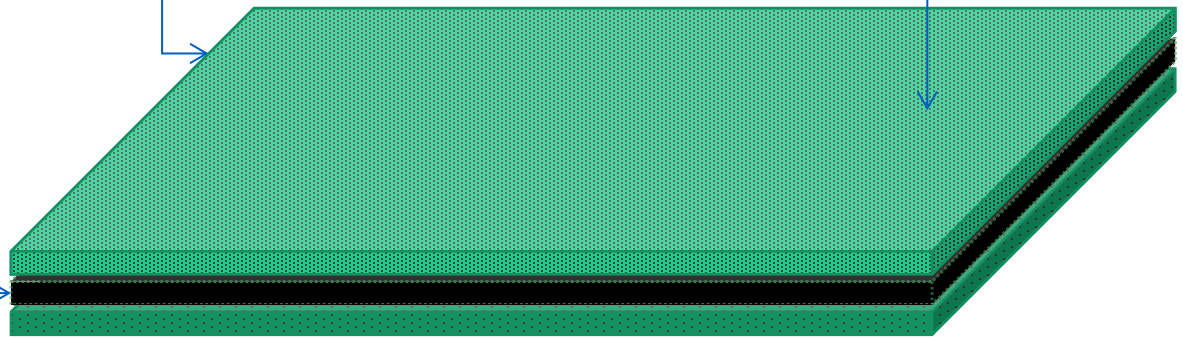

Stretched polyamide foil tensile member:
- High edge stability
- Shock absorbing
- Elongation at break over 25%

In general:
- Absorbing high loads and torques
- Permanently anti-static
- No tracking guides required
- Two different green colour simplify the installation

INTERNAL & BUSINESS ONLY

BENEFITS CLASSIC RANGE

Feature	Advantage	Benefit
High modulus Polyamide foil tensile member	Shock absorbing, easy on bearings	Easy installation and tracking
Extremely high edge resistance	No edge fraying	No yarn accumulation
XNBR rubber covers	Resistant to most oil and fat	Extend service life
Higher shore hardness	Wear resistant	No Rubber dust in the yarn
Rough top cover	Self cleaning effect	Constant spindle speed

INTERNAL & BUSINESS ONLY

BENEFITS QUICKSPLICE

Feature	Advantage	Benefit
PES-Fabric with high E-Modulus	No elongation	no re-tensioning necessary
Highest flexible tension member	Highest possible energy saving	Less operational costs
Engineered for hi-speed	Improved productivity	Highest sorting capacities
XNBR rubber cover	Firm vertical holding of mail pieces	Reliable transport at any time
XNBR rubber cover	Highly wear resistant	Long service life
QuickSplice	Quick and simple splicing with QSP-Tools	Safe joint, perfectly aligned, everybody can splice

INTERNAL & BUSINESS ONLY

Ammeraal Beltech

RAPPLON®

Swiss made High Performance Flat Belts

January 2023

Product Management

BU Switzerland

WOOD

© Ammeraal Beltech — All Rights Reserved.
Confidential and Proprietary Intellectual Property.

WOOD

PRODUCTION OF LUMBER

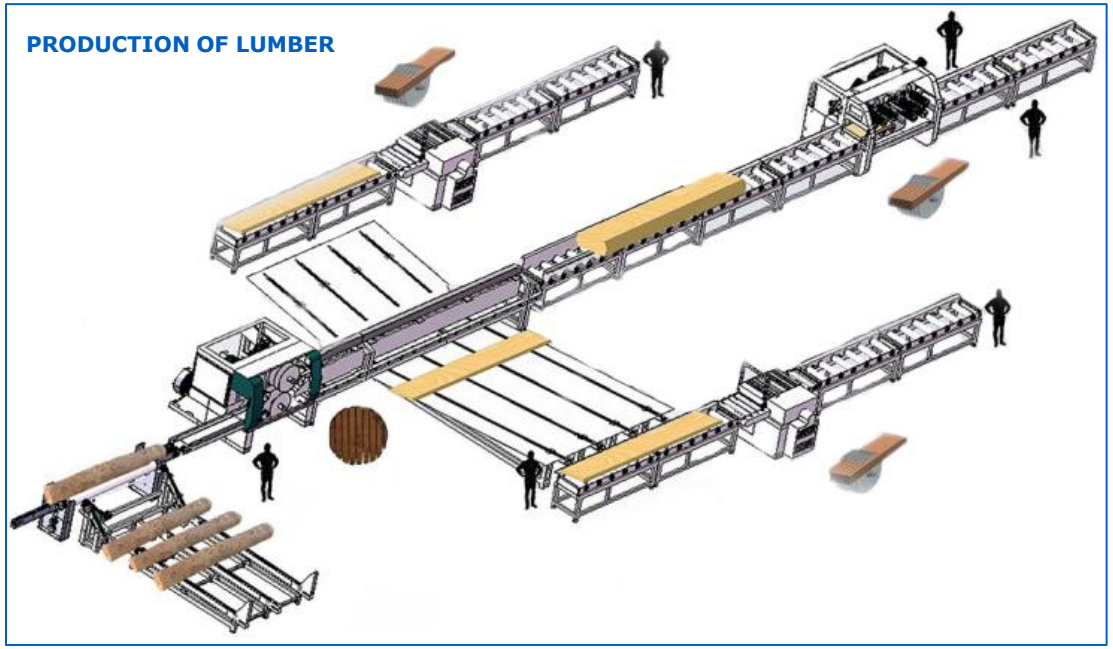

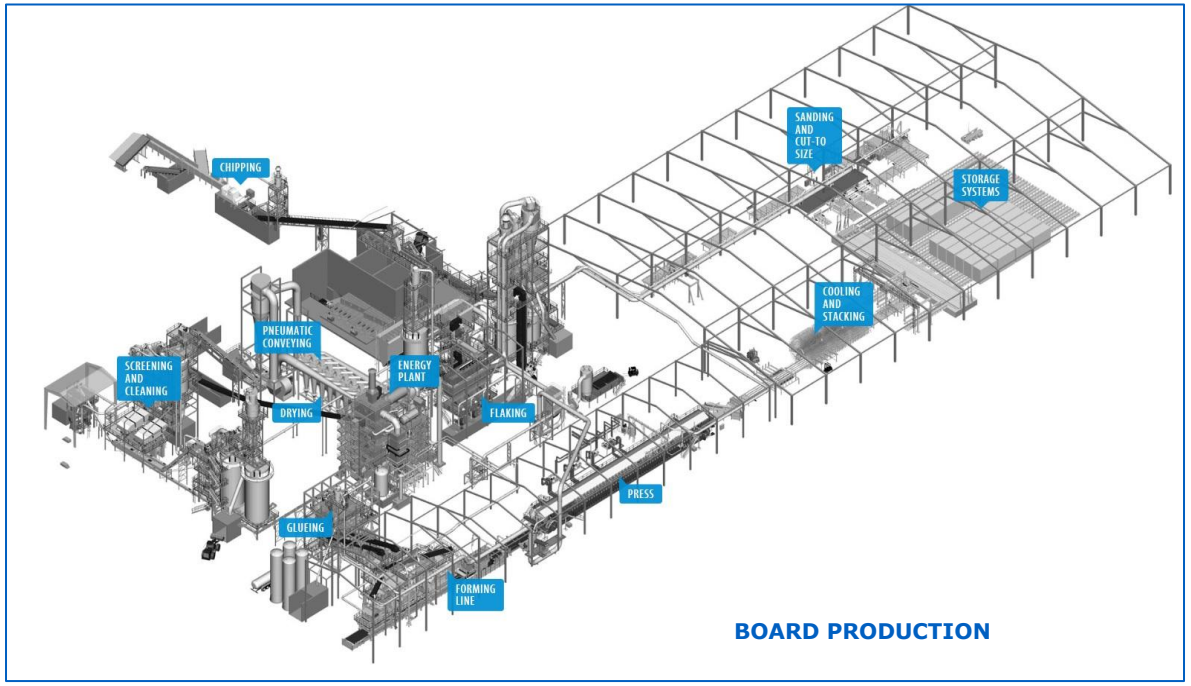

BOARD PRODUCTION

INTERNAL & BUSINESS ONLY

PRODUCTION OF LUMBER

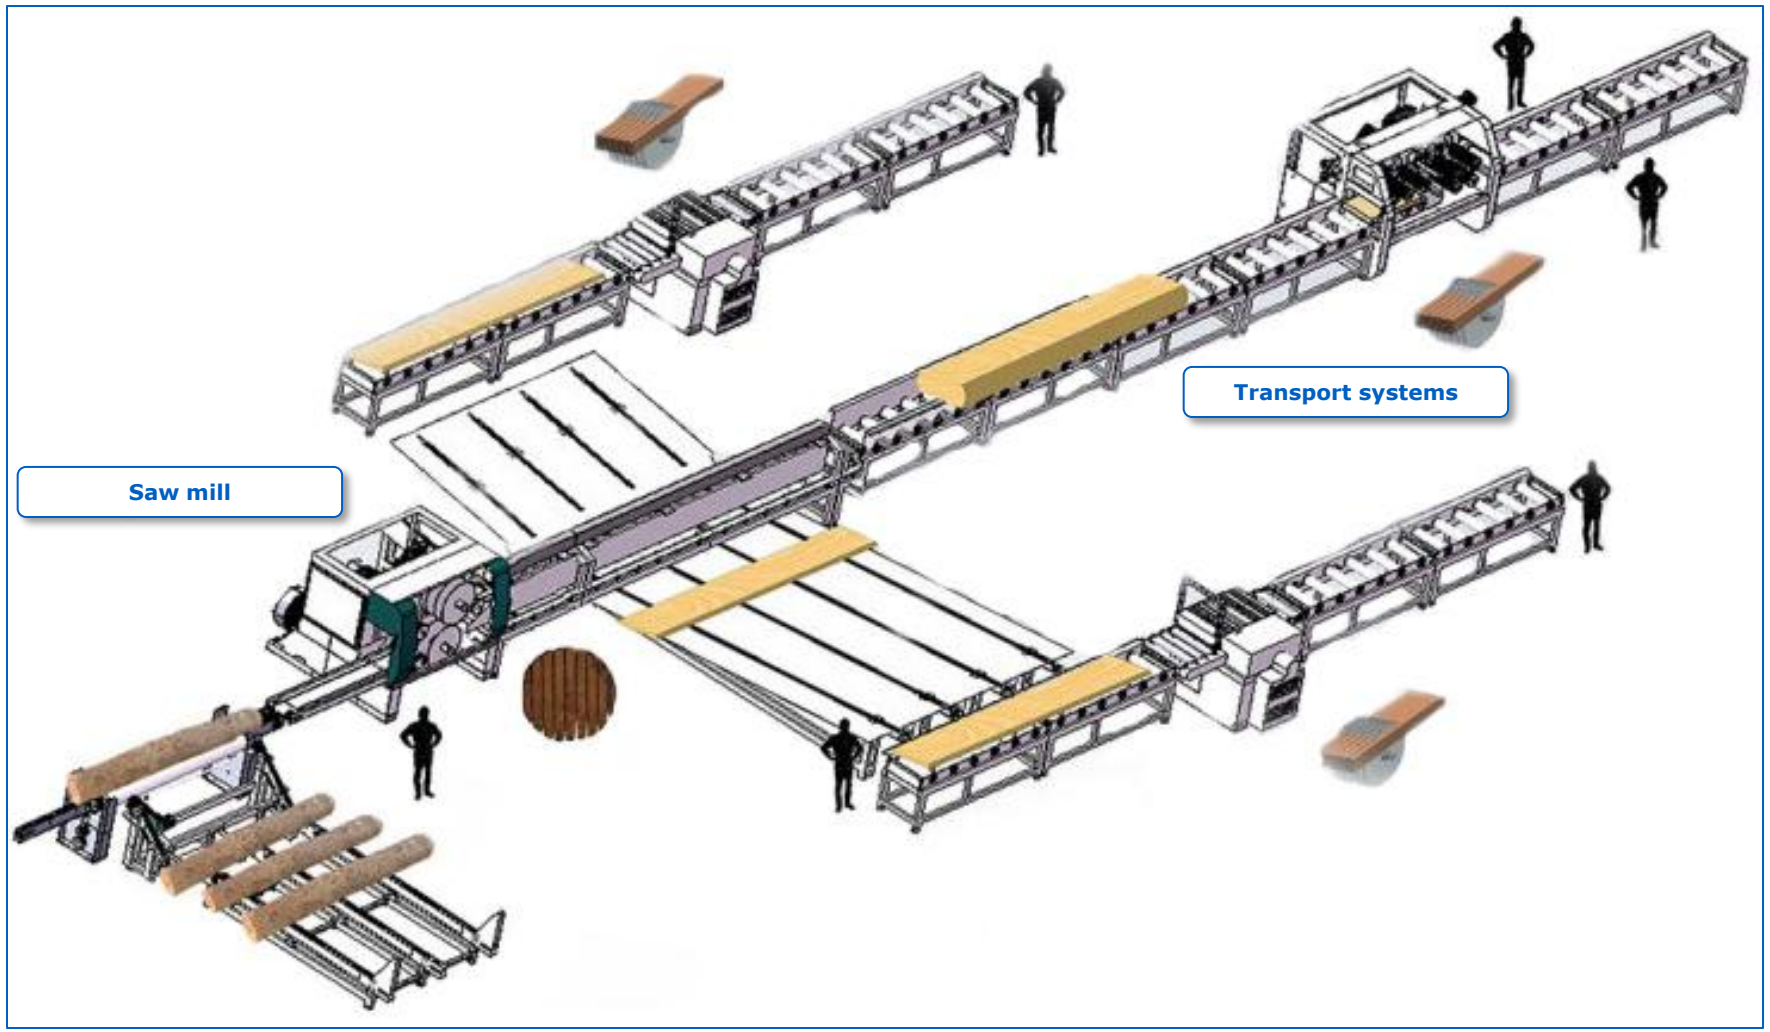

INTERNAL & BUSINESS ONLY

SAWMILL / CHIPPER / FLAKER / HAMMERMILL

Description

In all these machines Power Transmission belts are in use.

(LT- and GG SXX LRC types)

Refer to the Power Transmission Section for more details

POWER TRANSMISSION

TECHNICAL SPECIFICATIONS

INTERNAL & BUSINESS ONLY

TRANSPORT SYSTEM

Ammeraal Beltech

Description

Long distances of roller drive systems are installed.

Flat belts with high friction covers recommended

FBTG054716 TG S06.30 RC

FBGG054662 GG E10.55 RRQ FG

KEY POINTS

FEATURES BENEFITS

TECHNICAL SPECIFICATIONS

INTERNAL & BUSINESS ONLY

TRANSPORT SYSTEM

Description

Long distances of roller drive systems are installed.

LINE SHAFT DRIVE SYSTEM

BELT DRIVEN ROLLERS

Refer to the Logistic Section for more details

ROLLER DRIVES

TECHNICAL SPECIFICATIONS

INTERNAL & BUSINESS ONLY

BOARD PRODUCTION PROCESS

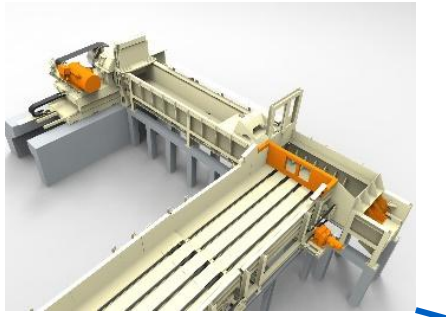

CHIPPING

Transport systems

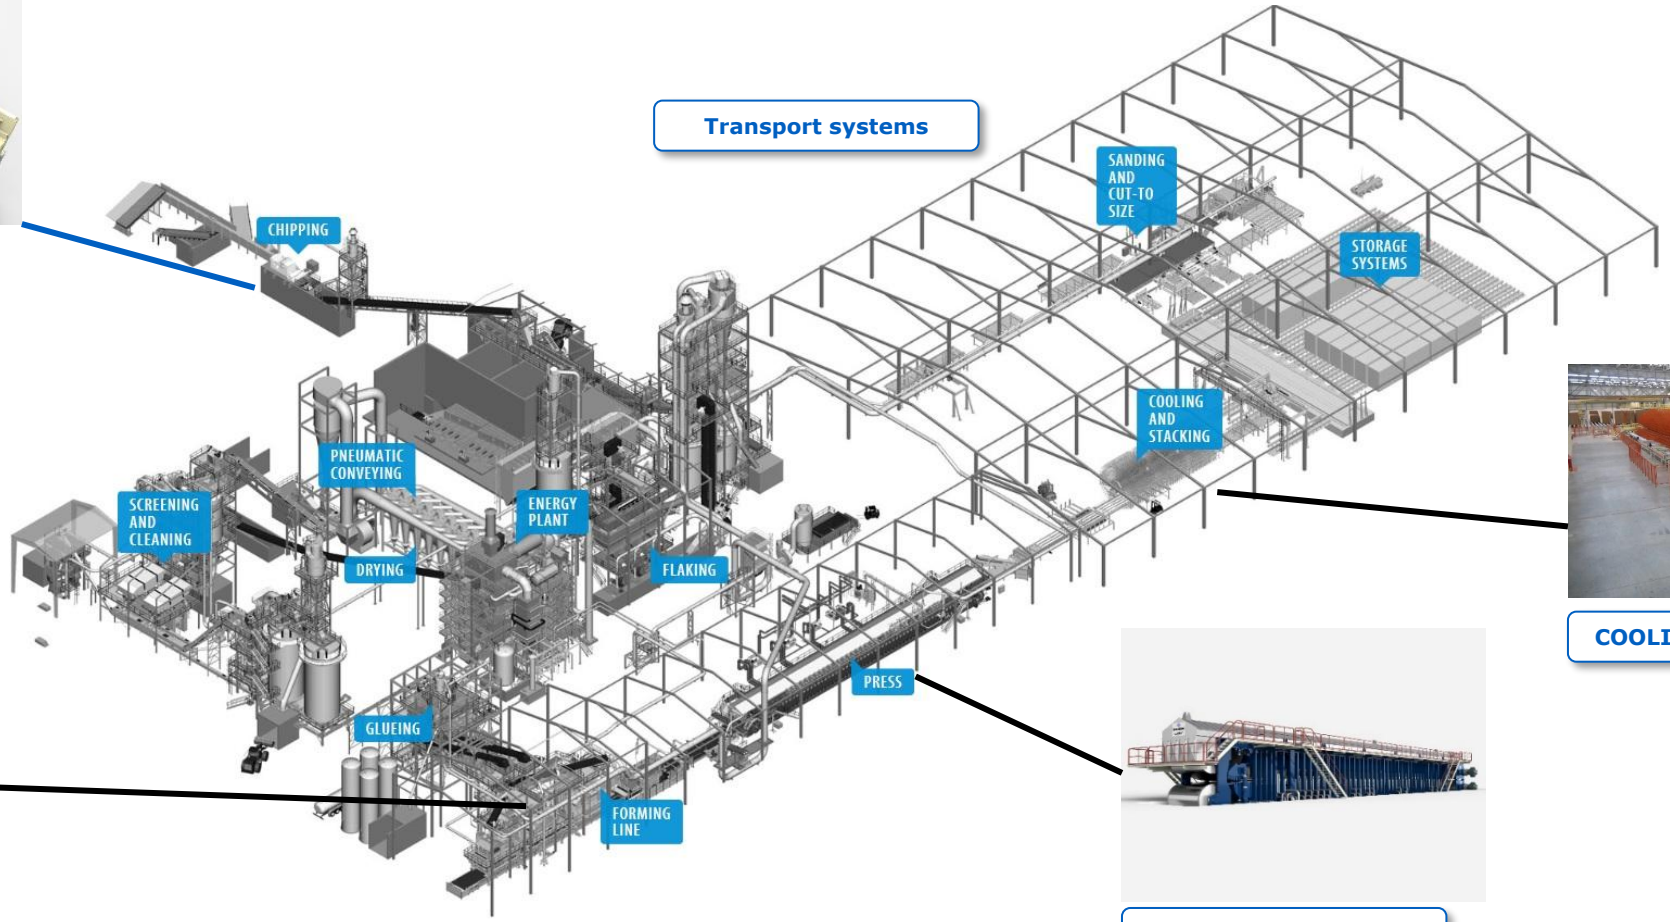

COOLING & STACKING

FORMING LINE

PRESS

RAPPLON®
Swiss made High Performance Flat Belts

INTERNAL & BUSINESS ONLY

REFERENCES / SUCCESS STORIES

Ammeraal Beltech

RAPPLON® for live roller conveyor with 90° twist at HOMAG

Technical data:

Art. Nr.	: FBGG054608
Type	: GG N27 RFQ
Tension	: approx. 8%
Pulley side	: black
Transport side	: blue
Belt length	: 570mm
Belt width	: 15mm

INTERNAL & BUSINESS ONLY

REFERENCES / SUCCESS STORIES

Ammeraal Beltech

RAPPLON® for roller drive conveyor (rollers with Ø 80-120mm) at KRONOSPAN CZ

Technical data:

Art. Nr.	: FBGG054530
Type	: GG S11.26 RFC
Pulley side	: grey
Transport side	: blue

or

Art. Nr.	: 54656
Type	: GG E15.25 RRQ
Pulley side	: grey
Transport side	: blue

INTERNAL & BUSINESS ONLY

REFERENCES / SUCCESS STORIES

Ammeraal Beltech

RAPPLON® for transport section at KRONOSPAN CZ

Technical data:

Art. Nr.	: FBTG054716
Type	: TG S06.30 RC
Pulley side	: blue
Transport side	: grey
Belt length	: 6214 mm
Belt width	: 80 mm

Set of 19 pcs.

REFERENCES / SUCCESS STORIES

RAPPLON® for transport section at Flakeboard / Arauco (North America)

Art. Nr. : FBGG054662
Type : GG E10.55 RRQ FG

Replace Forbo Transtex 908769 due to:

1. Belt stretch: 2-3 months of being installed
2. replacement of belt every 3-4 months
3. Short Belt Life: cracking of belt cover
4. Belt Slip on pulleys

Results:

1. Rapplon belts have run for 13 months vs. Forbo 3-4 months!
2. System runs faster due to no product slip!
3. Easy to install new belts with Quick Splice tool!

INTERNAL & BUSINESS ONLY

PRODUCT RANGE

Ammeraal Beltech

Item	Description	Thickness in mm	K1%/k6% in N/mm	Material tensile member	Application	Section
RAPPLON® QuickSplice Flat Belt						
FBUU054567	UU A80.45 RRQ	4.50	80.0	Aramid fabric	Live roller conveyor	Transferring handling / Board handling
FBGG054608	GG N27 RFQ	1.70	2.7	Thermoplastic	Line shaft roller drive	Transferring handling / Board handling
FBGG054614	GG E08.20 RRQ	2.00	8.0	Polyester fabric	Live roller conveyor	Transferring handling / Board handling
FBGG054656	GG E15.25 RFQ	2.50	15.0	Polyester fabric	Live roller conveyor	Transferring handling / Board handling
FBGG054662	GG E10.55 RRQ FG	5.50	10.0	Polyester fabric	Live roller conveyor	Transferring handling / Board handling
FBUU054762	UU E15.30 RFQ	3.00	15.0	Polyester fabric	Live roller conveyor	Transferring handling / Board handling
FBGG054680	GG A50.30 RRQ	3.00	50.0	Aramid fabric	Live roller conveyor	Transferring handling / Board handling
RAPPLON® Classic Flat Belts						
FBLT054049	LT S18 C	3.90	18	Polyamide foil	Power Transmission	Flaker / Chipper / Hammermill drives
FBGG054297	GG S22 LRC	4.60	22.0	Polyamide foil	Power Transmission	Flaker / Chipper / Hammermill drives
FBGG054530	GG S11.26 RFC	2.60	11.0	Polyamide foil	Live roller conveyor	Transferring handling / Board handling
FBGG054734	GG S06.18 RFC	1.80	6.0	Polyamide foil	Live roller conveyor	Transferring handling / Board handling
FBTG054716	TG S06.30 RC	3.00	6.0	Polyamide foil	Transport	Transferring handling / Board handling
FBTG054266	TG P07.29 RC	2.90	7.0	Polyamide foil	Transport	Transferring handling / Board handling
FBTG054420	TG E12.65 FC	6.50	11.0	Polyester fabric	Transport	Transferring handling / Board handling

INTERNAL & BUSINESS ONLY

WE MAKE YOUR
BUSINESS MOVE

Ammeraal Beltech

RAPPLON®

Swiss made High Performance Flat Belts

January 2023

Product Management

BU Switzerland

POWER TRANSMISSION

© Ammeraal Beltech — All Rights Reserved.
Confidential and Proprietary Intellectual Property.

INTRODUCTION

RAPPLON HPFB offers a wide range of Power Transmission belts for all industries/applications:

HYDROPLANT GENERATOR

FAN DRIVE

SAWMILL/LUMBERMILL

FLOUR MILL

METAL STAMP PRESS

SEPARATOR / DECANTER

INTERNAL & BUSINESS ONLY

HYDROPLANT GENERATOR

Ammeraal Beltech

Description

Driven by the water wheel, the flat belt is driving the generator.

Usual power to transmit is up to 800 KW.

Flat belts with high friction covers recommended
FBGG054289 GG S11 LRC
FBGG054297 GG S22 LRC
FBGG054298 GG S33 LRC

Please always calculate the correct belt with E-RappCalc®

INTERNAL & BUSINESS ONLY

FAN DRIVE

Description

Fan drives circulate air. Flat belts replacing the less efficient V-belts in fan drives.

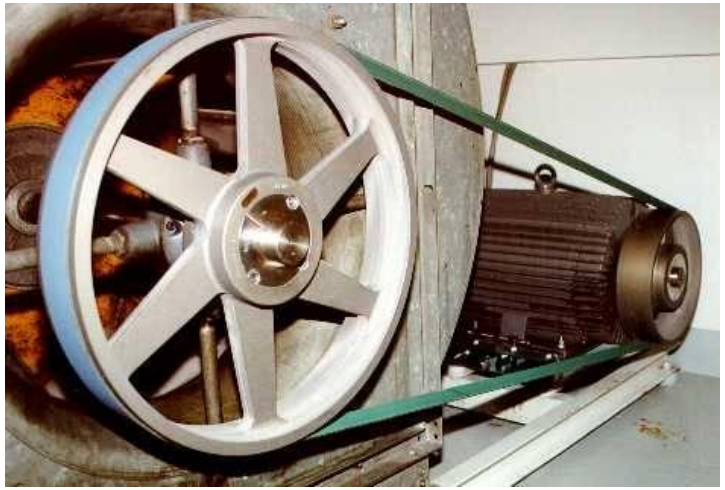

Flat belts with high friction cover on the pulley side recommended

FBGT054701 GT S02 RC
FBGT054702 GT S04 RC
FBGT054703 GT S06 RC
FBGT054704 GT S09 FC

Please always calculate the correct belt with E-RappCalc®

SAWMILL/LUMBERMILL

Description

Direct drives and secondary drives of sawmills request leather covered belts due to dusty environment. For primary drives LRC-items are recommended.

Flat belts with high friction cover on the pulley side recommended for Primary drive

FBGG054289 GG S11 LRC
FBGG054297 GG S22 LRC
FBGG054298 GG S33 LRC

Flat belts with medium friction cover on the pulley side recommended for secondary or direct drive

FBLT054046 LT S09 C
FBLT054047 LT S11 C
FBLT054048 LT S15 C
FBLT054049 LT S18 C
FBLT054050 LT S27 C

Please always calculate the correct belt with E-RappCalc®

INTERNAL & BUSINESS ONLY

FLOURMILL

Description

Plenty of crossed drives and half crossed drives can be found in flourmills.

Flat belts with medium friction cover recommended
FBLL054038 LL S06 C
FBLL054039 LL S09 C
FBLT054045 LT S06 C
FBLT054046 LT S09 C
FBLT054047 LT S11 C
FBLT054048 LT S15 C
FBLT054049 LT S18 C
FBLT054050 LT S27 C

Please always calculate the correct belt with E-RappCalc®

INTERNAL & BUSINESS ONLY

METAL STAMPING

Description

Simple two pulley drives to transmit power in metal stamping equipment. Those machines can be huge, especially in automotive industry.

Flat belts with high friction cover on the pulley side recommended

FBGG054289 GG S11 LRC
FBGG054297 GG S22 LRC
FBGG054298 GG S33 LRC

Please always calculate the correct belt with E-RappCalc®

INTERNAL & BUSINESS ONLY

SEPARATORS/DECANTERS

Description

Separators divide solid particles from liquid stuff: Oil, salt water, milk, orange juice and many more. GG- and GG LRC-items are the first choice.

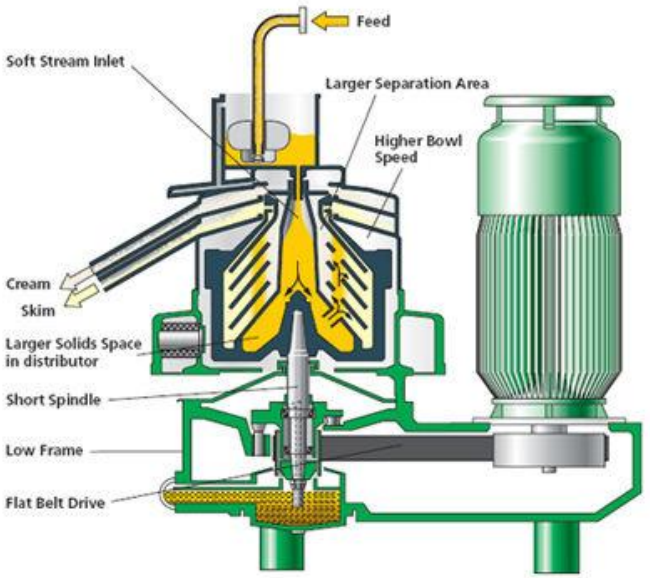

Flat belts with high friction cover on the pulley side recommended

FBGG054289 GG S11 LRC
FBGG054297 GG S22 LRC
FBGG054298 GG S33 LRC

Please always calculate the correct belt with E-RappCalc®

E-RAPPCALC® - ONLINE CALCULATION TOOL

Easy and accurate dimensioning online

- Power Transmission, Tangential and Roller drives can be calculated
- No guess work – easy calculation by E-RappCalc®
- No black box – calculation steps can be followed
- Clear advices of suitable belt and its reasons
- Perfect selling tool – convince the clients
- Precise instructions regarding belt tension for the on-site fitting staff

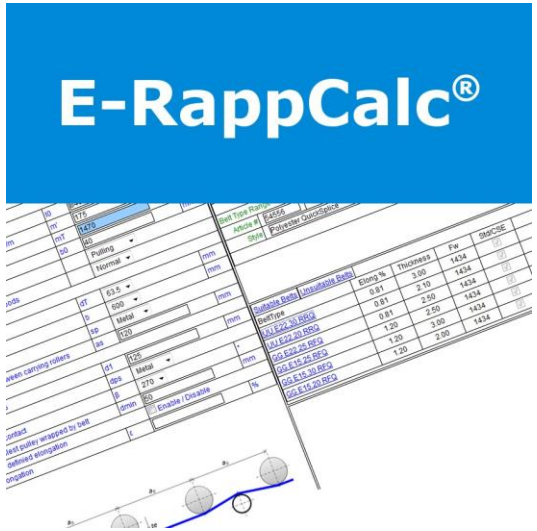

INTERNAL & BUSINESS ONLY

INSTALLATION ON SITE

- Thread flat belt
- Glue and press prepared ends according instructions
- Set meter marks
- Elongate belt according calculation
- Check tension again after running in

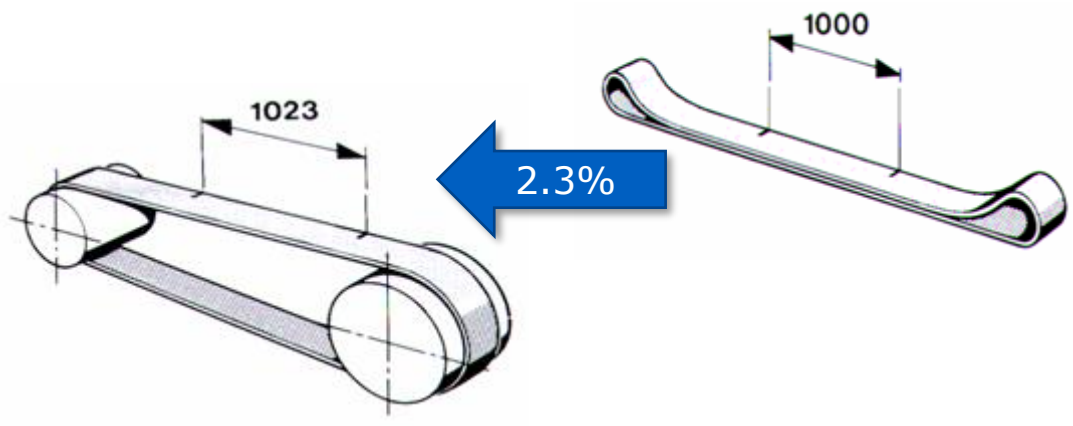

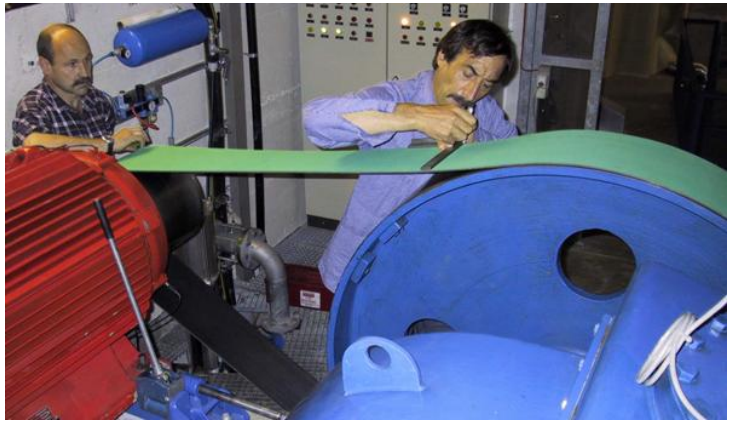

CUSTOMER BENEFITS

Feature	Advantage	Benefit
Polyamide foil tensile member	Very flexible and shock absorbing	Save equipment from peak loads
Polyamide foil with high E-modulus	High forces can be transmitted	Narrower belts do the job
XNBR rubber cover	Constant high friction	Highest possible efficiency
Grooved rubber cover	No aero-planning effects	Highest possible efficiency
Leather cover	Friction adapts itself (can slip under high torque changes)	Save shaft and bearings from peak loads
RAPPLON E-RappCalc®	Calculate best performing belt	High efficiency at lowest cost

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: BELTS WITH LEATHER COVER

The first choice for wet, oily, dusty, greasy applications

General statement:
- Medium friction (result in higher shaft load)
- Very easy/best to move laterally
- Medium temperature range
- The first choice for wet, oily, dusty, greasy applications

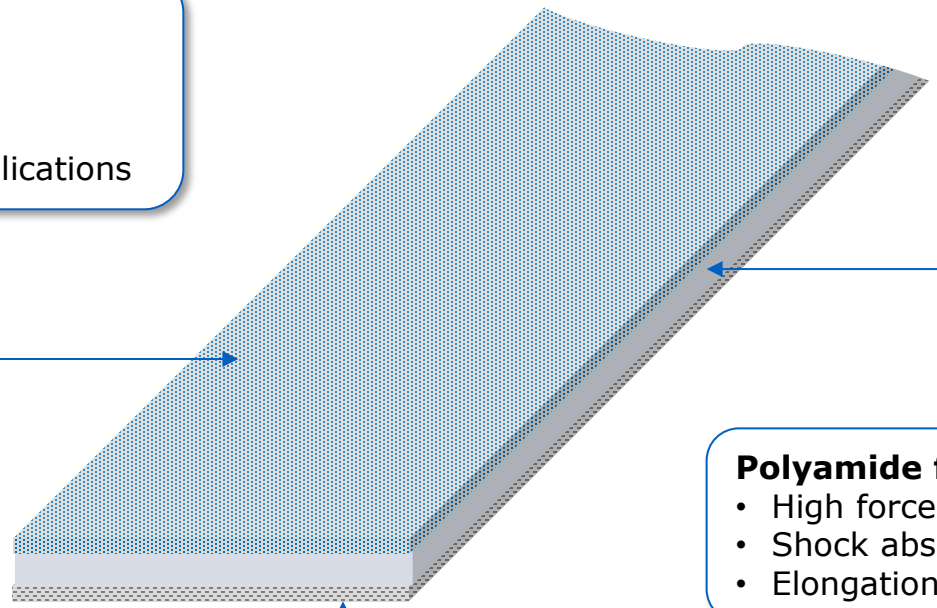

Polyamide foil tensile member:
- High forces can be transmitted
- Shock absorbing
- Elongation at break over 25%

Leather cover:
- Large, even surface contact area
- Friction adapts itself (can slip in high torque changes)
- Contamination can enter cover without much negative effect
- Self cleaning to some extent

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: BELTS WITH RUBBER COVER

The first choice for continuous running in clean environment

General statement:
- Synthetic product
- No maintenance required
- The first choice for continuous running in clean environment

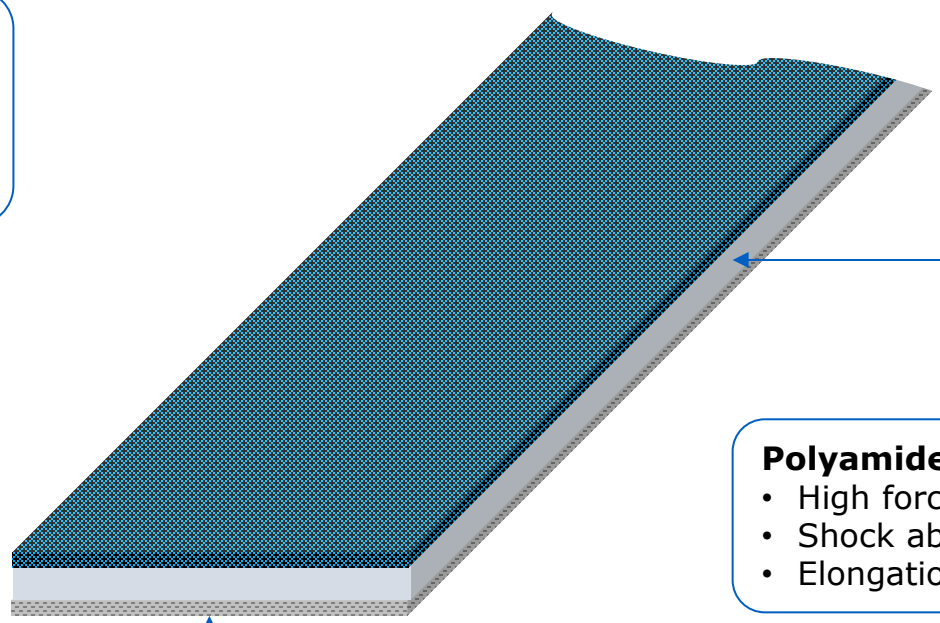

Polyamide foil tensile member:
- High forces can be transmitted
- Shock absorbing
- Elongation at break over 25%

Rubber covers:
- Constant high friction
- Highly abrasion resistant
- large, even surface contact area

INTERNAL & BUSINESS ONLY

PRODUCT DETAILS: BELTS WITH GROOVED RUBBER

Ammeraal Beltech

The first choice for hydro plants and generators

General statement:
- Synthetic product
- No maintenance required
- Constant high friction
- Highly abrasion resistant

Polyamide foil tensile member:
- High forces can be transmitted
- Shock absorbing
- Elongation at break over 25%

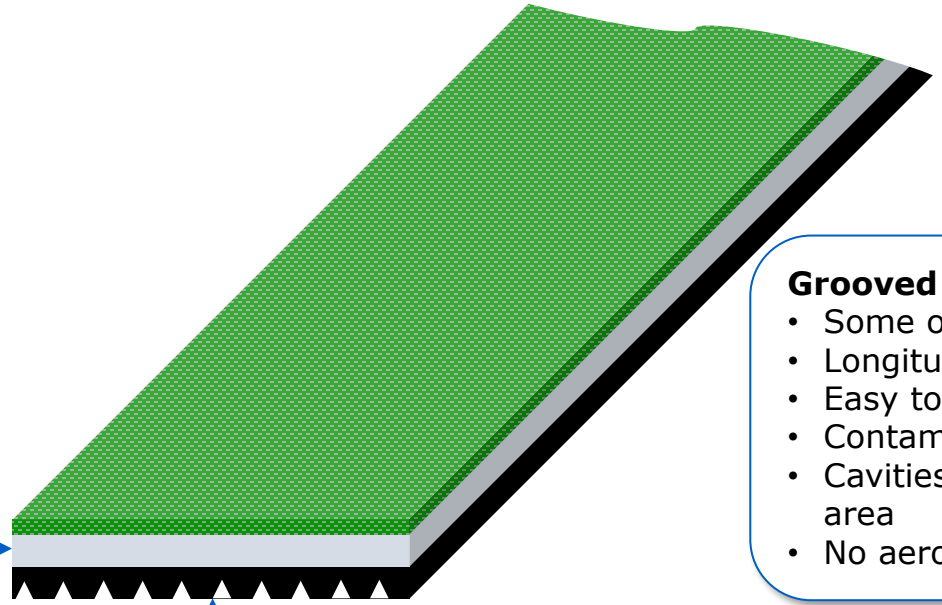

Grooved Rubber bottom side:
- Some open space surface
- Longitudinal, narrow line contact area
- Easy to move laterally – shifter belts
- Contamination tends to enter grooves
- Cavities resulting in a cleaner contact area
- No aero planning effects

Fast + wide belts + long area of contact = risk of aero planning effect
GG Sxx LRC types perform unaffected by airflow:
- Air is transported in the grooves around the pulley
- No lateral escape air under pressure = no noise
- No reduction of belt pressure



INTERNAL & BUSINESS ONLY

WE MAKE YOUR
BUSINESS MOVE

Ammeraal Beltech

RAPPLON®

Swiss made High Performance Flat Belts

January 2023

Product Management

BU Switzerland

MANUFACTURING UNIT SWITZERLAND

© Ammeraal Beltech — All Rights Reserved.
Confidential and Proprietary Intellectual Property.

MANUFACTURING UNIT SWITZERLAND

History of Ammeraal Beltech Switzerland

1791 Foundation of Freudenberg

1846 Foundation of the company Leder

1984 Starting up extruder

1990 Verseidag Beltech buys Leder & Co.

1992 Ground-breaking ceremony

1993 Starting new production plant in Jona

1999 Extension of building and modernising of coating line 1 up to width 2200mm

2000 Merger between Ammeraal and Verseidag

2001 Investing in 2nd coating line (width 2400 mm)

2005 New combustor to treat solvent contaminated air to meet environmental regulations

2018 Change of ownership of Ammeraal Beltech and Megadyne Group and merger between Ammeraal and Megadyne

2021 Commissioning solar voltage

1860 Introduction first leather belt

1957 Introduction of polyamide core belts: RAPPLON®

1987 Introduction of plied synthetic belt range Rapptex

1993 Diversification into the Airbag business

1998 Introduction of RAPPLON® QuickSplice range

1999 Introduction QuickSplice Tools

2003 Introduction belt range Paper & Print Industry

2005 Diversification into the Ski Skin business

2008 Diversification into the Steel Foil business

2014 Introduction of a full RAPPLON® Elastic Food grade range

2017 60 Years of RAPPLON®

2018 Introduction of new QuickSplice Boxfolding range

2020 Introduction of new RAPPLON® logo

2021 Introduction new Logistic Range in black

Product Range

Ammeraal Beltech

Our knowledge and expertise in coating and laminating result in different products

- **RAPPLON®** Classic flat belts
- **RAPPLON®** QuickSplice belts
- **RAPPLON®** Joining tools
- Airbag **silicone coating**
- **Steel lamination**
- **Film lamination** for balloons and Ski skins

INTERNAL & BUSINESS ONLY

HIGH PERFORMANCE FLAT BELTS

Ammeraal Beltech

Wide range of Flat Belts to suit the needs of various industries

- Paper production and converting
- Printing
- Packaging
- Logistics
- Mail Sorting
- Power Transmission
- Food industry
- Textile Industry
- Tube winding
- Wood industry
- and many more

INTERNAL & BUSINESS ONLY

COATING & LAMINATION

Strong expertise in coating and laminating the most diverse technical fabrics and sheet materials

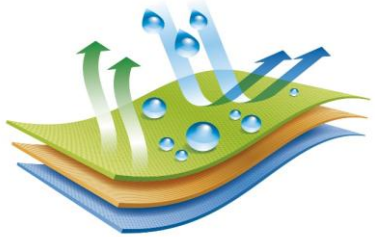

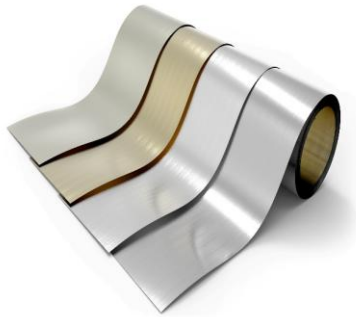

Coating

- Automotive
- Aeronautical
- Timber & Chipboard
- Food
- Printing & Paper

Lamination

- Automotive
- Sports & leisure
- Graphics & décor
- Architecture & interior design

INTERNAL & BUSINESS ONLY

R&D / Material Science

Ammeraal Beltech

Well equipped laboratory in combination with skilled staff in material science

Adhesion tests



Energy Efficiency test

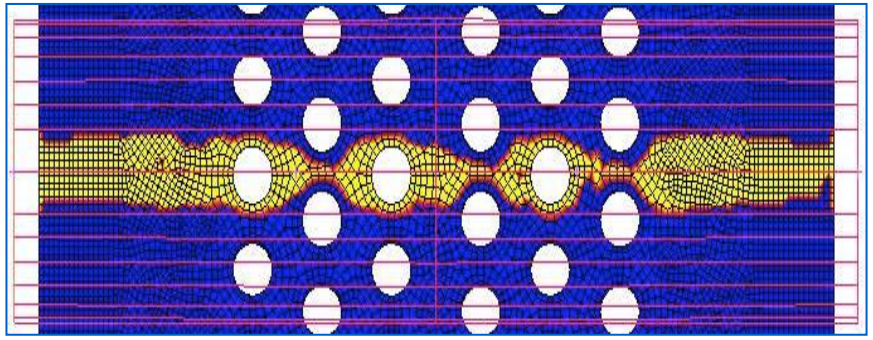

Finite Element Method Analysis

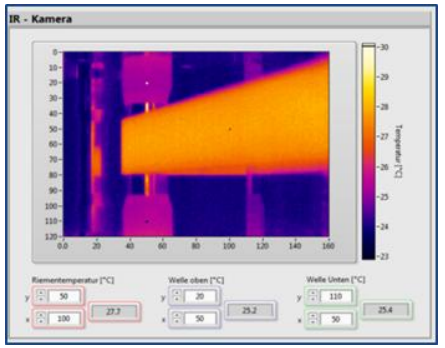

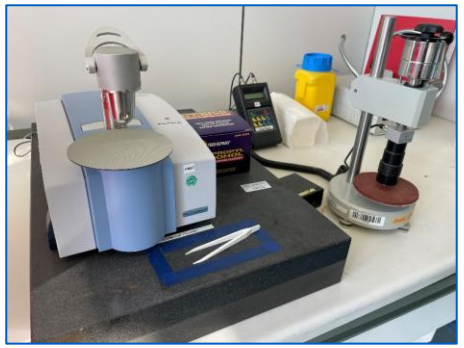

INTERNAL & BUSINESS ONLY

Conclusion

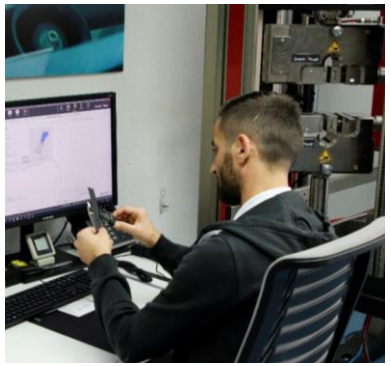

We provide solutions – not just selling belts.

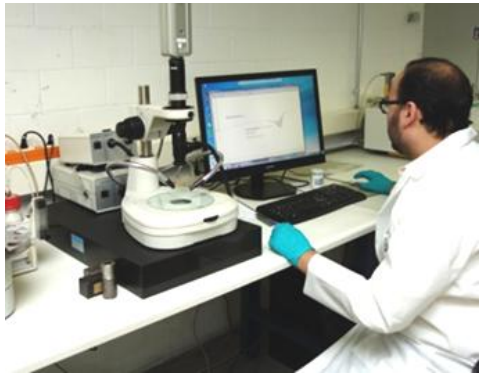

WE MAKE YOUR
BUSINESS MOVE

PRODUCT MANAGEMENT

Thomas Meile

Application Solution Engineer
Manager
Phone: +41 (0)55 225 36 25
thomas.meile@ammega.com

Marcel Oberholzer

Central Product Manager
Phone: +41 (0)55 225 36 26
marcel.oberholzer@ammega.com

INTERNAL & BUSINESS ONLY

INSIDE SALES & EXPORT

Cynthia Frey

Inside Sales & Export
Phone: +41 (0)55 225 36 43
ch-jon-export@ammega.com

Lavini Marti

Inside Sales & Export
Phone: +41 (0)55 225 36 42
ch-jon-export@ammega.com

Vivien Manino

Inside Sales & Export
Phone: +41 (0)55 225 36 45
ch-jon-export@ammega.com

SPECIFICATIONS

Ammeraal Beltech

AB-Code	Type	Thickness in mm	K-Value in %	k1% / k6% in N/mm dynamic	Min pulley diameter at 20° in mm	Recom elongation from in %	Recom elongation to in %	Friction steel bottom side in µD	Friction steel top side in µD	Bottom / Pulley side: Surface material	Bottom / Pulley side: Surface finish	Bottom / Pulley side: Surface colour	Tensile member	Top side: Surface material	Top side: Surface finish	Top side: Surface colour
FBLL054038	LL S06 C	3.50	1	6	70	2.0	3.0	0.25	0.25	Chrome leather	Ground quality	Grey	Polyamide foil	Chrome leather	Ground quality	Grey
FBLL054039	LL S09 C	3.80	1	9	90	2.0	3.0	0.25	0.25	Chrome leather	Ground quality	Grey	Polyamide foil	Chrome leather	Ground quality	Grey
FBLT054045	LT S06 C	2.60	1	6	50	2.0	3.0	0.25	0.15	Chrome leather	Ground quality	Grey	Polyamide foil	Polyamide fabric	Fabric texture	Black
FBLT054046	LT S09 C	2.90	1	9	70	2.0	3.0	0.25	0.15	Chrome leather	Ground quality	Grey	Polyamide foil	Polyamide fabric	Fabric texture	Black
FBLT054047	LT S11 C	3.00	1	11	100	2.0	3.0	0.25	0.15	Chrome leather	Ground quality	Grey	Polyamide foil	Polyamide fabric	Fabric texture	Black
FBLT054048	LT S15 C	3.60	1	15	150	2.0	3.0	0.25	0.15	Chrome leather	Ground quality	Grey	Polyamide foil	Polyamide fabric	Fabric texture	Black
FBLT054049	LT S18 C	3.75	1	18	200	2.0	3.0	0.25	0.15	Chrome leather	Ground quality	Grey	Polyamide foil	Polyamide fabric	Fabric texture	Black
FBLT054050	LT S27 C	5.10	1	27	350	2.0	3.0	0.25	0.15	Chrome leather	Ground quality	Grey	Polyamide foil	Polyamide fabric	Fabric texture	Black
FBLT054051	LT S36 C	5.90	1	36	400	2.0	3.0	0.25	0.15	Chrome leather	Ground quality	Grey	Polyamide foil	Polyamide fabric	Fabric texture	Black
FBGG054145	GG S06.40 RRC	4.00	1	6	40	0.6	1.0	0.6	0.6	XNBR elastomer	Rough	Green	Polyamide foil	XNBR elastomer	Rough	Green
FBGG054164	GG S04.40 RRC green	4.00	1	4	30	0.6	1.0	0.6	0.6	XNBR elastomer	Rough	Green	Polyamide foil	XNBR elastomer	Rough	Green
FBTT054235	TT S09.16 C HC	1.65	1	9	60	2.0	3.0	0.15	0.15	Polyamide fabric	Fabric texture	Black	Polyamide foil	Polyamide fabric	Fabric texture	Black
FBGG054243	GG S07.30 RRC	3.00	1	7	40	2.0	3.0	0.6	0.6	TNBR elastomer	Rough	Blue	Polyamide foil	TNBR elastomer	Rough	Blue
FBTT054249	TT S15.23 C	2.30	1	15	90	2.0	3.0	0.15	0.15	Polyamide fabric	Fabric texture	Black	Polyamide foil	Polyamide fabric	Fabric texture	Black
FBTT054250	TT S09.16 C	1.65	1	9	60	2.0	3.0	0.15	0.15	Polyamide fabric	Fabric texture	Black	Polyamide foil	Polyamide fabric	Fabric texture	Black
FBTT054251	TT S04.12 C	1.20	1	4	20	2.0	3.0	0.15	0.15	Polyamide fabric	Fabric texture	Black	Polyamide foil	Polyamide fabric	Fabric texture	Black
FBTG054261	TG S04.14 RC	1.40	1	4	20	2.0	3.0	0.15	0.6	Polyamide fabric	Fabric texture	Green	Polyamide foil	XNBR elastomer	Rough	Green
FBGG054262	GG N08 RRQ	1.50	6	0.8	15	0.5	6.0	0.6	0.6	XNBR elastomer	Rough	Black	-	XNBR elastomer	Rough	Green
FBGG054263	GG N22 RFQ	1.50	6	2.2	15	0.5	8.0	0.6	0.5	XNBR elastomer	Rough	Black	-	XNBR elastomer	Fine	Green
FBTG054265	TG P04.20 RC	2.00	1	3.8	25	0.2	0.6	0.15	0.55		Fabric texture	Black	Polyamide fabric	NBR elastomer	Rough	Green
FBTG054266	TG P07.29 RC	2.90	1	7	50	0.2	0.6	0.15	0.55	Polyamide fabric	Fabric texture	Black	Polyamide fabric	NBR elastomer	Rough	Green
FBTG054269	TG S04.12 RC	1.25	1	4	20	2.0	3.0	0.15	0.55	Polyamide fabric	Fabric texture	Green	Polyamide foil	NBR elastomer	Rough	Green
FBGG054273	GG S04.30 RRC green	2.90	1	4	30	0.6	1.0	0.6	0.6	XNBR elastomer	Rough	Green	Polyamide foil	XNBR elastomer	Rough	Green
FBGG054274	GG S06.30 RRC	3.00	1	6	30	0.6	1.0	0.6	0.6	XNBR elastomer	Rough	Green	Polyamide foil	XNBR elastomer	Rough	Green
FBGG054275	GG S06.50 RRC	5.00	1	6	50	0.6	1.0	0.6	0.6	XNBR elastomer	Rough	Green	Polyamide foil	XNBR elastomer	Rough	Green
FBGG054276	GG S06.60 RRC	6.00	1	6	60	0.6	1.0	0.6	0.6	XNBR elastomer	Rough	Green	Polyamide foil	XNBR elastomer	Rough	Green
FBGG054278	GG S11.50 RRC	5.00	1	11	80	2.0	3.0	0.6	0.6	TNBR elastomer	Rough	Blue	Polyamide foil	TNBR elastomer	Rough	Blue
FBGG054286	GG S15.30 RRC green	3.10	1	15	80	2.0	3.0	0.6	0.6	XNBR elastomer	Rough	Light green	Polyamide foil	XNBR elastomer	Rough	Dark green
FBGG054287	GG S18.34 RRC green	3.40	1	18	150	2.0	3.0	0.6	0.6	XNBR elastomer	Rough	Light green	Polyamide foil	XNBR elastomer	Rough	Dark green
FBGG054289	GG S11 LRC	3.25	1	11	80	2.0	3.0	0.6	0.55	NBR elastomer	Longitudinal grooves	Black	Polyamide foil	NBR elastomer	Rough	Green
FBGG054297	GG S22 LRC	4.60	1	22	220	2.0	3.0	0.6	0.55	NBR elastomer	Longitudinal grooves	Black	Polyamide foil	NBR elastomer	Rough	Green
FBGG054298	GG S33 LRC	5.70	1	33	310	2.0	3.0	0.6	0.55	NBR elastomer	Longitudinal grooves	Black	Polyamide foil	NBR elastomer	Rough	Green
FBGG054369	GG S09.22 RRC black	2.20	1	9	60	2.0	3.0	0.6	0.6	XNBR elastomer	Rough	Black	Polyamide foil	XNBR elastomer	Rough	Black
FBGG054370	GG S09.22 RRC green	2.20	1	9	60	2.0	3.0	0.6	0.6	XNBR elastomer	Rough	Dark green	Polyamide foil	XNBR elastomer	Rough	Light green
FBTG054525	TG P03.12 FC	1.25	1	3	25	0.2	0.6	0.15	0.5	Polyamide fabric	Fabric texture	Black	Polyamide fabric	XNBR elastomer	Fine	Green
FBGG054528	GG S11.25 RRC green	2.50	1	11	60	2.0	3.0	0.6	0.6	XNBR elastomer	Rough	Light green	Polyamide foil	XNBR elastomer	Rough	Dark green
FBGG054530	GG S11.26 RFC	2.60	1	11	60	2.0	3.0	0.6	0.6	XNBR elastomer	Rough	Grey	Polyamide foil	XNBR elastomer	Fine	Blue

SPECIFICATIONS

Ammeraal Beltech

AB-Code	Type	Thickness in mm	K-Value in %	k1% / k6% in N/mm dynamic	Min pulley diameter at 20° in mm	Recom elongation from in %	Recom elongation to in %	Friction steel bottom side in µD	Friction steel top side in µD	Bottom / Pulley side: Surface material	Bottom / Pulley side: Surface finish	Bottom / Pulley side: Surface colour	Tensile member	Top side: Surface material	Top side: Surface finish	Top side: Surface colour
FBUU054532	UU N06 RFQ FG	0.80	6	0.6	6	0.5	6.0	0.2	0.2	Polyurethane	Rough	Black	-	Polyurethane	Fine	Royal blue
FBUU054533	UU N12 RFQ FG	1.15	6	1.2	15	0.5	6.0	0.2	0.2	Polyurethane	Rough	Black	-	Polyurethane	Fine	Royal blue
FBUU054534	UU N17 RFQ FG	1.50	6	1.7	20	0.5	6.0	0.2	0.2	Polyurethane	Rough	Black	-	Polyurethane	Fine	Royal blue
FBUU054535	UU N22 RFQ FG	1.85	6	2.2	25	0.5	6.0	0.2	0.2	Polyurethane	Rough	Black	-	Polyurethane	Fine	Royal blue
FBUU054540	UU N16 RSQ FG	1.10	6	1.6	20	0.5	6.0	0.2	0.2	Polyurethane	Rough	Black	-	Polyurethane	Smooth	Royal blue
FBUU054543	UU N08 RSQ FG white	0.80	6	0.8	6	0.5	6.0	0.2	0.2	Polyurethane	Rough	White	-	Polyurethane	Smooth	White
FBUU054550	UU N06 RFQ HG FG	1.10	6	0.6	15	0.5	6.0	0.2	0.8	Polyurethane	Rough	Black	-	Polyurethane	Fine	Royal blue
FBUU054551	UU N16 SSQ FG	1.10	6	1.6	20	0.5	6.0	0.2	0.2	Polyurethane	Smooth	Black	-	Polyurethane	Smooth	Royal blue
FBUV054557	UV N12 FQ	1.50	6	1.2	20	0.5	1.5	0.2	0.2	Polyurethane	Fine	Royal blue	-	Fleece	Ground quality	Grey
FBUV054559	UV E06.20 FQ	2.00	1	6	20	0.5	1.5	0.2	0.2	Polyurethane	Fine	Royal blue	Polyester fabric	Fleece	Ground quality	Grey
FBUU054562	UU N16 SP5Q FG	1.30	6	1.6	20	0.5	0.8	0.2	0.2	Polyurethane	Smooth	Black	-	Polyurethane	P5 structure	Royal blue
FBUU054563	UU N08 RSQ FG blue	0.80	6	0.8	6	0.5	6.0	0.2	0.2	Polyurethane	Rough	Royal blue	-	Polyurethane	Smooth	Royal blue
FBUU054564	UU N06 RFQ HG	1.10	6	0.6	15	0.5	6.0	0.2	0.8	Polyurethane	Rough	Black	-	Polyurethane	Fine	Black
FBUU054567	UU A80.45 RRQ	4.50	1	80	150	0.3	1.0	0.2	0.2	Polyurethane	Rough	Black	Aramide fabric	Polyurethane	Rough	Black
FBUU054568	UU E15.16 RFQ	1.60	1	15	20	0.5	1.5	0.2	0.2	Polyurethane	Rough	Black	Polyester fabric	Polyurethane	Fine	Black
FBTU054572	TU N20 FQ	1.25	6	2	20	2.0	6.0	0.15	0.2	Polyamide fabric	Fabric texture	Green	-	Polyurethane	Fine	Black
FBTT054573	TT N20 Q	1.40	6	2	20	0.5	6.0	0.15	0.15	Polyamide fabric	Fabric texture	Green	-	Polyamide fabric	Fabric texture	Green
FBGG054582	GG P01.14 FFQ	1.40	1	1	15	0.5	2.0	0.6	0.5	XNBR elastomer	Fine	Green	Polyamide fabric	XNBR elastomer	Fine	Green
FBGG054583	GG E03.14 FFQ	1.40	1	3.1	20	0.5	2.0	0.5	0.5	XNBR elastomer	Fine	Grey	Polyester fabric	XNBR elastomer	Fine	Grey
FBGG054585	GG N15 FFQ HC	1.40	6	1.5	15	0.5	6.0	0.5	0.5	XNBR elastomer	Fine	Black	-	XNBR elastomer	Fine	Black
FBTT054598	TT E09.18 Q	1.90	1	9	25	0.5	2.1	0.2	0.2	Mixed fabric	Fabric texture	Grey	Polyester fabric	Mixed fabric	Fabric texture	Grey
FBTT054599	TT E05.11 Q	1.10	1	5	25	0.5	2.0	0.1	0.1	Polyester fabric	Fabric texture	Black	Polyester fabric	Polyester fabric	Fabric texture	White
FBTU054603	TU E04.09 RQ	0.90	1	4	15	0.5	2.0	0.1	0.2	Polyester fabric	Fabric texture	Green	Polyester fabric	Polyurethane	Rough	Black
FBGG054607	GG E05.14 FFQ	1.40	1	5	25	0.5	2.0	0.5	0.5	XNBR elastomer	Fine	Black	Polyester fabric	XNBR elastomer	Fine	Green
FBGG054608	GG N27 RFQ	1.70	6	2.7	15	0.5	6.0	0.6	0.5	XNBR elastomer	Rough	Black	-	XNBR elastomer	Fine	Blue
FBGG054614	GG E08.20 RRQ	2.00	1	8	25	0.5	1.5	0.6	0.6	XNBR elastomer	Rough	Black	Polyester fabric	XNBR elastomer	Rough	Blue
FBGG054620	GG E08.23 RRQ	2.30	1	8	25	0.5	1.5	0.6	0.6	XNBR elastomer	Rough	Black	Polyester fabric	XNBR elastomer	Rough	Blue
FBTG054624	TG E04.12 RQ	1.30	1	4	15	0.5	2.0	0.1	0.6	Polyester fabric	Fabric texture	Green	Polyester fabric	XNBR elastomer	Rough	Green
FBPG054630	PG E05.12 SFQ	1.20	1	5	20	0.5	2.0	0.2	0.5	Thermoplastic elastomer	Smooth	Black	Polyester fabric	XNBR elastomer	Fine	Green
FBTT054647	TT P02.12 Q	1.20	1	2	10	1.0	2.0	0.15	0.15	Polyamide fabric	Fabric texture	Black	Polyamide fabric	Polyamide fabric	Fabric texture	Blue
FBGG054655	GG E15.20 RFQ	2.05	1	15	25	0.5	1.5	0.6	0.5	XNBR elastomer	Rough	Grey	Polyester fabric	XNBR elastomer	Fine	Blue
FBGG054656	GG E15.25 RFQ	2.50	1	15	30	0.5	1.5	0.6	0.5	XNBR elastomer	Rough	Grey	Polyester fabric	XNBR elastomer	Fine	Blue
FBGG054657	GG E15.30 RFQ	3.00	1	15	40	0.5	1.5	0.6	0.5	XNBR elastomer	Rough	Grey	Polyester fabric	XNBR elastomer	Fine	Blue

SPECIFICATIONS

AB-Code	Type	Thickness in mm	K-Value in %	k1% / k6% in N/mm dynamic	Min pulley diameter at 20° in mm	Recom elongation from in %	Recom elongation to in %	Friction steel bottom side in µD	Friction steel top side in µD	Bottom / Pulley side: Surface material	Bottom / Pulley side: Surface finish	Bottom / Pulley side: Surface colour	Tensile member	Top side: Surface material	Top side: Surface finish	Top side: Surface colour
FBGG054659	GG E10.30 RRQ FG	3.00	1	10	30	0.4	0.6	0.6	0.6	XNBR elastomer	Rough	Grey	Polyester fabric	XNBR elastomer	Rough	Grey
FBGG054660	GG E10.40 RRQ FG	4.00	1	10	40	0.4	0.6	0.6	0.6	XNBR elastomer	Rough	Grey	Polyester fabric	XNBR elastomer	Rough	Grey
FBGG054662	GG E10.55 RRQ FG	5.50	1	10	60	0.4	0.6	0.6	0.6	XNBR elastomer	Rough	Grey	Polyester fabric	XNBR elastomer	Rough	Grey
FBGG054667	GG E18.25 RFQ	2.50	1	18	30	0.5	1.5	0.6	0.5	XNBR elastomer	Rough	Black	Polyester fabric	XNBR elastomer	Fine	Blue
FBGG054668	GG E18.30 RFQ	3.00	1	18	40	0.5	1.5	0.6	0.5	XNBR elastomer	Rough	Black	Polyester fabric	XNBR elastomer	Fine	Blue
FBGG054680	GG A50.30 RRQ	3.00	1	50	60	0.5	1.2	0.6	0.6	XNBR elastomer	Rough	Black	Aramide fabric	XNBR elastomer	Rough	blue
FBGT054701	GT S02 RC	1.00	1	2	10	2.0	3.0	0.6	0.15	XNBR elastomer	Rough	Grey	Polyamide foil	Polyamide fabric	Fabric texture	Blue
FBGT054702	GT S04 RC	1.25	1	4	20	2.0	3.0	0.6	0.15	XNBR elastomer	Rough	Grey	Polyamide foil	Polyamide fabric	Fabric texture	Blue
FBGT054703	GT S06 RC	1.40	1	6	40	2.0	3.0	0.6	0.15	XNBR elastomer	Rough	Grey	Polyamide foil	Polyamide fabric	Fabric texture	Blue
FBGT054704	GT S09 FC	1.90	1	9	40	2.0	3.0	0.6	0.15	XNBR elastomer	Fine	Blue	Polyamide foil	Polyamide fabric	Fabric texture	Blue
FBGT054705	GT S04.25 RC	2.40	1	4	40	2.0	3.0	0.6	0.15	XNBR elastomer	Rough	Green	Polyamide foil	Polyamide fabric	Fabric texture	Blue
FBGT054706	GT S06 RC green	1.40	1	6	40	2.0	3.0	0.6	0.15	XNBR elastomer	Rough	Green	Polyamide foil	Polyamide fabric	Fabric texture	Green
FBTG054716	TG S06.30 RC	3.00	1	6	50	2.0	3.0	0.15	0.6	Polyamide fabric	Fabric texture	Blue	Polyamide foil	TNBR elastomer	Rough	Grey
FBTG054717	TG S09.40 RC	4.00	1	9	60	2.0	3.0	0.15	0.6	Polyamide fabric	Fabric texture	Blue	Polyamide foil	TNBR elastomer	Rough	Grey
FBTG054718	TG S09.60 RC	6.10	1	9	80	2.0	3.0	0.15	0.6	Polyamide fabric	Fabric texture	Blue	Polyamide foil	TNBR elastomer	Rough	Grey
FBGG054729	GG S06.19 RFC green	1.90	1	6	40	2.0	3.0	0.6	0.6	XNBR elastomer	Rough	Dark green	Polyamide foil	XNBR elastomer	Fine	Light green
FBGG054730	GG S02.11 RRC	1.10	1	2	10	2.0	3.0	0.6	0.6	TNBR elastomer	Rough	Grey	Polyamide foil	TNBR elastomer	Rough	Grey
FBGG054731	GG S04.14 RRC	1.40	1	4	20	2.0	3.0	0.6	0.6	TNBR elastomer	Rough	Grey	Polyamide foil	TNBR elastomer	Rough	Grey
FBGG054733	GG S09.22 RFC	2.20	1	9	60	2.0	3.0	0.6	0.6	XNBR elastomer	Rough	Grey	Polyamide foil	XNBR elastomer	Fine	Blue
FBGG054734	GG S06.18 RFC	1.80	1	6	40	2.0	3.0	0.6	0.6	XNBR elastomer	Rough	Grey	Polyamide foil	XNBR elastomer	Fine	Blue
FBGG054735	GG S02.11 FFC	1.10	1	2	10	2.0	3.0	0.7	0.7	NBR elastomer	Fine	Grey	Polyamide foil	NBR elastomer	Fine	Grey
FBGG054736	GG S09.30 RRC	3.00	1	9	60	2.0	3.0	0.6	0.6	XNBR elastomer	Rough	Blue	Polyamide foil	XNBR elastomer	Rough	Blue
FBGG054738	GG S04.17 RFC	1.70	1	4	20	2.0	3.0	0.6	0.6	XNBR elastomer	Rough	Grey	Polyamide foil	XNBR elastomer	Fine	Blue
FBGG054739	GG S04.17 RRC green	1.70	1	4	20	2.0	3.0	0.6	0.6	XNBR elastomer	Rough	Dark green	Polyamide foil	XNBR elastomer	Rough	Light green
FBGG054740	GG S09.31 RRC green	3.10	1	9	60	2.0	3.0	0.6	0.6	XNBR elastomer	Rough	Light green	Polyamide foil	XNBR elastomer	Rough	Dark green
FBGG054747	GG S15.34 RRC black	3.40	1	15	80	2.0	3.0	0.6	0.6	XNBR elastomer	Rough	Black	Polyamide foil	XNBR elastomer	Rough	Black
FBGG054748	GG S15.30 RRC	3.00	1	15	80	2.0	3.0	0.6	0.6	XNBR elastomer	Rough	Grey	Polyamide foil	XNBR elastomer	Rough	Blue
FBGG054749	GG S18.40 RRC	4.00	1	18	160	2.0	3.0	0.6	0.6	XNBR elastomer	Rough	Grey	Polyamide foil	XNBR elastomer	Rough	Blue
FBTT054751	TT S04.12 C	1.20	1	4	20	2.0	3.0	0.15	0.15	Polyamide fabric	Fabric texture	Blue	Polyamide foil	Polyamide fabric	Fabric texture	Blue
FBTT054752	TT S02.10 C	1.00	1	2	10	2.0	3.0	0.15	0.15	Polyamide fabric	Fabric texture	Blue	Polyamide foil	Polyamide fabric	Fabric texture	Blue
FBPP054761	PP S04.14 SSC	1.40	1	4	50	2.0	3.0	0.2	0.2	Polyamide foil	Smooth	Black	Polyamide foil	Polyamide foil	Smooth	Black

SPECIFICATIONS

Ammeraal Beltech

AB-Code	Type	Thickness in mm	K-Value in %	k1% / k6% in N/mm dynamic	Min pulley diameter at 20° in mm	Recom elongation from in %	Recom elongation to in %	Friction steel bottom side in µD	Friction steel top side in µD	Bottom / Pulley side: Surface material	Bottom / Pulley side: Surface finish	Bottom / Pulley side: Surface colour	Tensile member	Top side: Surface material	Top side: Surface finish	Top side: Surface colour
FBUU054762	UU E15.30 RFQ	3.00	1	15	30	0.5	1.5	0.2	0.2	Polyurethane	Rough	Black	Polyester fabric	Polyurethane	Fine	Black
FBUU054763	UU E18.20 RRQ	2.00	1	18	25	0.5	1.5	0.2	0.2	Polyurethane	Rough	Black	Polyester fabric	Polyurethane	Rough	Black
FBUU054764	UU E18.30 RRQ	3.00	1	18	30	0.5	1.5	0.2	0.2	Polyurethane	Rough	Black	Polyester fabric	Polyurethane	Rough	Black
FBUU054765	UU E15.20 RFQ	2.00	1	15	25	0.5	1.5	0.2	0.2	Polyurethane	Rough	Black	Polyester fabric	Polyurethane	Fine	Black
FBUV054770	UV E06.20 FQ	2.00	1	6	20	0.5	1.5	0.2	0.2	Polyurethane	Fine	Black	Polyester fabric	Fleece	Ground quality	Grey
FBUU054771	UU N06 RFQ	0.80	6	0.6	6	0.5	6.0	0.2	0.2	Polyurethane	Rough	Black	-	Polyurethane	Fine	Black
FBUU054772	UU N12 RFQ	1.15	6	1.2	15	0.5	6.0	0.25	0.25	Polyurethane	Rough	Black	-	Polyurethane	Fine	Black
FBUU054773	UU N22 RFQ	1.85	6	2.2	25	0.5	6.0	0.2	0.2	Polyurethane	Rough	Black	-	Polyurethane	Fine	Black
FBUV054774	UV N12 FQ	1.50	6	1.2	20	0.5	1.5	0.2	0.2	Polyurethane	Fine	Black	-	Fleece	Ground quality	Grey
FBUU054775	UU N12 RRQ F1	1.15	6	1.2	15	0.5	6.0	0.2	0.2	Polyurethane	F1 rough structure	Black	-	Polyurethane	F1 rough structure	Black
FBGG054780	GG S06.30 RRC FG	3.00	1	6	30	0.6	1.0	0.6	0.6	XNBR elastomer	Rough	Grey	Polyamide foil	XNBR elastomer	Rough	Grey
FBGG054781	GG S06.40 RRC FG	4.00	1	6	40	0.6	1.0	0.6	0.6	XNBR elastomer	Rough	Grey	Polyamide foil	XNBR elastomer	Rough	Grey
FBGG054782	GG S06.55 RRC FG	5.50	1	6	60	0.6	1.0	0.6	0.6	XNBR elastomer	Rough	Grey	Polyamide foil	XNBR elastomer	Rough	Grey
FBGG054783	GG S04.30 RRC FG	3.00	1	4	30	0.6	1.0	0.6	0.6	XNBR elastomer	Rough	Grey	Polyamide foil	XNBR elastomer	Rough	Grey
FBGG054784	GG S04.40 RRC FG	4.00	1	4	30	0.6	1.0	0.6	0.6	XNBR elastomer	Rough	Grey	Polyamide foil	XNBR elastomer	Rough	Grey
FBGG054789	GG S06.60 RP6C	6.00	1	6	90	0.6	1.0	0.6	1	XNBR elastomer	Rough	Grey	Polyamide foil	NBR elastomer	P6 Super grip	Light blue
FBGG054790	GG S06.70 RP6C	7.00	1	6	90	0.6	1.0	0.6	1	XNBR elastomer	Rough	Grey	Polyamide foil	NBR elastomer	P6 Super grip	Light blue
FBTG054991	TG E08.65 P6Q	6.50	1	8	100	0.2	0.8	-	-	Fabric	Fabric texture	Natural	Polyester fabric	XNBR elastomer	P6 Supergrip	Blue
FBTG056420	TG E12.65 FC	6.50	1	11	80	0.2	0.6	0.1	0.9	Polyester fabric	Fabric texture	Black	Polyester fabric	Natural rubber	Fine	Red
FBTG056421	TG E12.50 FC	5.00	1	11	80	0.2	0.6	0.1	0.9	Polyester fabric	Fabric texture	Black	Polyester fabric	Natural rubber	Fine	Red
FBTG057239	TG E18.20 P5C	1.90	1	18	60	0.2	0.6	0.1	0.7	Polyester fabric	Fabric texture	Transparent	Polyester fabric	NBR elastomer	P5 structure	Green

INTERNAL & BUSINESS ONLY

SPLICE INSTRUCTIONS

Endless Instruction for RAPPLON® QuickSplice flat belts

Article Number	RAPPLON ® Type	Thickness (mm)	Thickness allowance (mm)	Finger length (mm)	Inlay top	Inlay top	Inlay bottom	Belt construction Colour	Temperature	QSP 60 plus				QSP 60LF plus				QSP 105 plus				Remarks
										Heating time	Cooling time	Heating time	Cooling time	Heating time	Cooling time	Heating time	Cooling time	Heating time	Cooling time	Heating time	Cooling time	
										30mm		60mm		30 mm		60 mm		30 mm		60 mm		100 mm	
54262	GG N08 RRQ	1,50	5	30	-	-	-	Rubber black Rubber green	180°C	4 min. 00 sec.		4 min. 15 sec.		-		-		4 min. 00 sec.		4 min. 15 sec.		4 min. 15 sec.	-
54263	GG N22 RFQ	1,50	5	30	-	-	-	Rubber black Rubber green	180°C	4 min. 00 sec.		4 min. 15 sec.		-		-		4 min. 00 sec.		4 min. 15 sec.		4 min. 15 sec.	-
54532	UU N06 RFQ FG	0,80	3	30 [1]	Silicone pad	Structure fine	Structure rough	PU black PU blue	180°C	2 min. 30 sec.		2 min. 45 sec.		-		-		2 min. 00 sec.		2 min. 30 sec.		2 min. 45 sec.	By using a QSP105 plus please attach the pliers with high pressure. If overlap splice on 50mm width:90° and 2mm/3:00 heating
54533	UU N12 RFQ FG	1,15	4	30 [1]	Silicone pad	Structure fine	Structure rough	PU black PU blue	180°C	2 min. 30 sec.		2 min. 45 sec.		-		-		2 min. 00 sec.		2 min. 30 sec.		2 min. 45 sec.	By using a QSP105 plus please attach the pliers with high pressure.100mm width:QSP160 pliers,heating time:2:45, high pressure.
54534	UU N17 RFQ FG	1,50	5	30 [1]	Silicone pad	Structure fine	Structure rough	PU black PU blue	180°C	3 min. 30 sec.		4 min. 30 sec.		-		-		3 min. 00 sec.		3 min. 30 sec.		4 min. 00 sec.	By using a QSP105 plus please attach the pliers with high pressure
54535	UU N22 RFQ FG	1,85	6	30 [1]	Silicone pad	Structure fine	Structure rough	PU black PU blue	180°C	3 min. 15 sec.		3 min. 30 sec.		-		-		3 min. 00 sec.		3 min. 15 sec.		3 min. 30 sec.	By using a QSP105 plus please attach the pliers with high pressure
54540	UU N16 RSQ FG	1,10	3	30 [1]	Silicone pad	-	Structure rough	PU black PU blue	180°C	3 min. 00 sec.		3 min. 00 sec.		-		-		3 min. 00 sec.		3 min. 00 sec.		3 min. 00 sec.	QSP105 plus attached with high pressure: heating/ cooling time 3 min. for belt width up to 60 mm
54543	UU N08 RSQ FG white	0,80	3	30 [1]	Silicone pad	-	Structure rough	PU white PU white	180°C	2 min. 30 sec.		2 min. 45 sec.		-		-		2 min. 30 sec.		2 min. 45 sec.		2 min. 45 sec.	Belt width 100mm: SPK750, Holdingtime 3 min, extra inlay baking paper instead of coated.
54550	UU N06 RFQ HG FG	1,10	3	30 [1]	Silicone pad	Structure Fine	Structure rough	PU back PU blue	180°C	3 min. 00 sec.		3 min. 30 sec.		-		-		3 min. 00 sec.		3 min. 30 sec.		3 min. 45 sec.	By using a QSP105 plus please attach the pliers with high pressure. If overlap splice on 50mm width:90° and 2mm/3:00 heating
54551	UU N16 SSQ FG	1,10	3	30	Silicone pad	-	PTFE	PU back PU blue	180°C	3 min. 15 sec.		3 min. 30 sec.		-		-		3 min. 00 sec.		3 min. 15 sec.		3 min. 30 sec.	QSP105 plus attached with high pressure: heating/ cooling time 3 min. for belt width up to 60 mm
54557	UY N12 FQ	1,50	5	30	Silicone pad	Structure fine	-	PU blue Fleece grey	180°C	3 min. 00 sec.		3 min. 15 sec.		-		-		3 min. 15 sec.		3 min. 15 sec.		3 min. 15 sec.	QSP105 plus attached with high pressure:heating/cooling time 2 min.45sec. for widths up to 30 and 60 mm
54559	UY E06.20 FQ	2,00	6	50	Silicone pad	Structure fine	-	PU blue Fleece grey	180°C	3 min. 45 sec.		4 min. 00 sec.		3 min. 45 sec.		4 min. 00 sec.		3 min. 15 sec.		3 min. 30 sec.		3 min. 45 sec.	By using QSP 105 plus attache the pliers with high pressure
54562	UU N16 SP5Q FG	1,30	4	30	Silicone pad P5	-	PTFE	PU black PU blue	180°C	2 min. 30 sec.		2 min. 45 sec.		-		-		2 min. 15 sec.		3 min. 00 sec.		3 min. 30 sec.	QSP105 plus attached with max. pressure: heating/ cooling time 3:00 for belt width up to 60 mm
54563	UU N08 RSQ FG blue	0,80	3	30 [1]	Silicone pad	-	Structure rough	PU blue PU blue	180°C	2 min. 30 sec.		3 min. 15 sec.		-		-		2 min. 00 sec.		3 min. 00 sec.		3 min. 15 sec.	By using a QSP105 plus please attach the pliers with high pressure. If overlap splice on 50mm width:90° and 2mm/3:00 heating
54564	UU N06 RFQ HG	1,10	3	30 [1]	Silicone pad	-	Structure rough	PU black PU black	180°C	2 min. 30 sec.		2 min. 45 sec.		-		-		2 min. 00 sec.		2 min. 15 sec.		2 min. 15 sec.	By using a QSP105 plus please attach the pliers with high pressure.
54567	UU A80.45 RRQ	4,50	14	110	-	Structure rough	Structure rough	PU black PU black	185°C	-		-		6 min. 15 sec.		6 min. 15 sec.		-		-		-	By using a QSP60LF plus please attach the pliers with high pressure
54568	UU E15.16 RFQ	1,60	5	110	-	Structure rough	Structure Rough	PU black PU black	180°C	-		-		3 min. 45 sec.		4 min. 00 sec.		3 min. 45 sec.		4 min. 00 sec.		4 min. 00 sec.	By using QSP105plus & QSP60LF plus please attach the pliers with high pressure
54572	TU N20 FQ	1,25	4	30	Silicone pad	Structure fine	Silicone pad	PU black PU black	180°C	3 min. 15 sec.		3 min. 30 sec.		-		-		3 min. 00 sec.		3 min. 15 sec.		3 min. 15 sec.	By using a QSP105 plus please attach the pliers with high pressure
54573	TT N20 Q	1,40	4	30	Silicone pad	-	Silicone pad	PU black PU black	180°C	2 min. 45 sec.		3 min. 15 sec.		-		-		2 min. 45 sec.		3 min. 15 sec.		3 min. 30 sec.	By using a QSP105 plus please attach the pliers with high pressure
54582	GG P01.14 FFQ	1,40	4	50	-	-	-	Rubber black Rubber green	180°C	3 min. 15 sec.		3 min. 15 sec.		3 min. 15 sec.		3 min. 15 sec.		3 min. 15 sec.		3 min. 15 sec.		3 min. 15 sec.	-
54583	GG E03.14 FFQ	1,40	4	50 [2]	-	-	-	Rubber grey Rubber grey	180°C	2 min. 30 sec.		3 min. 00 sec.		2 min. 30 sec.		3 min. 00 sec.		2 min. 30 sec.		3 min. 00 sec.		3 min. 00 sec.	-
54585	GG N15 FFQ HC	1,40	4	30	-	-	-	Rubber black Rubber black	180°C	3 min. 00 sec.		3 min. 15 sec.		-		-		3 min. 00 sec.		3 min. 15 sec.		3 min. 15 sec.	-
54598	TT E09.18 Q	1,90	6	50	-	-	-	Mixed-fabric grey Mixed-fabric grey	180°C	3 min. 30 sec.		4 min. 00 sec.		3 min. 30 sec.		4 min. 00 sec.		3 min. 30 sec.		4 min. 00 sec.		4 min. 15 sec.	-
54599	TT E05.11 Q	1,10	3	50	-	Silicone pad	-	PES-fabric black PES-fabric grey	180°C	3 min. 00 sec.		3 min. 30 sec.		3 min. 00 sec.		3 min. 30 sec.		3 min. 00 sec.		3 min. 30 sec.		3 min. 30 sec.	-
54603	TU E04.09 RQ	0,90	3	50	Silicone pad	-	Structure rough	PES-fabric green PU black	205°C	4 min. 30 sec.		4 min. 45 sec.		4 min. 00 sec.		4 min. 30 sec.		4 min. 00 sec.		4 min. 30 sec.		4 min. 30 sec.	Heating pliers must be attached with high pressure
54607	GG E05.14 FFQ	1,40	4	50	-	-	-	Rubber green Rubber green	180°C	3 min. 00 sec.		3 min. 30 sec.		3 min. 00 sec.		3 min. 30 sec.		3 min. 00 sec.		3 min. 30 sec.		3 min. 45 sec.	-

SPLICE INSTRUCTIONS

Endless Instruction for RAPPLON® QuickSplice flat belts

Article Number	RAPPLON ® Type	Thickness (mm)	Thickness allowance (mm)	Finger length (mm)	Inlay top	Inlay top	Inlay bottom	Belt construction Colour	Temperature	QSP 60 plus				QSP 60LF plus				QSP 105 plus				Remarks
										Heating time	Cooling time	Heating time	Cooling time	Heating time	Cooling time	Heating time	Cooling time	Heating time	Cooling time	Heating time	Cooling time	
										30mm		60mm		30 mm		60 mm		30 mm		60 mm		100 mm	
54608	GG N27 RFQ	1,70	5	30	-	-	-	Rubber black Rubber blue	180°C	2 min. 30 sec.		3 min. 00 sec.		2 min. 30 sec.		3 min. 00 sec.		2 min. 30 sec.		3 min. 00 sec.		3 min. 00 sec.	-
54614	GG E08.20 RRQ	2,00	6	110 *1	-	-	-	Rubber black Rubber blue	180°C	3 min. 45 sec.		4 min. 15 sec.		3 min. 45 sec.		4 min. 15 sec.		3 min. 45 sec.		4 min. 15 sec.		4 min. 30 sec.	50mm fingers possible if not used in tangential and rollerdrive applications
54624	TG E04.12 RQ	1,30	4	50	Silicone pad	not necessary	Silicone pad	PES-fabric green Rubber green	180°C	3 min. 15 sec.		5 min. 15 sec.		3 min. 30 sec.		5 min. 15 sec.		3 min. 30 sec.		5 min. 15 sec.		5 min. 30 sec.	When splicing 31 - 60mm width use Inlay material. Not necessary for 0 - 30 mm width.
54630	PG E05.12 SFQ	1,20	4	50	-	-	-	Thermoplast black Rubber green	180°C	4 min. 30 sec.		4 min. 30 sec.		4 min. 30 sec.		4 min. 30 sec.		4 min. 30 sec.		4 min. 30 sec.		5 min. 00 sec.	QSP 105 plus can handle max. 85 mm belt width. For widths >85 mm use QSP160 plus.
54647	TT P02.12 Q	1,20	4	50	-	-	-	PA-fabric black PA-fabric blue	180°C	3 min. 00 sec.		3 min. 15 sec.		3 min. 00 sec.		3 min. 15 sec.		3 min. 00 sec.		3 min. 15 sec.		3 min. 15 sec.	-
54655	GG E15.20 RFQ	2,05	6	110 *1	-	-	-	Rubber blue Rubber grey	180°C	4 min. 30 sec.		4 min. 45 sec.		4 min. 30 sec.		4 min. 45 sec.		4 min. 30 sec.		4 min. 45 sec.		5 min. 00 sec.	50mm fingers possible if not used in tangential and rollerdrive applications
54656	GG E15.25 RFQ	2,50	8	110 *1	-	-	-	Rubber blue Rubber grey	180°C	5 min. 00 sec.		5 min. 00 sec.		5 min. 00 sec.		5 min. 15 sec.		5 min. 00 sec.		5 min. 00 sec.		5 min. 15 sec.	50mm fingers possible if not used in tangential and rollerdrive applications
54657	GG E15.30 RFQ	3,00	9	110 *1	-	-	-	Rubber blue Rubber grey	180°C	6 min. 00 sec.		6 min. 00 sec.		6 min. 00 sec.		6 min. 00 sec.		6 min. 00 sec.		6 min. 00 sec.		6 min. 15 sec.	50mm fingers possible if not used in tangential and rollerdrive applications
54659	GG E10.30 RRQ FG	3,00	9	110 *1	-	-	-	Rubber grey Rubber grey	180°C	4 min. 00 sec.		4 min. 00 sec.		4 min. 00 sec.		4 min. 00 sec.		4 min. 00 sec.		4 min. 00 sec.		4 min. 00 sec.	For Boxfolding we recommend 110/10 Fingers, 50/8 fingers possible at your own responsibility
54660	GG E10.40 RRQ FG	4,00	13	110 *1	-	-	-	Rubber grey Rubber grey	180°C	4 min. 00 sec.		4 min. 00 sec.		4 min. 00 sec.		4 min. 00 sec.		4 min. 00 sec.		4 min. 00 sec.		4 min. 00 sec.	For Boxfolding we recommend 110/10 Fingers, 50/8 fingers possible at your own responsibility
54662	GG E10.55 RRQ FG	5,50	17	110 *1	-	-	-	Rubber blue Rubber grey	180°C	6 min. 00 sec.		6 min. 45 sec.		5 min. 30 sec.		6 min. 00 sec.		6 min. 00 sec.		6 min. 45 sec.		6 min. 45 sec.	For Boxfolding we recommend 110/10 Fingers, 50/8 fingers possible at your own responsibility
54667	GG E18.25 RFQ	2,50	8	110 *1	-	-	-	Rubber blue Rubber black	180°C	5 min. 00 sec.		5 min. 00 sec.		5 min. 00 sec.		5 min. 00 sec.		5 min. 00 sec.		5 min. 00 sec.		-	50 mm fingers possible if not used in tangential and rollerdrive applications
54668	GG E18.30 RFQ	3,00	9	110 *1	-	-	-	Rubber blue Rubber black	180°C	4 min. 45 sec.		5 min. 00 sec.		4 min. 45 sec.		5 min. 00 sec.		4 min. 45 sec.		5 min. 00 sec.		5 min. 15 sec.	50 mm fingers possible if not used in tangential and rollerdrive applications
54680	GG A50.30 RRQ	3,00	9	110 *1	-	-	-	Rubber blue Rubber black	180°C	4 min. 30 sec.		-		4 min. 30 sec.		-		4 min. 30 sec.		-		-	-
54762	UU E15.30 RFQ	3,00	9	110 *1	-	Structure Fine	Structure Rough	PU black PU black	180°C	4 min. 00 sec.		4 min. 15 sec.		4 min. 00 sec.		4 min. 15 sec.		4 min. 00 sec.		4 min. 15 sec.		4 min. 30 sec.	50 mm fingers possible if not used in tangential and rollerdrive applications
54763	UU E18.20 RRQ	2,00	6	110 *1	-	Structure Rough	Structure Rough	PU black PU black	180°C	3 min. 15 sec.		3 min. 30 sec.		3 min. 15 sec.		3 min. 30 sec.		3 min. 15 sec.		3 min. 45 sec.		3 min. 45 sec.	When splicing 60 mm width use QSP105 with high pressure.
54764	UU E18.30 RRQ	3,00	9	110 *1	-	Structure Rough	Structure Rough	PU black PU black	180°C	-		-		4 min. 30 sec.		5 min. 00 sec.		4 min. 30 sec.		5 min. 00 sec.		5 min. 15 sec.	50 mm fingers possible if not used in tangential and rollerdrive applications
54765	UU E15.20 RFQ	2,00	6	110 *1	-	Structure Fine	Structure Rough	PU black PU black	180°C	3 min. 15 sec.		3 min. 30 sec.		3 min. 15 sec.		3 min. 30 sec.		3 min. 15 sec.		3 min. 30 sec.		3 min. 45 sec.	50 mm fingers possible if not used in tangential and rollerdrive applications
54770	UY E06.20 FQ	2,00	6	50 *1	Silicone pad	Structure fine	-	PU black PU black	180°C	3 min. 45 sec.		4 min. 00 sec.		3 min. 45 sec.		4 min. 00 sec.		3 min. 15 sec.		3 min. 30 sec.		3 min. 45 sec.	By using QSP 105 plus attache the pliers with high pressure
54771	UU N06 RFQ	0,80	3	30 *1	Silicone pad	Structure fine	Structure rough	PU black PU black	180°C	2 min. 30 sec.		2 min. 45 sec.		-		-		2 min. 00 sec.		2 min. 30 sec.		2 min. 45 sec.	By using a QSP105 plus please attach the pliers with high pressure. If overlap splice on 50mm width:90° and 2mm/3:00 heating
54772	UU N12 RFQ	1,15	4	30 *1	Silicone pad	Structure fine	Structure rough	PU black PU black	180°C	-		-		-		-		2 min. 00 sec.		2 min. 30 sec.		2 min. 45 sec.	By using a QSP105 plus please attach the pliers with high pressure.100mm width:QSP160 pliers,heating time:2:45, high pressure.
54773	UU N22 RFQ	1,85	6	30 *1	Silicone pad	Structure fine	Structure rough	PU black PU black	180°C	3 min. 15 sec.		3 min. 30 sec.		-		-		3 min. 00 sec.		3 min. 15 sec.		3 min. 30 sec.	By using a QSP105 plus please attach the pliers with high pressure
54774	UY N12 FQ	1,50	5	30 *1	Silicone pad	Structure fine	-	PU black PU black	180°C	3 min. 00 sec.		3 min. 15 sec.		-		-		3 min. 15 sec.		3 min. 15 sec.		3 min. 15 sec.	QSP105 plus attached with high pressure:heating/cooling time 2 min.45sec. for widths up to 30 and 60 mm
54775	UU N12 RRQ F1	1,15	4	30 *1	Silicone pad	Structure rough	Structure rough	PU black PU black	180°C	-		-		-		-		2 min. 00 sec.		2 min. 30 sec.		2 min. 45 sec.	By using a QSP105 plus please attach the pliers with high pressure.100mm width:QSP160 pliers,heating time:2:45, high pressure.

*1 = overlap splice possible *1 = 30 mm finger possible *1 = 50 mm finger possible *1 = 110 mm finger possible

Before Splicing carefully read the operation manuals of the using pliers. All indications are approximate values and based on preheated Ammeraal Beltech guide rails.
The specifications have been defined under the following climatic conditions: 23 °C/73 °F, 50 % relative humidity (DIN 50005/ISO 554)

SPLICE INSTRUCTIONS

Endless Instruction for RAPPLON® Classic flat belts-Wedge Skive and RappSki200 / KSM 300

Article Number	RAPPLON® Type	approx. Thickness [mm]	Thickness allowance [mm]	Cutting angle	Wedge No. RappSki200	Angle table KSM 300	Skive length [mm]	Grinding paper [grain no.]	Friction surface Bottom side Pulley side	Surface Finish	Colour	Glue	Tension member	Glue	Back surface Top side Transport side	Surface Finish	Colour	Glue	Teflon fabric bottom	Teflon fabric top	Rubber pad bottom	Rubber pad top	Temperature [°C]	Pressure [bar]	Holding time with preheated and both side heated press [min]
54038	LL S06 C	3,50	11	75°	2,8	22	72	40	Chrome leather	Ground quality	Grey	2 x 103L *	Polyamide foil	118N	Chrome leather	Ground quality	Grey	2 x 103L *	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54039	LL S09 C	3,80	12	75°	2,8	22	78	40	Chrome leather	Ground quality	Grey	2 x 103L *	Polyamide foil	118N	Chrome leather	Ground quality	Grey	2 x 103L *	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54045	LT S06 C	2,60	8	75°	2,4	19	62	40	Chrome leather	Ground quality	Grey	2 x 103L *	Polyamide foil	118N	Polyamide fabric	Fabric texture	Black	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54046	LT S09 C	2,90	9	75°	2,4	19	69	40	Chrome leather	Ground quality	Grey	2 x 103L *	Polyamide foil	118N	Polyamide fabric	Fabric texture	Black	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54047	LT S11 C	3,00	9	75°	2,4	19	72	40	Chrome leather	Ground quality	Grey	2 x 103L *	Polyamide foil	118N	Polyamide fabric	Fabric texture	Black	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54048	LT S15 C	3,60	11	75°	2,4	19	86	40	Chrome leather	Ground quality	Grey	2 x 103L *	Polyamide foil	118N	Polyamide fabric	Fabric texture	Black	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54049	LT S18 C	3,75	12	75°	2,4	19	89	40	Chrome leather	Ground quality	Grey	2 x 103L *	Polyamide foil	118N	Polyamide fabric	Fabric texture	Black	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	20
54050	LT S27 C	5,10	16	75°	2,8	22	104	40	Chrome leather	Ground quality	Grey	2 x 103L *	Polyamide foil	118N	Polyamide fabric	Fabric texture	Black	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54051	LT S36 C	5,90	19	75°	2,8	22	121	40	Chrome leather	Ground quality	Grey	2 x 103L *	Polyamide foil	118N	Polyamide fabric	Fabric texture	Black	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	30
54145	GG S06.40 RRC	4,00	13	75°	2,4	20	95	40	XNBR elastomer	Rough	Green	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54164	GG S04.40 RRC green	4,00	13	75°	2,4	20	95	60	XNBR elastomer	Rough	Green	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54235	TT S09.16 C HC	1,65	5	75°	2,4	20	39	60	Polyamide fabric	Fabric texture	Black	118N	Polyamide foil	118N	Polyamide fabric	Fabric texture	Black	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54243	GG S07.30 RRC	3,00	9	75°**	2,4	20	72	40	TNBR elastomer	Rough	Blue	R2 or C8	Polyamide foil	118N	TNBR elastomer	Rough	Blue	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54249	TT S15.23 C	2,30	7	75°	2,4	20	55	40	Polyamide fabric	Fabric texture	Black	118N	Polyamide foil	118N	Polyamide fabric	Fabric texture	Black	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	20
54250	TT S09.16 C	1,65	5	75°	2,4	20	39	60	Polyamide fabric	Fabric texture	Black	118N	Polyamide foil	118N	Polyamide fabric	Fabric texture	Black	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54251	TT S04.12 C	1,20	4	75°	2,4	20	29	60	Polyamide fabric	Fabric texture	Black	118N	Polyamide foil	118N	Polyamide fabric	Fabric texture	Black	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54261	TG S04.14 RC	1,40	4	75°	2,4	20	33	60	Polyamide fabric	Fabric texture	Green	118N	Polyamide foil	118N	XNBR elastomer	Rough	Green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54265	TG P04.20 RC	2,00	6	75°	2,4	19	48	60	Polyamide fabric	Fabric texture	Black	118N	Polyamide fabric	118N	NBR elastomer	Rough	Green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54266	TG P07.29 RC	2,90	9	75°	2,4	19	69	40	Polyamide fabric	Fabric texture	Black	118N	Polyamide fabric	118N	NBR elastomer	Rough	Green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	15

Seite1

SPLICE INSTRUCTIONS

Endless Instruction for RAPPLON® Classic flat belts-Wedge Skive and RappSki200 / KSM 300

Article Number	RAPPLON® Type	approx. Thickness [mm]	Thickness allowance [mm]	Cutting angle	Wedge No. RappSki200	Angle table KSM 300	Skive length [mm]	Grinding paper [grain no.]	Friction surface Bottom side Pulley side	Surface Finish	Colour	Glue	Tension member	Glue	Back surface Top side Transport side	Surface Finish	Colour	Glue	Teflon fabric bottom	Teflon fabric top	Rubber pad bottom	Rubber pad top	Temperature [°C]	Pressure [bar]	Holding time with preheated and both side heated press [min]
54269	TG S04.12 RC	1,25	4	75°	2,4	20	30	60	Polyamide fabric	Fabric texture	Green	118N	Polyamide foil	118N	NBR elastomer	Rough	Green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54273	GG S04.30 RRC green	2,90	9	75°	2,4	20	69	40	XNBR elastomer	Rough	Green	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54274	GG S06.30 RRC	3,00	9	75°	2,4	20	72	40	XNBR elastomer	Rough	Green	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54275	GG S06.50 RRC	5,00	16	75°	2,8	22	102	40	XNBR elastomer	Rough	Green	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	30
54276	GG S06.60 RRC	6,00	19	75°	2,8	22	123	40	XNBR elastomer	Rough	Green	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	30
54278	GG S11.50 RRC	5,00	16	75°**	2,4	20	119	40	TNBR elastomer	Rough	Blue	R2 or C8	Polyamide foil	118N	TNBR elastomer	Rough	Blue	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54286	GG S15.30 RRC green	3,10	10	75°	2,8	22	63	40	XNBR elastomer	Rough	Dark green	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Light green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54287	GG S18.34 RRC green	3,40	11	75°	2,8	22	70	40	XNBR elastomer	Rough	Dark green	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Light green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54289	GG S11 LRC	3,25	10	75°	2,4	20	78	40	NBR elastomer	ngitudinal groov	Black	R2 or C8	Polyamide foil	118N	NBR elastomer	Rough	Green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	20
54297	GG S22 LRC	4,60	14	75°	2,8	22	94	40	NBR elastomer	ngitudinal groov	Black	R2 or C8	Polyamide foil	118N	NBR elastomer	Rough	Green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	20
54298	GG S33 LRC	5,70	18	75°	2,8	22	117	40	NBR elastomer	ngitudinal groov	Black	R2 or C8	Polyamide foil	118N	NBR elastomer	Rough	Green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54369	GG S09.22 RRC black HC	2,20	7	75°	2,4	20	52	40	XNBR elastomer	Rough	Black	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Black	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	20
54370	GG S09.22 RRC green	2,20	7	75°	2,4	20	52	40	XNBR elastomer	Rough	Dark green	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Light green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	20
54504	S09 C FG	0,92	3	75°	1,2	12	44	60	Polyamide foil	Smooth	Transparent	118N	Polyamide foil	118N	Polyamide foil	Smooth	Transparent	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54525	TG P03.12 FC	1,25	4	75°	2,0	18	36	60	Polyamide fabric	Fabric texture	Black	118N	Polyamide fabric	118N	XNBR elastomer	Fine	Green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	10

Seite 1

* = Preglue the leather area with 103L and let dry for 20 minutes

** = Cutting angle 90° for tubewinding applications

***Double the heating time with single side heated presses

SPLICE INSTRUCTIONS

Endless Instruction for RAPPLON® Classic flat belts-Wedge Skive and RappSki200 / KSM 300

Article Number	RAPPLON® Type	approx. Thickness [mm]	Thickness allowance	Cutting angle	Wedge No. RappSki200	Angle table KSM 300	Skive length [mm]	Grinding paper [grain no.]	Friction surface Bottom side Pulley side	Surface Finish	Colour	Glue	Tension member	Glue	Back surface Top side Transport side	Surface Finish	Colour	Glue	Inlay bottom	Inlay top	Rubber pad bottom	Rubber pad top	Temperature °C	Pressure [bar]	Holding time with preheated and both side heated press [min]
54528	GG S11.25 RRC green	2,50	8	75°	1,2	12	119	40	XNBR elastomer	Rough	Dark green	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Light green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54530	GG S11.26 RFC	2,60	8	75°	1,2	12	124	40	XNBR elastomer	Rough	Grey	R2 or C8	Polyamide foil	118N	XNBR elastomer	Fine	Blue	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54701	GT S02 RC	1,00	3	75°	2,4	20	24	60	XNBR elastomer	Rough	Grey	R2 or C8	Polyamide foil	118N	Polyamide fabric	Fabric texture	Blue	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54702	GT S04 RC	1,25	4	75°	2,4	20	30	60	XNBR elastomer	Rough	Grey	R2 or C8	Polyamide foil	118N	Polyamide fabric	Fabric texture	Blue	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54703	GT S06 RC	1,40	4	75°	2,4	20	33	60	XNBR elastomer	Rough	Grey	R2 or C8	Polyamide foil	118N	Polyamide fabric	Fabric texture	Blue	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54704	GT S09 FC	1,90	6	75°	2,4	20	45	60	XNBR elastomer	Fine	Blue	R2 or C8	Polyamide foil	118N	Polyamide fabric	Fabric texture	Blue	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54705	GT S04.25 RC	2,40	8	75°	2,4	20	57	40	XNBR elastomer	Rough	Green	R2 or C8	Polyamide foil	118N	Polyamide fabric	Fabric texture	Blue	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54714	TG S06.57 RC	5,70	9	75°	3,4	30	96	40	Polyamide fabric	Fabric texture	Blue	118N	Polyamide foil	118N	TNBR elastomer	Rough	Grey	R2	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54715	TG S06.37 RC	3,70	6	75°	2,4	20	88	40	Polyamide fabric	Fabric texture	Blue	118N	Polyamide foil	118N	TNBR elastomer	Rough	Grey	R2	PTFE fabric	PTFE fabric	no	yes	100	2,5	22
54716	TG S06.30 RC	3,00	5	75°	2,4	19	72	40	Polyamide fabric	Fabric texture	Blue	118N	Polyamide foil	118N	TNBR elastomer	Rough	Grey	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	20
54717	TG S09.40 RC	4,00	6	75°	2,4	20	95	40	Polyamide fabric	Fabric texture	Blue	118N	Polyamide foil	118N	TNBR elastomer	Rough	Grey	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	22
54718	TG S09.60 RC	6,10	10	75°	3,4	30	103	40	Polyamide fabric	Fabric texture	Blue	118N	Polyamide foil	118N	TNBR elastomer	Rough	Grey	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54729	GG S06.19 RFC green	1,90	3	75°	2,4	20	45	60	XNBR elastomer	Rough	Dark green	R2 or C8	Polyamide foil	118N	XNBR elastomer	Fine	Light green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54730	GG S02.11 RRC	1,10	3	75°	2,4	20	26	60	TNBR elastomer	Rough	Grey	R2 or C8	Polyamide foil	118N	TNBR elastomer	Rough	Grey	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54731	GG S04.14 RRC	1,40	4	75°**	2,4	20	33	60	TNBR elastomer	Rough	Grey	R2 or C8	Polyamide foil	118N	TNBR elastomer	Rough	Grey	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54732	GG S07.21 RRC green	2,10	7	75°	2,4	20	50	60	XNBR elastomer	Rough	Dark green	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Light green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54733	GG S09.22 RFC	2,20	7	75°	2,4	20	52	40	XNBR elastomer	Rough	Grey	R2 or C8	Polyamide foil	118N	XNBR elastomer	Fine	Blue	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54734	GG S06.18 RFC	1,80	6	75°	2,4	20	43	60	XNBR elastomer	Rough	Grey	R2 or C8	Polyamide foil	118N	XNBR elastomer	Fine	Blue	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	15

Seite 1

SPLICE INSTRUCTIONS

Endless Instruction for RAPPLON® Classic flat belts-Wedge Skive and RappSki200 / KSM 300

Article Number	RAPPLON® Type	approx. Thickness [mm]	Thickness allowance	Cutting angle	Wedge No. RappSki200	Angle table KSM 300	Skive length [mm]	Grinding paper [grain no.]	Friction surface Bottom side Pulley side	Surface Finish	Colour	Glue	Tension member	Glue	Back surface Top side Transport side	Surface Finish	Colour	Glue	Inlay bottom	Inlay top	Rubber pad bottom	Rubber pad top	Temperature °C	Pressure [bar]	Holding time with preheated and both side heated press [min]
54735	GG S02.11 FFC	1,10	3	75°	2,4	20	26	60	NBR elastomer	Fine	Grey	R2 or C8	Polyamide foil	118N	NBR elastomer	Fine	Grey	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	10
54736	GG S09.30 RRC	3,00	9	75°**	2,4	20	72	40	XNBR elastomer	Rough	Blue	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Blue	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54738	GG S04.17 RFC	1,70	5	75°	2,4	20	41	60	XNBR elastomer	Rough	Grey	R2 or C8	Polyamide foil	118N	XNBR elastomer	Fine	Blue	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54748	GG S15.30 RRC	3,00	9	75°	2,8	22	61	40	XNBR elastomer	Rough	Grey	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Blue	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54749	GG S18.40 RRC	4,00	13	75°	2,8	22	82	40	XNBR elastomer	Rough	Grey	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Blue	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54751	TT S04.12 C	1,20	4	75°	2,4	20	29	60	Polyamide fabric	Fabric texture	Blue	118N	Polyamide foil	118N	Polyamide fabric	Fabric texture	Blue	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54752	TT S02.10 C	1,00	3	75°	2,0	18	29	60	Polyamide fabric	Fabric texture	Blue	118N	Polyamide foil	118N	Polyamide fabric	Fabric texture	Blue	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	15
54761	PP S04.14 SSC	1,40	4	75°	2,0	18	40	60	Polyamide foil	Smooth	Black	118N	Polyamide foil	118N	Polyamide foil	Smooth	Black	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	10
54780	GG S06.30 RRC FG	3,00	9	75°	2,4	20	72	40	XNBR elastomer	Rough	Grey	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Grey	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54781	GG S06.40 RRC FG	4,00	13	75°	2,4	20	95	40	XNBR elastomer	Rough	Grey	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Grey	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54782	GG S06.55 RRC FG	5,50	17	75°	2,8	22	112	40	XNBR elastomer	Rough	Grey	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Grey	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	30
54783	GG S04.30 RRC FG	3,00	9	75°	2,4	20	72	40	XNBR elastomer	Rough	Grey	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Grey	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54784	GG S04.40 RRC FG	4,00	13	75°	2,4	20	95	40	XNBR elastomer	Rough	Grey	R2 or C8	Polyamide foil	118N	XNBR elastomer	Rough	Grey	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54789	GG S06.60 RP6C	6,00	19	90°	3,4	30	101	40	XNBR elastomer	Rough	Grey	R2 or C8	Polyamide foil	118N	NBR elastomer	P6 Super grip	Light blue	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
54790	GG S06.70 RP6C	7,00	22	90°	3,4	30	85	40	XNBR elastomer	Rough	Grey	R2 or C8	Polyamide foil	118N	NBR elastomer	P6 Super grip	Light blue	R2 or C8	PTFE fabric	PTFE fabric	no	yes	100	2,5	25
56420	TG E12.65 FC	6,50	10	90°	3,4	30	109	40	Polyester fabric	Fabric texture	Black	Conti Secur BFE	Polyester fabric	Conti Secur BFE	Natural rubber	Fine	Red	Conti Secur BFE	PTFE fabric	PTFE fabric	no	yes	110	2	15
56421	TG E12.50 FC	5,00	8	90°	3,4	30	84	40	Polyester fabric	Fabric texture	Black	Conti Secur BFA	Polyester fabric	Conti Secur BFA	Natural rubber	Fine	Red	Conti Secur BFA	PTFE fabric	PTFE fabric	no	yes	110	2	15
57239	TG E18.20 P5C	1,90	6	90°	2,4	20	45	60	Polyester fabric	Fabric texture	Transparent	30/18 and hard	Polyester fabric	30/18 and hard	NBR elastomer	P5 structure	Green	R2 or C8	PTFE fabric	PTFE fabric	no	yes	110	2,5	30
58181	S27 C FG	2,70	8	75°	2,4	20	64	60	Polyamide foil	Smooth	Transparent	118N	Polyamide foil	118N	Polyamide foil	Smooth	Transparent	118N	PTFE fabric	PTFE fabric	no	yes	100	2,5	15

Seite 1