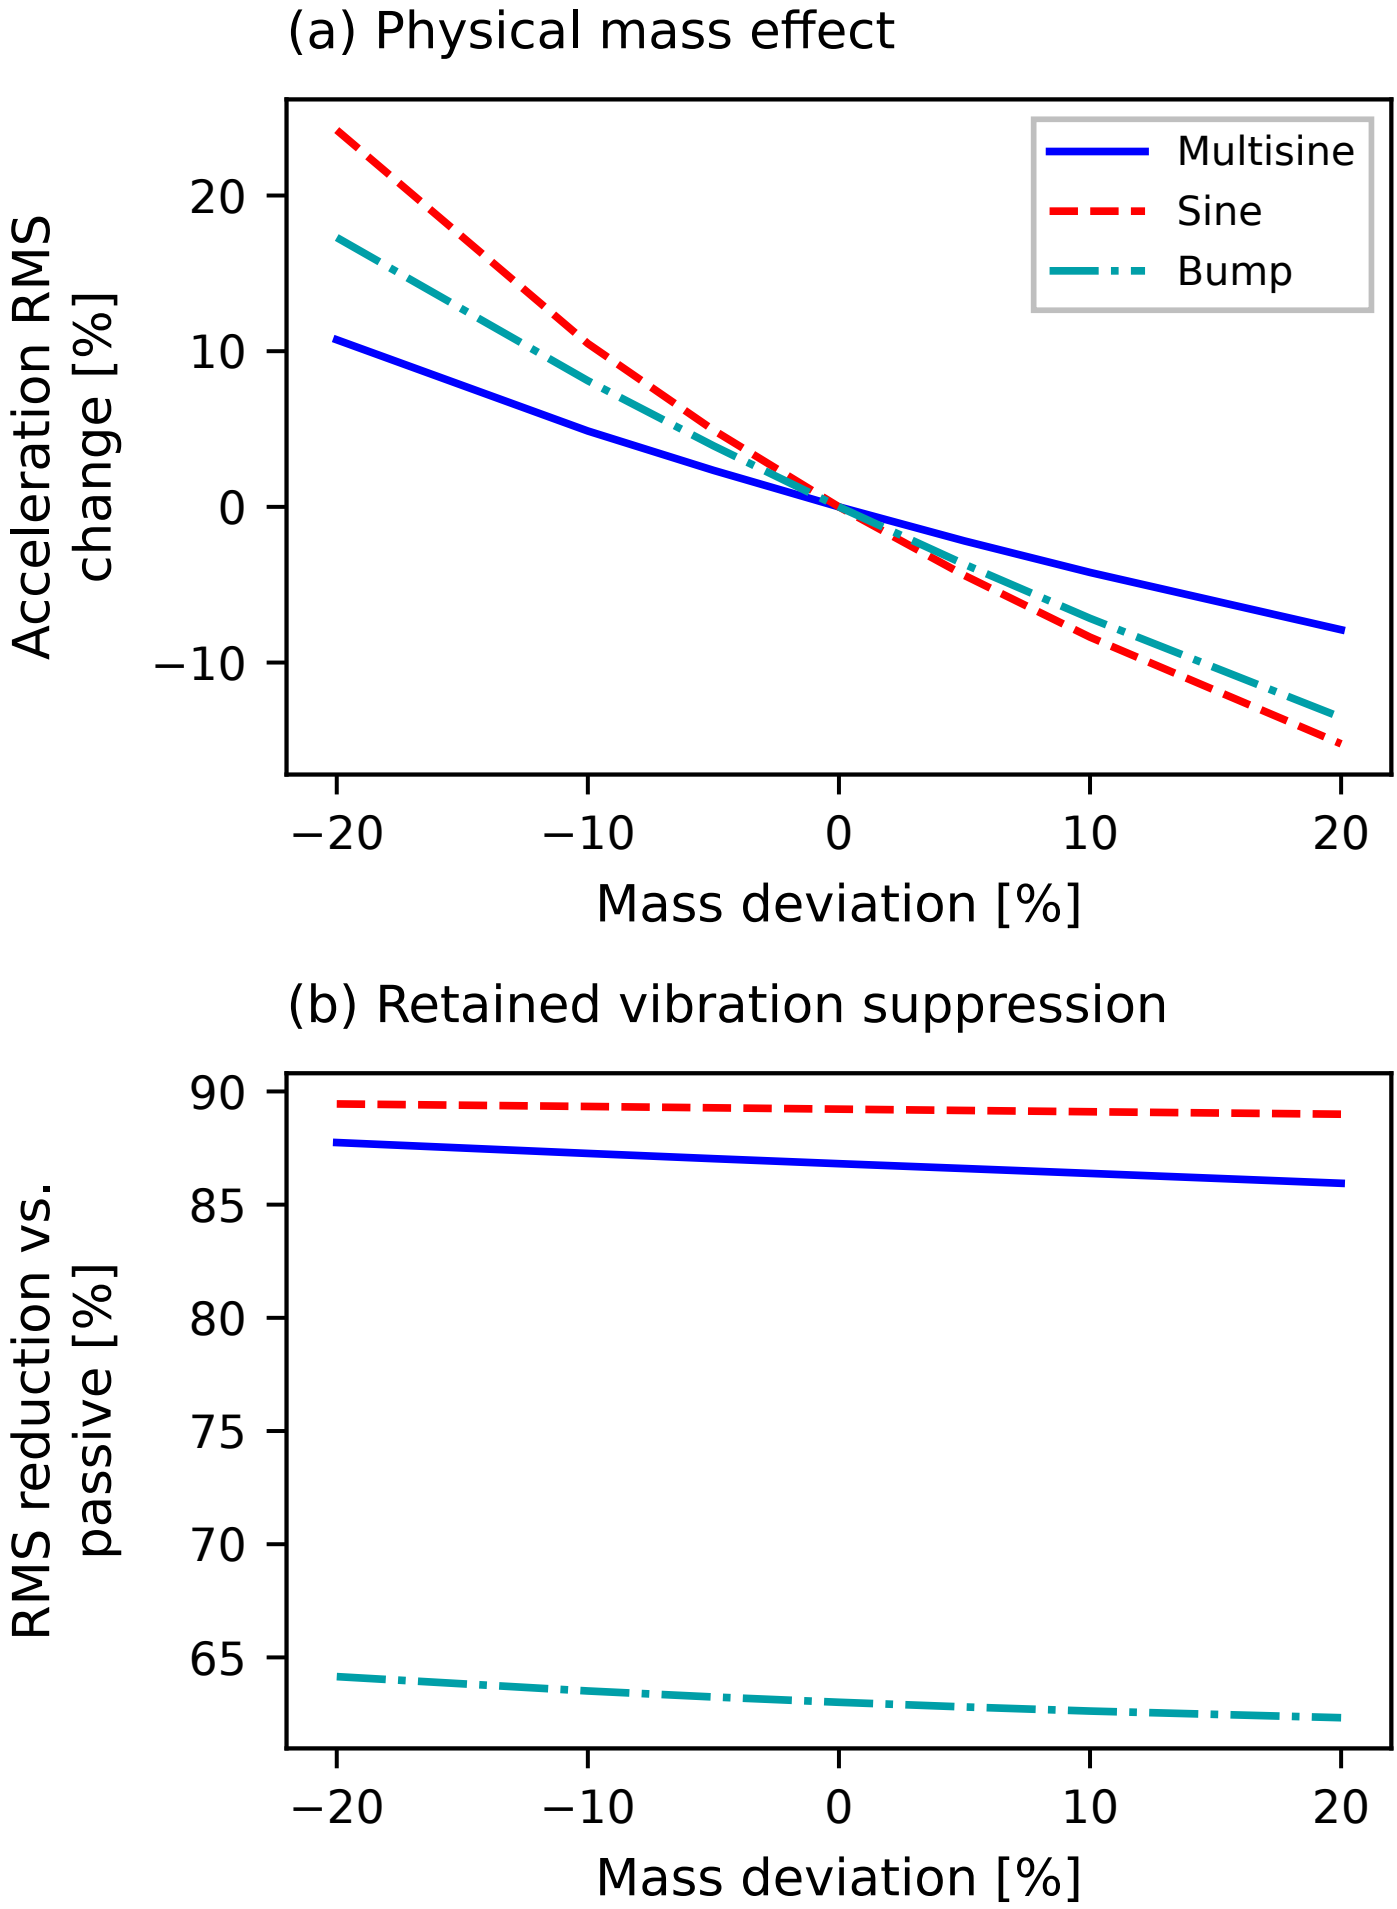
(a) Physical mass effect
Acceleration RMS change [%]
20
10
0
−10
−20
−10
0
10
20
Mass deviation [%]
Multisine
Sine
Bump
(b) Retained vibration suppression
RMS reduction vs. passive [%]
90
85
80
75
70
65
−20
−10
0
10
20
Mass deviation [%]