

# Maximum Allowable Current Determination of RBS By Using a Directed Graph Model and Greedy Algorithm

Binghui Xu<sup>1†</sup>, Guangbin Hua<sup>1†</sup>, Cheng Qian<sup>1\*</sup>, Quan Xia<sup>1,2</sup>, Bo Sun<sup>1</sup>, Yi Ren<sup>1</sup>, and  
Zili Wang<sup>1</sup>

<sup>1</sup>School of Reliability and Systems Engineering, Beihang University, Beijing, 100191,  
China

<sup>2</sup>School of Aeronautic Science and Engineering at Beihang University, Beijing, China

\*Address correspondence to: cqian@buaa.edu.cn

<sup>†</sup>These authors contributed equally to this work.

## Abstract

Reconfigurable battery systems (RBSs) present a promising alternative to traditional battery systems due to their flexible and dynamically changeable topological structure that can be adapted to different battery charging and discharging strategies. During RBS operation, a critical system parameter known as the maximum allowable current (MAC) become pivotal. This parameter is instrumental in maintaining the current of each individual battery within a safe range and serves as a guiding indicator for the system's reconfiguration, thereby ensuring its safety and reliability. This paper proposes a method to calculate the MAC of arbitrary RBSs using a greedy algorithm in conjunction with a directed graph model of the RBS. By introducing the shortest path of the battery, the greedy algorithm transforms the enumeration of switch states in the brute-force algorithm into the combination of the shortest paths, which greatly increases the efficiency with which the MAC is determined. The directed graph model, based on the equivalent circuit, provides a specific method for calculating the MAC of a given structure. The proposed method is validated on two published four-battery-RBSs and one with a more complex structure. The results are the same as those of the brute-force algorithm, but the proposed method significantly improves the computational efficiency ( $N_s 2^{N_s - N_b} \log_{10} N_b$  times faster than the brute force algorithm for an RBS with  $N_b$  batteries and  $N_s$  switches, theoretically). The main advantage of the proposed method is its ability to calculate the MAC of RBSs with arbitrary structures, even in scenarios with random isolated batteries.

## 1 Introduction

Battery energy storage systems (BESSs) are extensively used in various applications [1], such as wind power plants [2] and space power systems [3, 4], to store and release high-quality electrical energy

[5]. Typically, a BESS consists of numerous batteries interconnected by series-parallel circuitry to provide the required capacity storage. However, traditional BESSs, in which the batteries are connected in a fixed topology, suffer from a significant weakness in their worst battery due to the so-called cask effect. Moreover, if the worst battery fails during operation, it is highly likely to exacerbate the degradation of the other batteries, leading to reliability and safety issues [6, 7, 8]. These problems have become significant technical barriers in many engineering projects requiring high reliability, such as developing new-generation space vehicles [9].

Reconfigurable battery systems (RBSs), which can dynamically switch as required to different circuit topologies, are expected to solve this problem [10]. The switching circuit helps to isolate unhealthy batteries, thereby improving the safety and reliability of the battery system. To illustrate the working principle of an RBS, we consider a typical RBS structure developed by Visairo [11] (Fig. 1a), which is taken as an example to show the reconfiguration process. In this structure, the batteries can be connected not only in series when the switches  $S_1, S_5, S_6, S_7, S_8, S_9$ , and  $S_{13}$  are closed (see Fig. 1b) but also in parallel when  $S_1, S_2, S_3, S_4, S_5, S_9, S_{10}, S_{11}, S_{12}$ , and  $S_{13}$  are closed (Fig. 1c). Furthermore, when an unhealthy battery, for instance, the orange one  $B_3$  in Fig. 1d, appears in the RBS, it can be isolated by opening its two adjacent switches (i.e.,  $S_4$  and  $S_{11}$ ), ensuring that the system remains in a reliable working mode.

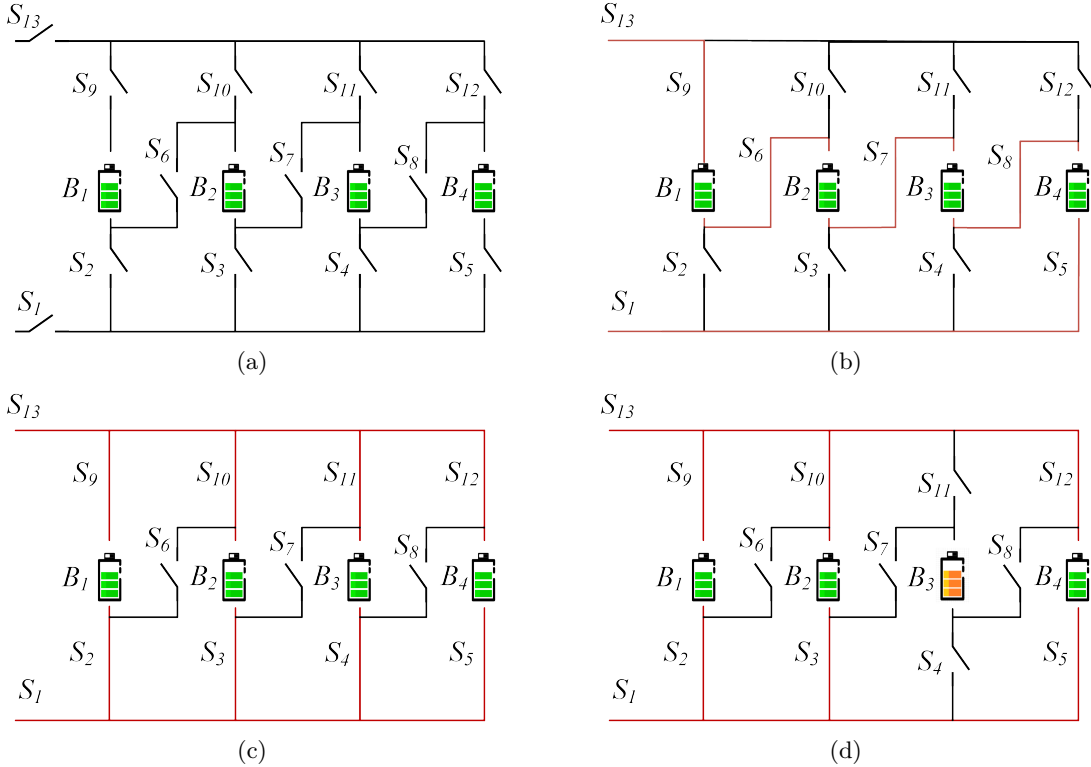


Figure 1: (a) The RBS structure proposed by Visairo[11], with all batteries in (b) series connection, (c) parallel connection, and (d) battery  $B_3$  isolated.

Recently, various types of RBSs with different flexibility and reconfigurability have been de-

signed to meet application requirements. For example, Ci et al. [12] proposed an RBS structure that dynamically adjusts the battery discharge rate to fully exploit the available capacity of each battery. Jan's [13, 14] structures reconfigure structures with variant batteries in series to reach the (constantly changing) voltage requirements during electric vehicle charging. As shown in Fig. 1a, the structure proposed by Visairo et al. [11] changes the system's output voltage based on the load conditions, thereby reducing the power loss of the voltage regulator during the power supply process and improving the efficiency of energy use. Also, to enhance the energy efficiency of the system, Lawson et al. [15] and He et al. [16] proposed simplified structures that have fewer switches than Visairo's design. Kim et al. [17] improved the system's ability to recover from battery failures by introducing multiple ports into the structure.

The complex structure between batteries and switches gives RBSs flexibility but also creates challenges in the design and control of the system. Thus, several approaches to analyze the RBS structure and performance have been proposed to tackle these challenges. For instance, Han et al. [18] derived an analytical expression for the maximum switch current during battery system reconfiguration for a specific RBS structure. This helps guide the selection of switches and supports the design of RBS hardware. Chen et al. [19] proposed a systematic approach based on sneak circuit theory to fundamentally avoid the short-circuit problem of RBSs: They thoroughly analyzed all paths between the cathode and anode of each battery in the RBS and identified paths that only contain switches as short-circuit paths for pre-checking before system reconfiguration.

In spite of the maximum switch current mentioned above, the maximum allowable current (MAC), defined as the maximum allowed current under the constraints of the battery cell, is another critical indicator of RBSs that needs to be evaluated during the design or control of the system. The MAC helps the designers assess whether the RBS meets the output current requirements and contributes to the formulation of appropriate and safe management strategies for the battery management system. Unfortunately, few studies have analyzed the RBS structure to determine the RBS MAC. An intuitive and straightforward method is to enumerate all possible switch states and calculate the output current of the system under each reconfigured structure. However, this method is inefficient and time-consuming, especially for RBSs with a large number of switches.

To solve this issue, this paper proposes an efficient method to evaluate the MAC of RBSs. In this method, a greedy algorithm is designed to efficiently search the possible circuit topology of RBSs with MAC. This algorithm transforms the enumeration of switch states in the brute-force algorithm into the combination of the batteries' shortest paths. An improved direct graph model that considers the voltage, the internal resistance, the MAC of the battery, and the external load is also introduced to analyze the current of the RBS. The main contributions of this paper can be summarized as follows:

- An efficient method is proposed to determine the MAC of RBSs with arbitrary structures, including scenarios with isolated batteries.
- A greedy algorithm is applied to solve the MAC problem, the computational complexity of which is greatly reduced compared with the brute-force algorithm.
- An improved directed graph model is introduced to provide a specific method for calculating

the MAC of a given structure.

The remainder of this paper is organized as follows: Section II presents the framework and details of the proposed directed graph model and greedy algorithm. Section III discusses a case study that uses the proposed method to determine the MACs of two published four-battery RBSs and one with a more complex structure. The calculation results, the algorithm's computational complexity, and scenarios such as battery random isolation are also discussed. Finally, the concluding remarks are presented in Section IV.

## 2 Methodology

The central principle of this method is to connect the batteries in an RBS in parallel to the extent possible, thereby maximizing the output current of the RBS. To achieve this universally and automatically, the overall process is divided into the four steps shown in Fig. 2. First, a directed graph model is established for subsequent computations. The model not only contains the connected relationships between batteries and switches but also retains the performance parameters of the batteries. Subsequently, based on the equivalent circuit, the MAC problem is transformed into specific objective functions and constraints. The shortest paths (SPs, where additional batteries and switches on the path are penalized as distance) for the batteries are then obtained by using the Dijkstra algorithm to connect the batteries in the RBS in parallel. Finally, a greedy algorithm is used to organize the switches, allowing the batteries to connect via their SPs while satisfying the constraints, resulting in the MAC of the RBS.

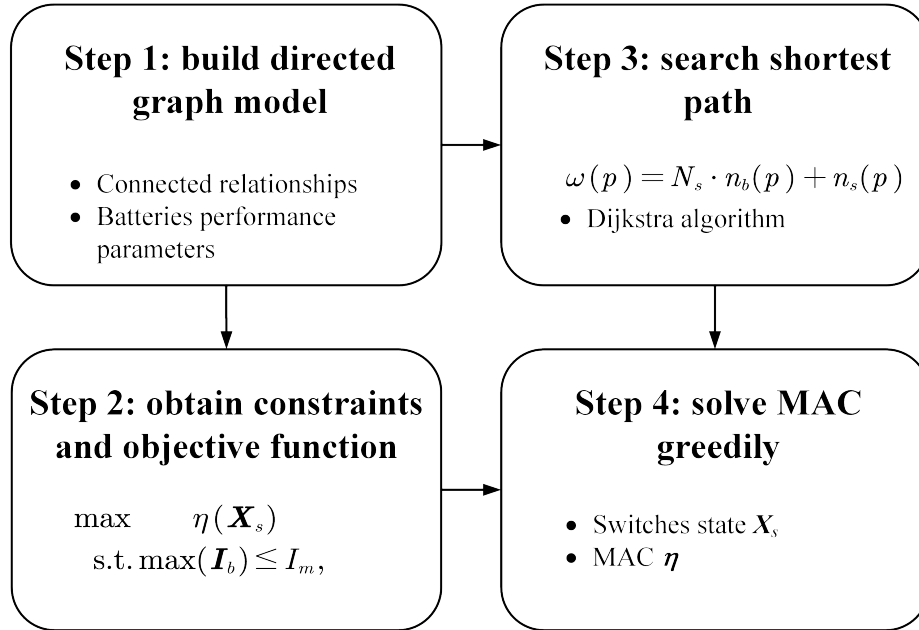


Figure 2: Diagram of this method, which contains four main steps.

## 2.1 Directed graph model

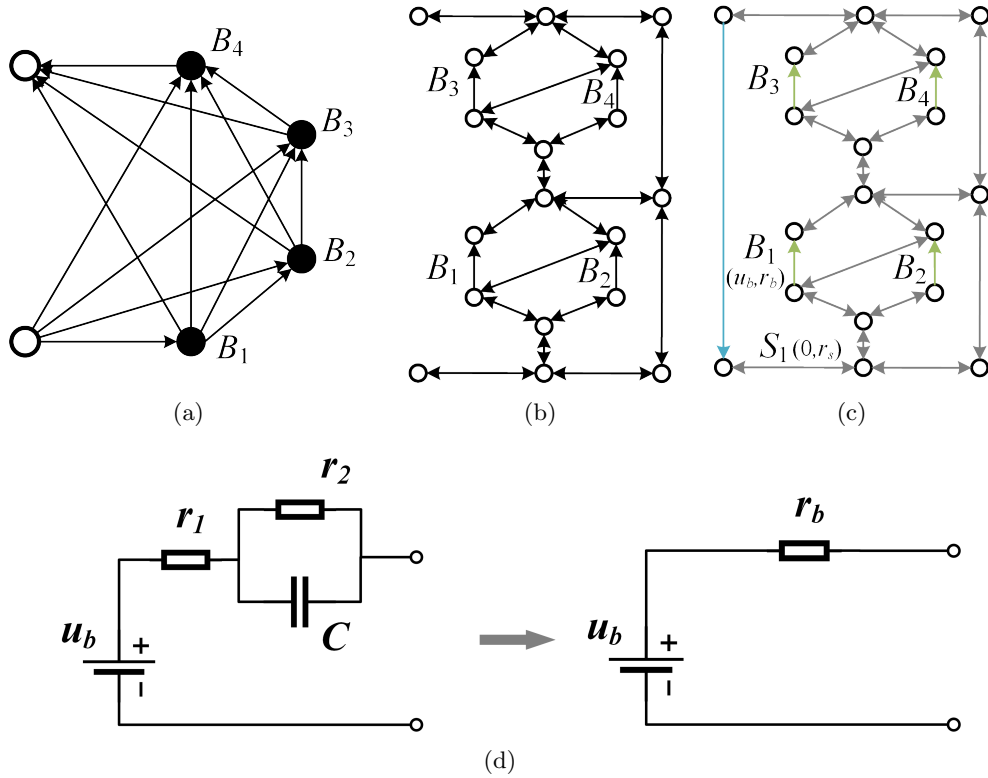


Figure 3: Directed graph models used in (a) He’s work [20], (b) our previous work, and (c) the improved model in this paper. (d) The equivalent circuit of a battery in this method.

He et al. [20] proposed an abstracted directed graph model for an RBS, where the nodes represent the batteries, the edges represent the configuration flexibility, and the weight of each vertex corresponds to the battery voltage (Fig. 3a). The model captures all potential system configurations and offers a direct metric for configuration flexibility, but it does not specify the physical implementation of the connectivity between batteries, meaning that one graph might correspond to multiple RBS structures. We previously proposed a directed graph model that differs completely from He’s model by using nodes to represent the connections between batteries and switches and directed edges to represent batteries and switches (Fig. 3b), allowing for a one-to-one correspondence between the RBS structure and the directed graph model. This model accurately and comprehensively represents the RBS topological structure but cannot be used for quantitative MAC calculations because it does not consider the voltage, internal resistance, and MAC of the battery. To address this issue, we improve our previous model by adding electromotive force and resistance attributes on the edges based on its equivalent circuits. The model also considers the external load as an equivalent resistance and integrates it into the analysis, making it a complete circuit model for later circuit analyses. Fig. 3c shows the improved directed graph model used in this paper. The following provides a detailed explanation of the method for equating components in RBSs and constructing the directed graph

126 model.

127 To use circuit analysis methods to solve the MAC of the RBS, the components in the RBS are  
 128 equated to ideal circuit elements. For instance, as shown in Fig. 3d, the battery in the RBS is  
 129 represented as a black-box circuit consisting of two resistors  $r_1$  and  $r_2$  and a capacitor  $C$ , known as  
 130 the Thevenin model [21, 22]. With an emphasis on the stable output of the RBS, the capacitor in  
 131 the Thevenin model can be considered as an open circuit without affecting the steady-state current.  
 132 Therefore, battery  $B_i$  in the RBS can be simplified as a series connection between a constant voltage  
 133 source  $u_i$  and a resistor  $r_i$ . Furthermore, the state of switch  $S_j$  in the RBS is represented by a binary  
 134 variable  $x_j$ , where 0 is ON and 1 is OFF. When the switch is closed, the circuit can be regarded as  
 135 a resistor with a very small resistance  $r_j$ . Finally, the external load is considered as a resistor with  
 136 resistance  $R_o$ .

137 For a given RBS structure, its directed graph model  $G(V, E)$  is constructed as follows:

- 138 1. Nodes: The nodes in the directed graph correspond to the connection points of components in  
 139 the actual RBS. Assuming there are a total of  $N$  nodes in the RBS, for the sake of convenience,  
 140 the anode of the RBS is denoted as  $v_1$  and the cathode as  $v_N$ .
- 141 2. Edges: The edges in the directed graph correspond to the batteries, switches, and external  
 142 electrical loads in the actual RBS. Therefore, there are three types of directed edges. For  
 143 battery  $B_i$ , its directed edge  $e_i$  is drawn from the cathode to the anode because the battery  
 144 in operation only allows current to flow in one direction. For switch  $S_j$ , since it is allowed to  
 145 work under bidirectional currents, it is represented by a pair of directed edges with two-way  
 146 directions. Regarding the external electronic load, because it is connected to the anode and  
 147 cathode of the RBS, a directed edge from  $v_N$  to  $v_1$  represents it. In conclusion, for a given RBS  
 148 structure with  $N_b$  batteries and  $N_s$  switches, the number of directed edges is  $N_b + 2N_s + 1$ ,  
 149 where 1 refers to the external electrical load.
- 150 3. Attributes of edges: Each edge is assigned two attributes, voltage difference and resistance,  
 151 based on the equivalent method mentioned above. The values for battery  $B_i$ , switch  $S_j$ , and  
 152 external loads correspond to  $(u_i, r_i)$ ,  $(0, r_j)$ , and  $(0, R_o)$ , respectively.

## 153 2.2 Constraints and objective function

154 For a given RBS, determining its MAC involves maximizing the RBS output current while ensuring  
 155 that all battery currents do not exceed the batteries' MAC. This subsection establishes the con-  
 156 straints and objective function to determine the RBS's MAC through circuit analysis based on the  
 157 directed graph model provided in the previous section.

158 First, the topology in the directed graph model is represented in matrix form  $\mathbf{A}$ , known as the  
 159 incidence matrix and defined as follows:

$$a_{kl} = \begin{cases} 1, & \text{edge } l \text{ leaves node } k, \\ -1, & \text{edge } l \text{ enters node } k, \\ 0, & \text{otherwise.} \end{cases} \quad (1)$$

For a directed graph consisting of  $N$  nodes and  $N_b + 2N_s + 1$  directed edges, its incidence matrix  $\mathbf{A}$  is an  $N \times (N_b + 2N_s + 1)$  matrix. In this matrix, the rows and columns represent the nodes and edges of the directed graph, respectively. By distinguishing the components in the RBS corresponding to each column,  $\mathbf{A}$  can be rewritten as

$$\mathbf{A} = \begin{bmatrix} \mathbf{A}_b & \mathbf{A}_s & \mathbf{A}_o \end{bmatrix}, \quad (2)$$

where  $\mathbf{A}_b$ ,  $\mathbf{A}_s$ , and  $\mathbf{A}_o$  are the submatrices corresponding to the batteries, switches, and external electrical load, respectively. To reduce the computational complexity, the dimensions of matrix  $\mathbf{A}$  are reduced. Since each directed edge has one node to leave and one to enter, the values in every column of  $\mathbf{A}$  sum to zero. Therefore, removing the last row will not result in a loss of information. Conversely, since each switch in the RBS is represented by a pair of directed edges with two-way directions, the two columns corresponding to the switch are mutually opposite. Thus, for the submatrix  $\mathbf{A}_s$ , only one column is retained for each pair of columns representing the same switch. As a result,  $\mathbf{A}$  can be reduced to an  $(N-1) \times (N_b + N_s + 1)$  matrix, denoted  $\tilde{\mathbf{A}}$ , for further calculation of current and voltage. Similar to Eq. (2),  $\tilde{\mathbf{A}}$  can be rewritten as

$$\tilde{\mathbf{A}} = \begin{bmatrix} \tilde{\mathbf{A}}_b & \tilde{\mathbf{A}}_s & \tilde{\mathbf{A}}_o \end{bmatrix}. \quad (3)$$

After obtaining the incidence matrix, the currents of all batteries and output in the RBS are determined by solving the circuit equations. According to Kirchhoff's laws, we have

$$\begin{cases} \tilde{\mathbf{A}}\mathbf{I} = \mathbf{0}, \\ \mathbf{U} = \tilde{\mathbf{A}}^T \mathbf{U}_n, \end{cases} \quad (4)$$

where  $\mathbf{I}$  and  $\mathbf{U}$  indicate the current and voltage difference arrays of the  $N_b + N_s + 1$  edges, respectively, and  $\mathbf{U}_n$  is the voltage array of the  $N - 1$  nodes. These directed edges are treated as generalized branches and expressed in matrix form as follows:

$$\mathbf{I} = \mathbf{Y}\mathbf{X}\mathbf{U} - \mathbf{Y}\mathbf{X}\mathbf{U}_s + \mathbf{I}_s, \quad (5)$$

where  $\mathbf{U}_s$  and  $\mathbf{I}_s$  denote the source voltage and source current of the generalized branches, respectively. Because all batteries have been equivalent to voltage sources rather than current sources in the previous subsection, all elements of the array  $\mathbf{I}_s$  are zero, whereas the elements of the array  $\mathbf{U}_s$  are equal to the first attribute of the corresponding edges in the directed graph. The matrix  $\mathbf{Y}$  in Eq. (5) is the admittance matrix of the circuit and is defined as the inverse of the impedance matrix. The elements on the diagonal of matrix  $\mathbf{Y}$  are equal to the reciprocal of the resistance, which is the second attribute of the corresponding edges in the directed graph. The off-diagonal elements of  $\mathbf{Y}$  are zero.  $\mathbf{X}$  is the state matrix that determines whether the RBS batteries and switches can pass

186 current. It is defined as

$$\mathbf{X} = \text{diag}(\underbrace{1, 0, \dots, 1}_{N_b \text{ of } 0/1}, \underbrace{1, 0, \dots, 1}_{N_s \text{ of } 0/1}, 1) = \begin{bmatrix} \mathbf{X}_b & & \\ & \mathbf{X}_s & \\ & & 1 \end{bmatrix}, \quad (6)$$

187 where element  $x_i$  of matrix  $\mathbf{X}_b$  indicates whether battery  $B_i$  has been removed from the circuit,  
 188 with  $x_i = 1$  indicating removal and  $x_i = 0$  indicating that battery  $B_i$  is still available to supply  
 189 power. When all batteries are healthy and capable of providing current to the external load,  $\mathbf{X}_b$   
 190 is the identity matrix. The elements  $x_j$  of matrix  $\mathbf{X}_s$  determine whether switch  $S_j$  is closed, with  
 191  $x_j = 1$  indicating a closed switch and  $x_j = 0$  indicating an open switch, which is consistent with the  
 192 previous subsection.

193 Theoretically, the output current  $I_o$  and the currents of each battery  $\mathbf{I}_b$  in the RBS can be  
 194 determined by solving Eqs. (4)–(6) under any given state  $\mathbf{X}$ . To further simplify the problem, it  
 195 is assumed that all batteries have the same electromotive force and internal resistance, which are  
 196 denoted  $u_b$  and  $r_b$ , respectively. This allows us to derive explicit expressions for  $I_o$  and  $\mathbf{I}_b$ . After  
 197 derivation and simplification, the output current  $I_o$  and the currents of each battery  $\mathbf{I}_b$  are ultimately  
 198 represented as Eqs. (7) and (8), respectively:

$$I_o = \frac{1}{R_o r_b} \tilde{\mathbf{A}}_o^T \mathbf{Y}_n^{-1}(\mathbf{X}) \tilde{\mathbf{A}}_b \mathbf{U}_b, \quad (7)$$

$$\mathbf{I}_b = \frac{1}{r_b^2} [\tilde{\mathbf{A}}_b^T \mathbf{Y}_n^{-1}(\mathbf{X}) \tilde{\mathbf{A}}_b \mathbf{U}_b - r_b \mathbf{U}_b], \quad (8)$$

199 where  $\mathbf{U}_b$  is an  $N_b \times 1$  array with all elements equal to  $u_b$ , and  $\mathbf{Y}_n$  is the equivalent admittance  
 200 matrix of the circuit and is defined as

$$\mathbf{Y}_n(\mathbf{X}) = \frac{1}{R_o} \tilde{\mathbf{A}}_o \tilde{\mathbf{A}}_o^T + \frac{1}{r_b} \tilde{\mathbf{A}}_b \mathbf{X}_b \tilde{\mathbf{A}}_b^T + \frac{1}{r_s} \tilde{\mathbf{A}}_s \mathbf{X}_s \tilde{\mathbf{A}}_s^T. \quad (9)$$

202 To characterize the current output capacity of the RBS structure under different switching states,  
 203 an indicator  $\eta$  is defined by the ratio of  $I_o$  to  $\max(\mathbf{I}_b)$ :

$$\eta = \frac{I_o}{\max(\mathbf{I}_b)}. \quad (10)$$

204 Finally the problem of finding the MAC can be formulated as

$$\max \eta(\mathbf{X}_s) \quad (11)$$

$$\text{s.t. } \max(\mathbf{I}_b) \leq I_m, \quad (12)$$

205 where  $I_m$  is the MAC of the battery.

206 However, it remains computationally difficult to solve Eq. (11) because of  $\mathbf{Y}_n^{-1}$ . On one hand,  
 207 the introduction of nonlinear terms by  $\mathbf{Y}_n^{-1}$  renders many methods in linear optimization unsuitable  
 208 for this problem. On the other hand, the rank of  $\mathbf{Y}_n$  is proportional to the number of batteries and



switches, which can be very large for a large RBS, leading to a significant computational burden. As a result, intelligent algorithms that rely on evolution by iteration may face efficiency problems when dealing with a large RBS. To address this issue, the problem should be considered from the perspective of guiding the RBS to reconstruct as many parallel structures as possible. Consequently, a greedy algorithm based on the shortest path is proposed. The detailed implementation of this algorithm is presented in the following two subsections.

### 2.3 Shortest path

The path  $p$  used in this method is defined as the complete route that passes through one battery (or a consecutive series of batteries) and closed switches, connecting the anode  $v_1$  to the cathode  $v_N$  of the RBS. By applying a penalty to the series-connected batteries on the path, where additional batteries imply a greater distance, the algorithm encourages the RBS to form parallel structures to the extent possible. In addition, to reduce the number of switches controlled during the reconstruction process, a penalty is also applied to the total number of switches on the path while ensuring the minimum number of batteries. Therefore, the distance  $\omega$  of path  $p$  is

$$\omega(p) = N_s n_b(p) + n_s(p), \quad (13)$$

where  $N_s$  is the total number of switches in the system, and  $n_b(p)$  and  $n_s(p)$  are number of batteries and switches in path  $p$ , respectively. Moreover, the shortest path  $SP_i$  is defined as the path with the minimum  $\omega$  for battery  $B_i$ :

$$SP_i = \arg \min_{p \in P_i} \omega(p), \quad (14)$$

where  $P_i$  is the set of all paths from  $v_1$  to  $v_N$  that pass through directed edge  $i$ .

$SP_i$  can be solved by the Dijkstra algorithm. The Dijkstra algorithm is a graph-search method that finds the shortest path between two given nodes in a weighted graph, efficiently solving the single-source shortest-path problem. Denoting the cathode and anode of battery  $B_i$  as  $v_i^-$  and  $v_i^+$  respectively, then path  $p$  of battery  $B_i$  can be divided into three segments:  $v_1 \rightarrow v_i^-$ ,  $v_i^+ \rightarrow v_N$ , and  $v_i^- \rightarrow v_i^+$ .  $v_i^- \rightarrow v_i^+$  is the directed edge corresponding to battery  $B_i$ . With the Dijkstra algorithm, shortest paths for  $v_1 \rightarrow v_i^-$  and  $v_i^+ \rightarrow v_N$  can be calculated under the weights given in Eq. (13) and denoted  $SP(v_1 \rightarrow v_i^-)$  and  $SP(v_i^+ \rightarrow v_N)$ , respectively. Finally,  $SP_i$  for battery  $B_i$  is formed by the complete path, which consists of  $SP(v_1 \rightarrow v_i^-)$ ,  $v_i^- \rightarrow v_i^+$ , and  $SP(v_i^+ \rightarrow v_N)$ .

### 2.4 Greedy algorithm

From the perspective of series vs parallel connections, integrating more batteries into the circuit through their shortest paths (SPs) results in more batteries connected in parallel, thereby increasing the total output current of the RBS. However, conflicts may arise between the SPs of different batteries. For instance, the SPs of two batteries might form a short-circuit RBS structure, which is not allowed. To address this issue, a greedy algorithm incorporates as many SPs as possible while satisfying the reconstruction requirements.

242 The algorithm (see pseudo-code in Algorithm 1) is illustrated in Fig. 4 and is summarized as  
 243 follows: First, the SPs are obtained by using Eqs. (13) and (14) in conjunction with the Dijkstra  
 244 search. Next, the matrix  $\mathbf{A}$  is calculated using Eq. (1), and the initial  $N_{\text{set}}$  is set to  $N_b$ . The  
 245 algorithm uses a dichotomy method to iteratively check until convergence different combinations of  
 246  $c_b$  batteries from  $N_b$  and updates  $N_{\text{set}}$ . For each combination, the algorithm constructs an effective  
 247 solution if possible and calculates the currents  $I_o$  and  $I_b$  by using Eqs. (7) and (8). If the maximum  
 248 current  $I_b$  is less than or equal to  $I_m$ ,  $\eta$  is calculated by using Eq. (10), and the maximum  $\eta$  is  
 249 updated accordingly. Finally, the algorithm outputs the maximum  $\eta$  once  $N_{\text{set}}$  converges.

## 250 3 Case Study

### 251 3.1 Structures

252 Currently, two types of RBS structures have been proposed by Visairo et al. [11] and Lawson et  
 253 al. [15], both of which have seen real use. The primary goal of Visairo's structure (Fig. 5b) is  
 254 to dynamically adjust the RBS output power. However, the isolation of unhealthy batteries is not  
 255 sufficiently addressed in their work. Lawson et al. designed the RBS structure shown in Fig. 5a  
 256 to isolate batteries. Although this structure easily isolates batteries, it cannot dynamically adjust  
 257 the output current of the RBS. Based on the structures of Visairo and Lawson, this paper proposes  
 258 the structure shown in Fig. 5c. By integrating the Visairo RBS structure into the Lawson RBS  
 259 structure, the proposed structure not only has the flexibility to switch the batteries between series,  
 260 parallel, and mixed series-parallel modes but also allows the isolation of highly degraded batteries  
 261 from the RBS. These four-battery RBS structures are investigated in the case study, including the  
 262 scenarios with random isolated batteries.

### 263 3.2 Result

264 As shown in Fig. 5c, the new RBS structure consists of four batteries and 19 switches. Figure 6a  
 265 shows the corresponding directed graph, which is composed of 18 nodes and 43 edges. Batteries  $B_1$ ,  
 266  $B_2$ ,  $B_3$ , and  $B_4$  are denoted by green directed edges in the graph, and the 19 switches are represented  
 267 by gray directed edges with bidirectional arrows. The external electrical load is treated as a directed  
 268 edge from the cathode of the RBS (i.e., node 18) to the anode (i.e., node 1), as indicated by the  
 269 blue directed edge in the graph. Using Eq. (13) and the Dijkstra algorithm, the SPs of the four  
 270 batteries in the RBS structure of Fig. 5c are highlighted in red in Figs. 6b and 6e. Finally, the  
 271 calculated MACs of the structure in Fig. 5c are listed in Tab. 1 and shown in Fig. 6f, as obtained  
 272 by the greedy algorithm 1. Tab. 1 contains the states of the switches, the output current  $I_o$ , the  
 273 battery current  $I_b$ , and the ratio  $\eta$  of the RBS structure with all batteries in good health when the  
 274 RBS output reaches the MAC. Fig. 6f presents the corresponding circuit, with the red highlight  
 275 indicating that the current is flowing through the respective branches.

276 Similarly, the results of the MAC calculation for the structures in Figs. 5a and 5b are listed in  
 277 Tabs. 2 and 3, respectively.

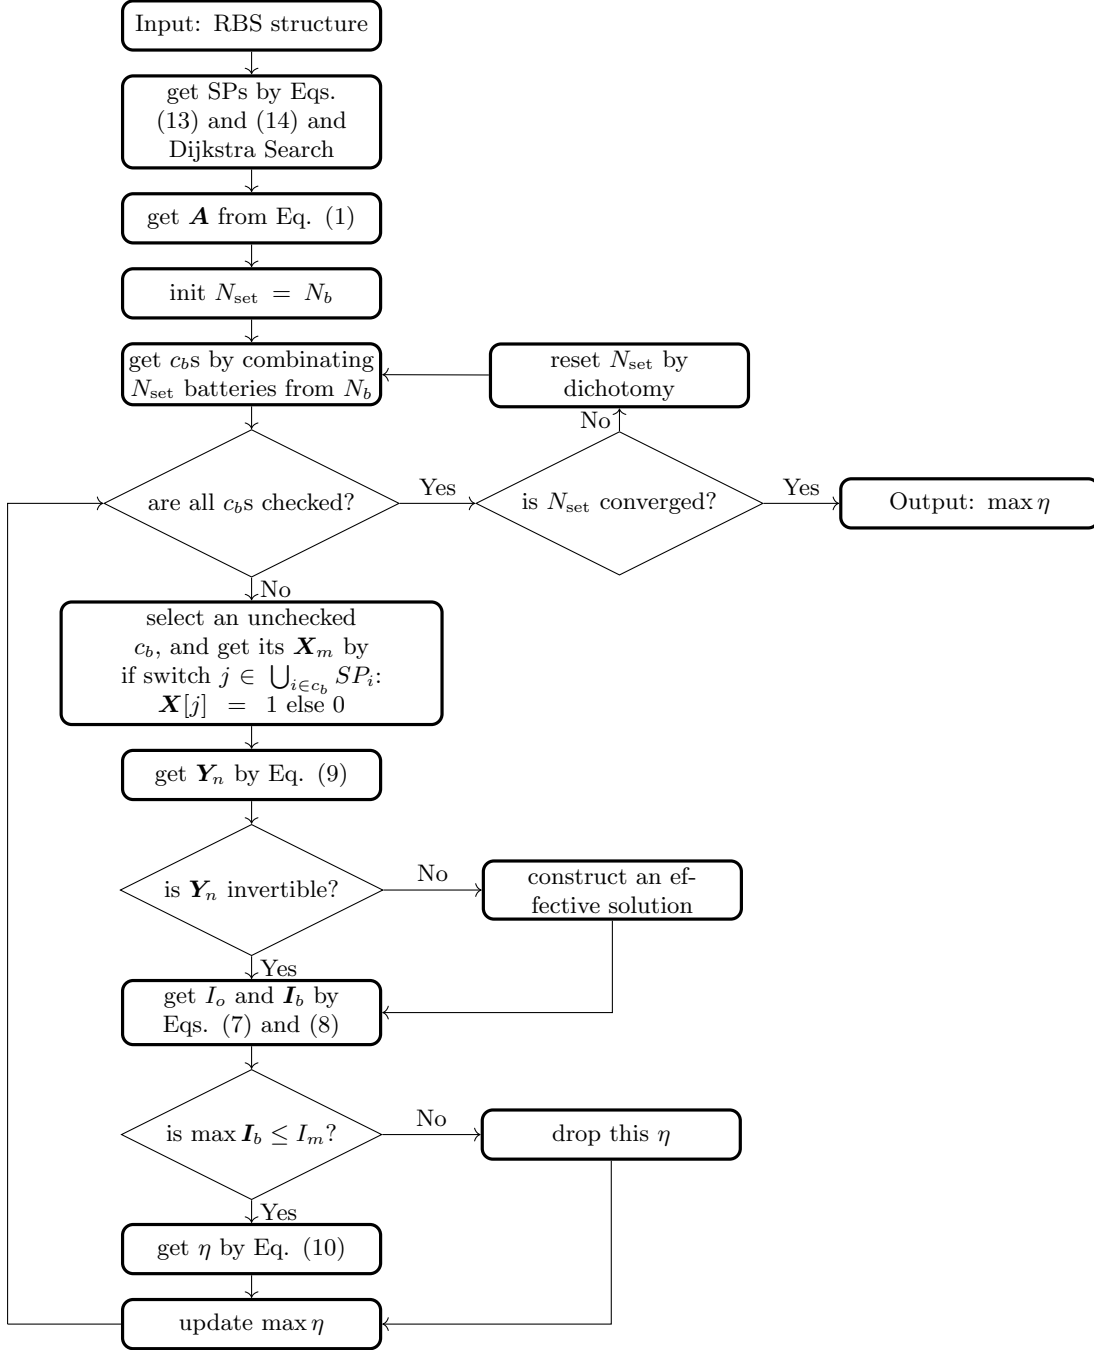


Figure 4: The computational flowchart of the MAC for a given RBS.

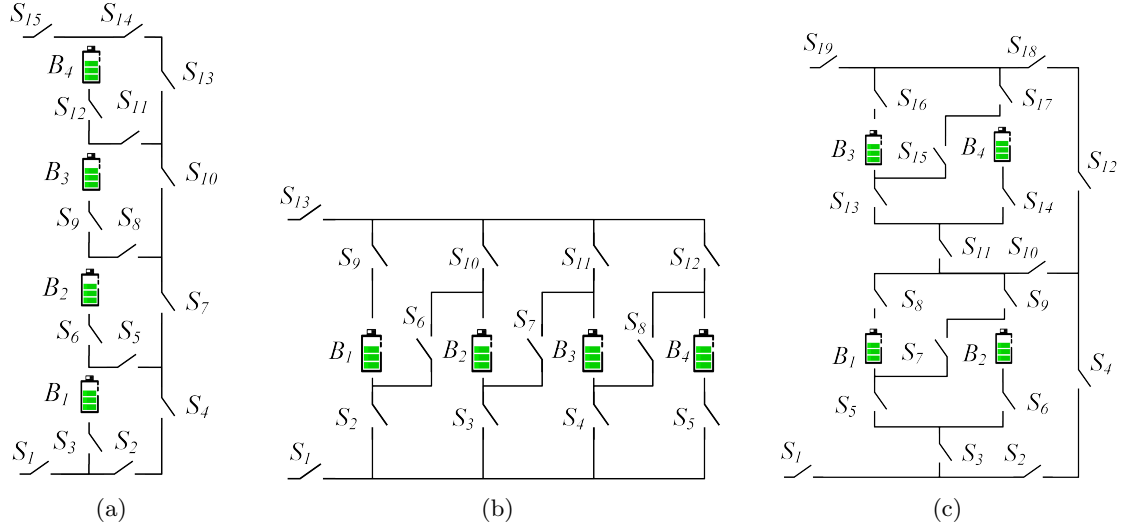


Figure 5: The four-battery RBS structures proposed by (a) Lawson [15], (b) Visairo [11], and (c) this paper.

Table 1: Calculated MAC for four-battery RBS structure in Fig. 5c.

Structure	Figure 5c with four batteries and 19 switches
Switch on	$S_1, S_3, S_5, S_6, S_8, S_9, S_{10}, S_{12}, S_{18}, S_{19}$
$I_o$	$2u_b/(2R_o + r_b)$
$I_b$	$[u_b/(2R_o + r_b), u_b/(2R_o + r_b), 0, 0]$
$\max \eta$	$2$

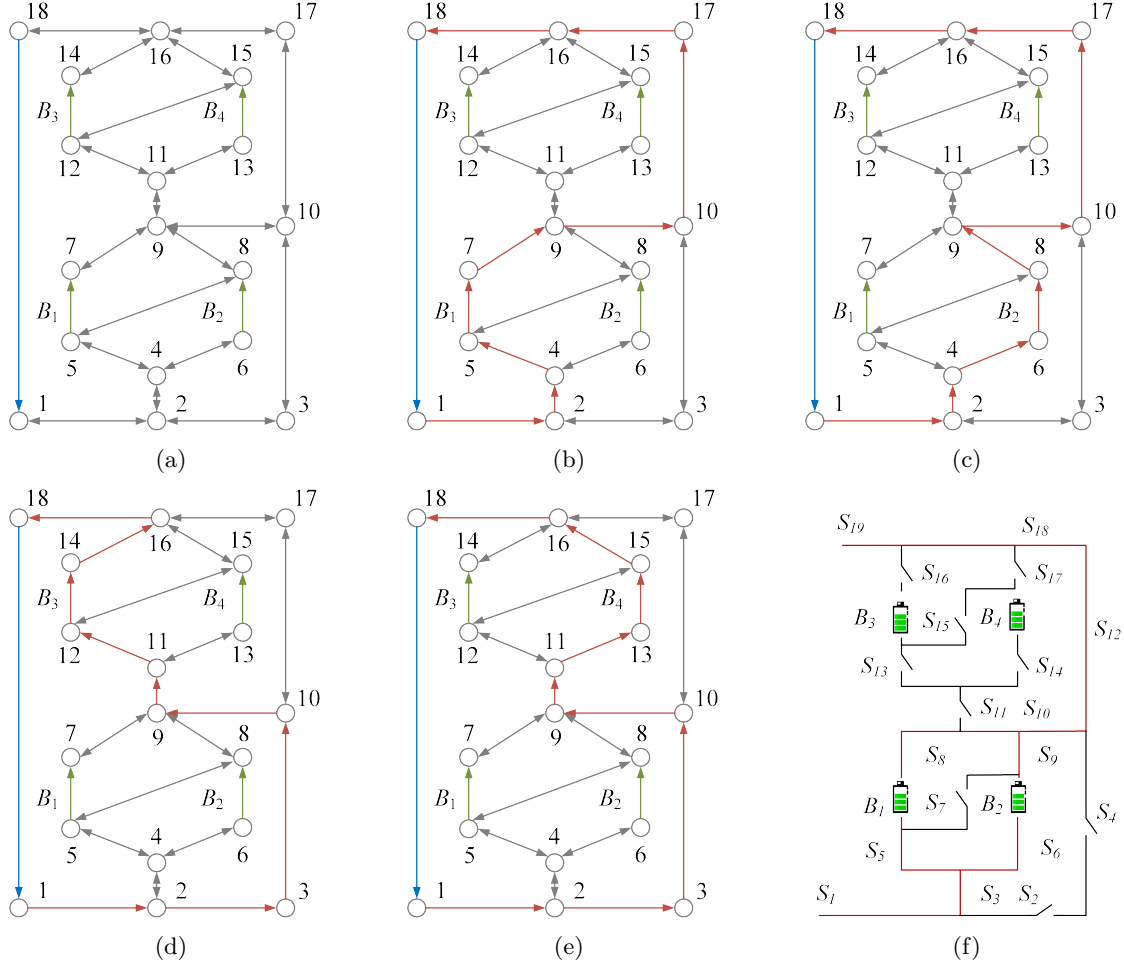


Figure 6: For the RBS structure in Fig. 5c, (a) its directed graph and the SPs (highlighted in red) of battery (b)  $B_1$ , (c)  $B_2$ , (d)  $B_3$ , and (e)  $B_4$ . (f) Circuit of RBS with its output reaching the MAC.

278 To verify and compare the results from the greedy algorithm, we also used a brute-force algorithm  
 279 that iterates through all possible switch states to calculate the MAC of the same three RBSs. The  
 280 final results are the same as the results shown in Tabs. 1–3. The method uses the greedy algorithm  
 281 to calculate 11, 11, and 1 reconfigured structures for the RBS structure in Figs. 5c, 5a, and 5b,  
 282 respectively. For the same RBS, the method counts all possible switch states, which equates to  $2^{19}$ ,  
 283  $2^{15}$ , and  $2^{13}$  structures, respectively.

Table 2: MAC Calculating result of the four-battery RBS structure in Fig. 5a.

Structure	Figure 5a with 4 batteries and 15 switches
Switch ON	$S_1, S_3, S_5, S_7, S_{10}, S_{13}, S_{14}, S_{15}$
$I_o$	$u_b/(R_o + r_b)$
$I_b$	$[u_b/(R_o + r_b), 0, 0, 0]$
$\max \eta$	1

Table 3: MAC Calculating result of the four-battery RBS structure in Fig. 5b.

Structure	Figure 5b with 4 batteries and 13 switches
Switch ON	$S_1, S_2, S_3, S_4, S_5, S_9, S_{10}, S_{11}, S_{12}, S_{13}$
$I_o$	$4u_b/(4R_o + r_b)$
$I_b$	$[u_b/(4R_o + r_b), u_b/(4R_o + r_b), u_b/(4R_o + r_b), u_b/(4R_o + r_b)]$
$\max \eta$	4

284 Furthermore, the RBS with isolated batteries is taken into consideration and calculated. The  
 285 MAC calculation results for the three structures under study, with varying numbers of isolated  
 286 batteries, are presented in Tab. 4. Figs. 7a–7d illustrate the corresponding switch-control schemes  
 287 for the new structure proposed in this paper under different conditions of isolated batteries.

Table 4: Variation of MAC with the number of isolated batteries for different RBS structures, including the structure proposed by Lawson et al., Visairo et al., and the structure proposed in this paper.

Number of isolated batteries	$\eta$ of RBS structure		
	This paper	Visairo	Lawson
0	2	4	1
1	2	3	1
2	2 <sup>a</sup> or 1 <sup>b</sup>	2	1
3	1	1	1

<sup>a</sup> Isolate two batteries within the same substructure, as shown in Fig. 7b.

<sup>b</sup> Isolate one battery in each of the two substructures, as shown in Fig. 7c.

### 288 3.3 Discussion

289 Consider first the results shown in Fig. 6f and listed in Tab. 1. When  $B_1$  and  $B_2$  or  $B_3$  and  $B_4$   
 290 are connected in parallel, the RBS outputs the maximum current, which is  $\eta = 2$  (i.e., twice the

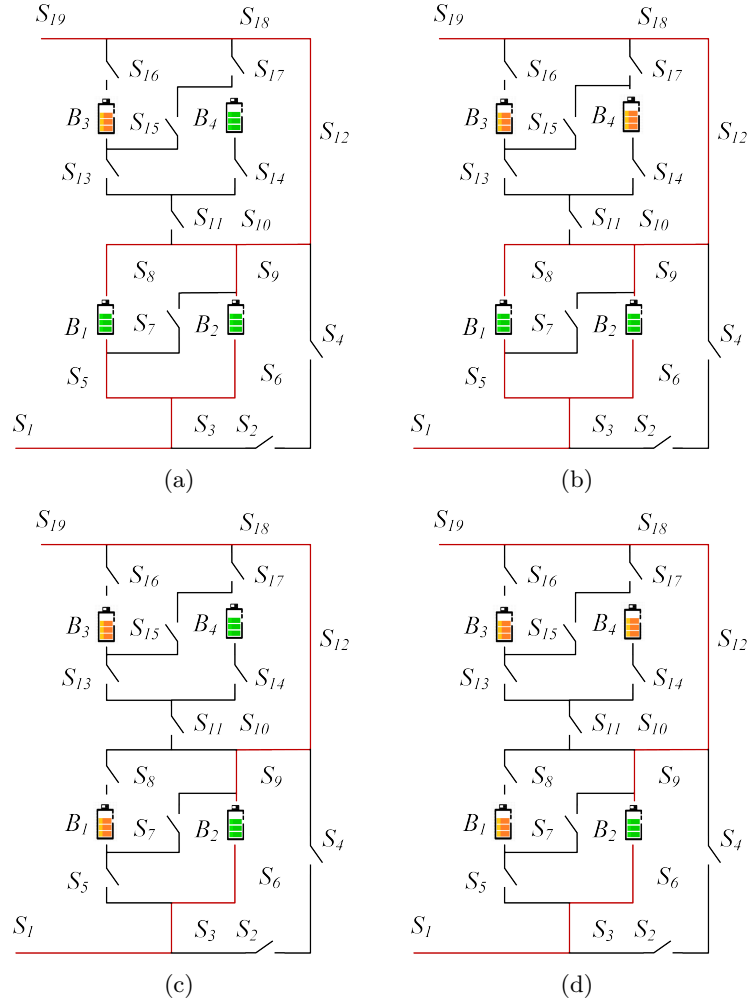


Figure 7: Circuit states of MACs when isolating (a) one, (b) two (best case), (c) two (worst case), and (d) three batteries for the structure in Fig. 5c.

current output of a single battery in the RBS). Adding more batteries to the main circuit only forms a series structure and does not improve the MAC. Therefore, the state of the switches given in Tab. 1 maximizes the RBS output current. The brute-force method, which go through all possible switch states, also gives the same result.

The literature contains no report on an algorithm for calculating the MAC of an RBS. The brute-force algorithm, which goes through all possible switch states, is the most straightforward way to determine the MAC and is used as a benchmark for the proposed greedy algorithm. If an RBS has  $N_b$  batteries and  $N_s$  switches and the corresponding directed graph has  $N$  nodes,  $2^{N_s}$  iterations are required to traverse all reconfigured structures. Calculating each reconfigured structure using Eqs. (7)–(10) requires matrix inversion and matrix multiplication, which has a time complexity of  $O(N^3 + 2N^2N_b + N^2N_s + NN_b^2)$ . Therefore, the time complexity of the brute-force algorithm is  $O((N^3 + 2N^2N_b + N^2N_s + NN_b^2)2^{N_s})$ . The greedy algorithm proposed in this paper requires that SP be found for each battery, which requires  $N_b$  iterations. Each SP can be obtained by several applications of Dijkstra's algorithms. Therefore, the total time complexity for calculating all SPs is  $O(N_b(N_b + 2N_s)\log_{10} N)$ . According to Appendix 1, the RBS can reconfigure  $C_{N_b}^{N_{\text{set}}}$  structures by selecting  $N_{\text{set}}$  batteries from  $N_b$  batteries, which gives  $\sum_{N_{\text{set}}=1}^{N_b} C_{N_b}^{N_{\text{set}}}/N_b \approx 2^{N_b} N_b^{-1}$  on average. Thus, with the bisection method, the time complexity of the greedy algorithm is  $O((N^3 + 2N^2N_b + N^2N_s + NN_b^2)2^{N_b} N_b^{-1} \log_{10} N_b + N_b(N_b + 2N_s)\log_{10} N)$ . Based on currently proposed RBS structures [23, 24, 25, 26, 27, 28], the number  $N_b$  of batteries,  $N_s$  of switches, and  $N$  of nodes are quantitatively related as follows:  $N_s \approx (3-5)N_b$ ,  $N \approx N_s$ . After simplifying, the time complexity of the method with greedy algorithm is  $O(2^{N_b} N_s^2 \log_{10} N_b)$ , while it is  $O(2^{N_s} N_s^3)$  for the method with brute force algorithm. Therefore, as the RBS grows, especially in the number of switches, the greedy algorithm gains an advantage over the brute-force algorithm. This is confirmed by the number of structures required to determine the MAC in the previous section. Compared with the brute-force algorithm, the method based on the greedy algorithm is 3 000 to 48 000 times more efficient, which is theoretically  $N_s 2^{N_s - N_b} \log_{10} N_b$  times according to the above time-complexity analysis. This benefits from two key points:

- (1) The SPs guide the RBS to reconfigure reasonable structures rather than blindly going through all possible structures. This reduces the complexity from  $2^{N_s}$  to  $2^{N_b}$ , which is the main reason for the improvement in efficiency.
- (2) The bisection method further accelerates this process, reducing the complexity from  $2^{N_b}$  to  $2^{N_b} N_b^{-1} \log_{10} N_b$ .

However, the greedy algorithm proposed in this paper still contains exponential terms in the time complexity, which means it may not be able to handle extremely large RBS structures having large  $N_b$ .

Note that  $\eta$  is used as the objective function instead of  $I_o$  in solving for the MAC. This choice makes the resulting MAC more reasonable. As shown in Tab. 1,  $I_o$  and  $I_b$  are functions of  $R_o$ ,  $u_b$ , and  $r_b$ . However, when  $I_o$  is used as the objective function, even for the same RBS structure, the MAC solution and corresponding switch states could change due to different external electrical appliances. This would increase the difficulty and uncertainty of designing the RBS structure. To



eliminate this problem, the ratio  $\eta = I_o / \max \mathbf{I}_b$  is adopted as the objective function in our research. Recall that  $\eta$  reflects only the structure's ability to output current, rather than the actual current outputting by the battery system. Assuming that the MAC of batteries in the RBS is  $I_m$ , the maximum output current of the RBS structure can be calculated as  $\eta I_m$  by determining the value of  $\eta$  for the structure.

The method proposed in this paper facilitates the design of RBSs in the following ways: Most currently proposed RBS structures [23, 24, 25, 26, 27, 28] have simple topological characteristics, so calculating the MACs is relatively straightforward, even intuitive. However, these simple structures do not always fully satisfy the requirements of complex applications, such as dynamically adapting the circuit to variable and random operating conditions or actively equalizing differences between batteries in the RBS. Moreover, isolating the batteries disrupts the original regularity and symmetry of the topology, which complicates the otherwise simple structure, and the maximum output current of the system becomes more challenging to obtain. In contrast, the proposed method calculates the MAC of arbitrary RBS structures, notably the complex and flexible RBS structures.

To illustrate this point, the MACs of three RBS structures mentioned above are calculated after isolating one or more of the batteries, as shown in Tab. 4. Specifically, for the structure presented in Fig. 5c, the corresponding circuit states for the MACs when isolating one to three batteries are depicted in Figs. 7a–7d. This structure has two cases in which two batteries are isolated: one is to isolate two batteries within the same substructure (Fig. 7b), in which case  $\eta = 2$ ; the other is to isolate one battery in each of the two substructures (Fig. 7c), in which case  $\eta = 1$ . The results in Figs. 7a–7d show that the proposed method provides reasonable outcomes for isolating any number of batteries in any position. Furthermore, the output current for the three RBSs with isolated batteries is also shown in Tab. 4. For the structure proposed by Lawson et al., the MAC is independent of the number of isolated batteries. However, for Visairo's structure, the MAC decreases upon increasing the number of isolated batteries. Nevertheless, the MAC of the structure proposed in this work falls between the MACs of these two structures. This result indicates that the structure proposed in this paper has a larger MAC than Lawson's for the same number of batteries and has a wider range of regulation of the output current.

## 4 Conclusion

This paper proposes a pervasive and automated method to efficiently compute the MAC of an RBS. The method is implemented by a greedy algorithm combined with an improved directed graph model. Not only does the method provides the same global MAC calculation results as the brute force method, but it also improves the calculation efficiency by 3 000 to 48 000 times for three RBS structures in the case study. Theoretically, for an RBS with  $N_s$  switches and  $N_b$  batteries, the efficiency of the proposed method is  $N_s 2^{N_s - N_b} \log_{10} N_b$  times that of the brute-force method, which is mainly because of using the batteries' SPs to guide the RBS to reconfigure reasonable structures rather than blindly going through all possible structures. The main advantage of this method is its ability to calculate the MAC of RBSs with arbitrary structures. Even in scenarios with random isolated batteries, the proposed method remains effective. This method helps to fully tap the current

370 output potential of the RBS, guide the RBS structure design and optimization in the design stage,  
 371 and assist in evaluating the current-overload risk of the system in practical applications.

## 372 5 Appendix

---

**Algorithm 1:** Get the max available currents of a certain RBS

---

**Data:** Directed graph model  $G(V, E)$  of the RBS  
**Result:**  $\max \eta$

```

1 for  $i \in E_b$  do
2    $P_i \leftarrow \{path | \text{starts at } v_1 \text{ and ends at } v_n\}$ ;
3    $SP_i \leftarrow p_i$  which has the minimum  $\omega(p_i)$  among all  $p_i \in P_i$ .
4 end
5 get  $A$  by Eq. 1;
6 while not yet determine  $\max \eta$  do
7    $N_{\text{set}} \leftarrow$  number of selected SPs calculated by dichotomy;
8    $C_b \leftarrow$  set of all combinations of  $N_{\text{set}}$  batteries from  $N_b$ ;
9   for  $c_b \in C_b$  do
10     $x_s \leftarrow$  list of all switches' state:  $x_s[j] = 1$  if  $j \in \bigcup_{i \in c_b} SP_i$  else 0;
11     $X \leftarrow \text{diag}[1, 1, \dots, 1, x_s]$ ;
12    get  $Y_n$  by Eq. 9;
13    if  $Y_n$  is invertible then
14      pass
15    else
16      construct an effective solution
17    end
18    get  $I_o$  by Eq. 7;
19    get  $I_b$  by Eq. 8;
20    if  $\max(I_b) \leq I_m$  then
21       $\eta \leftarrow I_o / \max(I_b)$ ;
22    else
23      break
24    end
25  end
26 end

```

---

## 373 Acknowledgments

### 374 Author Contributions

375 B. Xu conceived the main idea, formulated the overarching research goals and aims, designed the  
 376 algorithm, and reviewed and revised the manuscript. G. Hua developed and analyzed the model,  
 377 implemented the code and supporting algorithms, and wrote the initial draft. C. Qian provided  
 378 critical review, commentary, and revisions. Q. Xia contributed to shaping the research, analysis,  
 379 and manuscript. B. Sun conducted the research and investigation process. Y. Ren secured the

380 funding and supervised the project. Z. Wang verified the results and provided necessary resources.

## 381 **Funding**

382 This work was supported by the National Natural Science Foundation of China (NSFC, No.52075028).

## 383 **Conflicts of Interest**

384 The authors declare that there is no conflict of interest regarding the publication of this article.

## 385 **Data Availability**

386 This work does not require any data to be declared or publicly disclosed.

## 387 **References**

- 388 [1] Yuqing Yang, Stephen Bremner, Chris Menictas, and Merlinde Kay. Battery energy storage  
389 system size determination in renewable energy systems: A review. *Renewable and Sustainable*  
390 *Energy Reviews*, 91:109–125, August 2018.
- 391 [2] Luanna Maria Silva de Siqueira and Wei Peng. Control strategy to smooth wind power output  
392 using battery energy storage system: A review. *Journal of Energy Storage*, 35:102252, March  
393 2021.
- 394 [3] Eugene Schwanbeck and Penni Dalton. International Space Station Lithium-ion Batteries for  
395 Primary Electric Power System. In *2019 European Space Power Conference (ESPC)*, pages 1–1.  
396 IEEE, September 2019.
- 397 [4] Lihua Zhang. Development and Prospect of Chinese Lunar Relay Communication Satellite.  
398 *Space: Science & Technology*, 2021, January 2021.
- 399 [5] Jaephil Cho, Sookyung Jeong, and Youngsik Kim. Commercial and research battery technolo-  
400 gies for electrical energy storage applications. *Progress in Energy and Combustion Science*,  
401 48:84–101, June 2015.
- 402 [6] Naixing Yang, Xiongwen Zhang, BinBin Shang, and Guojun Li. Unbalanced discharging and  
403 aging due to temperature differences among the cells in a lithium-ion battery pack with parallel  
404 combination. *Journal of Power Sources*, 306:733–741, February 2016.
- 405 [7] Fei Feng, Xiaosong Hu, Lin Hu, Fengling Hu, Yang Li, and Lei Zhang. Propagation mecha-  
406 nisms and diagnosis of parameter inconsistency within Li-Ion battery packs. *Renewable and*  
407 *Sustainable Energy Reviews*, 112:102–113, September 2019.
- 408 [8] J. A. Jeevarajan and C. Winchester. Battery Safety Qualifications for Human Ratings. *Interface*  
409 *magazine*, 21(2):51–55, January 2012.

- [9] Daniel Vázquez Pombo. A Hybrid Power System for a Permanent Colony on Mars. *Space: Science & Technology*, 2021, January 2021.
- [10] Weiji Han, Torsten Wik, Anton Kersten, Guangzhong Dong, and Changfu Zou. Next-Generation Battery Management Systems: Dynamic Reconfiguration. *IEEE Industrial Electronics Magazine*, 14(4):20–31, December 2020.
- [11] H. Visairo and P. Kumar. A reconfigurable battery pack for improving power conversion efficiency in portable devices. In *2008 7th International Caribbean Conference on Devices, Circuits and Systems*, pages 1–6. IEEE, April 2008.
- [12] Song Ci, Jiucui Zhang, Hamid Sharif, and Mahmoud Alahmad. A novel design of adaptive reconfigurable multicell battery for power-aware embedded networked sensing systems. In *IEEE GLOBECOM 2007-IEEE Global Telecommunications Conference*, pages 1043–1047. IEEE, 2007.
- [13] Jan Engelhardt, Tatiana Gabderakhmanova, Gunnar Rohde, and Mattia Marinelli. Reconfigurable stationary battery with adaptive cell switching for electric vehicle fast-charging. In *2020 55th International Universities Power Engineering Conference (UPEC)*, pages 1–6, 2020.
- [14] Jan Engelhardt, Jan Martin Zepter, Tatiana Gabderakhmanova, Gunnar Rohde, and Mattia Marinelli. Double-string battery system with reconfigurable cell topology operated as a fast charging station for electric vehicles. *Energies*, 14(9):2414, 2021.
- [15] Barrie Lawson. A Software Configurable Battery. *EVS26 International Battery, Hybrid and Fuel Cell Electric Vehicle Symposium*, 2012.
- [16] Liang He, Linghe Kong, Siyu Lin, Shaodong Ying, Yu Gu, Tian He, and Cong Liu. Reconfiguration-assisted charging in large-scale lithium-ion battery systems. In *2014 ACM/IEEE International Conference on Cyber-Physical Systems (ICCPS)*, pages 60–71. IEEE, 2014.
- [17] Hahnsang Kim and Kang G Shin. On dynamic reconfiguration of a large-scale battery system. In *2009 15th IEEE Real-Time and Embedded Technology and Applications Symposium*, pages 87–96. IEEE, 2009.
- [18] Weiji Han, Anton Kersten, Changfu Zou, Torsten Wik, Xiaoliang Huang, and Guangzhong Dong. Analysis and estimation of the maximum switch current during battery system reconfiguration. *IEEE Transactions on Industrial Electronics*, 69(6):5931–5941, 2021.
- [19] Si-Zhe Chen, Yule Wang, Guidong Zhang, Le Chang, and Yun Zhang. Sneak Circuit Theory Based Approach to Avoiding Short-Circuit Paths in Reconfigurable Battery Systems. *IEEE Transactions on Industrial Electronics*, 68(12):12353–12363, 2021.
- [20] Liang He, Lipeng Gu, Linghe Kong, Yu Gu, Cong Liu, and Tian He. Exploring Adaptive Reconfiguration to Optimize Energy Efficiency in Large-Scale Battery Systems. In *2013 IEEE 34th Real-Time Systems Symposium*, pages 118–127, December 2013.

- [21] Hongwen He, Rui Xiong, Xiaowei Zhang, Fengchun Sun, and JinXin Fan. State-of-Charge Estimation of the Lithium-Ion Battery Using an Adaptive Extended Kalman Filter Based on an Improved Thevenin Model. *IEEE Transactions on Vehicular Technology*, 60(4):1461–1469, May 2011.
- [22] S.M. Mousavi G. and M. Nikdel. Various battery models for various simulation studies and applications. *Renewable and Sustainable Energy Reviews*, 32:477–485, April 2014.
- [23] Song Ci, Jiucui Zhang, Hamid Sharif, and Mahmoud Alahmad. A Novel Design of Adaptive Reconfigurable Multicell Battery for Power-Aware Embedded Networked Sensing Systems. In *IEEE GLOBECOM 2007-2007 IEEE Global Telecommunications Conference*, pages 1043–1047, November 2007.
- [24] Mahmoud Alahmad, Herb Hess, Mohammad Mojarradi, William West, and Jay Whitacre. Battery switch array system with application for JPL’s rechargeable micro-scale batteries. *Journal of Power Sources*, 177(2):566–578, March 2008.
- [25] Hahnsang Kim and Kang G. Shin. Dependable, efficient, scalable architecture for management of large-scale batteries. In *Proceedings of the 1st ACM/IEEE International Conference on Cyber-Physical Systems, ICCPS ’10*, pages 178–187, New York, NY, USA, April 2010. Association for Computing Machinery.
- [26] Younghyun Kim, Sangyoung Park, Yanzhi Wang, Qing Xie, Naehyuck Chang, Massimo Poncino, and Massoud Pedram. Balanced reconfiguration of storage banks in a hybrid electrical energy storage system. In *2011 IEEE/ACM International Conference on Computer-Aided Design (ICCAD)*, pages 624–631, November 2011.
- [27] Taesic Kim, Wei Qiao, and Liyan Qu. A series-connected self-reconfigurable multicell battery capable of safe and effective charging/discharging and balancing operations. In *2012 Twenty-Seventh Annual IEEE Applied Power Electronics Conference and Exposition (APEC)*, pages 2259–2264, February 2012.
- [28] Liang He, Linghe Kong, Siyu Lin, Shaodong Ying, Yu Gu, Tian He, and Cong Liu. Reconfiguration-assisted charging in large-scale Lithium-ion battery systems. In *2014 ACM/IEEE International Conference on Cyber-Physical Systems (ICCPS)*, pages 60–71, April 2014.