


POWER – 3S LiPo input, protection, 5 V buck

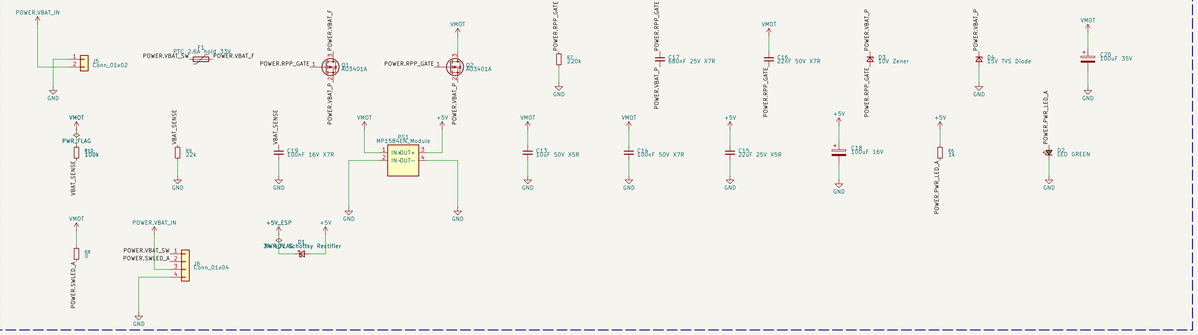

MCU – ESP32-S3-DevKitC-1

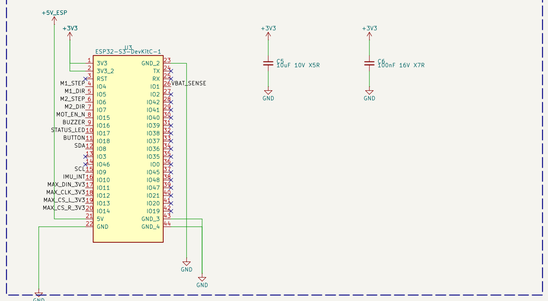

UI – status LED, button, buzzer

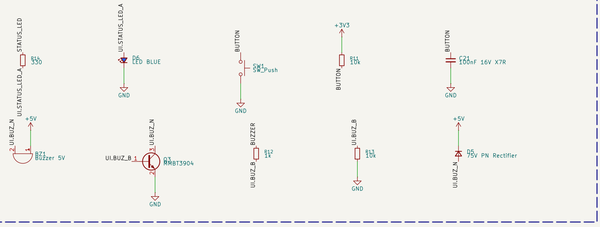


MOTOR LEFT – A4988 #1

MOTOR RIGHT – A4988 #2

IMU – GY-9250 (MPU-9250), I2C 0x68

EYES – 2x MAX7219 8x8, 74AHCT125 level shift

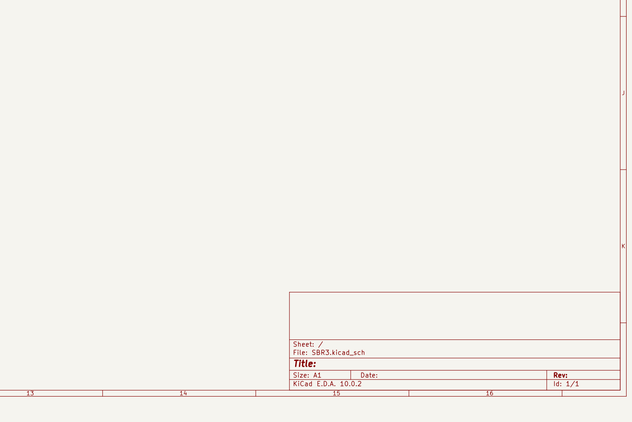

MECHANICAL / TEST POINTS / SHARED

Sheet: /
File: SBR3.kicad_sch
Title:
Size: A1 | Date: | Rev:
KiCad E.D.A. 10.0.2 | Id: 1/1