

Seeeduino Xiao and Voltage Regulator

Place C1 and C2 as close as possible to U3
Place U3 as close as possible to U2

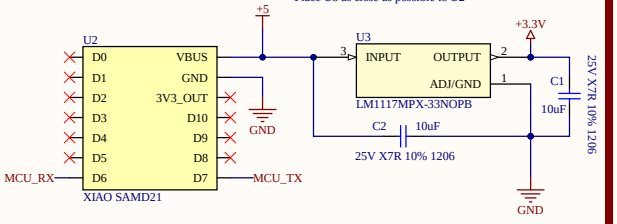

Test Points




LED Matrix




MCU VDDIO2

Place C7 and C8 as close as possible to VDDIO2 pin of U1




MCU AVDD

Place C9 and C10 as close as possible to AVDD pin of U1




MICROCONTROLLER UNIT

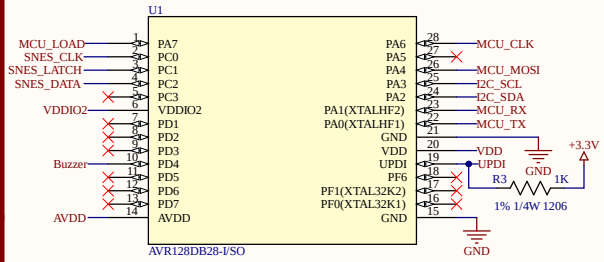

R3 (Pull-up resistor) for UPDI programming


LED Matrix Driver

Place C3 and C4 as close as possible to U4
Place C5 and C6 as close as possible to U5

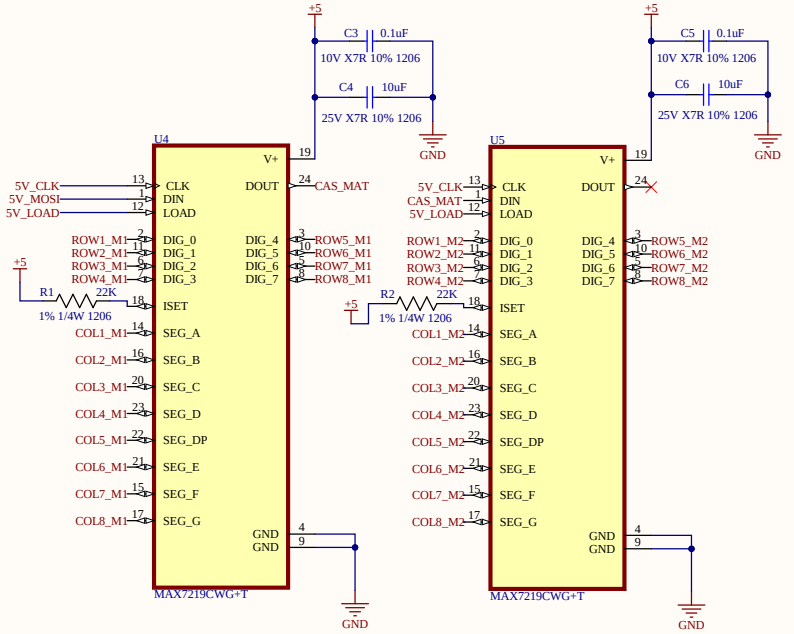


MCU VDD


Place C11 and C12 as close as possible to VDD pin of U1




UPDI Pin headers




SNES Connector



Buzzer




Accelerometer

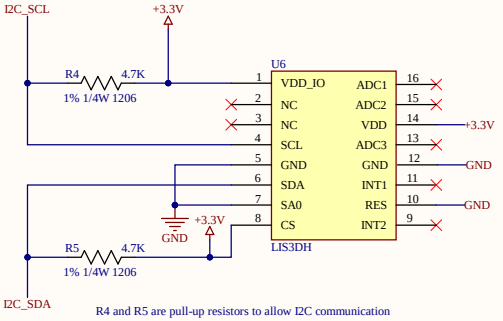


R4 and R5 are pull-up resistors to allow I2C communication

Driver MCU Communication

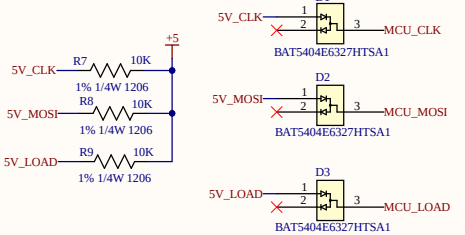


Used to mathematically increase voltage controller's data into MCU to ensure it is registered


Fiducials



Mounting Hardware

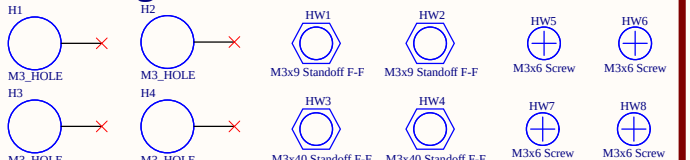

Title	Fliptris TEAM 33	
Size: A3	Number: 1	Revision: 2.2
Date: 10/22/2026	Sheet 1 of 2	
File: C:\Users\..\Fliptris_Schematic.SchDoc	Drawn By: N.M.Tran	

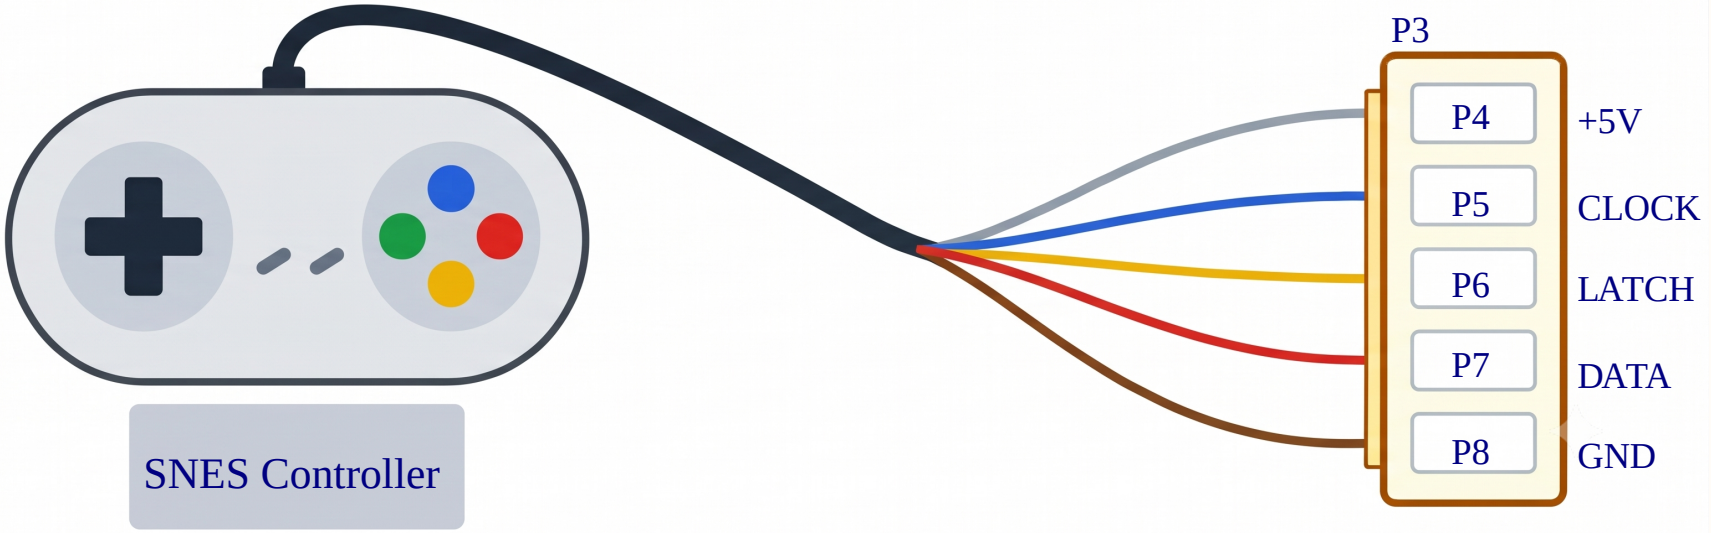

P3: KK 2.54mm 5-Way Housing (ETSG: 24 - 03 - 04)
P4 - P8: Crimp Terminals (ETSG: 24 - 03 - 01)

Title	Fliptris TEAM 33	
Size: A3	Number: 1	Revision: 2.2
Date: 10/22/2026	Sheet2 of 2	
File: C:\Users\..\Fliptris_Schematic2.SchDoc	Drawn By: N.M.Tran	