



1. Description

1.1. Project

Project Name	bluetooth_alarm
Board Name	NUCLEO-F429ZI
Generated with:	STM32CubeMX 6.9.2
Date	11/23/2023


1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F429/439
MCU name	STM32F429ZITx
MCU Package	LQFP144
MCU Pin number	144

1.3. Core(s) information

Core(s)	Arm Cortex-M4
---------	---------------

2. Pinout Configuration

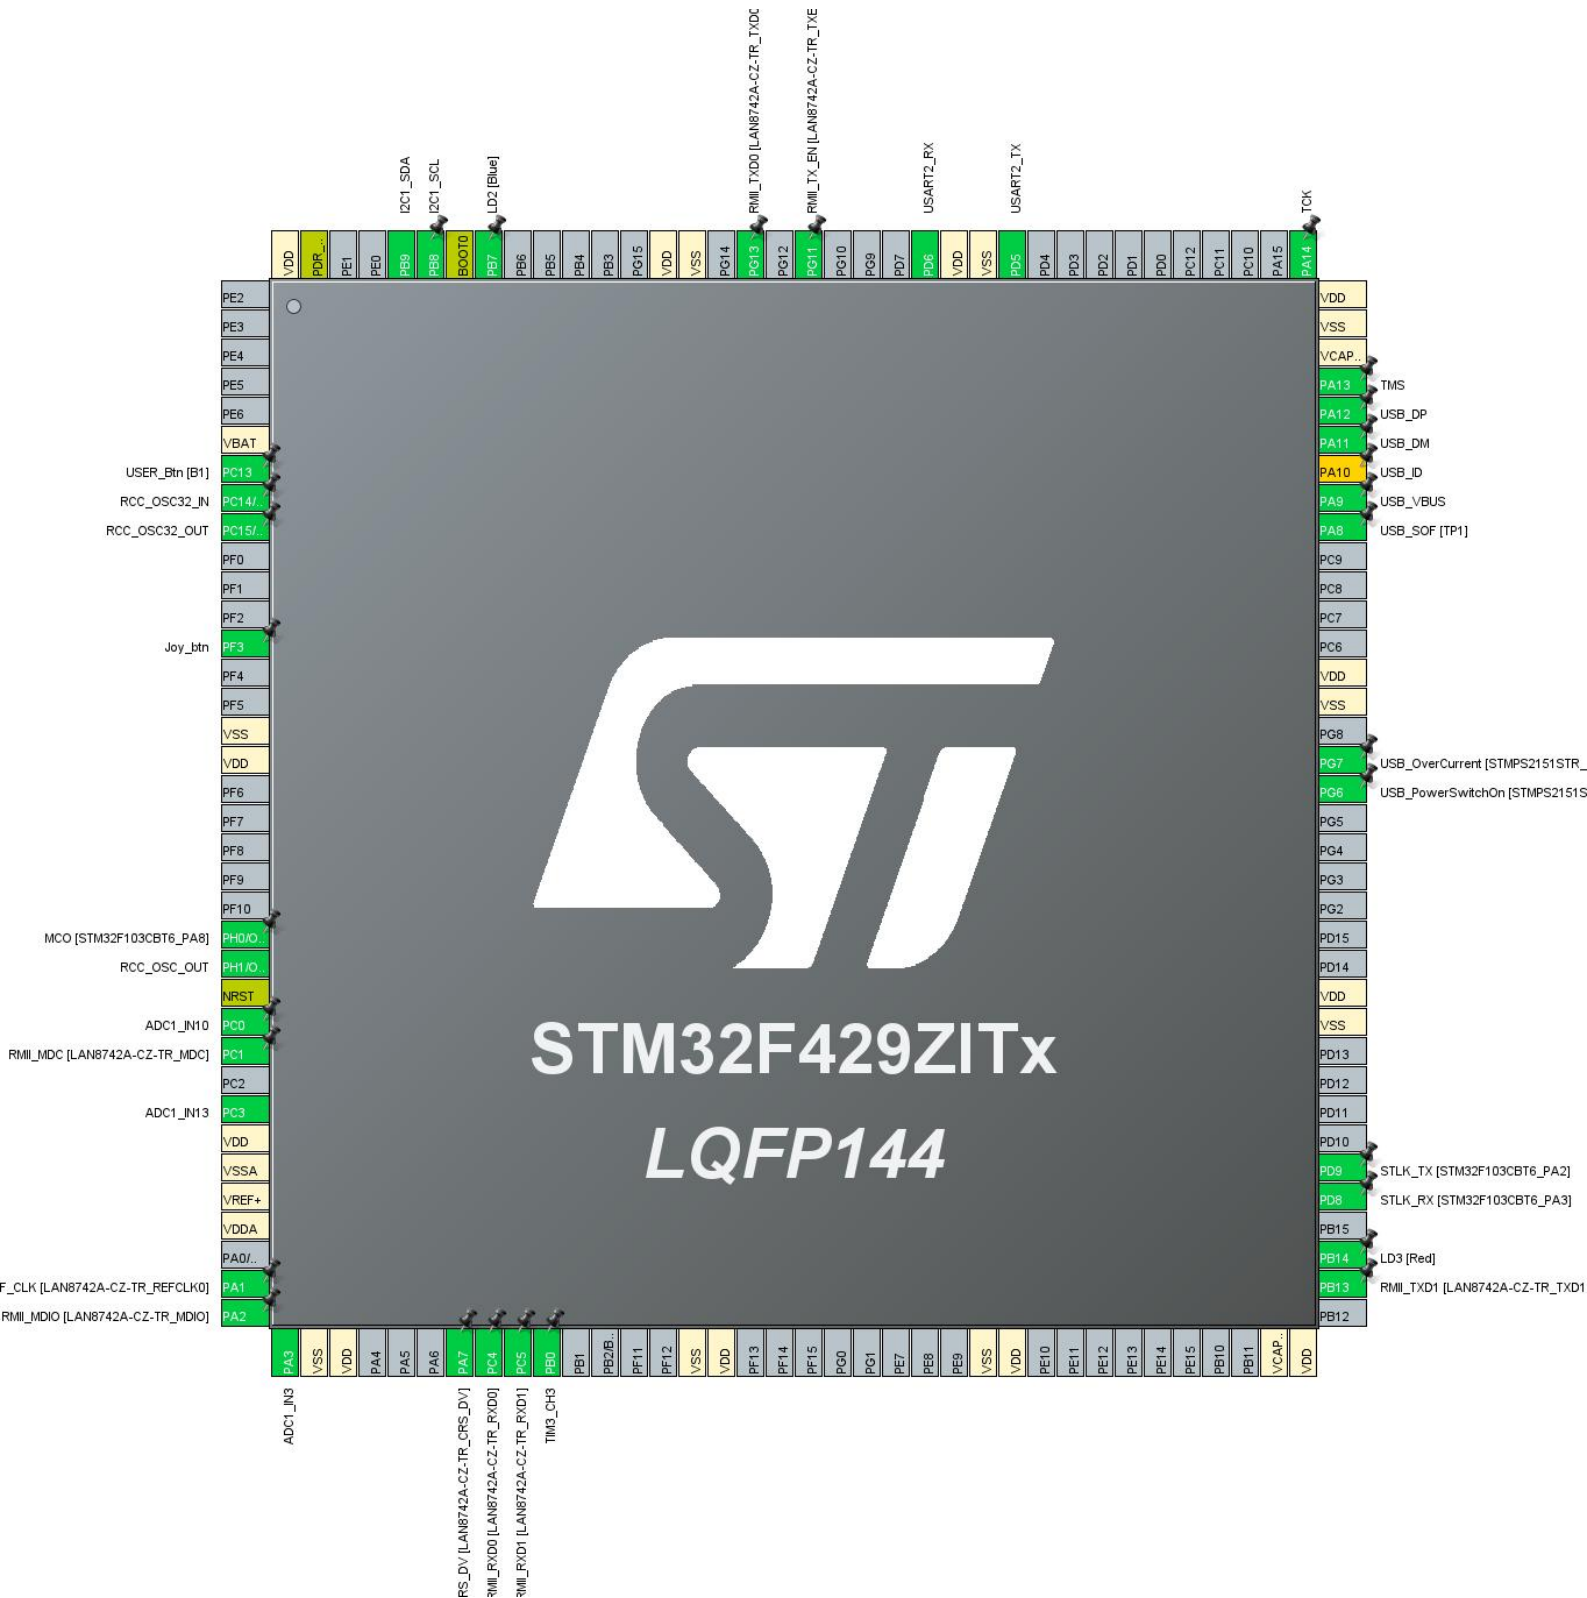

3. Pins Configuration

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
7	PC13	I/O	GPIO_EXTI13	USER_Btn [B1]
8	PC14/OSC32_IN	I/O	RCC_OSC32_IN	
9	PC15/OSC32_OUT	I/O	RCC_OSC32_OUT	
13	PF3	I/O	GPIO_EXTI3	Joy_btn
16	VSS	Power		
17	VDD	Power		
23	PH0/OSC_IN	I/O	RCC_OSC_IN	MCO [STM32F103CBT6_PA8]
24	PH1/OSC_OUT	I/O	RCC_OSC_OUT	
25	NRST	Reset		
26	PC0	I/O	ADC1_IN10	
27	PC1	I/O	ETH_MDC	RMII_MDC [LAN8742A-CZ- TR_MDC]
29	PC3	I/O	ADC1_IN13	
30	VDD	Power		
31	VSSA	Power		
32	VREF+	Power		
33	VDDA	Power		
35	PA1	I/O	ETH_REF_CLK	RMII_REF_CLK [LAN8742A-CZ- TR_REFCLK0]
36	PA2	I/O	ETH_MDIO	RMII_MDIO [LAN8742A-CZ- TR_MDIO]
37	PA3	I/O	ADC1_IN3	
38	VSS	Power		
39	VDD	Power		
43	PA7	I/O	ETH_CRS_DV	RMII_CRS_DV [LAN8742A- CZ-TR_CRS_DV]
44	PC4	I/O	ETH_RXD0	RMII_RXD0 [LAN8742A-CZ- TR_RXD0]
45	PC5	I/O	ETH_RXD1	RMII_RXD1 [LAN8742A-CZ- TR_RXD1]
46	PB0	I/O	TIM3_CH3	
51	VSS	Power		
52	VDD	Power		
61	VSS	Power		

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
62	VDD	Power		
71	VCAP_1	Power		
72	VDD	Power		
74	PB13	I/O	ETH_TXD1	RMII_TXD1 [LAN8742A-CZ- TR_TXD1]
75	PB14 *	I/O	GPIO_Output	LD3 [Red]
77	PD8	I/O	USART3_TX	STLK_RX [STM32F103CBT6_PA3]
78	PD9	I/O	USART3_RX	STLK_TX [STM32F103CBT6_PA2]
83	VSS	Power		
84	VDD	Power		
91	PG6 *	I/O	GPIO_Output	USB_PowerSwitchOn [STMP2151STR_EN]
92	PG7 *	I/O	GPIO_Input	USB_OverCurrent [STMP2151STR_FAULT]
94	VSS	Power		
95	VDD	Power		
100	PA8	I/O	USB_OTG_FS_SOF	USB_SOF [TP1]
101	PA9	I/O	USB_OTG_FS_VBUS	USB_VBUS
102	PA10 **	I/O	USB_OTG_FS_ID	USB_ID
103	PA11	I/O	USB_OTG_FS_DM	USB_DM
104	PA12	I/O	USB_OTG_FS_DP	USB_DP
105	PA13	I/O	SYS_JTMS-SWDIO	TMS
106	VCAP_2	Power		
107	VSS	Power		
108	VDD	Power		
109	PA14	I/O	SYS_JTCK-SWCLK	TCK
119	PD5	I/O	USART2_TX	
120	VSS	Power		
121	VDD	Power		
122	PD6	I/O	USART2_RX	
126	PG11	I/O	ETH_TX_EN	RMII_TX_EN [LAN8742A- CZ-TR_TXEN]
128	PG13	I/O	ETH_TXD0	RMII_TXD0 [LAN8742A-CZ- TR_TXD0]
130	VSS	Power		
131	VDD	Power		
137	PB7 *	I/O	GPIO_Output	LD2 [Blue]
138	BOOT0	Boot		
139	PB8	I/O	I2C1_SCL	

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
140	PB9	I/O	I2C1_SDA	
143	PDR_ON	Reset		
144	VDD	Power		

* The pin is affected with an I/O function

** The pin is affected with a peripheral function but no peripheral mode is activated

5. Software Project

5.1. Project Settings

Name	Value
Project Name	bluetooth_alarm
Project Folder	C:\Users\lentwu\STM32CubeIDE\mini-projects-with-stm32f429\bluetooth_alarm
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F4 V1.27.1
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_DMA_Init	DMA
4	MX_ETH_Init	ETH
5	MX_USART3_UART_Init	USART3
6	MX_USB_OTG_FS_PCD_Init	USB_OTG_FS
7	MX_ADC1_Init	ADC1
8	MX_I2C1_Init	I2C1
9	MX_RTC_Init	RTC
10	MX_TIM2_Init	TIM2
11	MX_TIM3_Init	TIM3

Rank	Function Name	Peripheral Instance Name
12	MX_USART2_UART_Init	USART2

1. Power Consumption Calculator report

1.1. Microcontroller Selection

Series	STM32F4
Line	STM32F429/439
MCU	STM32F429ZITx
Datasheet	DS9405_Rev9

1.2. Parameter Selection

Temperature	25
Vdd	3.3

1.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


1.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP UDM (Under Drive)
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	Scale1-High	No Scale
Fetch Type	FLASH	n/a
CPU Frequency	180 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator LP Flash-PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	57 mA	100 μ A
Duration	0.1 ms	0.9 ms
DMIPS	225.0	0.0
Ta Max	97.48	104.99
Category	In DS Table	In DS Table

1.5. Results

Sequence Time	1 ms	Average Current	5.79 mA
Battery Life	24 days, 10 hours	Average DMIPS	225.0 DMIPS

1.6. Chart

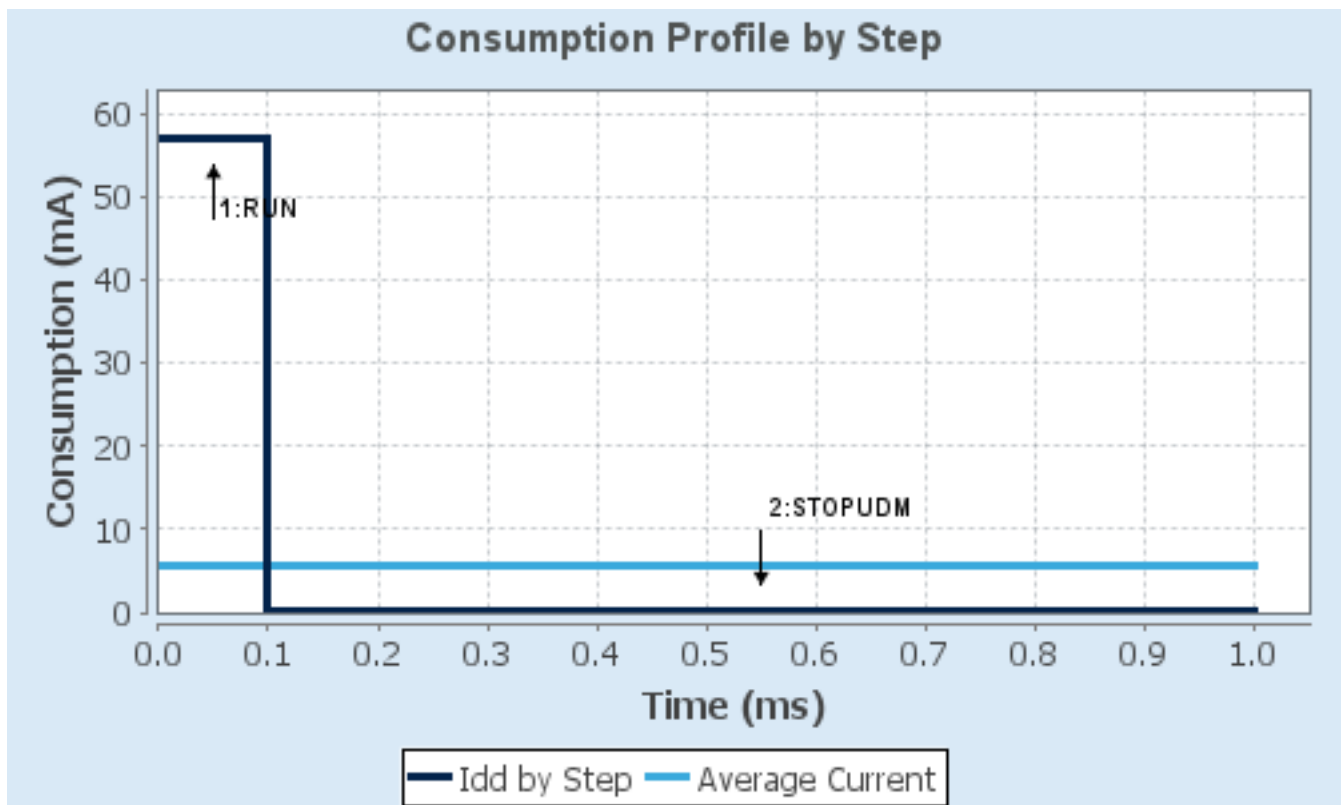

2. Peripherals and Middlewares Configuration

2.1. ADC1

mode: IN3

mode: IN10

mode: IN13

2.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode Independent mode

ADC_Settings:

Clock Prescaler PCLK2 divided by 4

Resolution 12 bits (15 ADC Clock cycles)

Data Alignment Right alignment

Scan Conversion Mode Enabled

Continuous Conversion Mode **Enabled ***

Discontinuous Conversion Mode Disabled

DMA Continuous Requests **Enabled ***

End Of Conversion Selection EOC flag at the end of single channel conversion

ADC_Regular_ConversionMode:

Number Of Conversion **2 ***

External Trigger Conversion Source Regular Conversion launched by software

External Trigger Conversion Edge None

Rank 1

Channel **Channel 10 ***

Sampling Time **84 Cycles ***

Rank **2 ***

Channel **Channel 13 ***

Sampling Time **84 Cycles ***

ADC_Injected_ConversionMode:

Number Of Conversions 0

WatchDog:

Enable Analog WatchDog Mode false

2.2. ETH

Mode: RMII

2.2.1. Parameter Settings:

General : Ethernet Configuration:

Ethernet MAC Address	00:80:E1:00:00:00
Rx Buffers Length	1524

Ethernet Basic Configuration:

Rx Mode	Polling Mode
---------	--------------

2.3. I2C1

I2C: I2C

2.3.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Timing configuration:

Coefficient of Digital Filter	0
Analog Filter	Enabled

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

2.4. RCC

High Speed Clock (HSE): BYPASS Clock Source

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

2.4.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	5 WS (6 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000
Power Parameters:	
Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
Power Over Drive	Disabled

2.5. RTC

mode: Activate Clock Source

mode: Activate Calendar

Alarm A: Internal Alarm

2.5.1. Parameter Settings:

General:

Hour Format	Hourformat 12 *
Asynchronous Predivider value	127
Synchronous Predivider value	255

Calendar Time:

Data Format	BCD data format
Hours	0 *
Minutes	0
Seconds	0
Time Format	12 AM
Day Light Saving: value of hour adjustment	Daylightsaving None
Store Operation	Storeoperation Reset

Calendar Date:

Week Day	Thursday *
Month	November *
Date	16 *
Year	23 *

Alarm A:

Hours	0 *
Minutes	0
Seconds	45 *
Sub Seconds	0
Alarm Mask Date Week day	Enable *
Alarm Mask Hours	Disable

Alarm Mask Minutes	Disable
Alarm Mask Seconds	Disable
Alarm Sub Second Mask	All Alarm SS fields are masked.
Alarm Date Week Day Sel	Date
Alarm Date	1

2.6. SYS

Debug: Serial Wire

Timebase Source: SysTick

2.7. TIM2

Clock Source : Internal Clock

2.7.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	8400-1 *
Counter Mode	Up
Counter Period (AutoReload Register - 32 bits value)	200-1 *
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

2.8. TIM3

Clock Source : Internal Clock

Channel3: PWM Generation CH3

2.8.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	15 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	199 *
Internal Clock Division (CKD)	No Division
auto-reload preload	Enable *

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

PWM Generation Channel 3:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High

2.9. USART2

Mode: Asynchronous

2.9.1. Parameter Settings:

Basic Parameters:

Baud Rate	9600 *
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

2.10. USART3

Mode: Asynchronous

2.10.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

2.11. USB_OTG_FS

Mode: Device_Only

mode: Activate_SOF

mode: Activate_VBUS

2.11.1. Parameter Settings:

Speed	Device Full Speed 12MBit/s
Low power	Disabled
Link Power Management	Disabled
VBUS sensing	Enabled
Signal start of frame	Enabled

*** User modified value**

3. System Configuration

3.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PC0	ADC1_IN10	Analog mode	No pull-up and no pull-down	n/a	
	PC3	ADC1_IN13	Analog mode	No pull-up and no pull-down	n/a	
	PA3	ADC1_IN3	Analog mode	No pull-up and no pull-down	n/a	
ETH	PC1	ETH_MDC	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_MDC [LAN8742A-CZ-TR_MDC]
	PA1	ETH_REF_CLK	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_REF_CLK [LAN8742A-CZ-TR_REFCLK0]
	PA2	ETH_MDIO	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_MDIO [LAN8742A-CZ-TR_MDIO]
	PA7	ETH_CRS_DV	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_CRS_DV [LAN8742A-CZ-TR_CRS_DV]
	PC4	ETH_RXD0	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_RXD0 [LAN8742A-CZ-TR_RXD0]
	PC5	ETH_RXD1	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_RXD1 [LAN8742A-CZ-TR_RXD1]
	PB13	ETH_TXD1	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_TXD1 [LAN8742A-CZ-TR_TXD1]
	PG11	ETH_TX_EN	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_TX_EN [LAN8742A-CZ-TR_TXEN]
	PG13	ETH_TXD0	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_TXD0 [LAN8742A-CZ-TR_TXD0]
I2C1	PB8	I2C1_SCL	Alternate Function Open Drain	No pull-up and no pull-down	Very High *	
	PB9	I2C1_SDA	Alternate Function Open Drain	No pull-up and no pull-down	Very High *	
RCC	PC14/OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15/OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0/OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	MCO [STM32F103CBT6_PA8]
	PH1/OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-	n/a	n/a	n/a	TMS

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
		SWDIO				
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
TIM3	PB0	TIM3_CH3	Alternate Function Push Pull	No pull-up and no pull-down	Low	
USART2	PD5	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PD6	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
USART3	PD8	USART3_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	STLK_RX [STM32F103CBT6_PA3]
	PD9	USART3_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	STLK_TX [STM32F103CBT6_PA2]
USB_OTG_FS	PA8	USB_OTG_FS_SOF	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USB_SOF [TP1]
	PA9	USB_OTG_FS_VBUS	Input mode	No pull-up and no pull-down	n/a	USB_VBUS
	PA11	USB_OTG_FS_DM	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USB_DM
	PA12	USB_OTG_FS_DP	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USB_DP
Single Mapped Signals	PA10	USB_OTG_FS_ID	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USB_ID
GPIO	PC13	GPIO_EXTI13	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	USER_Btn [B1]
	PF3	GPIO_EXTI3	External Interrupt Mode with Rising/Falling edge	Pull-up *	n/a	Joy_btn
	PB14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD3 [Red]
	PG6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	USB_PowerSwitchOn [STMP2151STR_EN]
	PG7	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	USB_OverCurrent [STMP2151STR_FAULT]
	PB7	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [Blue]

3.2. DMA configuration

DMA request	Stream	Direction	Priority
ADC1	DMA2_Stream0	Peripheral To Memory	Low

ADC1: DMA2_Stream0 DMA request Settings:

Mode: **Circular ***
Use fifo: Disable
Peripheral Increment: Disable
Memory Increment: **Enable ***
Peripheral Data Width: **Word ***
Memory Data Width: **Word ***

3.3. NVIC configuration

3.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
EXTI line3 interrupt	true	0	0
ADC1, ADC2 and ADC3 global interrupts	true	0	0
TIM2 global interrupt	true	0	0
USART2 global interrupt	true	0	0
USART3 global interrupt	true	0	0
EXTI line[15:10] interrupts	true	0	0
RTC alarms A and B interrupt through EXTI line 17	true	0	0
DMA2 stream0 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
TIM3 global interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
Ethernet global interrupt	unused		
Ethernet wake-up interrupt through EXTI line 19	unused		
USB On The Go FS global interrupt	unused		
FPU global interrupt	unused		

3.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true
EXTI line3 interrupt	false	true	true
ADC1, ADC2 and ADC3 global interrupts	true	true	true
TIM2 global interrupt	true	true	true
USART2 global interrupt	true	true	true
USART3 global interrupt	true	true	true
EXTI line[15:10] interrupts	true	true	true
RTC alarms A and B interrupt through EXTI line 17	true	true	true
DMA2 stream0 global interrupt	false	true	true

* User modified value

4. System Views

4.1. Category view

4.1.1. Current

Middleware						
System Core	Analog	Timers	Connectivity	Multimedia	Security	Computing
DMA ✓	ADC1 ✓	RTC ✓	ETH ✓			
GPIO ⚠		TIM2 ✓	I2C1 ✓			
NVIC ✓		TIM3 ✓	USART2 ✓			
RCC ✓			USART3 ✓			
SYS ✓			USB_FS ✓			

5. Docs & Resources

Type	Link
BSDL files	https://www.st.com/resource/en/bsdl_model/stm32f427-437_429-439_bsdl.zip
IBIS models	https://www.st.com/resource/en/ibis_model/stm32f427-437_429-439_ibis.zip
System View Description	https://www.st.com/resource/en/svd/stm32f4_svd.zip
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_embedded_software_solutions.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_eval_tools_portfolio.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_stm8_functional-safety-packages.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_software_development_tools.pdf
Brochures	https://www.st.com/resource/en/brochure/products-and-solutions-for-plcs-and-smart-i-os.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32nucleo.pdf
Flyers	https://www.st.com/resource/en/flyer/flstmcsuite.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32trust.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32gui.pdf
Product Certifications	https://www.st.com/resource/en/certification_document/stm32_authentication_can.pdf
Application Notes	https://www.st.com/resource/en/application_note/an1181-electrostatic-discharge-sensitivity-measurement-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an1709-emc-design-guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an2606-stm32-microcontroller-system-memory-boot-mode-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an2639-soldering-

recommendations-and-package-information-for-leadfree-ecopack-mcus-and-mpus-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an2834-how-to-get-the-best-adc-accuracy-in-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2867-oscillator-design-guide-for-stm8afals-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2945-stm8s-and-stm32-mcus-a-consistent-832bit-product-line-for-painless-migration-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3070-managing-the-driver-enable-signal-for-rs485-and-iolink-communications-with-the-stm32s-usart-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3126-audio-and-waveform-generation-using-the-dac-in-stm32-products-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3154-can-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3155-usart-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3156-usb-dfu-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3364-migration-and-compatibility-guidelines-for-stm32-microcontroller-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3997-audio-playback-and-recording-using-the-stm32f4discovery-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3998-pdm-audio-software-decoding-on-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4013-stm32-crossseries-timer-overview-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4031-using-the-stm32f2-stm32f4-and-stm32f7-series-dma-controller-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an4073-how-to-improve-adc-accuracy-when-using-stm32f2xx-and-stm32f4xx-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4221-i2c-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4229-how-to-implement-a-vocoder-solution-using-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4277-using-stm32-device-pwm-shutdown-features-for-motor-control-and-digital-power-conversion-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4286-spi-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4488-getting-started-with-stm32f4xxxx-mcu-hardware-development-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4547-migrating-from-stm32f407xx417xx-to-stm32f427xx429xx437xx439xx-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4566-extending-the-dac-performance-of-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4640-peripherals-interconnections-on-stm32f4057xx-stm32f4157xx-stm32f42xxx-stm32f43xxx-stm32f446xx-and-stm32f469479xx-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4658-migration-of-applications-from-stm32f429439-lines-to-stm32f446-line-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4660-migration-of-microcontroller-applications-from-stm32f42xxx43xxx-devices-to-stm32f7-series-devices-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4675-migration-of-microcontroller-applications-from-stm32f42xxxstm32f43xxx-to-

stm32f469xxstm32f479xx-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4739-stm32cube-firmware-examples-for-stm32f4-series-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4759-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-with-stm32-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4776-generalpurpose-timer-cookbook-for-stm32-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4850-stm32-mcus-spreadspectrum-clock-generation-principles-properties-and-implementation-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4861-lcdtft-display-controller-ltcd-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4908-stm32-usart-automatic-baud-rate-detection-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4989-stm32-microcontroller-debug-toolbox-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4995-using-an-electromyogram-technique-to-detect-muscle-activity-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5020-digital-camera-interface-dcmi-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5036-thermal-management-guidelines-for-stm32-applications-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5073-receiving-spdif-audio-stream-with-the-stm32f4f7h7-series-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an5225-usb-typec-power-delivery-using-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5543-enhanced-methods-to-handle-spi-communication-on-stm32-devices-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4899-stm32-microcontroller-gpio-hardware-settings-and-lowpower-consumption-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5612-esd-protection-of-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5156-introduction-to-stm32-microcontrollers-security-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4838-introduction-to-memory-protection-unit-management-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4230-random-number-generation-validation-using-nist-statistical-test-suite-for-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5688-migrating-microcontroller-applications-from-stm32f427437-and-stm32f429439-to-stm32h573563-and-stm32h562-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4879-introduction-to-usb-hardware-and-pcb-guidelines-using-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an1202_freertos_guide-for_related_Tools_freertos-guide-stmicroelectronics.pdf
& Software
- Application Notes https://www.st.com/resource/en/application_note/an1602_semihosting_in_for_related_Tools_truestudio-how-to-do-semihosting-in-truestudio-stmicroelectronics.pdf
& Software
- Application Notes https://www.st.com/resource/en/application_note/an1801_stm32cubeprog_for_related_Tools_rammer_in_truestudio-installing-stm32cubeprogrammer-in-truestudio-stmicroelectronics.pdf
& Software
- Application Notes https://www.st.com/resource/en/application_note/atollic_editing_keyboard

for related Tools [_shortcuts-atollic-editing-keyboard-shortcuts-stmicroelectronics.pdf](#)
& Software

Application Notes https://www.st.com/resource/en/application_note/iar_to_atollic_truestudio
for related Tools [_migration_guide-truestudio-for-arm-migration-guide-iar-embedded-](#)
& Software [workbench-to-truestudio-stmicroelectronics.pdf](#)

Application Notes https://www.st.com/resource/en/application_note/stm32cubemx_installatio
for related Tools [n_in_truestudio-stm32cubemx-installation-in-truestudio-](#)
& Software [stmicroelectronics.pdf](#)

Application Notes https://www.st.com/resource/en/application_note/an2656-stm32f10xxx-
for related Tools [lcd-glass-driver-firmware-stmicroelectronics.pdf](#)
& Software

Application Notes https://www.st.com/resource/en/application_note/an2790-tft-lcd-
for related Tools [interfacing-with-the-highdensity-stm32f10xxx-fsmc-stmicroelectronics.pdf](#)
& Software

Application Notes https://www.st.com/resource/en/application_note/an3078-stm32-
for related Tools [inapplication-programming-over-the-ic-bus-stmicroelectronics.pdf](#)
& Software

Application Notes https://www.st.com/resource/en/application_note/an3116-stm32s-adc-
for related Tools [modes-and-their-applications-stmicroelectronics.pdf](#)
& Software

Application Notes https://www.st.com/resource/en/application_note/an3174-implementing-
for related Tools [receivers-for-infrared-remote-control-protocols-using-stm32f10xxx-](#)
& Software [microcontrollers-stmicroelectronics.pdf](#)

Application Notes https://www.st.com/resource/en/application_note/an3241-qvga-tftlcd-
for related Tools [direct-drive-using-the-stm32f10xx-fsmc-peripheral-stmicroelectronics.pdf](#)
& Software

Application Notes https://www.st.com/resource/en/application_note/an3307-guidelines-for-
for related Tools [obtaining-iec-60335-class-b-certification-for-any-stm32-application-](#)
& Software [stmicroelectronics.pdf](#)

Application Notes https://www.st.com/resource/en/application_note/an3364-migration-and-
for related Tools [compatibility-guidelines-for-stm32-microcontroller-applications-](#)
& Software [stmicroelectronics.pdf](#)

Application Notes https://www.st.com/resource/en/application_note/an3965-
for related Tools [stm32f40xstm32f41x-inapplication-programming-using-the-usart-](#)

& Software [stmicroelectronics.pdf](#)

Application Notes [https://www.st.com/resource/en/application_note/an3969-eeeprom-](https://www.st.com/resource/en/application_note/an3969-eeeprom-for%20related%20Tools%20&%20Software%20emulation-in-stm32f40xstm32f41x-microcontrollers-stmicroelectronics.pdf)
for related Tools [emulation-in-stm32f40xstm32f41x-microcontrollers-stmicroelectronics.pdf](#)
& Software

Application Notes [https://www.st.com/resource/en/application_note/an3990-upgrading-](https://www.st.com/resource/en/application_note/an3990-upgrading-for%20related%20Tools%20&%20Software%20stm32f4discovery-board-firmware-using-a-usb-key-stmicroelectronics.pdf)
for related Tools [stm32f4discovery-board-firmware-using-a-usb-key-stmicroelectronics.pdf](#)
& Software

Application Notes [https://www.st.com/resource/en/application_note/an3997-audio-playback-](https://www.st.com/resource/en/application_note/an3997-audio-playback-and-recording-using-the-stm32f4discovery-stmicroelectronics.pdf)
for related Tools [and-recording-using-the-stm32f4discovery-stmicroelectronics.pdf](#)
& Software

Application Notes [https://www.st.com/resource/en/application_note/an3998-pdm-audio-](https://www.st.com/resource/en/application_note/an3998-pdm-audio-for%20related%20Tools%20&%20Software%20software-decoding-on-stm32-microcontrollers-stmicroelectronics.pdf)
for related Tools [software-decoding-on-stm32-microcontrollers-stmicroelectronics.pdf](#)
& Software

Application Notes [https://www.st.com/resource/en/application_note/an4044-floating-point-](https://www.st.com/resource/en/application_note/an4044-floating-point-unit-demonstration-on-stm32-microcontrollers-stmicroelectronics.pdf)
for related Tools [unit-demonstration-on-stm32-microcontrollers-stmicroelectronics.pdf](#)
& Software

Application Notes [https://www.st.com/resource/en/application_note/an4323-getting-started-](https://www.st.com/resource/en/application_note/an4323-getting-started-with-stemwin-library-stmicroelectronics.pdf)
for related Tools [with-stemwin-library-stmicroelectronics.pdf](#)
& Software

Application Notes [https://www.st.com/resource/en/application_note/an4365-using-stm32f4-](https://www.st.com/resource/en/application_note/an4365-using-stm32f4-mcu-power-modes-with-best-dynamic-efficiency-stmicroelectronics.pdf)
for related Tools [mcu-power-modes-with-best-dynamic-efficiency-stmicroelectronics.pdf](#)
& Software

Application Notes [https://www.st.com/resource/en/application_note/an4435-guidelines-for-](https://www.st.com/resource/en/application_note/an4435-guidelines-for-obtaining-ulcsaiec-607301603351-class-b-certification-in-any-stm32-application-stmicroelectronics.pdf)
for related Tools [obtaining-ulcsaiec-607301603351-class-b-certification-in-any-stm32-](#)
& Software [application-stmicroelectronics.pdf](#)

Application Notes [https://www.st.com/resource/en/application_note/an4457-implementing-](https://www.st.com/resource/en/application_note/an4457-implementing-an-emulated-uart-on-stm32f4-microcontrollers-stmicroelectronics.pdf)
for related Tools [an-emulated-uart-on-stm32f4-microcontrollers-stmicroelectronics.pdf](#)
& Software

Application Notes [https://www.st.com/resource/en/application_note/an4499-stm32--](https://www.st.com/resource/en/application_note/an4499-stm32-nrf51822-bluetooth-low-energy-system-solution-stmicroelectronics.pdf)
for related Tools [nrf51822-bluetooth-low-energy-system-solution-stmicroelectronics.pdf](#)
& Software

Application Notes [https://www.st.com/resource/en/application_note/an4657-stm32-](https://www.st.com/resource/en/application_note/an4657-stm32-inapplication-programming-iap-using-the-usart-stmicroelectronics.pdf)
for related Tools [inapplication-programming-iap-using-the-usart-stmicroelectronics.pdf](#)
& Software

Application Notes https://www.st.com/resource/en/application_note/an4666-parallel-synchronous-transmission-using-gpio-and-dma-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an4678-full-duplex-spi-emulation-for-stm32f4-microcontrollers-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an4701-proprietary-code-readout-protection-on-microcontrollers-of-the-stm32f4-series-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an4739-stm32cube-firmware-examples-for-stm32f4-series-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an4758-proprietary-code-readout-protection-on-stm32l4-stm32l4-stm32g4-and-stm32wb-series-mcus-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an4759-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-with-stm32-microcontrollers-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an4841-digital-signal-processing-for-stm32-microcontrollers-using-cmsis-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an4968-proprietary-code-read-out-protection-pcrop-on-stm32f72xxx-and-stm32f73xxx-microcontrollers-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an5054-secure-programming-using-stm32cubeprogrammer-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an5056-integration-guide-for-the-xcubesbsfu-stm32cube-expansion-package-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an5360-getting-started-with-projects-based-on-the-stm32mp1-series-in-stm32cubeide-stmicroelectronics.pdf
for related Tools
& Software

Application Notes [---

Page 31](https://www.st.com/resource/en/application_note/an5361-getting-started-</p></div><div data-bbox=)

for related Tools & Software	with-projects-based-on-dualcore-stm32h7-microcontrollers-in-stm32cubeide-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5394-getting-started-with-projects-based-on-the-stm32l5-series-in-stm32cubeide-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5418-how-to-build-a-simple-usbp-d-sink-application-with-stm32cubemx-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5426-migrating-graphics-middleware-projects-from-stm32cubemx-540-to-stm32cubemx-550-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5464-position-control-of-a-three-phase-permanent-magnet-motor-using-xcubemcsdk-or-xcubemcsdkful-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5564-getting-started-with-projects-based-on-dualcore-stm32wl-microcontrollers-in-stm32cubeide-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5698-adapting-the-xcubestl-functional-safety-package-for-stm32-iec-61508-compliant-to-other-safety-standards-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5731-stm32cubemx-and-stm32cubeide-threadsafe-solution-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an4502-stm32-smbuspm-bus-expansion-package-for-stm32cube-stmicroelectronics.pdf
Errata Sheets	https://www.st.com/resource/en/errata_sheet/es0206-stm32f427437-and-stm32f429439-device-errata-stmicroelectronics.pdf
Datasheet	https://www.st.com/resource/en/datasheet/dm00071990.pdf
Programming Manuals	https://www.st.com/resource/en/programming_manual/pm0214-stm32-cortexm4-mcus-and-mpus-programming-manual-stmicroelectronics.pdf
Reference Manuals	https://www.st.com/resource/en/reference_manual/rm0090-stm32f405415-stm32f407417-stm32f427437-and-stm32f429439-advanced-arm-based-32bit-mcus-stmicroelectronics.pdf

Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn0516-overview-of-the-stm32f0xf100xxf103xx-and-stm32f2xxf30xf4xx-mcus-pmsm-singledual-foc-sdk-v40-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1163-description-of-wlcsp-for-microcontrollers-and-recommendations-for-its-use-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-shipping-media-for-stm32-microcontrollers-in-bga-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1208-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1433-reference-device-marking-schematics-for-stm32-microcontrollers-and-microprocessors-stmicroelectronics.pdf