< PRF-G191 GPS G-Mouse Specifications >

1. Internal Patch Antenna Specifications

Item	Spec
Range of Frequency	1575.42MHz +/- 1,023MHz
Impedance	50 [Ohm]
Bandwidth	10MHz min Return Loss ≤ -10dB
Patch Antenna Size	15.0X15.0X4.0T
Polarization	R.H.C.P (Right Hand Circular Polarization)
Frequency Temperature Coefficient (TF)	0±20ppm/°C (-40°C ~ +85°C)


2. G-Mouse Key Features

Item	Spec	
Main chip	• AG3331	
Receiver Type	• GPS L1 C/A, GLONASS L1: 1602.5625MHz, QZSS L1: 1575.42MHz	
	• 33 tracking channels, 99 acquisition channels	
Sensitivity	• Acquisition : -148[dBm]	
	• Tracking : -165[dBm]	
TTFF	with AGNSS	
	• Cold Start	< 15 sec
	without AGNSS	
	• Cold Start	< 35 sec
	• Warm start	< 30 sec
	• Hot Start	< 2 sec
LNA	• Built in LNA	
satellite	• GPS and GLONASS and QZSS	
Position Updating Rate	• default 1Hz, up to 10 Hz	

Note :	Sheet No. : 1/2 PDOC-2015-Nov-01

Horizontal Position Accuracy (Autonomous)	• Autonomous: 2.5 CEP
UART port	• default 9600bps , Adjustable: 9600bps~921600bps
	• UART port is used for NMEA output, MTK proprietary commands input
Storage temperature	• - 40°C ~ +90°C
Operating Temperature	• - 40 °C ~ + 85 °C
Connector and Cable	• Optional
Power Supply	• Supply Volage : 3.3[V] ~ 6.0[V]
	• Typical Supply Volage : 5.0[V]
Size	• 44.0 x 25.0 x 13.0 mm
Cable	• 1.5 meter

3. Mechanical Viewing

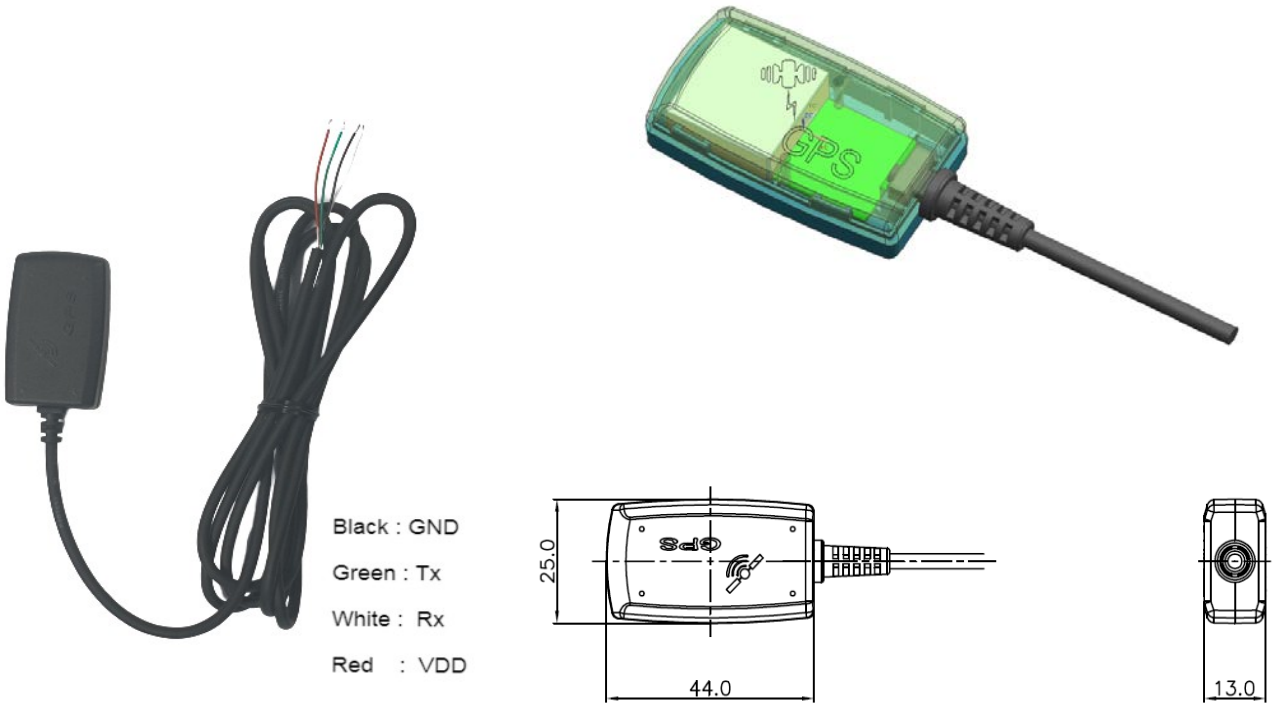

Note :	Sheet No. : 2/2 PDOC-2015-Nov-01

㈜피코아이앤시 T : 031-479-1829 alex_sung@picoinc.co.kr