


# MiraTherm Radiator Thermostat

## Software Specification

### Requirement Specification for a Master Project

Fulda University of Applied Sciences  
Department of Electrical Engineering



submitted by:	Alexander Menzel
Degree Program:	M.Eng. Embedded Systems (PO 2020)
Matriculation Number:	1316814
Advisor:	Prof. Dr. Uwe Werner
License:	Creative Commons Attribution 4.0 International
Copyright:	2025 MiraTherm
Link to original:	<a href="https://is.gd/mt_rt_sw_specs1">https://is.gd/mt_rt_sw_specs1</a>

November 2, 2025

# Contents

<b>Change Log</b>	<b>1</b>
<b>1 Introduction</b>	<b>2</b>
1.1 Document Purpose	2
1.2 Project Context	2
<b>2 Concept</b>	<b>3</b>
2.1 Solution approach	3
2.2 Hardware requirements	3
<b>3 Requirements</b>	<b>5</b>
3.1 Functional Requirements	5
3.2 Non-Functional Requirements	11
<b>4 Planning</b>	<b>12</b>
4.1 Time plan	12
4.2 Responsibilities	12
<b>Bibliography</b>	<b>13</b>
<b>List of Abbreviations</b>	<b>14</b>

# Change Log

Table 1: Document Change Log

№	Date	Version	Changed Chapters	Change Type	Editor
1	2.11.2025	0.1	All	Initial version	A. Menzel (AM)

Change ~~test~~text

Add test

Test note

Test highlight

[AM 1]  
v1.0: Ex-ample change

[AM 2]  
v1.0: Ex-ample ad-dition

[AM 3]  
v1.0: Ex-ample comment

[AM 4]  
v1.0: Ex-ample highlight

# 1 Introduction

In this chapter, the purpose of this document and the context of the project are described.

## 1.1 Document Purpose

This document provides a requirements specification for software of a Micro Controller Unit (MCU) based radiator thermostat, which will be developed as part of a master project at Fulda University of Applied Sciences. This software should implement basic consumer functions and could be used as a base for research, development and production of smart heating controllers or thermostats.

## 1.2 Project Context

The master project will be realized as part of a bigger interdisciplinary development named “MiraTherm Radiator Thermostat”, which includes the following areas:

- **Mechanics:** Development of the thermostat’s power transmission mechanism for proper function with commonly used radiator valves, followed by the design of an enclosure.
- **Control algorithms:** Engineering of control algorithms to be used by the thermostat.
- **Electronics:** Development of the thermostat’s Printed Circuit Board (PCB) and its integration with mechanical components.
- **Software:** The subject of this work, development of the thermostat’s software and its integration with PCB components.

## 2 Concept

In this chapter, the overall concept and approach for the development of the radiator thermostat software is described. Additionally, the required hardware for development and testing is outlined.

### 2.1 Solution approach

In this project, a basic software for the device should be implemented including hardware drivers and general program logic. The description of the eQ-3 eqiva Bluetooth from [1] will be used as a reference for defining the functional scope of the software to be developed.

The software should be designed ready for prospective integration of the control algorithms and Matter-over-Thread standard. (For further details about this standard see [2].) The device is supposed to be used for smart home applications, specifically for the integration of the thermostat in Home Assistant, apps like Google Home and/or custom Application Programming Interfaces (APIs).

### 2.2 Hardware requirements

To ensure a degree of independence from the PCB design and mechanics, the software will be developed using a hardware set that resembles the final thermostat in terms of components and interfaces. This approach enables early software development and testing before a hardware prototype is available.

A block diagram of the hardware setup for software development and testing is shown in Figure 2.1.

For the software development and testing, the following hardware components are required:

- **P-NUCLEO-WB55** - MCU development board with Matter-over-Thread standard support
- **eQ-3 eqiva Model N** - Radiator thermostat with a C300 3V motor and gear box for disassembly (available)

- **DRV8833** - Motor driver module
- **Shunt resistor** - For current measurement of the motor
- **1.3" 128x64 Organic Light-Emitting Diode (OLED) Display incl. SH1106**  
- Display with an embedded driver
- **KY-040** - Rotary encoder
- **Connecting wires**
- **Breadboard(s)**
- **Power supply** - laboratory power supply or batteries

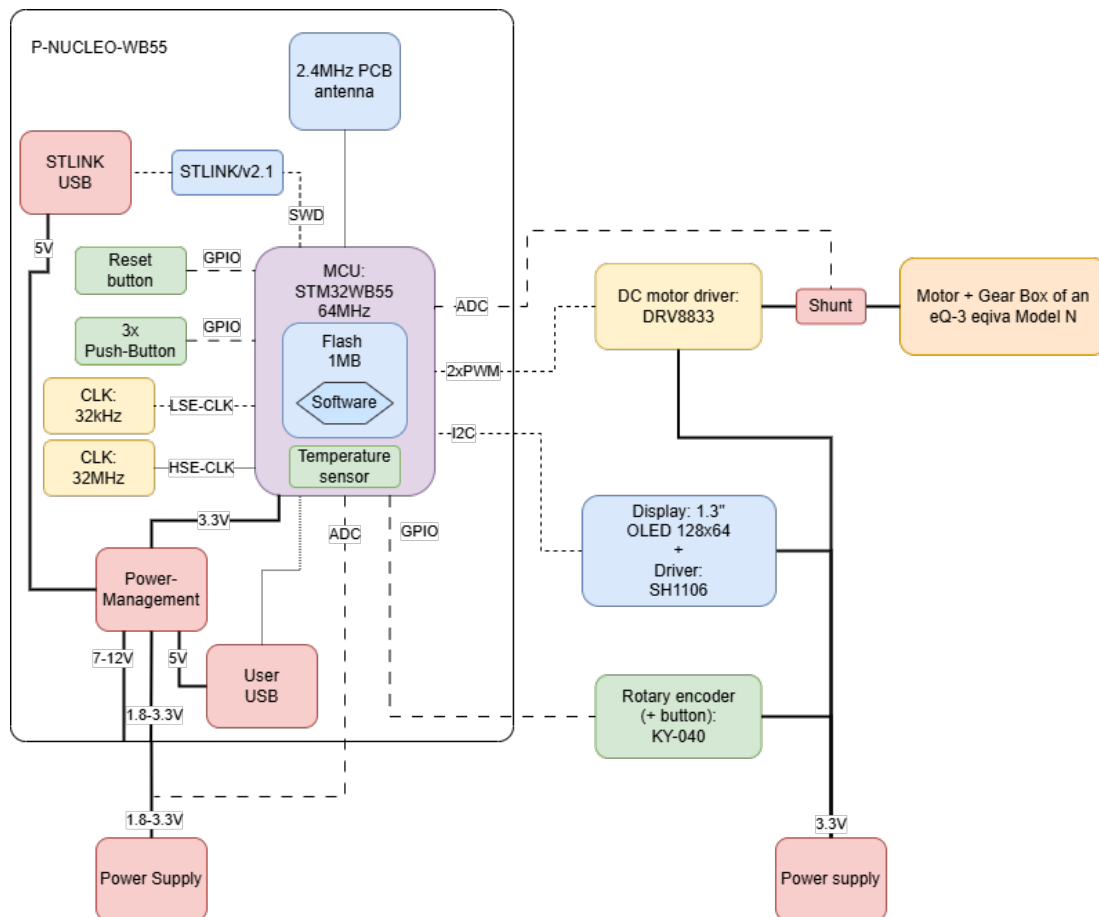


Figure 2.1: Hardware block diagram of the hardware set for software development and testing

## 3 Requirements

### 3.1 Functional Requirements

#### **REQ 1: Display**

The system shall integrate a 1.3" 128x64 OLED display with SH1106 controller over Inter-Integrated Circuit (I2C) protocol.

#### **REQ 2: Rotary Encoder**

The system shall integrate a rotary encoder KY-040 via General Purpose Inputs/Outputs (GPIOs).

#### **REQ 3: Buttons**

The system shall integrate SW1, SW2, and SW3 push buttons of the P-NUCLEO-WB55 via GPIOs.

#### **REQ 4: Motor Control**

The system shall support control of the eQ-3 eqiva Model N C300 3V motor through a DRV8833 motor driver module using two Pulse Width Modulation (PWM) signals.

#### **REQ 5: Motor Current Measurement**

The system shall measure the motor current consumption using an Analog-to-Digital Converter (ADC) channel connected to a shunt resistor in series with the motor circuit.

#### **REQ 6: Power Supply Voltage Measurement**

The system shall measure the power supply voltage using an ADC channel. The measured voltage shall be used to calculate the battery charge level as a percentage.

### REQ 7: Motor Extremes Definition

During the software development phase, the current extremes for the motor shall be defined to detect maximal and minimal valve pin positions. This definition shall be based on empirical measurements and analysis of the motor's current consumption during operation.

#### REQ 7.1: Pin Position Extremes Definition

After a successful adaptation procedure:

- Maximal valve pin position corresponds to the fully open valve position.
- Minimal valve pin position corresponds to the fully closed valve position.

### REQ 8: Configuration Routines

The system shall provide the following configuration routines for initial setup:

- **Configuration via App (CVA):** Automatic wireless configuration via Matter standard and/or Thread protocol.
- **Configuration on Device (COD):** Manual configuration via control wheel and buttons on the device without wireless connectivity.

The setup process shall be run after battery insertion if no complete configuration exists in persistent storage. Otherwise, the system shall resume normal operation with existing settings.

#### REQ 8.1: Prototype Configuration

In the prototype version of the thermostat's software, only the COD shall be fully supported. Wireless connectivity and the CVA shall not be implemented.

#### REQ 8.2: Configuration Routine Choice

The user shall be able to choose between the CVA ("Configuration via App") and COD ("Configuration on Device") before the initial setup process.



**REQ 8.3: Configuration Via App Blocking**

The system shall block access to the CVA in the prototype version of the thermostat software.

**REQ 9: Date and Time Configuration**

The system shall request date and time configuration as the first step in the COD or each time if no wireless connection is configured. The user shall be able to set the year, month, day, hour, and minute through the control wheel interface with confirmation capability via the control wheel button. After setting the date and time, the system shall ask whether the user wants to activate automatic summer/winter time switching.

**REQ 10: Installation Command**

The system shall wait for an installation begin command from the user as the second step in the COD. The text “Begin Installation?” shall be displayed. The user shall initiate the installation by pressing the control wheel button, which will start the valve adaptation procedure.

**REQ 11: Valve Adaptation**

The system shall perform an automatic adaptation run as the third step in the COD to detect and adapt to the specific valve characteristics. The adaptation procedure shall:

1. Display “Adaptation...” indicator page during the procedure.
2. Move the motor to the maximal pin position.
3. Move the motor to the minimal pin position.
4. Incrementally move the motor to the maximal pin position.
5. Calculate the valve stroke range.
6. Validate that the measured travel distance matches the expected 4.3 mm linear travel.
7. If valve characteristics are outside acceptable ranges, display the following error messages:

- **F1:** Valve drive sluggish (motor movement is impeded or extremely slow).
  - **F2:** Actuating range too wide (measured valve stroke exceeds expected parameters).
  - **F3:** Adjustment range too small (measured valve stroke is below acceptable minimum).
8. If an error occurs, allow reversal of the adaptation run by pressing the control wheel button, returning to the waiting state for the installation command.

### **REQ 12: Daily Schedule Configuration**

The system shall request daily schedule configuration as the fourth step in the COD. The user shall be able to set 3 time slots with corresponding target temperatures for the day using the control wheel interface with confirmation capability via the control wheel button. The first time slot shall always start at 00:00 and the last time slot shall always end at 23:59. After completing the daily schedule configuration, the system shall proceed to the main display page.

### **REQ 13: Main Display Page**

On the main display page, the system shall display at least the following information:

- Current time in hours and minutes.
- Current temperature.
- Target temperature.
- Current time slot.
- Operational mode indicator.
- Battery charge as a percentage.

**REQ 14: Operational Modes**

The system shall support the following operational modes:

- **Manual Mode:** The user can manually set the target temperature.
- **Auto Mode:** The system follows the heating program and sets the target temperature according to the current time slot.
- **Boost Mode:** Described in REQ 15.

**REQ 15: Switching Operational Modes**

The system shall allow switching between Manual Mode and Auto Mode using the SW2 button.

**REQ 16: Boost Mode**

The system shall provide a boost mode that immediately opens the heating valve to 80% for 5 minutes after pressing the control wheel button. The remaining time shall be displayed as a countdown in seconds. The function shall be deactivatable at any time by pressing the control wheel button.

**REQ 17: Temperature Range and Resolution**

In Manual Mode, the system shall allow setting target temperatures in the range of  $5.0^{\circ}\text{C}$  to  $30.0^{\circ}\text{C}$  in increments of  $0.5^{\circ}\text{C}$ . The system shall support the following special states:

- **OFF state:** When the user sets a target temperature below  $5.0^{\circ}\text{C}$ , the valve shall be fully closed.
- **ON state:** When the user sets a target temperature above  $30.0^{\circ}\text{C}$ , the valve shall be fully opened.

**REQ 18: Configuration Menu**

The system shall provide a configuration menu page accessible from the main display page by pressing SW1. The menu shall list the following configurable options:

- Temperature offset configuration.
- Inactivity timeout setting.
- Automatic descaling routine time.
- Factory reset function.

**REQ 19: Temperature Offset Configuration**

The system shall allow setting a temperature offset between  $-3.5^{\circ}\text{C}$  and  $+3.5^{\circ}\text{C}$  in increments of  $0.5^{\circ}\text{C}$ . The default value shall be  $0.0^{\circ}\text{C}$ . The offset shall be applied to the measured temperature to calculate the effective temperature.

**REQ 20: Inactivity Timeout**

If no user interactions occur for a default period of 30 seconds, the system shall turn the display off. The system shall return to the currently active page upon the next user interaction via any button.

**REQ 21: Automatic Summer/Winter Time Switching**

The system shall automatically switch between summer and winter time.

**REQ 22: Automatic Descaling Routine**

The system shall perform an automatic descaling routine once a week on Saturday at 12:00 to protect against calcification of the valve. The descaling procedure shall:

1. Display “Maintenance...” indicator page.
2. Ignore any user inputs during the routine.
3. Move the motor through its full stroke range at maximum speed.

The calcification protection routine shall continue running in all operational modes except Boost Mode. If Boost Mode is active, the system shall wait until it is deactivated before beginning the descaling routine.

#### **REQ 23: Persistent Settings Storage**

The system shall persist all user-configured settings in non-volatile memory. These settings shall survive battery removal and replacement.

#### **REQ 24: Factory Reset**

The system shall provide a factory reset function that clears all user settings and returns to default configuration. A confirmation prompt page (“Confirm Factory Reset?”) shall be displayed to prevent accidental data loss.

### **3.2 Non-Functional Requirements**

#### **REQ 25: Power Supply and Battery Life**

The system shall operate on two 1.5V LR6/mignon/AA alkaline batteries with an expected battery life of approximately 2 years.

#### **REQ 26: User Interface Responsiveness**

The system shall provide immediate visual feedback for all user interactions via the control wheel, SW1, and SW2 buttons, with display updates occurring within acceptable latency for user perception.

## 4 Planning

### 4.1 Time plan

The master project will presumably have the duration of 13 Calendar Weeks (CWs), which are divided into:

- CWs 44-45: Software requirements analysis.
- CW 46: Software architecture design.
- CW 47: Design of software interfaces.
- CW 48: Implementation and tests of software drivers.
- CWs 49-51: Implementation and tests of program logic.
- CWs 52-02: Paper writing.
- CWs 03-04: Final review and submission of the paper.

Each calendar week will approximately consist of  $\frac{150\text{h}}{13} \approx 11.5$  hours of work.

### 4.2 Responsibilities

The whole work will be carried out by Alexander Menzel. The advisor for this master project will be Prof. Dr. Uwe Werner.

E-Mails and questions should be answered within 2 working days by both parties. If any problems arise, the advisor has to be informed as soon as possible.

## Bibliography

- [1] eQ-3 AG, *Operating Manual BLUETOOTH® Smart Radiator Thermostat UK eqiva CC-RT-M-BLE-EQ*, May 2018.
- [2] Wikipedia contributors, *Matter (standard)* — *Wikipedia, the free encyclopedia*, [Online; accessed 28-October-2025], 2025. [Online]. Available: [https://en.wikipedia.org/w/index.php?title=Matter\\_\(standard\)&oldid=1318221979](https://en.wikipedia.org/w/index.php?title=Matter_(standard)&oldid=1318221979)

## List of Abbreviations

<b>CW</b>	Calendar Week
<b>MCU</b>	Micro Controller Unit
<b>PCB</b>	Printed Circuit Board
<b>API</b>	Application Programming Interface
<b>COD</b>	Configuration on Device
<b>CVA</b>	Configuration via App
<b>OLED</b>	Organic Light-Emitting Diode
<b>GPIO</b>	General Purpose Input/Output
<b>I2C</b>	Inter-Integrated Circuit
<b>PWM</b>	Pulse Width Modulation
<b>ADC</b>	Analog-to-Digital Converter