



Silicom Electronics logo

Usage guide for the vector logo rebuilt in September 2026 from the only supplied artwork, two small raster files. The mark and wordmark keep the original design; this package makes them sharp at any size and gives every surface the right version.

What changed from the old files

- **Arrow:** redrawn as a single clean outline with true corners.
- **SE monogram:** the standalone mark from the company-profile cover, rebuilt with smooth calligraphic strokes and continuous hairlines.
- **Wordmark:** reset in *Alegreya* (SIL Open Font License), the closest open typeface to the original lettering in a letter-by-letter comparison. Every letter keeps the original's position, height and width. Outlines are embedded in the files; no font needs to be installed.

Versions

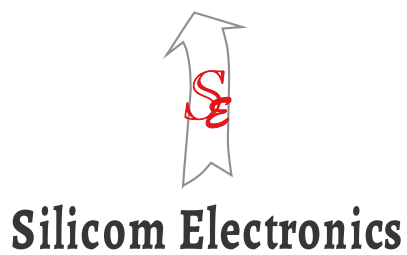

Version	Use it for
Primary (01-primary)	Default: website header, letterhead, documents, signage on light backgrounds.
Primary short	Tight horizontal spaces where "Pvt. Ltd." would be too small to read. Use the full name in legal and financial documents.
Reverse (02-reverse)	Navy or dark photography: website footer, dark slides, vehicle livery.
Mono black / white / blue (03-mono)	One-colour print, stamps, engraving, foil, embroidery, fax.
Stacked (04-stacked)	Square and narrow spaces: social profile images, merchandise, booth panels.
Symbol (05-symbol)	Where the name is already present or space is very small; app icons and avatars.
Favicon (06-favicon)	Browser tabs and home-screen icons. The favicon uses heavier strokes so it still reads at 16 px.

Clear space

Keep a margin of **X** on every side, where X is the height of the capital S in the wordmark. Nothing else (text, photos edges or other logos) should enter it.

X = cap height of the wordmark



Silicom Electronics Pvt. Ltd.

Minimum size

Version	Screen	Print
Primary	160 px wide	40 mm wide
Primary short	120 px wide	30 mm wide
Stacked	90 px wide	22 mm wide
Symbol	24 px tall (below this, use the favicon files)	10 mm tall
Embroidery	Use the mono symbol or mono stacked version at 25 mm or larger; the SE hairlines need at least 1 mm thread width.	

Colours

	Role	HEX	RGB	CMYK (approximate)
	SE monogram red	#E0161B	224 22 27	0 90 88 12
	Arrow grey	#8C9096	140 144 150	7 4 0 41
	Wordmark charcoal	#363636	54 54 54	0 0 0 79
	Silicom blue (mono version, website)	#0B6FD3	11 111 211	95 47 0 17
	Navy background (reverse)	#061A33	6 26 51	88 49 0 80
	Arrow on navy	#B9C6D6	185 198 214	14 7 0 16
	SE on navy	#FF4A4F	255 74 79	0 71 69 0

CMYK values are straight conversions. Ask your printer for a proof; for spot colour, match the red and grey against a physical Pantone swatch book.

Don't

- × Stretch, squash or rotate the logo.
- × Replace the wordmark with another typeface.
- × Add shadows, glows, bevels or gradients.
- × Use the old PNG logo files for print; they are low resolution.
- × Recolour it outside the versions in this package.
- × Rearrange the arrow, monogram and name.
- × Put the colour version on dark or busy backgrounds; use the reverse.
- × Draw the arrow filled in; it is always an outline.

Files

SVG is the master for every version. Use PDF for print, PNG (transparent, 256–2048 px wide) for slides and documents, and JPG (white background) for email signatures. The files are generated by `prototype/scripts/build-logo.py`; edit that script rather than the files. The Alegreya font licence is in `prototype/scripts/fonts/Alegreya-OFL.txt`.