



Mawlana Bhashani Science and Technology University

Lab-Report

Report No: 03

Course code: ICT-3207

Course title: Computer Networking Lab

Date of Performance:

Date of Submission:

Submitted by

Name: Ashikur Rahman Miran &
Rafiul Hasan

ID:IT-18014 & IT-18016

3rd year 2nd semester

Session: 2017-2018

Dept. of ICT

Submitted To

Nazrul Islam

Assistant Professor

Dept. of ICT

MBSTU.

Lab Report No.: 03

Lab Report Name: Python for Networking

Theory

Third-party libraries: Although the Python's standard library provides a great set of awesome functionalities, there will be times that you will eventually run into the need of making use of third party libraries. Can you imagine building a webserver from scratch? Or making a port to a database driver? Or, maybe, coming up with an image manipulation tool? Third party libraries are welcome in a way that they prevent you from reinventing the something that exist. They save you time to focus on finishing and delivering your application.

Networking Glossary: Before we begin discussing networking with any depth, we must define some common terms that you will see throughout this guide, and in other guides and documentation regarding networking.

- **Connection:** In networking, a connection refers to pieces of related information that are transferred through a network. This generally infers that a connection is built before the data transfer (by following the procedures laid out in a protocol) and then is deconstructed at the end of the data transfer.
- **Packet:** A packet is, generally speaking, the most basic unit that is transferred over a network. When communicating over a network, packets are the envelopes that carry your data (in pieces) from one end point to the other. Packets have a header portion that contains information about the packet including the source and destination, timestamps, network hops, etc. The main portion of a packet contains the actual data being transferred. It is sometimes called the body or the payload.
- **Network Interface:** A network interface can refer to any kind of software interface to networking hardware. For instance, if you have two network cards in your computer, you can control and configure each network interface associated with them individually. A network interface may be associated with a physical device, or it may be a representation of a virtual interface. The "loopback" device, which is a virtual interface to the local machine, is an example of this.

- **LAN:** LAN stands for "local area network". It refers to a network or a portion of a network that is not publicly accessible to the greater internet. A home or office network is an example of a LAN.
- **WAN:** WAN stands for "wide area network". It means a network that is much more extensive than a LAN. While WAN is the relevant term to use to describe large, dispersed networks in general, it is usually meant to mean the internet, as a whole. If an interface is said to be connected to the WAN, it is generally assumed that it is reachable through the internet.
- **Protocol:** A protocol is a set of rules and standards that basically define a language that devices can use to communicate. There are a great number of protocols in use extensively in networking, and they are often implemented in different layers. Some low level protocols are TCP, UDP, IP, and ICMP. Some familiar examples of application layer protocols, built on these lower protocols, are HTTP (for accessing web content), SSH, TLS/SSL, and FTP. **Port:** A port is an address on a single machine that can be tied to a specific piece of software. It is not a physical interface or location, but it allows your server to be able to communicate using more than one application.
- **Firewall:** A firewall is a program that decides whether traffic coming into a server or going out should be allowed. A firewall usually works by creating rules for which type of traffic is acceptable on which ports. Generally, firewalls block ports that are not used by a specific application on a server.
- **NAT:** NAT stands for network address translation. It is a way to translate requests that are incoming into a routing server to the relevant devices or servers that it knows about in the LAN. This is usually implemented in physical LANs as a way to route requests through one IP address to the necessary backend servers.
- **VPN:** VPN stands for virtual private network. It is a means of connecting separate LANs through the internet, while maintaining privacy. This is used as a means of connecting remote systems as if they were on a local network, often for security reasons.
- **Interfaces:** Interfaces are networking communication points for your computer. Each interface is associated with a physical or virtual networking device. Typically, your server will have one configurable network interface for each Ethernet or wireless internet card you have. In addition, it will define a virtual network interface called the "loopback" or localhost interface. This

is used as an interface to connect applications and processes on a single computer to other applications and processes. You can see this referenced as the "lo" interface in many tools. Many times, administrators configure one interface to service traffic to the internet and another interface for a LAN or private network.

- **Protocols:** Networking works by piggybacking a number of different protocols on top of each other. In this way, one piece of data can be transmitted using multiple protocols encapsulated within one another. We will talk about some of the more common protocols that you may come across and attempt to explain the difference, as well as give context as to what part of the process they are involved with. We will start with protocols implemented on the lower networking layers and work our way up to protocols with higher abstraction.

Exercise:

Exercise 4.1: Enumerating interfaces on your machine

Code:

```
import sys
import socket
import fcntl
import struct
import array
SIOCGIFCONF = 0x8912
STUCT_SIZE_32 = 32
STUCT_SIZE_64 = 40
PLATFORM_32_MAX_NUMBER = 2 ** 32
DEFAULT_INTERFACES = 8
def list_interfaces():
    interfaces = []
    max_interfaces = DEFAULT_INTERFACES
    is_64bits = sys.maxsize > PLATFORM_32_MAX_NUMBER
    struct_size = STUCT_SIZE_64 if is_64bits else STUCT_SIZE_32
    sock = socket.socket(socket.AF_INET, socket.SOCK_DGRAM)
    while True:
        bytes = max_interfaces * struct_size
        interface_names = array.array('B', '\0' * bytes)
        sock_info = fcntl.ioctl(sock.fileno(), SIOCGIFCONF, struct.pack('iL', bytes, interface_names.buffer_info()[0]))
        outbytes = struct.unpack('iL', sock_info)[0]
```

```

        if outbytes == bytes:
            max_interfaces *= 2
        else:
            break
    namestr = interface_names.tostring()
    for i in range(0, outbytes, struct_size):
        interfaces.append((namestr[i:i + 16].split('\0', 1)[0]))
    return interfaces
interfaces = list_interfaces()
print(f"This machine has {len(interfaces)} network interfaces: {interfaces}.")

```

Output:

```
This machine has 2 network interfaces: ['lo', 'eth0'].
```

Exercise 4.2: Finding the IP address for a specific interface on your machine

Code:

```

import argparse
import sys
import socket
import fcntl
import struct
import array

def get_ip_address(ifname):
    s = socket.socket(socket.AF_INET, socket.SOCK_DGRAM)
    return socket.inet_ntoa(fcntl.ioctl(s.fileno(), 0x8915, struct.pack('256s', if-
name[:15]))[20:24])

if __name__ == '__main__':
    parser = argparse.ArgumentParser(description='Python networking utils')
    parser.add_argument('--ifname', action="store", dest="ifname",
required=True)
    given_args = parser.parse_args()
    ifname = given_args.ifname
    print ("Interface [%s] --> IP: %s" %(ifname, get_ip_address(ifname)))

```

Output:

```
Interface [eth0] --> IP: 10.0.2.15
```

Exercise 4.3: Finding whether an interface is up on your machine

Code:

```

import argparse
import socket
import struct
import fcntl
import nmap
SAMPLE_PORTS = '21-23'
def get_interface_status(ifname):
    sock = socket.socket(socket.AF_INET, socket.SOCK_DGRAM)
    ip_ad-
dress = socket.inet_ntoa(fcntl.ioctl(sock.fileno(),0x8915,struct.pack('256s', if-
name[:15]))[20:24])
    nm = nmap.PortScanner()
    nm.scan(ip_address, SAMPLE_PORTS)
    return nm[ip_address].state()

if __name__ == '__main__':
    parser = argparse.ArgumentParser(description='Python networking utils')
    parser.add_argument('--ifname', action="store", dest="ifname",required=True)
    given_args = parser.parse_args()
    ifname = given_args.ifname
    print ("Interface [%s] is: %s" %(ifname, get_interface_status(ifname)))

```

Output:

Interface [eth0] is: up

Exercise 4.4: Detecting inactive machines on your network

Code:

```

import argparse
import time
import sched
from scapy.layers.inet import sr, srp, IP, UDP, ICMP, TCP, ARP, Ether
RUN_FREQUENCY = 10
scheduler = sched.scheduler(time.time, time.sleep)
def detect_inactive_hosts(scan_hosts):
    global scheduler
    scheduler.enter(RUN_FREQUENCY, 1, detect_inactive_hosts, (scan_hosts, ))
    inactive_hosts = []
    try:
        ans, unans = sr(IP(dst=scan_hosts)/ICMP(), retry=0, timeout=1)
        ans.summary(lambda(sr):r.sprintf("%IP.src% is alive"))
        for inactive in unans:
            print ("%s is inactive" %inactive.dst)

```

```

        inactive_hosts.append(inactive.dst)
        print ("Total %d hosts are inactive" %(len(inactive_hosts)))
    except KeyboardInterrupt:
        exit(0)
if __name__ == "__main__":
    parser = argparse.ArgumentParser(description='Python networking utils')
    parser.add_argument('--scan-hosts', action="store", dest="scan_hosts", required=True)
    given_args = parser.parse_args()
    scan_hosts = given_args.scan_hosts
    scheduler.enter(1, 1, detect_inactive_hosts, (scan_hosts, ))
    scheduler.run()

```

Output:

```

$ sudo python 3_7_detect_inactive_machines.py --scan-hosts=10.0.2.2-4
Begin emission:
.*...Finished to send 3 packets.
.
Received 6 packets, got 1 answers, remaining 2 packets
10.0.2.2 is alive
10.0.2.4 is inactive
10.0.2.3 is inactive
Total 2 hosts are inactive
Begin emission:
*.Finished to send 3 packets.
Received 3 packets, got 1 answers, remaining 2 packets
10.0.2.2 is alive
10.0.2.4 is inactive
10.0.2.3 is inactive
Total 2 hosts are inactive

```

Exercise 4.5: Pinging hosts on the network with ICMP

Code:

```

import os
import argparse
import socket
import struct
import select
import time
ICMP_ECHO_REQUEST = 8
DEFAULT_TIMEOUT = 2
DEFAULT_COUNT = 4
class Pinger(object):
    def __init__(self, target_host, count=DEFAULT_COUNT, timeout=DEFAULT_TIMEOUT):

```

```

        self.target_host = target_host
        self.count = count
        self.timeout = timeout
    def do_checksum(self, source_string):
        sum = 0
        max_count = (len(source_string)/2)*2
        count = 0
        while count < max_count:
            val = ord(source_string[count + 1])*256 +ord(source_string[count])
            sum = sum + val
            sum = sum & 0xffffffff
            count = count + 2
        if max_count<len(source_string):
            sum = sum + ord(source_string[len(source_string) - 1])
            sum = sum & 0xffffffff
        sum = (sum >> 16) + (sum & 0xffff)
        sum = sum + (sum >> 16)
        answer = ~sum
        answer = answer & 0xffff
        answer = answer >> 8 | (answer << 8 & 0xff00)
        return answer
    def receive_pong(self, sock, ID, timeout):
        time_remaining = timeout
        while True:
            start_time = time.time()
            readable = select.select([sock], [], [], time_remaining)
            time_spent = (time.time() - start_time)
            if readable[0] == []:
                return
            time_received = time.time()
            recv_packet, addr = sock.recvfrom(1024)
            icmp_header = recv_packet[20:28]
            type, code, checksum, packet_ID, sequence = struct.unpack("bbHHh", icmp_header)
            if packet_ID == ID:
                bytes_In_double = struct.calcsize("d")
                time_sent = struct.unpack("d", recv_packet[28:28 +bytes_In_double])[0]

                return time_received - time_sent
            time_remaining = time_remaining - time_spent
            if time_remaining <= 0:
                return
    def send_ping(self, sock, ID):
        target_addr = socket.gethostbyname(self.target_host)
        my_checksum = 0

```



```

        header = struct.pack("bbHHh", ICMP_ECHO_REQUEST, 0, my_checksum, ID, 1)
        bytes_in_double = struct.calcsize("d")
        data = (192 - bytes_in_double) * "Q"
        data = struct.pack("d", time.time()) + data
        my_checksum = self.do_checksum(header + data)
        header = struct.pack("bbHHh", ICMP_ECHO_RE-
QUEST, 0, socket.htons(my_checksum), ID, 1)
        packet = header + data
        sock.sendto(packet, (target_addr, 1))
    def ping_once(self):
        icmp = socket.getprotobyname("icmp")
        try:
            sock = socket.socket(socket.AF_INET, socket.SOCK_RAW, icmp)
        except socket.error, (errno, msg):
            if errno == 1:
                msg += "ICMP messages can only be sent from root user processes"
                raise socket.error(msg)
        except Exception, e:
            print "Exception: %s" % (e)
        my_ID = os.getpid() & 0xFFFF
        self.send_ping(sock, my_ID)
        delay = self.receive_pong(sock, my_ID, self.timeout)
        sock.close()
        return delay
    def ping(self):
        for i in xrange(self.count):
            print "Ping to %s..." % self.target_host,
            try:
                delay = self.ping_once()
            except socket.gaierror, e:
                print "Ping failed. (socket error: '%s')" % e[1]
                break
            if delay == None:
                print "Ping failed. (timeout within %ssec.)" % self.timeout
            else:
                delay = delay * 1000
                print "Get pong in %0.4fms" % delay
if __name__ == '__main__':
    parser = argparse.ArgumentParser(description='Python ping')
    parser.add_argument('--target-host', action="store", dest="target_host", re-
quired=True)
    given_args = parser.parse_args()
    target_host = given_args.target_host
    pinger = Pinger(target_host=target_host)
    pinger.ping()

```

Output:

```
$ sudo python 3_2_ping_remote_host.py --target-host=www.google.com
Ping to www.google.com... Get pong in 7.6921ms
Ping to www.google.com... Get pong in 7.1061ms
Ping to www.google.com... Get pong in 8.9211ms
Ping to www.google.com... Get pong in 7.9899ms
```

Exercise 4.6: Pinging hosts on the network with ICMP using pc resources

Code:

```
import subprocess
import shlex
command_line = "ping -c 1 10.0.1.135"
if __name__ == '__main__':
    args = shlex.split(command_line)
    try:
        subprocess.check_call(args, stdout=subprocess.PIPE, stderr=subprocess.PIPE)
        print("Your pc is up!")
    except subprocess.CalledProcessError:
        print("Failed to get ping.")
```

Output:

```
miran@Miran-Inspiron-5570: /media/miran/New Volume/programming/python/practice/lab$ /usr/bin/python3.8 "/media/miran/New Volume/programming/python/practice/lab/4.6.py"
Failed to get ping.
miran@Miran-Inspiron-5570: /media/miran/New Volume/programming/python/practice/lab$
```

Exercise 4.7: Scanning the broadcast of packets

Code:

```
from scapy import all
from scapy.layers.inet import sr, srp, IP, UDP, ICMP, TCP, ARP, Ether, sniff
captured_data = dict()
END_PORT = 1000
def monitor_packet(pkt):
    if IP in pkt:
        if not captured_data.has_key(pkt[IP].src):
            captured_data[pkt[IP].src] = []
    if TCP in pkt:
        if pkt[TCP].sport <= END_PORT:
            if not str(pkt[TCP].sport) in captured_data[pkt[IP].src]:
```

```

        captured_data[pkt[IP].src].append(str(pkt[TCP].sport))
    os.system('clear')
    ip_list = sorted(captured_data.keys())
    for key in ip_list:
        ports=', '.join(captured_data[key])
        if len(captured_data[key]) == 0:
            print('%s' % key)
        else:
            print('%s (%s)' % (key, ports))
if __name__ == '__main__':
    sniff(prn=monitor_packet, store=0)

```


Output:

```

10.0.2.15
XXX.194.41.129 (80)
XXX.194.41.134 (80)
XXX.194.41.136 (443)
XXX.194.41.140 (80)
XXX.194.67.147 (80)
XXX.194.67.94 (443)
XXX.194.67.95 (80, 443)

```

Exercise 4.8: Sniffing packets on your network

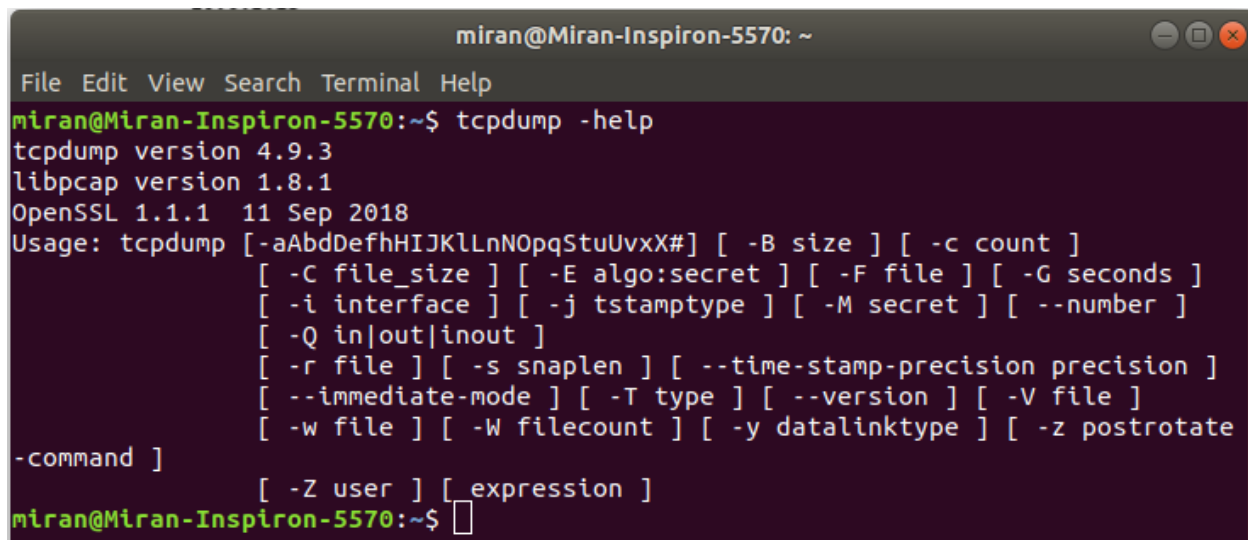

```

miran@Miran-Inspiron-5570: ~
File Edit View Search Terminal Help
miran@Miran-Inspiron-5570:~$ tcpdump -help
tcpdump version 4.9.3
libpcap version 1.8.1
OpenSSL 1.1.1 11 Sep 2018
Usage: tcpdump [-aAbDfhHIJKLlNOpqStuUvXx#] [-B size] [-c count]
               [-C file_size] [-E algo:secret] [-F file] [-G seconds]
               [-i interface] [-j tstamptype] [-M secret] [--number]
               [-Q in|out|inout]
               [-r file] [-s snaplen] [--time-stamp-precision precision]
               [--immediate-mode] [-T type] [--version] [-V file]
               [-w file] [-W filecount] [-y datalinktype] [-z postrotate
-command ]
               [-Z user] [expression]
miran@Miran-Inspiron-5570:~$

```

Conclusion: There are two levels of network service access in Python. These are:

- Low-Level Access
- High-Level Access

In the first case, programmers can use and access the basic socket support for the operating system using Python's libraries, and programmers can implement both connection-less and connection-oriented protocols for programming.

Application-level network protocols can also be accessed using high-level access provided by Python libraries. These protocols are HTTP, FTP, etc. A socket is the end-point in a flow of communication between two programs or communication channels operating over a network. They are created using a set of programming requests called socket API (Application Programming Interface). Python's socket library offers classes for handling common transports as a generic interface. Sockets use protocols for determining the connection type for port-to-port communication between client and server machines. The protocols are used for:

- Domain Name Servers (DNS)
- IP addressing
- E-mail
- FTP (File Transfer Protocol) etc...

Python has a socket method that let programmers' set-up different types of socket virtually. After you defined the socket, you can use several methods to manage the connections. Some of the important server socket methods are:

- **listen():** is used to establish and start TCP listener.
- **bind():** is used to bind-address (host-name, port number) to the socket.
- **accept():** is used to TCP client connection until the connection arrives.
- **connect():** is used to initiate TCP server connection.
- **send():** is used to send TCP messages.
- **recv():** is used to receive TCP messages.
- **sendto():** is used to send UDP messages
- **close():** is used to close a socket.

Sending messages back and forth using different basic protocols is simple and straightforward. It shows that programming takes a significant role in client-server architecture where the client makes data request to a server, and the server replies to those machines.