### MHz RANGE CRYSTAL UNIT

# **FA-128**

•Nominal frequency range 16 MHz to 54 MHz  $2.0 \times 1.6 \times 0.5 \text{ mm}$  External dimensions Overtone order : Fundamental

: Mobile phone, Bluetooth, W-LAN Applications

ISM band radio, Clock for MPU



### Specifications (characteristics)

Item	Symbol	Specifications		One ditions / Demander
		For RF Reference	For Clock	Conditions / Remarks
Nominal frequency range	f nom	16.000 MHz to 54.000 MHz		Fundamental
				Please contact us about available frequencies.
Storage temperature range	T_stg	-40 °C to +125 °C		Storage as single product.
Operating temperature range	T_use	-40 °C to +85 °C (+105 °C)		Please contact us about +85 °C < T_use
Level of drive	DL	100 μW Max.	200 μW Max.	Recommended: 1 to 100 μW
Frequency tolerance	f tol	±10 × 10 <sup>-6</sup> *1	±30 × 10 <sup>-6</sup>	+25 °C, please contact us for requirements
(standard)	1_101	±10 × 10 ° *1		not listed in this specification.
Frequency versus		em ±10 × 10 <sup>-6</sup> *1	±30 × 10 <sup>-6</sup>	-20 °C to +75 °C, please contact us for
temperature characteristics.	f_tem			requirements not listed in this specification.
(standard)				requirements not listed in this specification.
Load capacitance	CL	6 pF to ∞		Please specify.
Motional resistance (ESR)	R1	As per table below		-20 °C to +75 °C
Frequency aging	f_age	$\pm 1 \times 10^{-6}$ / year Max.	$\pm 5 \times 10^{-6}$ / year Max.	+25 °C, First year

<sup>\*1</sup> Please contact us for available frequency tolerances as they are dependent upon the nominal frequency.

### Motional resistance (ESR)


Frequency	Motional resistance
16.0 MHz ≤ f_nom < 18.0 MHz	200 Ω Max.
18.0 MHz ≤ f_nom < 20.0 MHz	150 Ω Max.
20.0 MHz ≤ f_nom < 24.0 MHz	100 Ω Max.
24.0 MHz ≤ f_nom < 26.0 MHz	80 Ω Max.
26.0 MHz ≤ f nom ≤ 54.0 MHz	60 Ω Max.


Product name (Standard form) <u>FA-128</u> <u>24.000000MHz</u> <u>12.0</u> <u>+10.0-10.0</u> 1 (2) (3) 4

and operating temperature range in case of inquiry.

③Load capacitance(pF) ④ Frequency tolerance(x 10<sup>-6</sup>, +25 °C) ①Model ②Frequency In addition to the above mentioned specification item, please specify frequency temperature characteristics

External dimensions (Unit:mm)

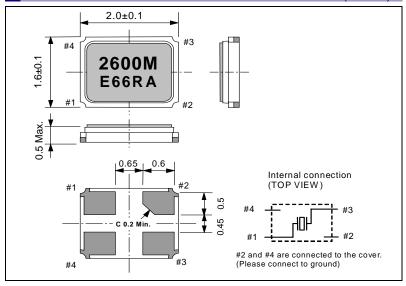

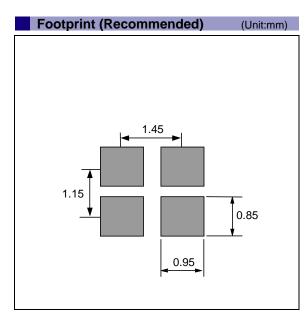

# PROMOTION OF ENVIRONMENTAL MANAGEMENT SYSTEM CONFORMING TO INTERNATIONAL STANDARDS

At Seiko Epson, all environmental initiatives operate under the Plan-Do-Check-Action (PDCA) cycle designed to achieve continuous improvements. The environmental management system (EMS) operates under the ISO 14001 environmental management standard.

All of our major manufacturing and non-manufacturing sites, in Japan and overseas, completed the acquisition of ISO 14001 certification.

ISO 14000 is an international standard for environmental management that was established by the International Standards Organization in 1996 against the background of growing concern regarding global warming, destruction of the ozone layer, and global deforestation.

#### **WORKING FOR HIGH QUALITY**

In order provide high quality and reliable products and services than meet customer needs.

Seiko Epson made early efforts towards obtaining ISO9000 series certification and has acquired ISO9001 for all business establishments in Japan and abroad. We have also acquired ISO/TS 16949 certification that is requested strongly by major automotive manufacturers as standard.

ISO/TS16949 is the international standard that added the sector-specific supplemental requirements for automotive industry based on ISO9001.

Explanation of the mark that are using it for the catalog



►Pb free.



- ► Complies with EU RoHS directive.
  - \*About the products without the Pb-free mark.

    Contains Pb in products exempted by EU RoHS directive.

    (Contains Pb in sealing glass, high melting temperature type solder or other.)



▶ Designed for automotive applications such as Car Multimedia, Body Electronics, Remote Keyless Entry etc.



▶ Designed for automotive applications related to driving safety (Engine Control Unit, Air Bag, ESC etc.).

## **Notice**

- This material is subject to change without notice.
- Any part of this material may not be reproduced or duplicated in any form or any means without the written permission of Seiko Epson.
- The information about applied data, circuitry, software, usage, etc. written in this material is intended for reference only. Seiko Epson
  does not assume any liability for the occurrence of customer damage or infringing on any patent or copyright of a third party. This
  material does not authorize the licensing for any patent or intellectual copyrights.
- When exporting the products or technology described in this material, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
- You are requested not to use the products (and any technical information furnished, if any) for the development and/or manufacture of weapon of mass destruction or for other military purposes. You are also requested that you would not make the products available to any third party who may use the products for such prohibited purposes.
- These products are intended for general use in electronic equipment. When using them in specific applications that require extremely high reliability, such as the applications stated below, you must obtain permission from Seiko Epson in advance.
  - / Space equipment (artificial satellites, rockets, etc.) / Transportation vehicles and related (automobiles, aircraft, trains, vessels, etc.) / Medical instruments to sustain life / Submarine transmitters / Power stations and related / Fire work equipment and security equipment / traffic control equipment / and others requiring equivalent reliability.
- All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective.

### **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

### Epson:

FA-128 32.0000MF20X-K3 FA-128 48.0000MF20X-K0 FA-128 24.0000MF10Z-W3 FA-128 25.0000MF10Z-AC FA-128 25.0000MF20X-K0 FA-128 26.0000MF10Z-AC3 FA-128 26.0000MF10Z-W FA-128 26.0000MF10Z-W3 FA-128 31.2500MF20X-K0 FA-128 32.0000MD30Z-C3 FA-128 32.0000MF10Z-W3 FA-128 40.0000MB30Z-AJ3 FA-128 40.0000MF10Z-K3 FA-128 40.0000MF20X-K0 FA-128 48.0000MB30Z-AJ3 FA-128 48.0000MD20X-B FA-128 48.0000MF20X-K FA-128 32.0000MF09Z-AC3 FA-128 26.0000MF10Z-E3 FA-128 32.0000MF10Z-AJ3 FA-128S 19.2000MF12Y-AG3 FA-128 16.0000MF20X-AJ FA-128 16.0000MF20X-AJ3 FA-128 25.0000MD20X-E3 FA-128 16.0000MF20X-AJ0 FA-128 25.0000MF10Z-AC3 FA-128 30.0000MF20X-AC FA-128 32.0000MF10Z-AJ5 FA-128 32.0000MF20X-K FA-128 25.0000MF10Z-K FA-128 25.0000MF10Z-K3 FA-128 32.0000MA20Z-K FA-128 32.0000MF10Z-AJ0 FA-128 24.0000MB-W FA-128 24.0000MB-W0 FA-128 24.0000MA25V-AJ FA-128 16.0000MF10Z-W FA-128 16.0000MF10Z-K FA-128 24.0000MD30X-K FA-128 24.0000MF10Z-W0 FA-128 27.1200MD30Z-K FA-128 27.1200MF10Z-K0 FA-128 24.0000MF10Z-K FA-128 24.0000MF10Z-W5 FA-128 27.1200MD30Y-E FA-128 27.1200MF10Z-K FA-128 27.1200MF10Z-K3 FA-128 32.0000MF20X-K5 FA-128 26.0000MF10Z-AC FA-128 27.1200MD30Z-K5 FA-128 27.1200MF20X-K3 FA-128 32.0000MF10Z-AG FA-128 32.0000MF10Z-K5 FA-128 32.0000MF20X-K0 FA-128 27.1200ME15X-AJ3 FA-128 38.4000MF10Z-K FA-128 25.0000MF20X-K FA-128 25.0000MF20X-W3 FA-128 32.0000MF20X-W FA-128 24.0000MD30Z-C FA-128 32.0000MF20X-AJ FA-128 32.0000MF20X-AJ3 FA-128 32.0000MF20X-AJ5 FA-128 38.4000MF10Z-K3 FA-128 24.0000MF10Z-AC FA-128 25.0000MD30X-C FA-128 38.4000MF10Z-K0 FA-128 48.0000MF20X-K3 FA-128 16.0000MF10Z-AC3 FA-128 27.1200ME15P-AJ0 FA-128 27.1200ME15R-AJ FA-128 32.0000MF10Z-W FA-128 32.0000MF10Z-AJ FA-128 24.0000ME20X-K FA-128 24.0000ME20X-K5 FA-128 26.0000MF10P-K5 FA-128 26.0000MF20X-K3 FA-128 27.1200ME15X-AJ0 FA-128 40.0000MF10Z-AJ FA-128 50.0000MF10Z-AG3 FA-128 35.3280MF15X-AG3 FA-128 19.2000MF10Z-W0 FA-128 24.0000MD30X-K0 FA-128 27.1200MD30Z-K0 FA-128 25.0000MD30Z-K3 FA-128 26.0000MF10Z-W5 FA-128 26.0000MF20X-K FA-128 27.0000MF10Z-AC FA-128 37.4000MF10Z-C5 FA-128 38.4000MF12CC-AG0 FA-128 26.0000MF10Z-K FA-128 27.0000MF18X-AJ FA-128 40.0000MF20X-K FA-128 48.000000M-70689N22R3 FA-128 24.0000MF10Z-AJ3 FA-128 25.0000MD30Z-AJ FA-128S 38.4000MF12Y-AGX FA-128S 38.40M-70AAYYH50REX FA-128 48.0000MF10Y-KX FA-128 48.0000MF15X-AG