





IHLE HIGH CURRENT INDUCTORS

WITH INTEGRATED E-FIELD SHIELD

Reduced noise

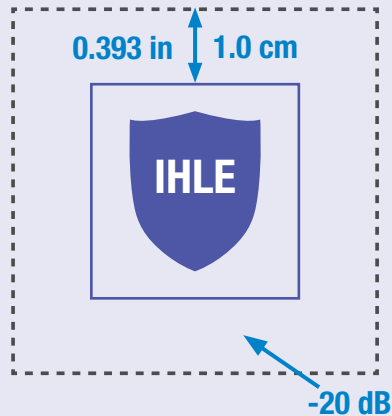

ELECTROMAGNETIC FIELD STRENGTH VS. DISTANCE FROM INDUCTOR

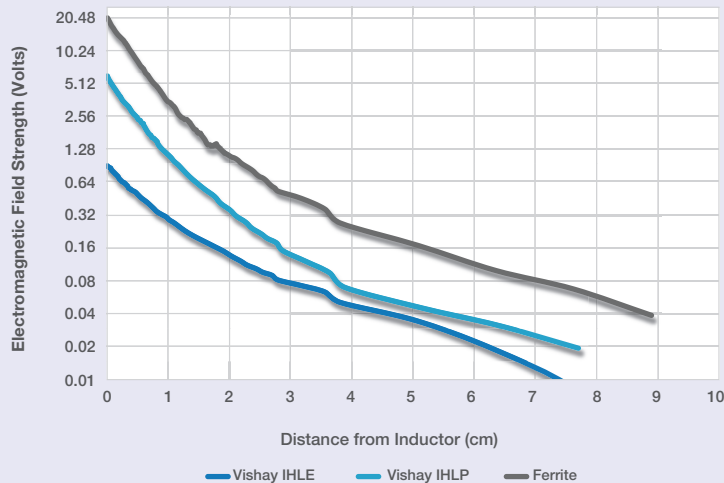


High temperature operation to **+155 °C**



Compact size with **no additional** external **EMI shielding** required



APPLICATIONS



FOOTPRINT AND PROFILE CAPABILITY

| IHLE-2525 | IHLE-3232 | IHLE-4040 | IHLE-5050 |
|-----------|-----------|-----------|-----------|
| | | | |
| | | | |
| 3.4 mm | 4.4 mm | 4.4 mm | 6.8 mm |

Shown at actual size
(when viewed or printed at 100 %)