


NOTE: SITE ACCESS ROCK SHAKER PADS SHOULD BE TURNED OVER AT REGULAR INTERVALS TO DESILT AND REMAIN EFFECTIVE

ESC LEGEND:


ROCK PAD CONSTRUCTION ENTRANCE TO IECA STD. DRG. EXIT-01



SEDIMENT FENCE TO IECA STD. DRGS. SF-1 AND SF-02



DIVERSION BUND REFER DETAIL ON DR-05



ROCK FILTER DAM WITH ENERGY DISSIPATION APRON REFER DR-05 FOR DETAILS



LEGEND

- EXISTING PROPERTY BOUNDARY
- EXISTING CONTOUR MAJOR
- EXISTING CONTOUR MINOR
- EXISTING ELECTRICITY
- EXISTING ELECTRICITY (UNDERGROUND)
- EXISTING ELECTRICITY (HIGH VOLTAGE)
- EXISTING WATER
- EXISTING RECYCLE WATER
- EXISTING IRRIGATION
- EXISTING STORMWATER
- EXISTING SEWER MAIN
- EXISTING SEWER MAIN (RAISING MAIN)
- EXISTING COMMUNICATION

INSTALL SEDIMENT FENCE ADJACENT TO TOE OF PROPOSED BATTER PRIOR TO TOPSOIL STRIP. LOCATION SHOWN INDICATIVELY, EXACT LOCATIONS DETERMINE ON SITE BY SITE ENGINEER WHERE DISTURBED AREAS GRADE OFF SITE

DIVERSION BUND INSTALLED DURING EARLY EARTHWORKS. BUNDS MUST BE IN PLACE PRIOR TO FORECAST RAIN EVENTS LIKELY TO RESULT IN RUN OFF.

INSTALL GULLY SEDIMENT INLET PROTECTION TO EXTERNAL ROAD STORMWATER PITS (TYP.)

ENSURE EXTERNAL ROADWAY IS SWEEP CLEAN OF DIRT FROM SITE VEHICLES AT ALL TIMES DURING CONSTRUCTION

SITE ACCESS ROCK PAD WITH CATTLE GRID. EXACT LOCATION DETERMINED BY SITE ENGINEER


ROCK FILTER DAM TO BE LOCATED AT THE BOTTOM OF THE PROPOSED EARTHWORKS BATTER BETWEEN PROPOSED STORMWATER QUALITY TREATMENT DEVICE AND TRANSFORMER PAD SO THAT THE FILTER DAM CAN REMAIN IN PLACE WHILE THE TREATMENT DEVICE AND PAD ARE CONSTRUCTED

SITE ENGINEER TO DETERMINE IF SECONDARY ENTRANCE / EXIT ROCK SHAKER PAD IS NEEDED AND INSTALL AS REQUIRED


PLACE SIGNAGE / FENCING TO ENSURE THAT ALL SITE VEHICLES EXIT VIA THE ROCK SHAKER PAD

NOTE: STOCKPILE LOCATIONS TO BE DETERMINED BY SITE ENGINEER. TYPICALLY STOCKPILES SHOULD HAVE A MINIMUM SET BACK OF 20m FROM DRAINAGE LINE / WATER BODY. STOCKPILES TO HAVE UPSLOPE DIVERSION BUND AND DOWN SLOPE SEDIMENT FENCE AS A MINIMUM. LONG TERM STOCKPILES (GREATER THAN 28 DAYS, SHOULD CONSIDER STABILISATION (POLYMER BINDER OR SIMILAR) TO REDUCE DUST AND EROSION ISSUES

LAYOUT PLAN



ORIGINAL DRAWINGS PROVIDED BY NORTHROP CONSULTING ENGINEERS

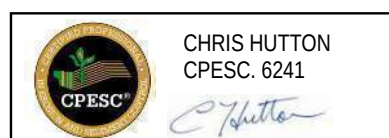

CHRIS HUTTON
CPESC. 6241



89 CASLICK LANE,
BROADWATER, QLD.
PH: (MOB) 0400 643 883

APPROVED
DATE
26-05-2026
CHRIS HUTTON - CPESC No. 6241

CLIENT
NORTHROP CONSULTING ENGINEERS
PROJECT
SKYGATE PLAY
LOCATION
LOT SKG26, THE CIRCUIT, BRISBANE AIRPORT
DRAWING TITLE
EROSION AND SEDIMENT CONTROL - TOPSOIL STRIP EARLY EARTHWORKS PHASE

JOB No.
ESC-0606
DRAWING No. / REVISION
DR-03 / b