




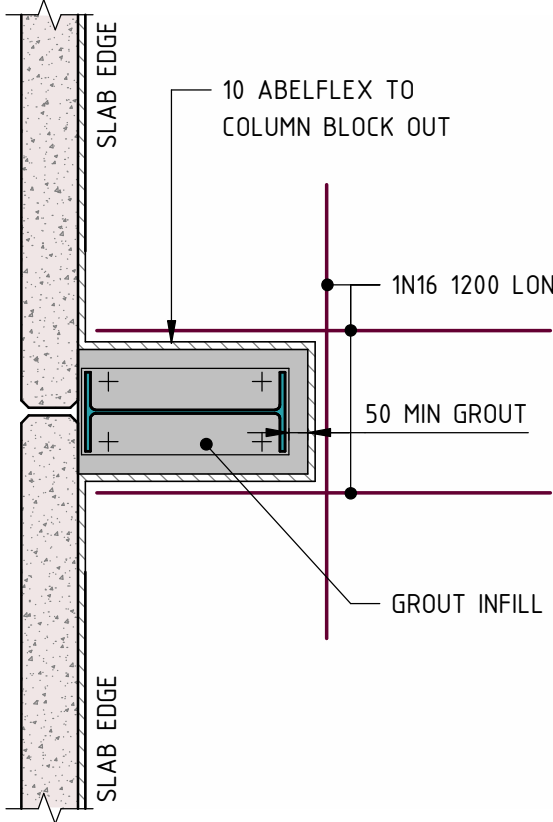


EDGE UB/UC COLUMN
ENCAPSULATE COLUMN AND BASE
PLATE IN 50 MIN NON SHRINK GROUT

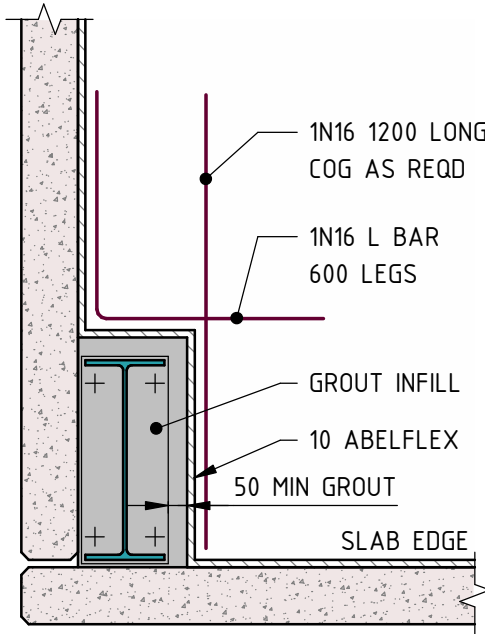


CORNER UB/UC COLUMN
ENCAPSULATE COLUMN AND BASE
PLATE IN 50 MIN NON SHRINK GROUT

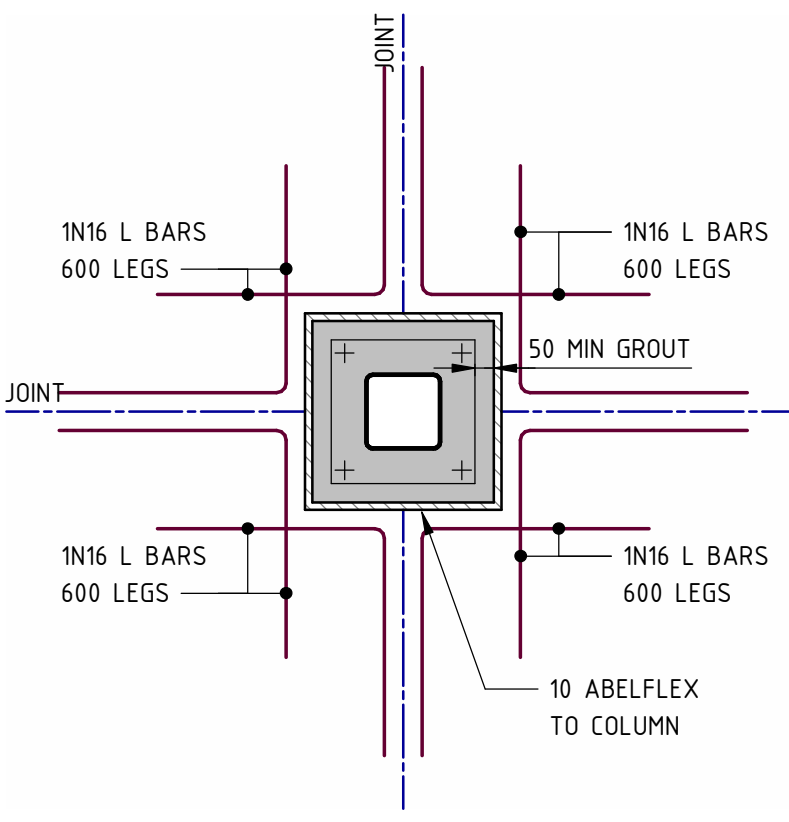


INTERNAL SHS COLUMN JOINT INTERSECTION
ENCAPSULATE COLUMN AND BASE PLATE IN 50 MIN NON
SHRINK GROUT

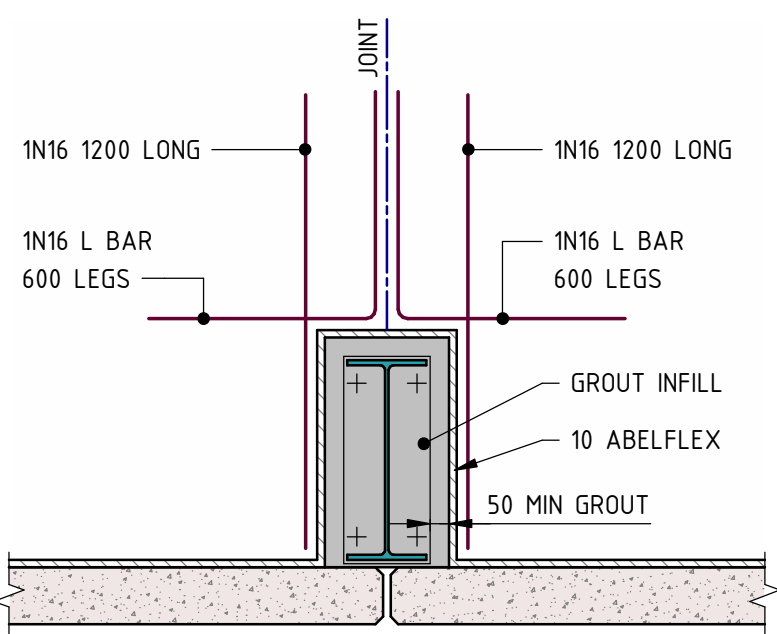


EDGE UB/UC COLUMN AT JOINT
ENCAPSULATE COLUMN AND BASE
PLATE IN 50 MIN NON SHRINK GROUT

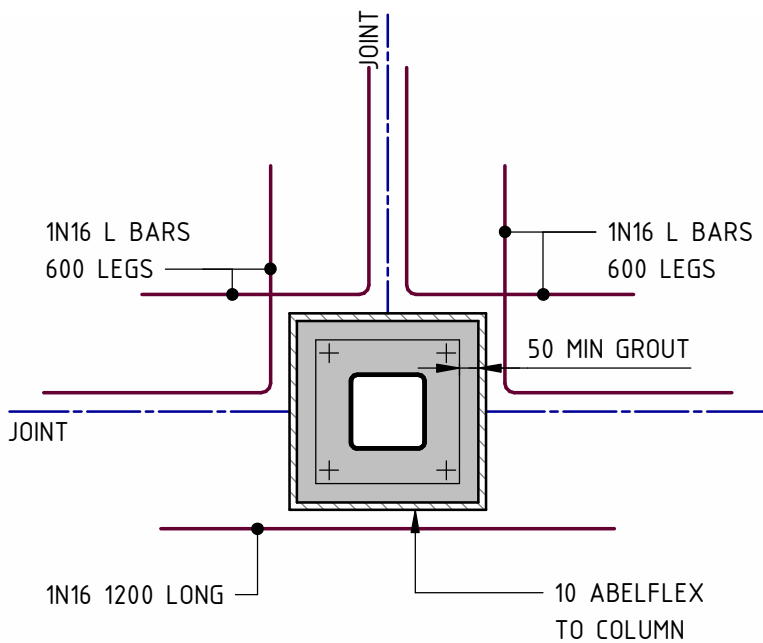


INTERNAL SHS COLUMN JOINT 'T' INTERSECTION
ENCAPSULATE COLUMN AND BASE PLATE IN 50 MIN NON
SHRINK GROUT

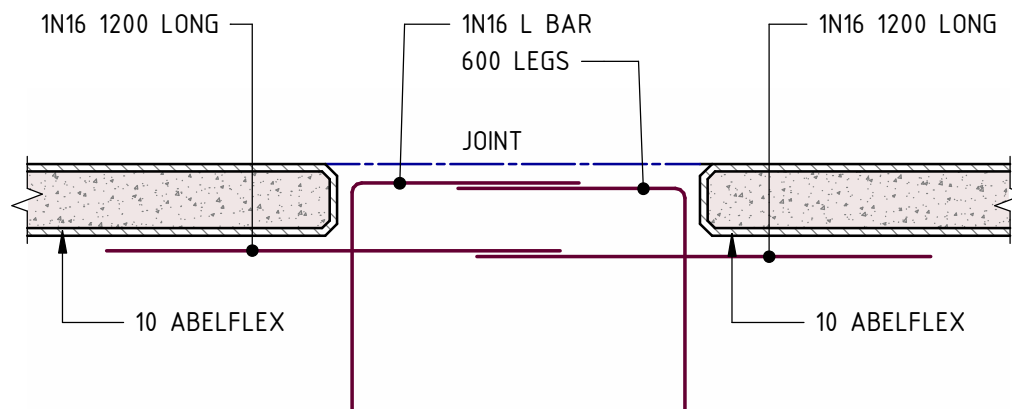


PERSONNEL DOOR

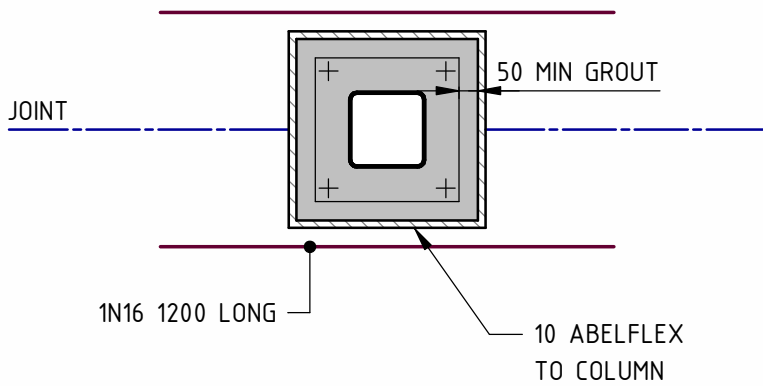

INTERNAL SHS COLUMN JOINT 'T' INTERSECTION
ENCAPSULATE COLUMN AND BASE PLATE IN 50 MIN NON
SHRINK GROUT

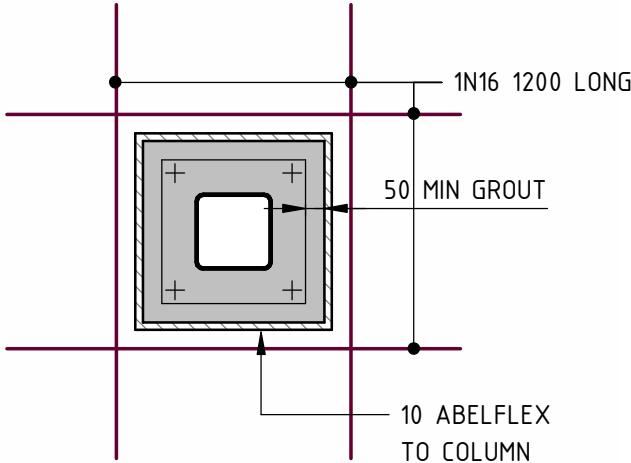

INTERNAL SHS COLUMN NO JOINT
ENCAPSULATE COLUMN AND BASE PLATE IN 50 MIN NON
SHRINK GROUT

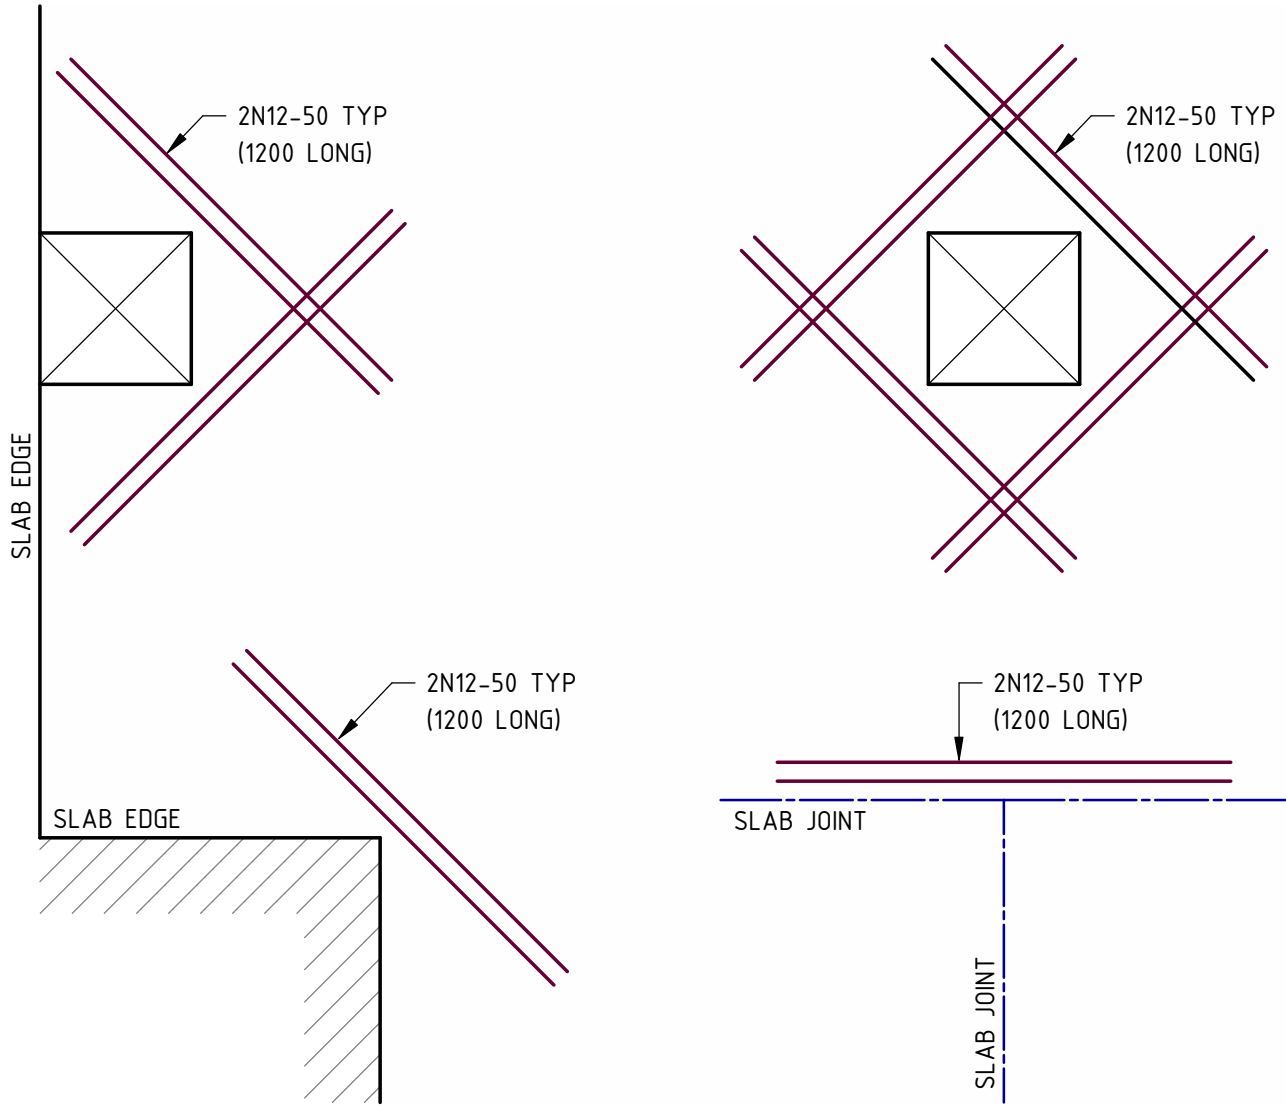

TYPICAL EXTERNAL SLAB ON GROUND TRIMMER DETAILS

- PROVIDE 2N16 TRIMMER BARS MINIMUM 1200 LONG UNO AT ALL PITS, COLUMNS, INSPECTION OPENINGS, RE-ENTRANT CORNERS, DOWNPIPES THAT CAUSE A PENETRATION THROUGH SLAB.
- ALL TRIMMER BARS MUST MAINTAIN A MINIMUM 70 COVER FROM PENETRATION AND CONTROL JOINTS.
- PROVIDE ISOLATION JOINT AT ALL PAVEMENT INTERFACES WITH STRUCTURE / PITS UNO.