



PRODUCT REFERENCE GUIDE

VERSION 1125V1



ELEVATE

NOBODY COVERS YOU BETTER™

At Elevate, we are dedicated to helping your business rise above with a comprehensive and trusted portfolio of commercial roofing systems that save you time, perform reliably, and protect our communities.

With a 45-year legacy of delivering the highest quality solutions — including EPDM, TPO, PVC, metal, asphalt, polyiso, and more — we're committed to excellence in commercial roofing and building partnerships rooted in trust. Our offerings are backed by industry-leading warranties, a dedicated team of technical experts and sales representatives, and a network of highly qualified licensed installers.

TABLE OF CONTENTS

EPDM	1 - 5
RUBBERGARD™ EPDM MEMBRANES	3
RUBBERGARD™ EPDM ACCESSORIES	4 - 5
TPO	6 - 10
ULTRAPLY™ TPO MEMBRANES	8
ULTRAPLY™ TPO ACCESSORIES	9 - 10
PVC	11 - 15
ELEVATE PVC MEMBRANES	13
ELEVATE PVC ACCESSORIES	14 - 15
METAL	16 - 23
UNA-CLAD™ METAL ROOFING PANELS	18
UNA-CLAD™ METAL ROOFING CLIPS	19
UNA-CLAD™ METAL SOFFIT PANELS	20
UNA-CLAD™ METAL FLAT SHEET AND COIL	21
UNA-CLAD™ METAL COLORS	22 - 23
ASPHALT	24 - 32
SBS	26 - 27
APP	28
BUR	29
ASPHALT ACCESSORIES	30 - 31
PMMA	32
INSULATION	33 - 36
ISOGARD INSULATION	35
INSULATION ATTACHMENT	36
MULTI-SYSTEM ACCESSORIES	37 - 41
UNDERLAYMENTS	42 - 43
FASTENERS & PLATES	44 - 47
PRODUCT REFERENCE INDEX	48 - 86

NOVEMBER 2025

Scan to download
the latest Product
Reference Guide
or click here





RUBBERGARD™

EPDM



RETURN
TO T.O.C.

FEATURES & BENEFITS



HISTORICALLY PROVEN

- Over 40 years of proven service life
- After decades of exposure to extreme environmental conditions, EPDM membrane continues to exhibit a great ability to retain the physical properties and performance of ASTM specification standards
- Little or no maintenance required over its service life
- Outstanding weathering characteristics and superior durability
- Ensured quality of workmanship through our vast network of highly skilled Red Shield Licensed Applicators



COMPREHENSIVE OFFERING

- Portfolio supports all attachment methods: Self-adhered (SA), Adhered, Ballasted, Mechanically Attached
- Full assortment of upgradable features and accessories: Self-Adhered (SA), Pre-Taped (PT), MAX Reinforced
- Available in traditional black or white EPDM
- Available in all industry-standard thicknesses including 45-mil, 60-mil, 75-mil non-reinforced and reinforced, and 90-mil non-reinforced
- Extensive portfolio of supporting EPDM QuickSeam™ accessories



SUSTAINABLE

- EPDM is long lasting and easily repaired, keeping it on roofs and out of landfills
- No/low VOC and no/low odor options



LEADS IN EASE OF INSTALLATION

- With an elongation of 300%+, EPDM can shift with and absorb building movement, leading to a more resilient system
- EPDM is naturally pliable, which allows for easier detail work, even in cold conditions
- EPDM can be repaired at any point in its life, while some thermoplastic membranes lose their initial weldability and flexibility properties
- EPDM requires no expensive specialized equipment such as robotic or hand-held welding equipment, or generators, compared to other roofing systems
- On-demand support from trusted technical team with over 500 years of combined roofing experience
- Ensured quality of workmanship through our nationwide network of qualified installers



INSTALLATION OPTIONS TO GAIN CONTROL OVER PROJECT SCHEDULES

- RubberGard™ EPDM SA features factory-applied adhesive: installs faster than traditional EPDM, no odor and no VOCs
- RubberGard™ EPDM available in widths from 5' to 50' and lengths up to 200'
- Systems available for installation in 20°F (-7°C) and rising conditions, thereby extending the roofing season and enabling EPDM contractors to better control their labor scheduling in an unpredictable market
- No/low VOC and no/low odor options, which are ideal for occupied buildings
- Technical Library of more than 1,800 supporting EPDM documents, including over 1,500 detail drawings, assuring options for virtually every circumstance

RUBBERGARD™ EPDM MEMBRANES

EPDM (Ethylene propylene diene monomer) is a type of single-ply rubber roofing membrane that has been used in the low-slope commercial roofing industry for more than half a century. There is a strong demand for EPDM in construction, but it is also widely used in many other industries. EPDM has become the standard for single-ply roofing systems worldwide due to its extensive list of benefits.

RubberGard EPDM (LSFR)

Low Slope Fire Retardant (LSFR) RubberGard EPDM is a non-reinforced, cured, single-ply roofing membrane that can be used in ballasted, adhered and mechanically attached systems.

Thickness

45-mil, 60-mil, 90-mil

Size

Widths: 10' (3.05 m) - 50' (15.24 m), Lengths: 50' (15.24 m) - 200' (60.96 m)

Pre-Tape

45-mil: 3" and 6" PT available

60-mil: 3" and 6" PT available

90-mil: 3" and 6" PT available

RubberGard EPDM SA

Elevate RubberGard EPDM SA membrane with Secure Bond™ Technology is a self-adhered EPDM membrane. The factory-applied adhesive helps ensure uniform adhesion across the entire membrane, creating a powerful bond with the substrate. This advanced technology not only improves installation speed over traditional adhered applications but also widens the installation window with the ability to be installed down to 20°F (-7°C).

Thickness

60-mil

Size

Width: 10' (3.05 m), Lengths: 100' (30.5 m)

RubberGard MAX (Reinforced) EPDM Membrane

RubberGard MAX (Reinforced) EPDM membrane is an internally reinforced, cured single-ply roofing membrane that features a 9 x 9, 1,000 denier polyester weft inserted reinforcing scrim for increased puncture resistance. Designed with fire retardants, RubberGard MAX EPDM membrane can meet the qualifications for UL Class A for slopes up to 3" (76 mm), depending on the roofing assembly.

Thickness

45-mil, 60-mil, 75-mil

Size

Width: 10' (3.05 m), Lengths: 100' (30.5 m)

Pre-Tape

45-mil: 3" PT available

60-mil: 3" and 6" PT available

75-mil: 6" PT available



EPDM MEMBRANE ACCESSORIES

Factory laminated to QuickSeam tape for quicker installation

- Available in white
- Available in black

QuickSeam™ Splice Tape

Elevate QuickSeam Splice Tape is designed for field splicing of RubberGard™ EPDM membrane panels and flashing.

Sizes Available:

- 3" x 100' Roll (76.2 mm x 30.5 m)
- 6" x 100' Roll (152.4 mm x 30.5 m)



QuickSeam™ FormFlash

QuickSeam FormFlash consists of uncured FormFlash factory laminated to QuickSeam Tape. It is designed to flash inside and outside corners, pipes, penetration-pockets, and other applications as required by Elevate Specifications and Details.

Sizes Available:

- 9" x 50' Roll (228.6 mm x 15.24 m)
- 12" x 50' Roll (304.8 mm x 15.24 m)
- 18" x 50' Roll (457.2 mm x 15.24 m)



QuickSeam™ Corner Flashing

Elevate QuickSeam Corner Flashing consists of Elevate FormFlash™ factory laminated to QuickSeam Tape. It is designed to flash inside and outside corners of RubberGard™ EPDM roofing installations.

Sizes Available:

- 8.5" diameter (216 mm)



QuickSeam™ Reinforced Perimeter Fastening (RPF) Strip

QuickSeam Reinforced Perimeter Fastening (RPF) Strip is a RubberGard™ MAX EPDM membrane with 3" (76 mm) wide QuickSeam Tape factory laminated to it along one edge. It is used for non-penetrating membrane securement as specified in Elevate Specifications and Details.

Sizes Available:

- 6" x 100' Roll (152.4 mm x 30.5 m)



QuickSeam™ Flashing

QuickSeam Flashing is a semi-cured EPDM flashing laminated to cured seam tape, used to flash gravel stops and other details as specified in Elevate Specifications and Details.

Sizes Available:

- 5" x 100' Roll (127 mm x 30.5 m)

ECOWHITE:

- 6" x 100' Roll (152.4 mm x 30.5 m)
- 12" x 50' Roll (304.8 mm x 15.24 m)



QuickSeam™ Curb Flashing

QuickSeam Curb Flashing is a non-reinforced RubberGard™ EPDM membrane with 3" (76.2 mm) wide tape factory laminated along one edge. The 3" (76.2 mm) tape portion is used to splice the QuickSeam Curb Flashing to the roof membrane. The balance of the QuickSeam Curb Flashing is applied to the vertical surface with an Elevate bonding adhesive to hold the membrane in place, then terminated using an approved termination detail.

Sizes Available:

- 18" x 50' Roll (457.2 mm x 15.24 m)



QuickSeam™ Batten Cover

QuickSeam Batten Cover is a semi-cured EPDM and QuickSeam Tape laminate designed to cover and seal batten strips, as specified by Elevate Specifications and Details.

Sizes Available:

- 6" x 100' Roll (152.4 mm x 30.5 m)
- 9" x 100' Roll (228.6 mm x 30.5 m)
- 12" x 100' Roll (304.8 mm x 30.5 m)



QuickSeam™ R.M.A. Strip

Elevate QuickSeam R.M.A. Strip is a 10" (254 mm) wide RubberGard™ MAX EPDM membrane with two 3" (76 mm) wide strips of QuickSeam tape factory laminated to it along its length. It is used for roof membrane attachment beneath RubberGard membrane as additional membrane securement as specified in Elevate Specifications and Details. QuickSeam R.M.A. is also used for membrane securement in Elevate's RubberGard R.M.A. (Reinforced Mechanically Attached) roofing system.

Sizes Available:

- 10" x 100' Roll (254 mm x 30.5 m)



EPDM MEMBRANE ACCESSORIES

 Factory laminated to QuickSeam tape for quicker installation
 Available in white
 Available in black

QuickSeam™ Walkway Pad

  QuickSeam Walkway Pads are high-quality rubber walkway pads with QuickSeam Tape factory laminated to the bottom surface. The QuickSeam Tape secures the walkway pads to the primed RubberGard™ EPDM membrane.

Sizes Available:

- 30" x 30" x .30" thick
(762 mm x 762 mm x 762 mm)



QuickSeam™ Penetration Pocket Kit

  QuickSeam Penetration Pockets are a labor-saving alternative to conventional penetration pockets. Each Penetration Pocket is produced with factory-laminated QuickSeam Tape, simplifying the installation to RubberGard™ EPDM.

Sizes Available:

- 6" diameter (152 mm)
- 10" diameter (254 mm)



QuickSeam™ Joint Cover

  QuickSeam Joint Cover is uncured FormFlash™ laminated to QuickSeam tape. A second 3" (76.2 mm) layer of tape is applied at the center and is a special uncured, flowable QuickSeam tape compound. The QuickSeam Joint Cover conforms to irregular surfaces such as encountered at "T" joints, readily providing an excellent seal.

Sizes Available:

- 5.75" ± 0.125" diameter
(146.05 mm ± 3.175 mm)



QuickSeam™ SA Patch for Conduit Flashing

  18" X 18" Standard RubberGard EPDM membrane is factory-laminated to QuickSeam tape with a 3¼" diameter hole die-cut in the center. It can be used to flash the flange of QuickSeam Conduit Flashings in conjunction with RubberGard EPDM roofing systems as permitted by Elevate Specifications.

Sizes Available:

- 18" x 18" (w/ 3.25" center hole)
[457.2 mm x 457.2 mm (w/82.55 mm center hole)]



QuickSeam™ Pipe Boot

  QuickSeam Pipe Flashings are specifically designed to be used in roofing applications for flashing of round penetrations.

Sizes Available:

- 1" to 6.875" O.D.
(25.4 mm to 174.625 mm)



QuickSeam™ Conduit Flashing

 Elevate QuickSeam Conduit Flashing is designed for flashing rigid round penetrations and conduits. Conduit Flashing will fit various-sized penetrations from ½" to 2 ½" (12.7 mm to 63.5 mm) and can be cut to the desired diameter before installation.

Sizes Available:

- .5" to 2.5" (127 mm x 63.5 mm)



18" QuickSeam™ SA Flashing

  QuickSeam SA Flashing is a non-reinforced RubberGard™ membrane fully laminated to Elevate QuickSeam Tape and can be used for curbs or parapets where flashing heights allow.

Sizes Available:

- 18" x 50' Roll (15.25 mm)



RubberGard™ EPDM FormFlash™ Flashing

RubberGard EPDM FormFlash Flashing is a 60-mil uncured EPDM flashing membrane that cures in place after installation.

Sizes Available:

- 6" x 100' Roll (152.4 mm x 30.5 m)
- 9" x 100' Roll (228.6 mm x 30.5 m)
- 12" x 100' Roll (304.8 mm x 30.5 m)
- 24" x 100' Roll (609.6 mm x 30.5 m)



RubberGard™ Neoprene Membrane

RubberGard Neoprene Membrane is a self-curing material used as a protection layer over RubberGard EPDM Membrane.

Sizes Available:

- 24" x 100' (0.6 x 30.5 m)
- 48" x 100' (1.2 x 30.5 m)





ULTRAPLY™

TPO



RETURN
TO T.O.C.

FEATURES & BENEFITS



ENHANCED ENERGY EFFICIENCY

- White, tan, and gray options are listed with the Cool Roof Rating Council (CRRC)
- Elevate's UltraPly™ white TPO membrane option complies with California's Title 24 Energy Efficiency Building Standards and can be used to gain credits with Leadership in Energy and Environmental Design (LEED®) certification



LONG-LASTING PERFORMANCE

- Resists degradation from ultraviolet (UV) radiation and ozone
- Guards against erosion from harmful chemicals and microbial growth
- Performs at more than three times the ASTM international standard for weathering resistance



EXCELLENT DURABILITY AND STRENGTH

- Average thickness over scrim meets ASTM D6878 standard for 45-mil, 60-mil and 80-mil, which helps protect against punctures, tears, and abrasion
- UltraPly™ TPO provides protection against hail damage, achieving Factory Mutual (FM) approval for severe hail for over 500 assemblies, and more than 14,000 Severe Hail assemblies




LESS ENVIRONMENTAL IMPACT

- Does not contain chlorinated or halogenated components
- Can add LEED points to the design, construction, operation, and maintenance of a commercial building



EXCELLENT WIND UPLIFT RESISTANCE

- Elevate provides an array of TPO systems to meet the most demanding wind uplift requirements
- FM certified systems up to 720 psf
- Roofing systems tested per CSA A123.21 dynamic wind uplift resistance

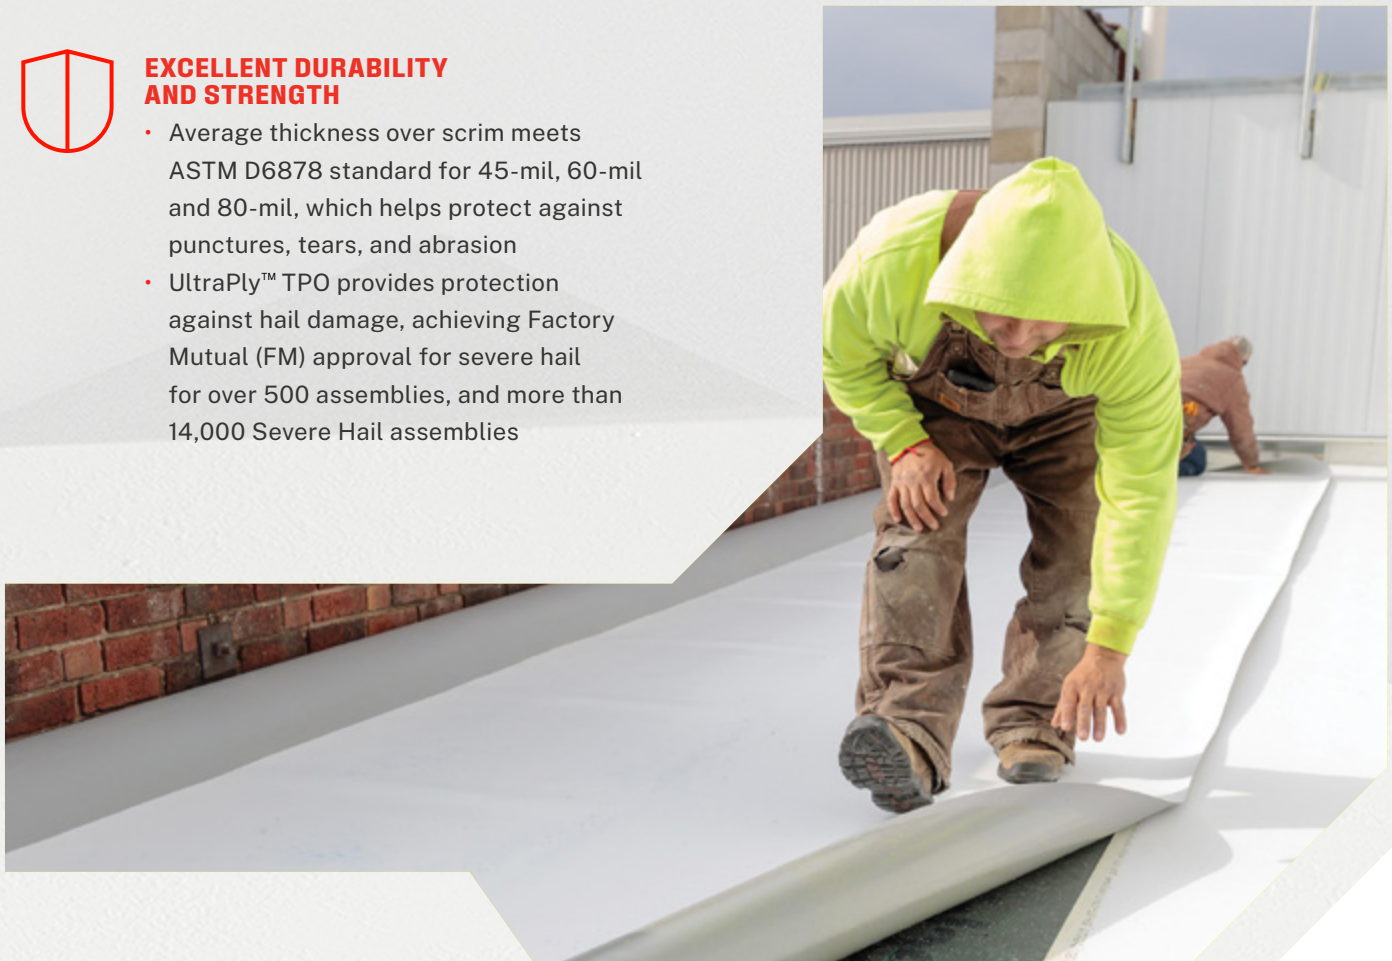

ULTRAPLY™ TPO MEMBRANES

- Available in white
- Available in tan
- Available in gray

TPO (thermoplastic polyolefin) is a single-ply reflective roofing membrane made from polypropylene and ethylene-propylene rubber polymerized together. This thermoplastic cool-roof solution has gained broad industry acceptance for its many performance and installation advantages. TPO is among the fastest-growing commercial roofing products in the world today.

UltraPly™ TPO Membrane



Elevate UltraPly TPO is a flexible thermoplastic polyolefin roofing membrane that is produced with polyester weft-inserted reinforcement. UltraPly TPO membrane meets or exceeds all requirements for ASTM D 6878 Specification. UltraPly TPO Membranes are also available in a minimum thickness.

Thickness

45-mil, 60-mil, 80-mil

Size

Widths: 5' (1.52 m), 8' (2.43 m), 10' (3.05 m), 12' (3.66 m), Lengths: various 50' - 200' (15.24 m - 60.96 m)

UltraPly™ TPO XR Fleece-Back Membrane



Elevate UltraPly TPO XR Membrane is a flexible Thermoplastic Polyolefin (TPO) roofing membrane that is produced with polyester weft-inserted reinforcement and an 8-ounce polyester fleece backing. UltraPly TPO XR Membrane meets or exceeds all requirements for ASTM D 6878 Specification. This membrane is ideal for a variety of new or re-roofing applications.

Thickness

45-mil (110), 60-mil (115), 80-mil (135)

Size

Widths: 10' (3.05 m), Lengths: 50' (15.24 m) - 100' (30.48 m)

UltraPly™ TPO SA



UltraPly TPO SA with Secure Bond™ Technology is a heat-weldable, flexible thermoplastic polyolefin (TPO) membrane with a factory-applied pressure sensitive adhesive. Elevate Secure Bond Technology helps ensure uniform adhesion across the entire membrane, creating a powerful bond. This advanced technology not only improves installation speed over traditional adhered applications but also widens the weather window, with the ability to install down to 20°F (-7°C). With no VOCs, UltraPly TPO SA with Secure Bond technology is an excellent solution for all your roofing needs. No primers or adhesives are required on horizontal surfaces, further reducing VOCs.

Thickness

60-mil

Size

Widths: 10' (3.05 m), Lengths: 100' (30.48 m)



ULTRAPLY™ TPO ACCESSORIES

Factory laminated to QuickSeam tape for quicker installation

Available in white

Available in tan

Available in gray

X-Tred™ Walkway Pad



The Elevate X-Tred Walkway Pad is a highly specialized UV resistant pad made from 100% TPO and designed to provide protection from essential rooftop services and traffic and maintain the integrity of the existing roof surface. X-Tred Walkway Pads can be installed loose-laid on top of the existing adhered TPO or EPDM roofing assemblies, making installation simple.

Sizes Available:

- 30" x 30' (762 mm x 9.14 m)



UltraPly™ TPO Walkway Pad



A reinforced walkway with a textured surface and a smooth bottom surface for easy welding to UltraPly TPO roof membrane. The walkway pad or an acceptable paver is required at all access points (ladders, hatches, doorways, etc.) and is recommended in areas where necessary rooftop traffic will occur to help protect the roofing system from damage.

Sizes Available:

- 30" x 50' (76 mm x 15 m)



UltraPly™ TPO Reinforced Curb Corner



Elevate UltraPly TPO Reinforced Curb Corners are prefabricated curb corners designed for use in the flashing of curbs, eliminating the need for time-consuming field fabrication.

Sizes Available:

- 7" to 37" (178 mm to 940 mm)



UltraPly™ TPO Inside / Outside Corner



Molded from a flexible thermoplastic polyolefin, TPO Inside/Outside Corners are specifically designed for flashing inside or outside corners on curbs, parapets, and scuppers.



UltraPly™ QuickSeam™ Corner Flashing



UltraPly QuickSeam Corner Flashing consists of Unsupported TPO Flashing factory laminated to QuickSeam Tape.



UltraPly™ TPO Universal Pipe Boot



The UltraPly TPO Universal Pipe Boot is specifically designed for the flashing of round penetrations on TPO installations. The UltraPly TPO Universal Pipe Boot fits various penetrations and must be cut to correct size before installation.

One Size Fits:

- 1" (25 mm) to 6" (152 mm)



UltraPly™ TPO Large Pipe Boot



Elevate UltraPly TPO Large Pipe Flashings are specifically designed for flashing large round penetrations. The pipe flashing fits various penetration sizes and can be cut as necessary to ensure a tight fit before installation.

Sizes Available:

- 6" (152 mm) to 8" (203 mm)



UltraPly™ TPO Reinforced Split Pipe Boot



UltraPly TPO Reinforced Split Pipe Boots are factory-fabricated flashings. The split tab design allows the boot to be used to flash pipe penetrations with limited or no access from above the penetration. This design eliminates the need to use unsupported flashing, reducing labor and increasing the performance of the detail and system.

Sizes Available:

- 1" to 8" (25 mm to 203 mm)



UltraPly™ TPO Penetration Pocket Kit



The Elevate UltraPly TPO Penetration Pocket Kit is designed for use with Elevate UltraPly TPO systems to seal around odd-shaped penetrations or a small cluster of penetrations.

Sizes Available:

- Fits penetrations up to 3.5" (90 mm) in diameter.



ULTRAPLY™ TPO ACCESSORIES

Factory laminated to QuickSeam tape for quicker installation

Available in white

Available in tan

Available in gray

UltraPly™ TPO Unsupported Flashing



Elevate UltraPly TPO Unsupported Flashing is a non-reinforced, thermoplastic polyolefin membrane used in roofing applications where Elevate pre-formed TPO accessory products are not appropriate.

Sizes Available:

- 24" x 50' Roll (610 mm x 15.24 m)



UltraPly™ TPO 8" Reinforced Cover Strip



This heat-weldable cover strip can be used for intermediate mechanical attachment on TPO systems, as well as stripping in UltraPly TPO XR membrane end laps.

Sizes Available:

- 8" x 50' (0.20 m x 15.24 m)



UltraPly™ TPO 18" Curb Flashing



Elevate UltraPly TPO 18" Curb Flashing is designed for the flashing of curbs and parapet walls, eliminating the need for time-consuming field cutting of the membrane.

Sizes Available:

- 18" x 50' Roll (457.2 mm x 15.24 m)



UltraPly™ TPO T-Joint Cover



Made from flexible, non-reinforced, thermoplastic polyolefin membranes, they are designed to cover and seal T-joints formed at seam intersections and at angle changes of 1:12 or greater for UltraPly TPO membranes.

Sizes Available:

- 4" x 4" (120 mm x 120 mm)



UltraPly™ QuickSeam™ Reinforced Perimeter Fastening (RPF) Strip



UltraPly QuickSeam Reinforced Perimeter Fastening Strip is made from UltraPly TPO membrane with a 3" (76 mm) wide tape factory laminated along one edge. It is used for non-penetrating flashings as specified in Elevate Specifications and Details.

Sizes Available:

- 6" x 100' Roll (152 mm x 30.5 m)



UltraPly™ QuickSeam™ R.M.A. Strip



UltraPly QuickSeam R.M.A. Strip is a 10" (254 mm) wide UltraPly TPO membrane with two 3" (76 mm) wide strips of tape factory laminated to it along its length. It is used for roof membrane attachment beneath the UltraPly TPO membrane as additional membrane securement.

Sizes Available:

- 10" x 100' Roll (254 mm x 30.5 m)



UltraPly™ TPO QuickSeam™ Flashing



UltraPly TPO QuickSeam Flashing is an unsupported (non-reinforced) TPO membrane factory laminated to white seam tape. UltraPly TPO QuickSeam Flashing is used to flash gravel stops and other flashing applications.

Sizes Available:

- 5.5" x 100' Roll (140 mm x 30.5 m)
- 9.5" x 100' Roll (235 mm x 30.5 m)




UltraPly™ TPO Coated Metal



Elevate UltraPly TPO Coated Metal is made from a flexible non-reinforced thermoplastic polyolefin membrane, factory laminated to hot-dipped galvanized steel.

Sizes Available:

- 4' x 10' (1.22 m x 3.05 m)





PVC



RETURN
TO T.O.C.

FEATURES & BENEFITS



DURABLE

Highly resistant to impact and puncture.



RESISTANT

PVC provides superior resistance to chemicals and grease, and is the most fire-resistant single-ply roofing membrane.*



RECYCLABLE

PVC is a sustainable roofing material that can be recycled during manufacturing and after installation, at the end of the roof's life.**



ENERGY SAVINGS

PVC is a cool roof solution, designed to reflect sunlight and absorb less heat. Cool roofing is used to help mitigate the urban heat island effect, which results in lower heat transfer to the building's interior and decreases air conditioning demands.



STRONG SEAMS

Heat welded seams form a permanent, watertight bond. No adhesives, tapes, or caulks are required.

Elevate PVC single-ply membrane formulation is a durable, long-term commercial roofing solution that has provided quality performance in the market for over 30 years. Elevate PVC systems include highly reflective roofing membranes, UV inhibitors, high-performance watertight heat-welded bonds, and exceptional resistance to harsh environments.

* Refer to test results from the American Society for Testing and Materials (ASTM) test E108.

** Products are 100% recyclable if mechanically attached



**RETURN
TO T.O.C.**

ELEVATE PVC MEMBRANES

- Available in white
- Available in tan
- Available in gray
- Available in yellow
- Available in charcoal

Polyvinyl chloride (PVC) single-ply roofing membranes are among the most popular commercial roofing products available today. They're remarkably durable and highly resistant to some of the toughest flat-roof aggressors like fire, chemicals, and hurricane-level winds. However, the benefits of PVC roofing go beyond durability to include solar reflectivity, which can help regulate building temperature and energy use. PVC roofing systems have been put to the test and trusted by building owners around the world for more than 50 years.

Elevate MAX PVC Membrane



Elevate MAX PVC is a flexible thermoplastic polyvinyl chloride roofing membrane that is produced with polyester weft-inserted reinforcement. Also available in minimum thickness.

Thickness

50-mil, 60-mil, 80-mil

Size

Widths: 5' (1.52 m) - 10' (3.05 m), Lengths: 65' (19.8 m) - 100' (30.48 m)

Elevate MAX PVC XR Fleece-Backed Membrane



Elevate MAX PVC XR is a flexible thermoplastic polyvinyl chloride roofing membrane that is produced with polyester weft-inserted reinforcement and a 5.5-ounce non-woven spun-bonded polyester fleece backing. Also available in minimum thickness.

Thickness

60-mil, 80-mil

Size

Widths: 10' (3.05 m), Lengths: 60-mil: 90' (27.4 m), 80-mil: 65' (19.8 m)

Elevate PVC KEE & PVC KEE XR Fleece-Backed Membrane



Elevate PVC KEE is a flexible thermoplastic roofing membrane produced with DuPont™ Elvaloy® KEE and polyester weft-inserted reinforcement. Elevate PVC KEE XR Membrane features the additional 5.5-ounce non-woven spun-bonded polyester fleece backing. Also available in minimum thickness.

Thickness

50-mil, 60-mil, 80-mil

Size

ELEVATE PVC KEE:

Widths: 5' (1.5 m) - 10' (3.05 m), Lengths: 80' (24.4 m) - 100' (30.5 m)

ELEVATE PVC KEE XR:

Widths: 76" (1.93 m) - 10' (3.05 m), Lengths: 75' (22.3 m) - 100' (30.5 m)



MAX PVC ACCESSORIES

- Available in white
- Available in tan
- Available in gray
- Available in charcoal
- Available in yellow

MAX PVC Inside/Outside Corners



Made with reinforced PVC, Elevate MAX PVC inside and outside corners are factory-formed for use at curbs, parapets, scuppers, and other roof transitions where watertight corner flashings are required.



MAX PVC Open/Closed Stack Flashing



Elevate MAX PVC stack flashings are factory-formed for round pipe penetrations on roofing projects. Made with reinforced PVC, the prefabricated design ensures long-lasting watertight performance.

Sizes Available:

- 2" (51 mm)
- 3" (76 mm)
- 4" (101.6 mm)
- 5" (127 mm)
- 6" (152.4 mm)
- 7" (177.8 mm)
- 8" (203.2 mm)
- 9" (228.6 mm)
- 10" (254 mm)
- 11" (279.4 mm)
- 12" (304.8 mm)



MAX PVC T-Joint Cover



Elevate MAX PVC T-joint covers are prefabricated from reinforced PVC membrane. They are designed to seal T-joints at seam intersections and at angle changes of 1:12 or greater in MAX PVC systems.

Size Available:

- 4" (101.6 mm)
- 6" (152.4 mm)



MAX PVC Vinyl Rib



Elevate MAX PVC vinyl ribs are designed to simulate the look of a standing seam metal roof. Installed after the roofing system, ribs provide a durable and attractive alternative to metal panels. Each rib is extruded PVC. Sections may be joined as needed.

Size Available:

- 1.375" (34.93 mm) base width, 1" (25.4 mm) tall, 10' (3.05 m) lengths



MAX PVC Safety Strip



Elevate MAX PVC yellow safety stripping is a bright yellow PVC membrane strip used to mark safety warning lines on roofs. Constructed with laminated PVC film and weft-inserted polyester reinforcement.

Size Available:

- 6" x 100' (152.4 mm x 30.48 m)



MAX PVC Reinforced Membrane Flashing



Elevate MAX PVC reinforced membrane flashing is a flexible PVC sheet with polyester weft-inserted reinforcement. It meets ASTM D 4434 Type III standards and is heat-weldable for low-slope applications. May be adhered, fastened, or induction welded to substrates.

Size Available:

- 10" X 100' Roll (254 mm x 30.5 m)
- 30" X 100' Roll (762 mm x 30.5 m)
- 10" X 65' Roll (254 mm x 19.8 m)
- 30" X 65' Roll (762 mm x 19.8 m)



Elevate PVC Unsupported Flashing



Elevate PVC Unsupported Flashing is a non-reinforced PVC membrane made with DuPont Elvaloy® KEE, used in roofing applications where Elevate preformed PVC accessory products are not appropriate.

Size Available:

- 24" x 50' Roll (610 mm x 15.2 m)



MAX PVC ACCESSORIES

- Available in white
- Available in tan
- Available in gray
- Available in charcoal
- Available in yellow

MAX PVC Metal Pitch Pan



Elevate MAX PVC metal pitch pans provide a watertight seal around rooftop penetrations. Each pan ships with one corner open for installation around existing penetrations.

Sizes Available:

- 6" x 6" (152.4mm x 152.4mm), 4" (102mm) min height
- 8" x 8" (203.2mm x 203.2mm), 4" (102mm) min height



MAX PVC Clad Metal



Elevate MAX PVC clad metal is sheet of 24-gauge, G90 galvanized steel laminated with a 17-mil PVC film. The PVC surface allows for hot-air welding to MAX PVC membranes when incorporated into roof details.

Size Available:

- 4' x 10' (1.2 m x 3.05 m)



PVC Walkway Pad



The Elevate PVC Walkway Pad is a reinforced thermoplastic material intended for use as a traffic-bearing surface over Elevate PVC and PVC KEE roofing installations. The pad has a textured top surface and a smooth bottom surface for easy welding to Elevate PVC roof membrane.

Sizes Available:

- 30" x 60' Roll (762 mm x 18.3 m)



MAX PVC Walkway Pad



Elevate MAX PVC walkway pads are non-skid, maintenance-free protection pads for high-traffic roof areas. Extruded from recycled PVC membrane with polyester reinforcement, pads protect around mechanical units and under sleepers. Each pad includes factory-attached 4" (101.6 mm) white PVC skirts for hot-air welding to the field membrane.

Sizes Available:

- 30" x 60" (762 mm x 1524 mm)





METAL



RETURN
TO T.O.C.

FEATURES & BENEFITS



DURABLE



**AESTHETIC
VERSATILITY**



SUSTAINABLE

With a 45+ year legacy, Elevate™ is your trusted partner for top-tier metal offerings. Our extensive portfolio showcases adaptable and design-forward solutions for roofing, wall, and edge that are ideal for architects, contractors, and building owners alike. Additionally, our metal roofing products are backed by a comprehensive 30-year system warranty. Our systems are designed for long-lasting durability, making them the ideal choice for both commercial and residential applications, ensuring the protection of your investment. Our region-specific color offerings blend seamlessly with local aesthetics, enabling your projects to resonate with the community's architectural style, or to stand out against the crowd to showcase your creativity. We're committed to sustainability across our portfolio, with 100% of our metal offering being recyclable at the end of its product life cycle. Choose Elevate metal for roofing and architectural solutions that stand the test of time and backed by a trusted, industry-leading supplier.



**RETURN
TO T.O.C.**

UNA-CLAD™ METAL ROOFING

PANELS

UC-3

UNA-CLAD UC-3 Roofing Panel is a factory-formed architectural standing seam metal roof panel featuring a traditional 1-1/2" mechanical lock seam for enhanced design flexibility. The double-lock system is mechanically seamed in the field and offers proven high wind performance. It can be curved or tapered to accommodate complex architectural geometry.

Features:

- Connection Type: Mechanical-Lock
- FM Approved / Miami-Dade Approved / Florida Building Code Approved / UL Listed
- 35 Pre-finished Color Options
- May qualify for Elevate's 30-Year Platinum Warranty



UC-4

UNA-CLAD UC-4 Roofing Panel is a 1-1/2" snap-lock, self-locking architectural standing seam metal roof panel that completely eliminates the need for clips. UC-4 Roofing Panel's unique integral fastening flange accommodates thermal movement and its easy snap-together seam saves installation time and money.

Features:

- Connection Type: Snap-Lock
- FM Approved / Miami-Dade Approved / Florida Building Code Approved / UL Listed
- 35 Pre-finished Color Options
- May qualify for Elevate's 25- and 30-Year Platinum Warranties



UC-6

UNA-CLAD UC-6 Double-Lock Standing Seam Roofing Panel features a 2" mechanical lock seam and utilizes the proven seaming process of Pittsburgh Locking in conjunction with the floating action of a concealed clip and assembly. This design allows for expansion and contraction caused by natural elements to provide a virtually leak-proof roof with exceptional uplift ratings.

Features:

- Connection Type: Mechanical-Lock
- FM Approved / Miami-Dade Approved / Florida Building Code Approved / UL Listed
- 35 Pre-finished Color Options
- May qualify for Elevate's 30-Year Platinum Warranty



UC-7

UNA-CLAD UC-7 Roofing Panel is a factory-formed, 1" batten seam Snap-On Batten standing seam metal roof panel. The UC-7 roofing panel offers a straightforward installation with the appearance of a thin-line standing seam. The panel is available in a wide variety of materials and finishes, including Kynar™ coated G-90 Galvanized Steel and Aluminum, Copper.

Features:

- Connection Type: Snap-Lock
- UL Listed
- 35 Pre-finished Color Options
- 1" profile which offers the designer the ability to specify and create high-profile features
- High radius capabilities and can be curved for radius applications.
- Not eligible for Elevate warranty coverage



UC-14

Elevate UNA-CLAD UC-14 Roofing Panel is a factory-formed architectural standing seam metal roof panel with a proven 1-3/4" tall continuous interlocking seam that snaps together for ease of installation. The system uses a concealed clip fastening method for added protection and is designed to accommodate very long panels and virtually unlimited thermal expansion.

Features:

- Connection Type: Snap-Lock
- FM Approved / Miami-Dade Approved / Florida Building Code Approved / UL Listed
- 35 Pre-finished Color Options
- May qualify for Elevate's 30-Year Platinum Warranty



UNA-CLAD™ METAL ROOFING

PANEL CLIPS

UC-3 CLIPS

UC-3 Super Clips

UNA-CLAD UC-3 Super Clip is specially designed to be used in the UC-3 Standing Roof Panel. The design of the clip allows the upper tab to be mechanically integrated into the double-lock seam. The two-piece construction allows for the thermal movement of the panel while providing positive securement to the deck.

Material Available:

- Galvanized Steel
- Stainless Steel



UC-3 Expansion Clips

UNA-CLAD UC-3 Expansion Clips are specially designed to be used in the attachment of the UNA-CLAD UC-3 Standing Seam Roof Panel. The design of the clip allows the upper tab to be mechanically integrated into the double-lock seam. The two-piece construction allows for thermal movement of the panel while providing positive securement to the deck.

Material Available:

- Stainless Steel



UC-3 Fixed Clip

UNA-CLAD UC-3 Fixed Clips are specially designed to be used in the attachment of the UNA-CLAD UC-3 Standing Seam Roof Panel. The design of the clip allows the upper tab to be mechanically integrated into the double-lock seam.

Material Available:

- Galvanized Steel
- Stainless Steel



UC-6 CLIPS

UC-6 Low Float Clip

UNA-CLAD UC-6 Low-Float Clip is specially designed to be used in the attachment of the UNA-CLAD UC-6 Standing Seam Roof Panel. The design of the clip allows the upper tab to be mechanically integrated into the double-lock seam. The two-piece construction allows for thermal movement of the panel while providing positive securement to the deck or purlin.

Material Available:

- Galvanized Steel
- Stainless Steel



UC-6 Super Clips

UNA-CLAD UC-6 Super Clip is specially designed to be used in the attachment of the UNA-CLAD UC-6 Standing Seam Roof Panel. The design of the clip allows the upper tab to be mechanically integrated into the double-lock seam. The two-piece construction allows for thermal movement of the panel while providing positive securement to the deck or purlin.

Material Available:

- Galvanized Steel
- Stainless Steel



UC-6 Fixed Clip

UNA-CLAD UC-6 Fixed Clip is specially designed to be used in the attachment of the UNA-CLAD UC-6 Standing Seam Roof Panel. The design of the clip allows the upper tab to be mechanically integrated into the double-lock seam.

Material Available:

- Galvanized Steel



UC-7 CLIPS

UC-7 Clips

UNA-CLAD UC-7 Clip is specially designed to be used in the attachment of the UNA-CLAD UC-7 Standing Seam Roof Panel. The design of the clip allows for unlimited thermal movement of the panel while securing the UC-7 Snap-on Batten.

Material Available:

- Galvanized Steel
- Stainless Steel



UC-14 CLIPS

UC-14 Clips

UNA-CLAD UC-14 Clips are specially designed to be used in the attachment of the UNA-CLAD UC-14 Standing Seam Roof Panel. The design of the clip allows the upper tab to be mechanically integrated into the double-lock seam.

Material Available:

- Galvanized Steel
- Stainless Steel




SOFFIT PANELS

UC-500 Flush Panel

1-inch flush panel system, designed for secure mechanical attachment and sequential installation. Each panel is precision roll-formed to exact dimensions, ensuring consistent quality and a sleek appearance. Key features include a robust 35-year warranty on the coil-coated Kynar 500®/Hylar 5000® finish, a reliable male/female interlocking joint design, an optional vented profile for enhanced airflow, and its lightweight construction, making it ideal for various architectural applications.

- 35-year warranty on coil-coated Kynar 500®/Hylar 5000®
- Male/female interlocking joint design
- Optional vented profile
- Sequential installation



Material Options:

- Coil anodized aluminum
- Coil-coated aluminum
- Widths Available: 8", 12", 16" and 20"


Finish Options:

- Coil-anodized
- Custom coatings
- Kynar 500®/Hylar 5000® high performance fluorocarbon resinous coatings

UC-750 V Groove

The 1/2-inch soffit panel system is mechanically attached and installed in a sequential pattern. All panel systems are roll-formed to specified dimensions and tolerances, ensuring accurate formation.

- 35-year warranty on coil-coated Kynar 500®/Hylar 5000®
- Male/female interlocking joint design
- Optional vented profile
- Sequential installation



Material Options:

- Coil anodized aluminum
- Coil-coated aluminum
- Widths Available: 12", 16"


Finish Options:

- Coil-anodized
- Custom coatings
- Kynar 500®/Hylar 5000® high performance fluorocarbon resinous coatings

UC-501 Reveal Flush Panel

The 1-inch reveal joint flush panel system is mechanically attached and installed in a sequential pattern. All panel systems are to be roll-formed to specified dimensions and tolerances and shall be accurately formed.

- 35-year warranty on coil-coated Kynar 500®/Hylar 5000®
- Bent and irregular shapes available
- Male/female interlocking joint design
- Sequential installation
- Special reveals available
- Stiffening ribs available
- Venting available



Material Options:

- Coil-anodized aluminum
- Coil-coated aluminum
- Copper in various gauges and finishes
- Widths Available: 8", 12", 16", 20"
- Steel coil-coated extra smooth galvanized

Finish Options:

- Coil-anodized
- Kynar 500®/Hylar 5000® high performance fluorocarbon resinous coatings

UNA-CLAD™ METAL ROOFING

FLAT SHEET & COIL

Flat Sheet

Elevate Metal Flat Sheets are engineered for performance for roofing and architectural applications. These flat sheets are versatile and suitable for use in press brakes to create precise bends and folds, making them ideal for crafting trims, flashings, and edge metal. They are offered in a variety of material options and colors, providing aesthetic versatility and functionality.

- Material:
Available in Aluminum, Galvanized Steel, Galvalume Steel, and Copper
- Thickness:
22ga., 24ga., and 26ga. as well as .032", .040", .050", and .063" are available
- Finishing Options:
Extra Smooth Matte, low to medium gloss
- Dimensions:
4'x 10' and 4'x 12' are available



Coil

Elevate Metal Coil offers versatility and efficiency for a range of roofing and industrial applications. Engineered for performance, this coil provides the flexibility and strength needed for continuous or large-scale projects. Coils are for use in rollforming equipment to create a variety of panels, including siding, roofing, and structural components. The slitting process ensures uniform width and quality, allowing for seamless integration into rollforming machinery. With a range of material options and finishes available, Elevate Slit Coils offer exceptional durability and aesthetic flexibility for diverse construction and manufacturing needs.

- Material:
Available in Aluminum, Galvanized Steel, Galvalume Steel, and Copper
- Thickness:
22ga., 24ga., and 26ga. as well as .032", .040", .050", and .063" are available
- Finishing Options:
Extra Smooth Matte, Low to Medium Gloss
- Dimensions:
20", 21", and 24" available as standard, custom widths available upon request



Embossed Metal

Embossing enhances the performance and appearance of any flat sheet by adding texture that increases durability and helps minimize the visual effect of oil canning. This subtle patterning improves both aesthetics and structural integrity, making it an excellent choice for a variety of applications. It is especially beneficial in cold storage environments, where embossed panels contribute to durability and energy efficiency.

Elevate now offers embossed metal across a wider range of materials. This added value comes at no additional cost. Whether your priority is visual appeal or enhanced performance, embossing delivers extra benefits without affecting your budget.




UNA-CLAD™ METAL COLORS

NATIONAL SELECTION



STONE WHITE



BONE WHITE



ALMOND



SANDSTONE



SIERRA TAN



SLATE GRAY



AGED ZINC •



CITYSCAPE



CHARCOAL GRAY



MATTE BLACK



MOUNTAIN BLACK ♦



MANSARD BROWN



BURNISHED SLATE • ▲



MEDIUM BRONZE



DARK BRONZE



EXTRA DARK BRONZE



BRANDY WINE



REGAL RED •



COLONIAL RED ♦



TERRA COTTA



HARTFORD GREEN •



AWARD BLUE • ▲



REGAL BLUE •



SKY BLUE



ELECTRIC BLUE • ▲



TEAL •



SHERWOOD GREEN



DARK IVY



PATINA GREEN



HEMLOCK GREEN •



TROPICAL PATINA •



VINTAGE • ▲



SILVER METALLIC • ▲



CLASSIC COPPER • ▲



CHAMPAGNE METALLIC • ▲

Colors shown are as close to actual painted steel as allowed by the printing process. For finish warranty information and actual metal samples, please contact your local Elevate Sales Rep. SRI numbers available by request.

• = Denotes premium color.

♦ = Denotes FEVE finish.

▲ = Due to the unique nature of the product, color may vary slightly from batch to batch. Batches should not be mixed on projects.

UNA-CLAD™ METAL COLORS

NATIONAL AVAILABILITY

▲ = High Availability ■ = Call for Availability ▼ = Limited Availability ● = Premium color ◆ = FEVE Finish

COLOR / FINISH	GALVANIZED STEEL				ALUMINUM				ANODIZED			ZINCALUME PLUS	BONDERIZED	COPPER	GALVALUME
	20GA	22GA	24GA	26GA	.032	.040	.050	.063	.032	.040	.050	24GA	24GA	16OZ	24GA
COLOR / FINISH	48"	48"	40"	48"	48"	48"	48"	48"	48"	48"	48"	48"	48"	48"	48"
Aged Zinc ●				▲											
Almond		▲	■	▲	■	▲	▲	▲							
Amazon Blue ●				▲		▲									
Award Blue ●				▲											
AZ55												▲			
Bare - 3105					▲	▲									
Bare - G90	▲	▲		▲											
Bonderized													▲		
Bone White		▲		▲	▲	▲	▲	▲							▲
Brandywine				▲											
Burnished Slate ●				▲											
Champagne Metallic ●		▲		▲		▲									
Charcoal Gray		▲	■	▲	▲	▲									▲
Cityscape		▲		▲	▲	▲	▲								▲
Classic Copper ●				▲											
Clear									▲	▲	▲				
Colonial Red ◆		▲	■	▲		▲									
Copper														■	
Dark Bronze		▲		▲	▲	▲	▲	▲		▲					▲
Dark Ivy			■	▲											
Electric Blue ●				▲											
Extra Dark Bronze		▲		▲	▲	▲	▲								
Hartford Green ●				▲		▲									▲
Hemlock Green ●				▲											
Mansard Brown		▲	■	▲	▲	▲									
Matte Black		▲		▲	▲	▲	▲	▲							▲
Medium Bronze		▲		▲	▲	▲	▲								▲
Mountain Black ◆		▲	■	▲	▲	▲	▲								▲
Patina Green				▲		▲									
Regal Blue ●		▲		▲		▲									
Regal Red ●				▲		▲									
Sandstone		▲	▲	▲	■	▲	▲	▲							▲
Sherwood Green		▲		▲											
Sierra Tan		▲	■	▲	▲	▲	▲								▲
Silver Metallic ●		▲		▲	▲	▲	▲	▲							
Sky Blue		▲		▲		▲									
Slate Gray		▲		▲	▲	▲	▲								
Stone White		▲		▲	▲	▲	▲								
Teal ●				▲											
Terra Cotta				▲											
Tropical Patina ●				▲											
Vintage ●				▲											



ASPHALT



RETURN
TO T.O.C.

FEATURES & BENEFITS



STRONG AND FLEXIBLE

Proprietary elastomeric blend
of polymers provides strength
and flexibility



THERMAL RESISTANCE

Resistance to structural
and thermal movement
down to 1.4° F (-17° C)



**RETURN
TO T.O.C.**

SBS

SBS Modified Bitumen Membranes

ASTM CLASSIFICATION			MEMBRANE	TOP SURFACING Granule Color	MATERIAL # SKU	MEMBRANE TYPE / USE	REINFORCEMENT TYPE	APPLICATION
ASTM	Type	Grade						
6163	I	S	SBS Base Sheet	Smooth / Sand	W71FSS0825	Base , Ply / Interply	Fiber-Glass	
6163	II	S	SBS Premium Base	Smooth / Sand	W71GSS0925	Base , Ply / Interply	Fiber-Glass	
6163	I	S	SBS Glass Torch Base	Smooth / Sand	W71FSP1225	Base , Ply / Interply	Fiber-Glass	
6163	I	S	SBS Glass Torch Base 1.5 Square	Smooth / Sand	W71FSP0925	Base , Ply / Interply	Fiber-Glass	
6163	I	G	SBS Glass	UltraWhite	W71FNUWS1600	Cap	Fiber-Glass	
				White	W71FWS1600N	Cap	Fiber-Glass	
				Black	W71FBS1600N	Cap	Fiber-Glass	
6163	I	G	SBS Glass FR	UltraWhite	W71FNUWS160F	Cap	Fiber-Glass	
				White	W71FWS160FN	Cap	Fiber-Glass	
				Black	W71FBS160FN	Cap	Fiber-Glass	
6163	I	G	SBS Glass FR Torch	UltraWhite	W71FNUWP16FT	Cap	Fiber-Glass	
				White	W71FWP16FTN	Cap	Fiber-Glass	
				Black	W71FBP16FTN	Cap	Fiber-Glass	
6164	I	S	SBS Poly Base	Smooth / Sand	W71PSS0925	Base , Ply / Interply	Polyester	
6164	I	S	SBS Poly Torch Base	Smooth / Sand	W71PSP1625	Base , Ply / Interply	Polyester	
6164	I	S	SBS Smooth	Smooth / Sand	W71PSS1400	Base , Ply / Interply	Polyester	
6164	II	S	SBS Premium Poly Base	Smooth / Sand	W71HSS1600	Base , Ply / Interply	Polyester	
6164	I	G	SBS Cap	UltraWhite	W71PNUWS1600	Cap	Polyester	
				White	W71PWS1600N	Cap	Polyester	
				Black	W71PBS1600N	Cap	Polyester	
6164	I	G	SBS Torch	UltraWhite	W71PNUWP160T	Cap	Polyester	
				White	W71PWP160TN	Cap	Polyester	
				Black	W71PBP160TN	Cap	Polyester	
6164	I	G	SBS FR	UltraWhite	W71PNUWS160F	Cap	Polyester	
				White	W71PWS160FN	Cap	Polyester	
				Black	W71PBS160FN	Cap	Polyester	
6164	I	G	SBS FR Torch	UltraWhite	W71PNUWP16FT2	Cap	Polyester	
				White	W71PWP16FT2N	Cap	Polyester	
				Black	W71PBP16FT2N	Cap	Polyester	
6164	II	G	SBS Premium	UltraWhite	W71HNUWS160P	Cap	Polyester	
				White	W71HWS160PN	Cap	Polyester	
				Black	W71HBS160PN	Cap	Polyester	
			SBS Premium SRG *	Smog Red. White	W71HWS160FSR	Cap	Polyester	
				Smog Red. Gray	W71HGS160FSR	Cap	Polyester	
6164	II	G	SBS Premium Torch	UltraWhite	W71HNUWS160PT	Cap	Polyester	
				White	W71HWS160PTN	Cap	Polyester	
				Black	W71HBS160PTN	Cap	Polyester	
			SBS Premium Torch SRG *	Smog Red. White	W71HWS160PTSR	Cap	Polyester	
				Smog Red. Gray	W71HGS160PTSR	Cap	Polyester	
6164	II	G	SBS Premium FR	UltraWhite	W71HNUWS160F	Cap	Polyester	
				White	W71HWS160FN	Cap	Polyester	
				Black	W71HBS160FN	Cap	Polyester	
			SBS Premium FR SRG *	Smog Red. White	W71HWS160FSR	Cap	Polyester	
				Smog Red. Gray	W71HGS160FSR	Cap	Polyester	
6164	II	G	SBS Premium FR Torch	UltraWhite	W71HNUWS16FT	Cap	Polyester	
				White	W71HWS16FTN	Cap	Polyester	
				Black	W71HBS16FTN	Cap	Polyester	
			SBS Premium FR Torch SRG *	Smog Red. White	W71HWS16FTSR	Cap	Polyester	
				Smog Red. Gray	W71HGS16FTSR	Cap	Polyester	
D4601	I	S	BaseGard SA	Smooth / Sand	W71FSP70SA	Base , Underlayment / Vapor Retarder	Fiber-Glass	
D6298			SBS Metal Flash-AL	Aluminum	W71RACALCL	Flashing	Fiber-Glass	

* Contains 3M™ Smog-reducing Granules

For SKU and packaging details, please refer to the Product Reference Index starting on page 48.

RETURN TO T.O.C.

SBS

SBS Modified Bitumen Membranes - AVAILABLE ONLY IN CANADA

ASTM CLASSIFICATION			MEMBRANE	TOP SURFACING Granule Color	MATERIAL # SKU	MEMBRANE TYPE / USE	REINFORCEMENT TYPE	APPLICATION
ASTM	Type	Grade						
6164	I	S	SBS 180 Base	Smooth / Sand	W71PSS180	Base , Ply / Interply	Polyester	  
6164	I	S	SBS 180 Torch Base	Smooth / Sand	W71PSS180T	Base , Ply / Interply	Polyester	 
6164	II	G	SBS 250	UltraWhite	W71HNUWS250	Cap	Polyester	 
				White	W71HWS250	Cap	Polyester	 
				Black	W71HBS250	Cap	Polyester	 
				UltraWhite	W71HNUWS250T	Cap	Polyester	
6164	II	G	SBS 250 Torch	White	W71HWS250T	Cap	Polyester	
					W71HBS250T	Cap	Polyester	
				UltraWhite	W71HNUWS250F	Cap	Polyester	 
6164	II	G	SBS 250 FR	White	W71HWS250F	Cap	Polyester	 
				Black	W71HBS250F	Cap	Polyester	 
				UltraWhite	W71HNUWS250FT	Cap	Polyester	
6164	II	G	SBS 250 FR Torch	White	W71HWS250FT	Cap	Polyester	
					W71HBS250FT	Cap	Polyester	

APP

APP Modified Bitumen Membranes**

ASTM CLASSIFICATION			MEMBRANE	TOP SURFACING Granule Color	MATERIAL # SKU	MEMBRANE TYPE / USE	REINFORCEMENT TYPE	APPLICATION
ASTM	Type	Grade						
D6509	I	S	APP 80 Glass Base	Smooth / Sand	W70FTS0802	Base , Ply / Interply	Fiber-Glass	
D6509	I	S	APP Premium Base	Smooth / Sand	W70BTS0802	Base	Fiber-Glass	
D6222	I	S	APP 160	Smooth / Sand	W70APP0162	Cap, Ply / Interply, Base	Polyester	
D6222	I	S	APP 160 Cool	Smooth / Sand	W70PTT1600	Cap, Ply / Interply, Base	Polyester	
D6222	I	S	APP 170	Smooth / Sand	W70APP0172	Cap, Ply / Interply, Base	Polyester	
D6222	I	S	APP 170 Cool	Smooth / Sand	W70PTT1700	Cap, Ply / Interply, Base	Polyester	
D6222	I	G	APP 180	UltraWhite	W70PNUWP1800	Cap	Polyester	
				White	W70PWP1800N	Cap	Polyester	
				Black	W70PBP1800N	Cap	Polyester	
D6222	I	G	APP 180 Cool	White	W70PWS180CN	Cap	Polyester	
				Black	W70PBS180CN	Cap	Polyester	
D6222	I	G	APP 180 FR	UltraWhite	W70PNUWP180F	Cap	Polyester	
				White	W70PWP180FN	Cap	Polyester	
				Black	W70PBP180FN	Cap	Polyester	
D6222	I	G	APP 180 FR Cool	UltraWhite	W70PNUW180FC	Cap	Polyester	
				White	W70PWS180FCN	Cap	Polyester	
				Black	W70PBT180FCN	Cap	Polyester	

** Available only in the United States

BUR

Asphalt Built-Up-Roofing Felt Ply Sheets - BUR

ASTM CLASSIFICATION			MEMBRANE	TOP SURFACING Granule Color	MATERIAL # SKU	MEMBRANE TYPE / USE	REINFORCEMENT TYPE	APPLICATION
ASTM	Type	Grade						
D2178	IV		Ply IV (4) M Felt	Black Non-Granulated	W70RAC8740	Ply / Interply	Fiber-Glass	
D2178	VI		Ply VI (6) M Felt	Black Non-Granulated	W70RAC8760	Ply / Interply	Fiber-Glass	

Asphalt Roofing - Base Sheets, Underlayments, Barriers

ASTM CLASSIFICATION			MEMBRANE	TOP SURFACING Granule Color	MATERIAL # SKU	MEMBRANE TYPE / USE	REINFORCEMENT TYPE	APPLICATION
ASTM	Type	Grade						
D4601	II		MB Base M Sheet	Smooth / Sand	W70RAC8500	Ply / Interply, Base	Fiber-Glass	
D4897	II		Channel Venting Base	Smooth / Sand	W70RACCVBS	Base	Fiber-Glass	
			V-Force Vapor Barrier	Polyethylene	W56358900V25	Underlayment / Vapor Retarder		
			V-Force FR Vapor Barrier	Polyethylene		Underlayment / Vapor Retarder		

Multi-Purpose MB Cold Adhesive

APP SBS

Elevate Multi-Purpose MB Cold Adhesive consists of an asphalt matrix with non-asbestos fibers and performance additives designed to meet adhesion characteristics necessary for horizontal applications of select Elevate Base Sheets, Cap Sheets, and as a lap adhesive in two-ply SBS Systems.

Sizes Available:

- 4.75 Gallon (18 L) Pail
- 55 Gallon (208 L) Drum
- 275 Gallon (1,041 L) Tote



SA Primer

APP SBS BUR

SA Primer is designed to prime substrates prior to the application of BASEGARD™ SA membrane where required by Elevate Technical Specifications and Details. SA Primer must be applied with a solvent-resistant roller.

Sizes Available:

- 5 Gallon (18.9 L) Pail

Ceramic Coated Roofing Granules

APP SBS BUR

Roofing granules that are applied to areas of asphalt “bleed-out” while the asphalt is still in a molten state.

Sizes Available:

- 50 lbs (22.7 kg) Pails (Black and White)
- 40 lbs (18.1 kg) Pails (UltraWhite)



Multi-Purpose MB Flashing Cement

APP SBS

Elevate Multi-Purpose MB Flashing Cement may be used to adhere Elevate sand-backed base sheets, Elevate SBS cap sheets and APP Cool cap sheets. Elevate Multi-Purpose MB Flashing Cement can be used as a lap adhesive in two-ply SBS systems.

Sizes Available:

- 4.75 Gallon (17 L) Pail



SEBS Mopping Asphalt

SBS

Elevate SEBS Mopping Asphalt is modified with SEBS (styreneethylene-butadiene-styrene) block copolymer to make it a premium choice for hot-mopped roof membrane applications. It is intended for use in Elevate Built-up Roofing systems as the primary waterproofing and as an interply adhesive.

Sizes Available:

- 50 lbs (22.7 kg) Keg

Channel Venting Base

APP SBS BUR

Channel Venting Base is designed to be mechanically fastened over lightweight concrete roof decks or other surfaces as a base for Elevate roofing systems. The top sanded surface is suitable for installation of additional plies using hot asphalt, Elevate MB Cold Adhesive, or a roofing torch, and is also suitable for the installation of Elevate insulation in foam adhesive.

Sizes Available:

- 3' 3" x 32' 11" (1 m x 10 m)



ULTRAFLASH™ ACCESSORIES

UltraFlash™ Fabric

SBS

Used with UltraFlash Liquid Flashing, UltraFlash™ Fabric is a stitch-bonded polyester scrim that provides a sturdy combination of burst strength and toughness for roofing applications.

Sizes Available:

- 6" x 100 yd (152.4 mm x 91.4 m)
- 12" x 100 yd (304.8 mm x 91.4 m)
- 24" x 100 yd (609.6 mm x 91.4 m)
- 40" x 108 yd (1.02 m x 98.8 m)



UltraFlash™ One-Part Liquid Flashing

APP SBS BUR

UltraFlash One-Part Liquid Flashing is a one-component polyurethane / bitumen waterproofing resin. It is ideal for roof flashings and details where the application of waterproofing membranes is challenging.

Sizes Available:

- 2x 1 Gallons (3.78 L) Pails
- 5 Gallon (18.9 L) Pail



UltraFlash™ Two-Part Liquid Flashing Dual Cartridges

APP SBS BUR

Elevate UltraFlash Two-Part Liquid Flashing is a tough liquid-applied urethane elastomer blend of Part A and Part B Activator II that chemically cures to form an impermeable, seamless, UV-resistant, monolithic membrane and is tack-free within approximately four (4) hours.

Sizes Available:

- Carton of 4 Cartridges:
Part A 24.3 oz (750 mL) and Part B 3.38 oz (100 mL)

UltraFlash™ LVOC Primer

APP SBS BUR

UltraFlash LVOC Primer is an organosilane compound dispersed in acetone. It is used to improve adhesion of UltraFlash Two-Part Liquid Flashing to non-porous substrates like metal, glass, plastics, and tile.

Sizes Available:

- 4x 1-quart Spray Bottles / Carton

PMMA MEMBRANES & ACCESSORIES

AC FAST FR

Elevate AC FAST FR is part of a multi-component, quick-curing, UV-stable, high-performance, cold liquid-applied Polymethyl Methacrylate (PMMA) roofing and waterproofing system, and is suitable for roof flashings and full system applications on SBS roofs. Do NOT apply to APP, TPO, PVC, or EPDM.

Colors Available:

- White
- Gray

Sizes Available:

- 3.96 Gallon (15 L)

AC Fleece 120

AC Fleece 120 is a non-woven, needle-punched fabric reinforcement used with AC FAST FR to improve strength tear and puncture resistance while maintaining membrane uniformity. AC FAST FR and AC Fleece 120 are used together to create a durable, monolithic PMMA membrane.



Sizes Available:

- 164' x 41.3" (49.99 m x 1049.02 mm)
- 164' x 20.7" (49.99 m x 525.78 mm)
- 164' x 13.8" (49.99 m x 350.52 mm)
- 164' x 10.3" (49.99 m x 261.62 mm)
- 164' x 4.1" (49.99 m x 104.14 mm)

AC Catalyst Powder

AC Catalyst Powder is a reactive agent, based on 50% dibenzoyl peroxide, used to induce setting of AC Primer and AC FAST FR. Use when additional catalyst is required.

Sizes Available:

- 3.5 oz (103.5 mL) Bag
- 10.6 oz (313.5 mL) Bag



AC Primer

AC Primer is a quick-curing, high-bonding Polymethyl Methacrylate (PMMA) primer used between acceptable substrates and catalyzed Elevate AC FAST FR. AC Primer is a resin which must be catalyzed with AC Catalyst Powder.

Sizes Available:

- 1.32 Gallon (5 L)



ISOGARD™ POLYISO INSULATION



RETURN
TO T.O.C.

FEATURES & BENEFITS



THE POWER OF INNOVATIVE ISOGARD

Our ISOGARD family of high-performance polyiso delivers the highest R-value per inch in cold mean temperatures, making it a smart investment when insulating your building. Competing polyiso boards require additional thickness to achieve the same R-value at low temperatures.



UP TO 40% BETTER THERMAL PERFORMANCE

ISOGARD delivers up to 40% better thermal performance in colder mean temperatures than the competition*



EXPERTISE

Installation experts and product support, plus a wide-ranging network of contractors, distributors, and field sales.



GREEN-FOCUSED

Elevate plays a global role in protecting the environment by focusing on recyclability, reflectivity, conservation, and sustainability.




* The thermal performance of ISOGARD polyiso insulation is up to 40% better than major competitors when tested by an independent third party in cold temperature 40°F (4°C) applications according to ASTM C1289 standards. The increased R-value per inch means better thermal performance from the same roofing systems using the same amount of insulation compared to leading competitive products on the market today.

**RETURN
TO T.O.C.**

ISOGARD INSULATION

Definitions Based on ASTM C1289: Standard Specification for Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board

ISOGARD GL PREVIOUS GENERATION: ISO 95+ GL	ISOGARD CG PREVIOUS GENERATION: Resista	ISOGARD HD	ISOGARD HD Composite	ISOGARD HG PREVIOUS GENERATION: HailGard
				
Glass reinforced mat facers on both sides	Coated, inorganic fiberglass facers on both sides	Coated glass facers on both sides	ISOGARD HD board on one side with coated, inorganic fiberglass facers on the other side	Polyiso foam core laminated to a 7/16" OSB on one side and a black glass reinforced mat facer on the other side
- Versatile insulation is especially suited for FM-approved and UL classified direct-to-deck applications/assemblies without an additional thermal barrier in most installations - Glass reinforced facer on both sides of the foam core - Can be attached with hot asphalt or low-rise foam adhesive to various substrates, or mechanically fastened	- Ultimate in fire and mold resistance, our ISOGARD CG product provides exceptional protection for your roofing system - Class A fire rating over combustible decks at 1" thick - Meets D3273 standards for mold resistance - Compatible with all roofing systems and provides enhanced wind uplift performance for your roofing system	- Combines impact resistance, mold resistance, energy savings and ease of installation in a single, high-density product - Lightweight and easy to cut and install - Offers savings from reduced transportation costs, labor and material during application - Provides the highest thermal performance of any 1/2" cover board product on the market	- Consists of a 1/2" ISOGARD HD cover board laminated directly to Elevate standard ISOGARD polyisocyanurate insulation - High performing, energy efficient insulation board, while the installer saves time and labor due to not having to adhere another layer - Controlled manufacturing environment reduces the introduction of variables that could impact performance, such as dirt and adhesive application	- Nailable OSB surface makes ISOGARD HG suitable for use with EPDM, TPO, modified bitumen and metal roofing systems - Helps protect against accidental punctures, hail, and winds up to 100 mph
TYPE II CLASS 1 GRADE 2 (20 PSI) GRADE 3 (25 PSI) CAN/ULC-S704: TYPE 2, CLASS 2	TYPE II CLASS 2 GRADE 2 (20 PSI) GRADE 3 (25 PSI) CAN/ULC-S704: TYPE 2, CLASS 2	TYPE II CLASS 4 GRADE 1 (109 PSI MAX) GRADE 2 (139 PSI MAX)	TYPE IV	TYPE V
ROOF FLAT / TAPERED 0.5" - 4.5" (12.7 mm x 114.3 mm) 4' x 4' & 4' x 8' (1.2 m x 1.2 m & 1.2 m x 2.4 m)	ROOF FLAT / TAPERED 0.5" - 4.5" (12.7 mm x 114.3 mm) 4' x 4' & 4' x 8' (1.2 m x 1.2 m & 1.2 m x 2.4 m)	ROOF FLAT ONLY 0.5" (12.7 mm) 4' x 4' & 4' x 8' (1.2 m x 1.2 m & 1.2 m x 2.4 m)	ROOF FLAT ONLY 1.5" - 4.0" (38.1 mm x 101.6 mm) 4' x 4' & 4' x 8' (1.2 m x 1.2 m & 1.2 m x 2.4 m)	ROOF FLAT ONLY 1.5" - 4.0" (38.1 mm x 101.6 mm) 4' x 4' & 4' x 8' (1.2 m x 1.2 m & 1.2 m x 2.4 m)

* The thermal performance of ISOGARD polyiso insulation is up to 40% better than major competitors when tested by an independent third party in cold temperature 40°F (4°C) applications according to ASTM C1289 standards. The increased R-value per inch means better thermal performance from the same roofing systems using the same amount of insulation compared to leading competitive products on the market today.

I.S.O. Spray™ R Adhesive



Elevate I.S.O. Spray R Adhesive is a two-component, LVOC, low-rise polyurethane adhesive used to anchor roof insulation to acceptable substrates or to adhere multiple layers of insulation. It can also be used to adhere fleece-backed Elevate PVC XR, PVC KEE XR, and UltraPly™ TPO XR membranes to acceptable substrates.

Sizes Available (Part A & B):

- 5 Gallon (18.9 L) Bag in Box
- 15 Gallon (56.8 L) HDPE Keg Part
- 50 Gallon (189.3 L) contained in 55 Gallon (208.2 L) Drum



I.S.O. Stick™ Insulation Adhesive



I.S.O. Stick is a two-component, LVOC, low-rise polyurethane insulation adhesive applied in beads for the adhesive attachment of Elevate-approved roof insulations to acceptable substrates as allowed by Elevate specifications.

Sizes Available (Part A & B):

- 5 Gallon (19 L) Bag in Box
- 15 Gallon (57 L) drum (also available in a 'Winter Grade' option)
- 55 Gallon (208.2 L) Drum



Twin Jet™



Twin Jet is a pressurized two-component, LVOC, low-rise polyurethane adhesive applied in a bead pattern for the attachment of Elevate-approved roof insulations. It may also be applied in bead or spatter pattern for the attachment of Elevate PVC XR, PVC KEE XR, or UltraPly TPO XR membranes to acceptable horizontal substrates, per Elevate specifications.



Twin Jet Y



Twin Jet Y is a pressurized, two-component, low-VOC, low-rise polyurethane adhesive approved for board-to-board applications and membrane attachment. It can be applied in bead or spatter pattern for the attachment of Elevate-approved roof insulations, as well as UltraPly™ TPO XR, PVC XR, PVC KEE XR, and MAX PVC XR membranes to acceptable horizontal substrates, in accordance with Elevate specifications. Twin Jet Y features an HFO propellant compliant with all U.S. state and Canadian regulations.



I.S.O. Twin Pack™ Adhesive



I.S.O. Twin Pack Insulation Adhesive is a two-component, LVOC, low-rise polyurethane adhesive designed for anchoring acceptable roof insulation and cover boards to acceptable substrates, as well as for adhering multiple layers of insulation. I.S.O. Twin Pack is a solvent-free and VOC-free insulation adhesive and contains no harmful HCFC or CFCs.

Kit Available:

- Combination 25.36 oz (750 mL) Part A cartridge / 25.36 oz (750 mL) Part B cartridge





MULTI-SYSTEM ACCESSORIES



MULTI-SYSTEM ACCESSORIES

EPDM Compatible with EPDM
TPO Compatible with TPO
PVC Compatible with PVC
ASPHALT Compatible with Asphalt
Low-VOC Product

ADHESIVES

Single-Ply LVOC Bonding Adhesive

EPDM TPO

Elevate Single-Ply LVOC Bonding Adhesive is a bonding adhesive designed for bonding RubberGard™ EPDM or UltraPly™ TPO membranes and flashings to wood, metal, masonry, and other acceptable substrates.

Sizes Available:

- 5 Gallon (18.9 L) Pail



Single-Ply LVOC Bonding Adhesive-1168

EPDM TPO

Elevate Single-Ply LVOC Bonding Adhesive -1168 is a bonding adhesive designed for adhering RubberGard EPDM and UltraPly TPO membranes and flashings to substrates such as insulation, wood, metal, masonry, and other acceptable substrates.

Sizes Available:

- 5 Gallon (18.9 L) Pail



XR Stick™

TPO PVC

Elevate XR Stick adhesive is a two-component, LVOC, low-rise polyurethane adhesive designed to attach Elevate PVC XR, PVC KEE XR, and UltraPly™ TPO XR, fleece-backed roofing membranes to a variety of acceptable substrates as allowed by Elevate specifications.

Sizes Available:

- Box – Part 1, 5 Gallon Bag in Box (3.78 L, 18.9 L Bag in Box)
- Box – Part 2, 5 Gallon Bag in Box (7.57 L, 18.9 L Bag in Box)
- Cartridge – 1500 ml Cartridge Kit [25.36 oz (750 ml) Part 1, 25.36 oz (750 ml) Part 2]



Jet Bond Spray Adhesive

EPDM TPO

Jet Bond Spray Adhesive is an LVOC bonding adhesive packaged in portable, pressurized canisters and formulated for two-sided spray application directly from the canister. Jet Bond provides excellent adhesion of Elevate RubberGard EPDM, EcoWhite EPDM, UltraPly TPO, and TPO XR roofing membranes and flashings to approved substrates in both horizontal and vertical applications.

Complementary Accessories:

- Jet Bond Canister Flush
- Spray Gun with 2' (0.61 m) Extension (replacement tips available)
- Canister Hose – 6', 12', or 18' (1.83 m, 3.66 m, or 5.47 m)



EPDM Bonding Adhesive BA-2004(T)

EPDM

Elevate EPDM Bonding Adhesive BA-2004 (T) is a solvent-based contact adhesive designed specifically for bonding Elevate RubberGard EPDM membranes and flashings to ISOGARD™ insulations, wood, metal, masonry, and other acceptable substrates.

Sizes Available:

- 5 Gallon (18.9 L) Pail



UltraPly™ TPO Bonding Adhesive

TPO

UltraPly Bonding Adhesive is a solvent-based contact adhesive designed specifically for bonding Elevate UltraPly TPO membranes to approved insulations, as well as to wood, metal, masonry, and other acceptable substrates. **This product is not intended for use in adhering UltraPly TPO XR membranes.**

Sizes Available:

- 5 Gallon (18.9 L) Pail



PVC Water Based Bonding Adhesive

PVC

PVC Water Based Bonding Adhesive is designed to adhere Elevate PVC, PVC XR, and Elevate PVC KEE XR membranes and flashings to wood, metal, masonry, and other acceptable substrates.

Sizes Available:

- 5 Gallon (18.9 L) Pail



Jet Bond PVC Spray Adhesive

PVC

Jet Bond PVC Spray Adhesive is a Low-VOC bonding adhesive packaged in portable, pressurized canisters and formulated for two-sided spray application directly from the canister. It provides excellent adhesion of Elevate PVC and Elevate MAX PVC roofing membranes and flashings to approved substrates in both horizontal and vertical applications. Jet Bond PVC is not intended for use with Elevate PVC XR, PVC KEE, PVC KEE XR, and MAX PVC XR Membrane.

Complementary Accessories:

- Jet Bond PVC Cleaner
- Spray Gun with 2' (0.61 m) Extension (replacement tips available)
- Canister Hose – 12' or 18' (3.66 m or 5.47 m)



MULTI-SYSTEM ACCESSORIES

EPDM	Compatible with EPDM
TPO	Compatible with TPO
PVC	Compatible with PVC
ASPHALT	Compatible with Asphalt
Low-VOC Product	

ADHESIVES CONTINUED

PVC LVOC Bonding Adhesive

PVC 

A bonding adhesive designed for bonding Elevate PVC and PVC KEE membranes and flashings to wood, metal, masonry, and other acceptable substrates.

Sizes Available:

- 5 Gallon (18.9 L) Pail



Splice Adhesive SA-1065 (for flashing)

EPDM

Elevate Splice Adhesive (SA-1065) is designed for splicing RubberGard™ EPDM membrane flashing, FormFlash™ flashing, and the attachment of field membrane panels to Reinforced Perimeter Fastening Strips, and metal surfaces as specified in the Elevate Specifications and Details. It is also used as a primer at seam edges for Lap Sealant application.

Available in White and Black.

Sizes Available:

- 1 Gallon (3.78 L) Pail
- 3 Gallon (11.35 L) Pail



PRIMERS / CLEANERS

Single-Ply QuickPrime™ Primer

EPDM TPO

A solvent-based primer designed to clean and prime RubberGard™ EPDM membranes (Standard, Platinum™, MAX™, and EcoWhite™) and UltraPly™ TPO membranes to receive QuickSeam™ tape products/accessories, where allowed by Elevate specifications and in accordance with state regulations.

Sizes Available:

- 3 Gallon (11.35 L) Pail



Splice Wash SW-100

EPDM TPO

Splice Wash SW-100 is designed to clean and prepare Elevate single-ply membranes to be welded or to receive Elevate Primers, Adhesives, or Sealants as noted in Elevate Specifications and Details. **This product is not intended for use with PVC or PVC KEE membranes.**

Sizes Available:

- 5 Gallon (18.9 L) Pail



QuickPrime™ PLUS

EPDM

QuickPrime Plus is designed to clean and prime RubberGard™ EPDM membranes (LSFR, Platinum, and RubberGard MAX) prior to application of QuickSeam™ products as required by Elevate Specifications and Details. **QuickPrime Plus is NOT acceptable for use on EcoWhite™ EPDM, UltraPly™ TPO or Elevate PVC membranes.**

Sizes Available:

- 1 Quart (0.95 L)
- 1 Gallon (3.78 L)
- 3 Gallon (11.35 L)



QuickScrubber™ Kit

EPDM TPO PVC

The Elevate QuickScrubber Kit consists of a scrub pad and holder that allows for the application of primers. The QuickScrubber scrub pad is secured in place to the bottom of the holder.



QuickPrime™ PLUS LVOC

EPDM 

QuickPrime Plus LVOC is designed to clean and prime RubberGard™ EPDM membrane prior to application of QuickSeam™ products, as required by Elevate Specifications and Details.

Sizes Available:

- 1 Gallon (3.78 L)
- 3 Gallon (11.35 L)



SEALANTS

Black One-Part Pourable Sealer

EPDM ASPHALT

An easy-to-dispense Black One-Part Pourable Sealer, packaged in resealable pouches, designed to seal penetrations inside penetration pockets where allowed by Elevate details.

This liquid-applied membrane is suitable for roof flashings on black EPDM, SBS, and BUR roofs (do not use on white EPDM, PVC, or TPO – use Elevate White One-Part Pourable Sealer instead).

Sizes Available:

- 0.53 Gallon (2 L) pouch
- 4 Pouches per Carton



White One-Part Pourable Sealer

EPDM TPO PVC ASPHALT

An easy-to-dispense White One-Part Pourable Sealer, packaged in resealable pouches, designed to seal penetrations inside penetration pockets where allowed by Elevate details.

This liquid-applied membrane is suitable for roof flashings on TPO, EPDM, APP, SBS, and BUR roofs. It may be used to fill penetration pockets on PVC roofs (do not apply as a liquid flashing on PVC).

Sizes Available:

- 0.53 Gallon (2 L) pouch
- 4 Pouches per Carton



Pourable Sealer S-10 (Part A & Part B)

EPDM TPO PVC ASPHALT

Pourable Sealer S-10 is designed for sealing penetration pockets used in conjunction with Elevate roof systems.

Sizes Available:

- Part A: 1 Gallon (3.78 L) Can
- Part B: 1 Pint (0.47 L) Can



Lap Sealant HS

EPDM TPO PVC 

Elevate Lap Sealant HS is a low volatile organic compound (LVOC) sealant designed to be used with approved Elevate primers for seam edge treatment applications, and as a sealant in other applications as indicated by current Elevate Specifications and Details.

Available in White and Black.

Sizes Available:

- 11 fl oz Cartridge (325.3 mL / Plastic Pail)
- 11 fl oz Cartridge (325.3 mL / Cardboard Carton)



EcoWhite Lap Sealant:

- 10.3 fl oz Cartridge (300 mL)

UltraPly™ TPO General Purpose Sealant

TPO 

This high-quality sealant is for use in conjunction with Elevate UltraPly TPO Systems as a fastener sealer and TPO cut edge sealant or QuickSeam edge treatment, where required by Elevate details.

Sizes Available:

- 11 fl oz (0.326 L)



UltraPly™ TPO Clear Cut Edge Sealant

TPO 

Elevate UltraPly TPO Clear Cut Edge Sealant is a polymer-based sealant used to seal all cut edges of UltraPly TPO Membrane where the polyester reinforcement is exposed. It is approved for use with all Elevate TPO membranes.

Sizes Available:

- 16 oz (0.47 L) squeeze bottle



PVC Clear Cut Edge Sealant

PVC 

Elevate PVC Clear Cut Edge Sealant is an optional treatment used to seal cut edges of PVC and PVC KEE membranes where the scrim reinforcement is exposed.

Sizes Available:

- 16 oz (0.47 L) squeeze bottle



Flashing Foam

Elevate Flashing Foam is a low-pressure, high-density, two-component spray polyurethane foam used to fill voids around penetrations, perimeters, and other gaps requiring high compressive strength or added thermal protection. Meets the requirements of ASTM E84, classified as a Class 2 (A) material.

Sizes Available:

- 115 Kit (Part A & B SKUs sold together)
- 340 Kit (Part A & B sold separately)

MULTI-SYSTEM ACCESSORIES

EPDM Compatible with EPDM
TPO Compatible with TPO
PVC Compatible with PVC
ASPHALT Compatible with Asphalt
Low-VOC Product

BARS / PLATES

Metal Batten Strip

EPDM TPO PVC

Metal Batten Strip is specifically designed to be used for anchoring Elevate membrane and flashing details as specified in Elevate Specifications and Details.

Sizes Available:

- 50x 10' (3 m) Pieces per Cardboard Tube



Coiled Metal Batten Strip

EPDM TPO PVC

Coiled Metal Batten Strip is specifically designed to be used for anchoring Elevate membranes and flashing details as specified in Elevate Specifications and Details.

Sizes Available:

- 220' (67 m) per Coil



Polymer Fastener Metal Batten Strip

EPDM TPO PVC

Polymer Fastener Metal Batten Strip is specifically designed to be used with the Elevate Polymer Fastener for anchoring Elevate membranes as specified in Elevate Specifications and Details.

Sizes Available:

- 50x 10' (3 m) Pieces per Tube



Termination Bar

EPDM TPO PVC

Termination Bar is intended for attaching and sealing flashing terminations as outlined by Elevate Specifications and Details.

Sizes Available:

- Tube: 50x 10' (3 m) Pieces per Tube



DRAIN COMPONENTS

Aluminum Drain Bar

EPDM TPO PVC

Aluminum Drain Bar is specifically designed to be used with Elevate Single-Ply Membrane systems for terminating the membrane as required by Elevate Specifications and Details.

Sizes Available:

- 10x 10' (3 m) Pieces per Carton including 240x 1.5" (38 mm) Stainless Steel Hex Head Fasteners and Rubber Washers



Elevate Drain Inserts

EPDM TPO PVC ASPHALT

The Elevate Drain Insert is specifically designed to be used in Elevate roofing systems where an existing drain is to be left in place.

Sizes Available:

- 3" (76 mm)
- 4" (102 mm)
- 5" (127 mm)
- 6" (152.4 mm)



SAFETY STRIP


QuickSeam™ Yellow Safety Strip

EPDM TPO PVC

QuickSeam Yellow Safety Strip is a nominal 30 mil (0.76 mm) yellow unsupported TPO membrane laminated to a 35 mil (0.89 mm), white cured seaming tape. The QuickSeam Yellow Safety Strip is used for designating a safety perimeter around the roof edge, equipment, and any other rooftop hazards.

Sizes Available:

- 5.5" x 100' (139.7 mm x 30.5 m)





UNDERLAYMENTS



V-Force™ Vapor Barrier Membrane

V-Force Vapor Barrier Membrane is comprised of SBS modified bitumen adhesive, factory laminated to a tri-laminate woven, high-density polyethylene top surface. A polymeric release liner protects the adhesive. V-Force membrane is intended for use as a vapor retarder in Elevate roofing systems and may be used as a temporary roof membrane for up to ninety (90) days.

Sizes Available:

- 3' 9" x 133' 9" (1.14 m x 40.8 m)



V-Force™ FR Vapor Barrier Membrane

V-Force FR Vapor Barrier Membrane is comprised of a non-asphaltic, pressure-sensitive adhesive, factory laminated to a polypropylene top surface. A siliconized release liner protects the adhesive. V-Force FR is intended for use as an air and vapor barrier in Elevate roofing systems and is designed to perform in high-temperature applications and may be used as a temporary roof membrane for up to 180 days.

Sizes Available:

- 60" x 100' (1.52 m x 30.48 m)



CLAD-GARD™ SA Metal Underlayment

CLAD-GARD SA Metal Underlayment consists of a Styrene-Butadiene-Styrene (SBS) rubber-modified, self-adhesive asphalt blend with a woven slip-resistant traction film on the top surface and an opaque release film on the bottom surface. CLAD-GARD SA Metal Underlayment is designed for use as an underlayment with UNA-CLAD™ metal roofing assemblies.

Sizes Available:

- 3' x 67' (0.914 m x 20.4 m)



PRIMER FOR UNDERLAYMENTS

SA-Solvent Based (SB) Primer

Use to prime and prepare exterior concrete, metal, wood, plywood, and gypsum surfaces to enhance the adhesion of Elevate V-Force™ Vapor Barrier Membranes and CLAD-GARD™ Metal Roof Underlayments.

Sizes Available:

- 5 Gallon (18.9 L) Pail

SA-LVOC Primer

Use to prime and prepare exterior concrete, metal, wood, plywood, and gypsum surfaces to enhance the adhesion of Elevate V-Force™ Vapor Barrier Membranes and CLAD-GARD™ Metal Roof Underlayments.

Sizes Available:

- 5 Gallon (18.9 L) Pail




CLAD-GARD™ R Metal Underlayment

CLAD-GARD R Underlayment is a Styrene-Butadiene-Styrene (SBS) rubber-modified; self-adhesive membrane reinforced with a non-woven fiberglass mat. CLAD-GARD R underlayment has textured, skid-resistant traction film on the top surface and a silicone-treated, split-back opaque release liner on the bottom surface.

Sizes Available:

- 3' x 67' (0.914 m x 20.4 m)



CLAD-GARD™ MA Metal Underlayment

CLAD-GARD MA Underlayment is a mechanically attached, synthetic metal roofing underlayment with slip-resistant coating, ideal for use as an underlayment in steep slope, greater than 5:12, Elevate metal roofing applications.

Sizes Available:

- 4' x 250' (1.2 m x 76.2 m)

SA-Water Based (WB) Primer

Use to prime and prepare exterior concrete, metal, wood, plywood, and gypsum surfaces to enhance the adhesion of Elevate V-Force™ Vapor Barrier Membranes and CLAD-GARD™ Metal Roof Underlayments.

Sizes Available:

- 5 Gallon (18.9 L) Pail





FASTENERS & PLATES



RETURN
TO T.O.C.

FASTENERS & PLATES

FASTENERS

Elevate #12 Fastener

Elevate #12 Fasteners are specifically engineered to secure insulation, cover boards, and base sheets to corrugated steel (16 – 22 gauge) and wood substrates.

Also available as pre-assembled with insulation plate.

Sizes Available:

- 1.625" to 8" (41.275 mm to 203.2 mm)



All Purpose (AP) Fastener (#14)

All-Purpose Fasteners are used for the attachment of roofing insulation and base sheets with Elevate Insulation Plates and for the attachment of Elevate Batten Strips, Seam Plates, Termination Bars, and other accessories to steel and wood substrates as approved by Elevate Technical.

Also available in Stainless Steel.

Sizes Available:

- 1.5" to 8" (38.1 mm to 203.2 mm)



Heavy-Duty Fastener (#15)

The Heavy-Duty Fastener is designed to be used in applications that require additional corrosion protection and additional pullout resistance. Used for attachment of roofing insulation and base sheets in combination with Elevate Insulation Plates, or for attachment of Elevate Batten Strips, Seam Plates, Termination Bars, and other accessories to steel, wood, concrete, and other decks as approved by Elevate Technical Specifications.

Sizes Available:

- 1.25" to 24" (31.75 mm to 609.6 mm)
(lengths vary by color)



Heavy Duty Plus Fastener

Heavy Duty Plus Fasteners are specifically designed to be used in systems to attach Elevate metal, polymer batten strips, or Heavy Duty Plus Seam Plates where additional pullout strength is required. The Heavy Duty Plus Fastener is designed for use in steel decks only.

Sizes Available:

- 2" to 10" (50.8 mm to 254 mm)



Heavy Duty (HD) ISOGARD™ HG/HailGard™ Fastener

Specifically designed to be used in roofing applications where ISOGARD HG insulation or an OSB or plywood, overlay is used and fastened into 22 ga. steel, concrete or wood decking.

Sizes Available:

- 2.5" to 12" (63.5 mm to 304.8 mm)



Polymer Fasteners

Polymer Fasteners are used in conjunction with Polymer Insulation Plates for the attachment of insulation, base sheets, and select roof system components into cementitious wood fiber or gypsum decks. The Elevate Polymer Fastener Metal Batten Strip or 2" (51 mm) Polymer Fastener Metal Seam Plates must be used when attaching the membrane.

Sizes Available:

- 2.75" to 8" (69.85 mm to 203.2 mm)



Coated Drive Pin Fastener

The Coated Drive Pin Fastener is a compression-type fastener for use with acceptable substrates such as hollow or solid concrete block, masonry, or structural concrete.

Sizes Available:

- 1.25" to 2" (31.75 mm to 50.8 mm)



Purlin Fasteners Black E-Coated

Purlin Fasteners are used to attach membrane and QuickSeam™ R.M.A. Strip to 16 gauge (3/16") structural steel purlins where allowed by Elevate specifications. The Purlin Fastener can be used in conjunction with Elevate 2" (50.8 mm) Seam Plates, Elevate Heavy Duty Seam Plates, Elevate V-Plates, InvisiWeld Plates, and Elevate Batten Strips.

Sizes Available:

- 2.75" to 8.75" (69.85 mm to 222.25 mm)



Concrete Drive Fastener

Concrete Drive Fasteners are used in roofing applications in conjunction with Elevate Insulation Plates for the attachment of roofing insulation, and base sheets, or attachment of Elevate Metal Batten Strips, Seam Plates, Termination Bars, and other accessories into structural concrete substrates.

Sizes Available:

- 1.5" to 16" (38.1 mm to 406.4 mm)



RetroDriller Fastener

The RetroDriller Fastener is designed for attaching single-ply membrane systems to structural steel (up to 3/16" (4.78 mm)) purlins in standing seam metal roof retrofit applications. The RetroDriller Fastener is to be used with the Elevate UltraPly TPO InvisiWeld or InvisiWeld-S and Elevate PVC InvisiWeld Insulation Plates.

Sizes Available:

- 4" - 12" (101.6 mm - 304.8 mm)



FASTENERS & PLATES

PLATES

2" Metal Plate

The 2" (51 mm) Metal Plates are specifically designed to be used with Elevate All-Purpose, Heavy Duty (HD), and Concrete Drive Fasteners in roofing system applications, for the attachment of Elevate roof membranes and Reinforced Perimeter Fastening (RPF) Strips.

Quantity:

- 1000 per Pail



V-Plate

The V-Plate is specifically designed to be used with Elevate All-Purpose, Heavy Duty, and Concrete Drive fasteners. The V-Plate is used to anchor Elevate RubberGard MAX EPDM membrane, Elevate Reinforced Perimeter (RPF) Strip and QuickSeam™ Reinforced Perimeter (RPF) Strips, and Elevate QuickSeam R.M.A. Strip as shown in Elevate Specifications and Details.

Quantity:

- 500 per Pail



Heavy Duty Seam Plate

Heavy Duty Seam Plates are specifically designed to be used for the attachment of Elevate thermoplastic membranes to approved substrates. Elevate Heavy Duty Seam Plates are to be used with Elevate Heavy Duty or All-Purpose Fasteners into 22-gauge steel, wood or structural concrete decks (Heavy Duty Fasteners only).

They may also be used with Elevate Purlin Fasteners to attach the membrane to structural steel purlins. The plates are packaged in a clear plastic sleeve for easy handling.

Quantity:

- 1000 per Pail



Insulation Fastening Plate

Insulation Fastening Plates are specifically designed to be used with Elevate All-Purpose, Heavy-Duty, Concrete Drive, and Stainless Steel Fasteners in roofing applications for attaching insulation as required by Elevate Specifications.

Quantity:

- 1000 per Pail



HD Plus Seam Plate

The HD Plus Seam Plate is specifically designed to be used for the attachment of Elevate thermoplastic membranes to approved substrates. Elevate HD Plus Seam Plates are suitable for use with Elevate HD Plus Fasteners into 22-gauge steel decking.

Quantity:

- 500 per Pail



UltraPly™ TPO InvisiWeld™ Plate

InvisiWeld Plates are designed to secure roof insulation and Elevate UltraPly TPO roof membrane. The plates are 3" (76 mm) (nominal) round, and made with specially formulated, coated galvanized steel. The plates are installed with Elevate Heavy Duty, Concrete Drive, or Purlin fasteners on steel, wood, or structural concrete roof decks, and are used for induction-welded Elevate TPO roof systems.

Quantity:

- 500 per Pail



InvisiWeld™ Cardboard Disc

InvisiWeld Cardboard Discs are used in combination with an InvisiWeld Plate when installing approved single-ply roof covers over EPS or XPS insulation. These disc prevent the insulation from melting during the induction welding process, and are compatible with both TPO and PVC InvisiWeld Applications

Quantity:

- 250 per Pail



Elevate PVC InvisiWeld™ Plate

3" (76 mm) (nominal) round, and made with specially formulated, coated galvanized steel for induction-welded Elevate PVC and PVC KEE roof systems.

Sizes Available:

- 500 per Pail



Polymer Fastener Insulation Plate

Specifically designed to be used with the Elevate Polymer Fastener in roofing applications to attach insulation as specified in current Elevate Specifications and Details.

Quantity:

- 500 per Pail



Polymer Fastener Plate

The Polymer Fastener Plate is specifically designed to be used with the Elevate Fastener for attaching Elevate Reinforced Perimeter Fastening (RPF) Strips as specified in Elevate Specifications and Details.

Quantity:

- 1000 per Pail



FASTENERS & PLATES


FASTENER / PLATE COMBOS

IsoFast™ #12 Belted Fasteners and Insulation Plates

IsoFast™ #12 Belted Fasteners are designed for the attachment of insulation to steel and wood. The IsoFast Belted Fasteners must be installed with the IF 160 or IF 240 automatic installation tool available from SFS intec, Inc. When used for insulation attachment, the 2.75" x 2.75" (69.9 mm x 69.9 mm) plate is used.

Sizes Available:

- 2.25" to 6" (57.15 mm to 152.4 mm)



IsoFast™ #15 Belted Fasteners and Insulation Plates

The IsoFast™ #15 Belted Fasteners are designed for the attachment of membrane to steel and wood. The IsoFast Belted Fasteners must be installed with the IF 160 or IF 240 automatic installation tool available from SFS intec, Inc. When used for membrane attachment, the 2.375" (60.2 mm) diameter plate is used.

Sizes Available:

- 2" to 6" (50.8 mm to 152.4 mm)



ACCUTRAC* KITS

AP AccuTrac Kits

The AP AccuTrac Kits are specifically designed to be used in roofing applications for the attachment of insulation into steel and wood roof decks with OMG AccuTrac installation equipment. A kit consists of both #12 fasteners and insulation plates for the AccuTrac tool.

Sizes Available:

- 1.625" to 6" (41.275 mm to 152.4 mm)




HD AccuTrac Kits

The HD AccuTrac Kits are specifically designed to be used in roofing applications for the attachment of insulation to steel and wood roof decks with OMG AccuTrac installation equipment. A kit consists of both heavy-duty fasteners and insulation plates for the AccuTrac tool.

Sizes Available:


- 1.25" to 6" (31.75 mm to 152.4 mm)

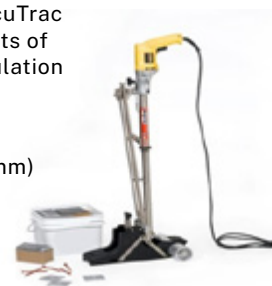

* AccuTrac™ is a trademark of OMG Inc.



PRODUCT REFERENCE INDEX

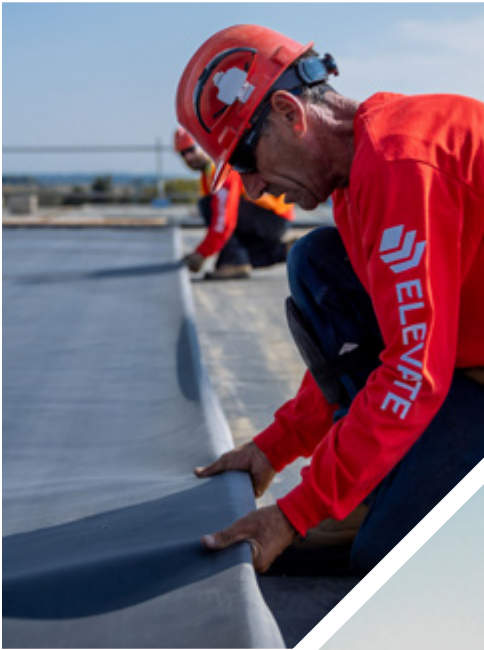

RETURN
TO T.O.C.

PRODUCT REFERENCE INDEX

M - Mt. Joy, PA
P - Prescott, AR
I - Indianapolis, IN
LT - Lead Time

EPDM

RubberGard™ EPDM - Membrane Products							
DESCRIPTION	ITEM CODE	SIZE	NET MEMBRANE WEIGHT	GROSS WEIGHT PER ROLL (LBS)	PACKAGING	STOCKING LOCATION	UOM
45-mil LSFR	W57L451025	10' x 25'	0.29 lbs / sqft	78	1 Roll	LT	FT ²
	W57L451005	10' x 50'		155		M, P	
	W57L451010	10' x 100'		310		M, I, P	
	W57L451610	16' -8" x 100'		516		I, P	
	W57L452005	20' x 50'		310		LT	
	W57L452010	20' x 100'		620		I, P	
	W57L452510	25' x 100'		775		LT	
	W57L453010	30' x 100'		930		P	
	W57L454010	40' x 100'		1240		I, P	
	W57L455010	50' x 100'		1550		I, P	
	W57L455015	50' x 150'		2325		I, P	
	W57L45502F	50' x 200'		3100		I, P	
	W57L451510	15' x 100'		465		P	
	W57L451530	15' x 300'		1395		P	
	W57L451630	16' -8" x 300'		1549		P	
60-mil LSFR	W57L601025	10' x 25'	0.39 lbs / sqft	108	1 Roll	LT	FT ²
	W57L601005	10' x 50'		215		M, I, P	
	W56L601010	10' x 100'		430		M, I, P	
	W56L601610	16' -8" x 100'		716		M, I, P	
	W57L602005	20' x 50'		430		M, I, P	
	W56L602010	20' x 100'		860		M, I, P	
	W57L602510	25' x 100'		1075		I, P	
	W57L603010	30' x 100'		1290		M, I, P	
	W57L604010	40' x 100'		1720		I, P	
	W57L605010	50' x 100'		2150		M, I, P	
90-mil LSFR	W57L901005	10' x 50'	0.59 lbs / sqft	315	1 Roll	M, I, P	FT ²
	W57L901010	10' x 100'		630		M, I, P	
	W57L901610	16' -8" x 100'		1050		M, I, P	
60-mil RubberGard MAX ³	W57SI61010	10' x 100'	0.49 lbs / sqft	440	1 Roll	LT	FT ²
75-mil RubberGard MAX ^{2, 3}	W57SI71010	10' x 100'	0.55 lbs / sqft	560	1 Roll	LT	FT ²

NOTE: All panels are packaged one per core. EPDM is not palletized with the exception of SA material.
For shipping these rolls are either loose laid or placed on runners based on customer request.

² Available with lead time.

³ No-Fold Panels

SA EPDM - Membrane Products							
DESCRIPTION	ITEM CODE	SIZE	NET MEMBRANE WEIGHT	GROSS WEIGHT PER ROLL (LBS)	PACKAGING	STOCKING LOCATION	UOM
LSFR 060 10X100 BL SA FS	W56L61010SA	10' x 100'	0.42 lbs / sqft	440	1 Roll	M, I, P	FT ²

Non-stock items have 21 day (LT)

Gross Weight Per Roll includes actual roll weight with packaging (poly wrap and core).

RETURN
TO T.O.C.

PRODUCT REFERENCE INDEX

M - Mt. Joy, PA
P - Prescott, AR
I - Indianapolis, IN
LT - Lead Time

EPDM

Pre-Taped RubberGard™ EPDM - Membrane Products							
DESCRIPTION	ITEM CODE	SIZE	NET MEMBRANE WEIGHT	GROSS WEIGHT PER ROLL (LBS)	PACKAGING	STOCKING LOCATION	UOM
45-mil LSFR PT (3" Tape, One Fold)	W56LT41010	10' x 100'	0.31 lbs / sqft	310	1 Roll	LT	FT ²
60-mil LSFR PT (3" Tape, No Fold)	W56LT610103	10' x 100'	0.44 lbs / sqft	440	1 Roll	M, I, P	FT ²
	W56LT61610	16'-8" x 100'	0.44 lbs / sqft	733		M, I, P	
60-mil LSFR PT (3" Tape, One Fold)	W56LT62010	20' x 100'	0.44 lbs / sqft	880	1 Roll	M, I, P	FT ²
	W56LT6251F	25' x 100'	0.44 lbs / sqft	1100		LT	
	W56LT6301F	30' x 100'	0.44 lbs / sqft	1320		M, I, P	
60-mil LSFR PT (6" Tape, One Fold)	W56LT61016	10' x 100'	0.44 lbs / sqft	440	1 Roll	M, P	FT ²
	W56LT616106	16'-8" x 100'	0.44 lbs / sqft	733		LT	
	W56LT620106	20' x 100'	0.44 lbs / sqft	880		M, P	
	W56LT6301F6	30' x 100'	0.44 lbs / sqft	1320		LT	
90-mil LSFR PT (3" Tape)	W56LT91010	10' x 100'	0.63 lbs / sqft	630	1 Roll	M, P	FT ²
90-mil LSFR PT (6" Tape)	W56LT910056	10' x 50'	0.63 lbs / sqft	315	1 Roll	P	FT ²
	W56LT910106	10' x 100'	0.63 lbs / sqft	630		M, P	
	W56LT916106	16'-8" x 100'	0.63 lbs / sqft	1050		I, P	
60-mil MAX PT (3" Tape)	W56ST610103	10' x 100'	0.44 lbs / sqft	440	1 Roll	I, P	FT ²
60-mil MAX PT (6" Tape)	W56ST61010	10' x 100'	0.44 lbs / sqft	440	1 Roll	P	FT ²
75-mil MAX PT (6" Tape)	W56ST71010	10' x 100'	0.56 lbs / sqft	560	0.56 lbs / sqft	P	FT ²

NOTE : All panels are packaged one per core. EPDM is not palletized with the exception of SA material.
For shipping these rolls are either loose laid or placed on runners based on customer request.

Non-stock items have 21 day (LT)

Gross Weight Per Roll includes actual roll weight with packaging (poly wrap and core).

RETURN
TO T.O.C.

PRODUCT REFERENCE INDEX

M - Mt. Joy, PA
P - Prescott, AR
I - Indianapolis, IN
LT - Lead Time

EPDM

EPDM - QuickSeam Products						
DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	STOCKING LOCATION	UOM
QuickSeam 3" Splice Tape	W56RAC1603	3" x 100' Roll	38 lbs / Carton	6 Rolls / Carton	M,I,P	CAR
QuickSeam 6" Splice Tape	W56RAC1626	6" x 100' Roll	26lbs / Carton	2 Rolls / Carton	M,I,P	CAR
QuickSeam Flashing	W56RAC1615	5" x 100' Roll	38 lbs	2 Rolls / Carton	M,I,P	CAR
QuickSeam 6" Batten Cover	W56RAC1616	6" x 100' Roll	59 lbs / Carton	2 Rolls / Carton	M,I,P	CAR
QuickSeam 9" Batten Cover	W56RAC1619	9" x 100' Roll	46 lbs / Carton	1 Roll / Carton	M,I,P	CAR
QuickSeam 12" Batten Cover	W56RAC1624	12" x 50' Roll	40 lbs / Carton	1 Roll / Carton	M,I,P	CAR
QuickSeam RPF Strip	W56RAC1632	6" x 100' Roll	42 lbs / Carton	2 Rolls / Carton	M,I,P	CAR
QuickSeam 10" EPDM RMA Strip	W56RAC1633	10" x 100' Roll	48 lbs / Carton	1 Roll / Carton	M,I,P	CAR
QuickSeam 9" FormFlash	W56RAC1650	9" x 50' Roll	44 lbs / Carton	2 Rolls / Carton	M,I,P	CAR
QuickSeam 12" FormFlash	W56RAC1653	12" x 50' Roll	29 lbs / Carton	1 Roll / Carton	M,I,P	CAR
QuickSeam 18" FormFlash	W56RAC162A	18" x 50' Roll	44 lbs / Carton	1 Roll / Carton	M,I,P	CAR
18" QuickSeam SA Flashing (full width QS Tape)	W56RAC1620	18" x 50' Roll	44 lbs / Carton	1 Roll / Carton	M,I,P	CAR
QuickSeam Curb Flashing 18"	W56RAC1622	18" x 50'	37 lbs / Carton	1 Roll / Carton	M,I,P	CAR
QuickSeam Corner Flashing	W56RAC1646	8.5" diameter	9 lbs / Carton	20 / Carton	M,I,P	CAR
QuickSeam Walkway Pads	W56RAC1860	2.5' x 2.5'	445 lbs / Pallet	50 pads / Carton	M,I,P	EA
QuickSeam Joint Covers	W56RAC1644	6" diameter	9 lbs / Carton	100 / Carton	M,I,P	CAR
QS6 Penetration Pocket Kit	W56RACQS06	6" diameter	15 lbs / Kit	6 Kits / Carton	M,I,P	CAR
QS10 Penetration Pocket Kit	W56RACQS10	10" diameter	22 lbs / Kit	6 Kits / Carton	M,I,P	CAR
QuickSeam Universal Pipe Flashing	W563581063	1" to 6.875" O.D.	5 lbs / Carton	10 CAR w/rings	M,I,P	CAR
QuickSeam SA Patch for Pipe Flashing	W56RAC1629	18" x 18" (7.25" center hole)	26 lbs / Carton	25 pcs / Carton	M,I,P	CAR
QuickSeam Conduit Flashing	W563581070	N/A	5 lbs / Carton	10 pcs w/rings	M,I,P	CAR
QuickSeam SA Patch for Conduit Flashing	W56RAC1621	18" x 18" (3.25" center hole)	32 lbs / Carton	25 pcs / Carton	M,I,P	CAR
QuickScrubber Plus Stand-Up Tool	W563582049	6000 linear ft of seam	5.50 lbs / Carton	20 pads & 4 Handles / Carton	M,I,P	CAR
QuickScrubber Kits (Pads and Handles)	W563582045	apx. 6000 linear ft of seam	2 lbs / Carton	30 pads & 4 Handles / Carton	M,I,P	CAR
QuickScrubber Pads (Pads Only)	W563582057	apx. 20,000 linear ft of seam	2 lbs / Carton	100 pads / Carton	M,I,P	CAR
QuickScrubber Handles (Handles Only)	W563582056	N/A	7.25 lbs / Carton	40 Handles / Carton	M,I,P	CAR
QuickSeam Silicone Roller	W563582023	1.3125" dia. x 175" wide	4 lbs / Carton	6 / Carton	M,I,P	CAR
Quick Roller	W563582026	3.75" Roller w/ 42" Steel Rod	48 lbs / Carton	2 Rollers / 2 Sleeves	M,I,P	CAR
QuickSeam Roller Sleeves ¹	W563582027	4" Sleeves	7 lbs / Carton	12 Sleeves / Carton	M,I,P	CAR

NOTE: QuickSeam products contain necessary QuickScrubber pads and handles, and are sold in packaged quantities only.

Items available as a direct shipment from vendor **ONLY**

Subject to change without notice.

¹ Sold in packaged quantities only

² Coverages are estimated. Actual field application may vary.

³ Items available as a direct shipment from vendor

EPDM

EcoWhite™ EPDM - Flashings, Sealants and Adhesives

DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	STOCKING LOCATION	UOM
EcoWhite EPDM Lap Sealant	W56358703A	500 linear ft / Carton	18 lbs / Carton	25 Cartridges / Carton	M,I,P	CAR
EcoWhite EPDM 3" QuickSeam Splice Tape	W56RAC160B	3" x 100' Roll	26 lbs / Carton	4 Rolls / Carton	M,I,P	CAR
EcoWhite EPDM 6" QuickSeam Splice Tape	W56RAC160E	6" x 100' Roll	26 lbs / Carton	2 Rolls / Carton	M,I,P	CAR
EcoWhite 6" QuickSeam Penetration Pockets	W56RACEWP6	6" I.D.	6.5 lbs / Carton	6 Pockets / Kit	M,I,P	CAR
EcoWhite 10" QuickSeam Penetration Pockets	W56RACEWPX	10" I.D.	7 lbs / Carton	6 Pockets / Kit	M,I,P	CAR
EcoWhite QuickSeam Walkway Pads	W56RAC186W	2.5' x 2.5'	445 lbs / Pallet	50 Pads / Carton	M,I,P	EA
EcoWhite EPDM QuickSeam Pipe Flash	W56358106A	1" to 6.875" O.D.	5 lbs / Carton	10CAR w/Rings	M,I,P	CAR
EcoWhite EPDM 6" QuickSeam Flash	W56RACEW06	6" x 100' Roll	60 lbs / Carton	2 Rolls / Carton	M,I,P	CAR
EcoWhite EPDM 12" QuickSeam Flash	W56RACEW12	12" x 50' Roll	30 lbs / Carton	1 Rolls / Carton	M,I,P	CAR
EcoWhite EPDM QuickSeam Joint Covers	W56RACEWJC	6" diameter	9 lbs / Carton	100 / Carton	M,I,P	CAR
EcoWhite EPDM QuickSeam Corner Flash	W56RACEWCF	8.5" diameter	9 lbs / Carton	20 / Carton	M,I,P	CAR
Single-Ply QuickPrime Primer ⁴	W56358704A	3 Gallon Pail	24 lbs / Pail	75 Pails / Pallet	M,I,P	GAL

⁴ Single-Ply QuickPrime Primer is required for use on EcoWhite QuickSeam accessories and white QuickSeam seam tape.

PRODUCT REFERENCE INDEX

M - Mt. Joy, PA
P - Prescott, AR
I - Indianapolis, IN
LT - Lead Time

EPDM

EPDM - Flashings, Sealants and Adhesives

DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	STOCKING LOCATION	UOM
60-mil Neoprene Membrane	W563581602	24" x 100'	.55 lbs / sqft	1 Roll / Carton	LT	FT ²
	W563581600	48" x 100'			LT	
Lap Sealant-HS Tubes ¹	W563587031	560 linear ft / Pail	30 lbs / Carton	28 Cartridges / Pail	M,I,P	PL
Lap Sealant-HS Pails ¹	W563587032	5 Gallon Pail	54 lbs / Pail	28 Cartridges / Pail	M,I,P	GAL
Lap Sealant- HS (Sausage Chubs)	W563587030	20x 20 oz Chubs / Carton	37 lbs / Carton	800 linear ft / Carton	M,I,P	CAR
Lap Sealant-HS (Cardboard cartons)	W56358703E	25x 11 oz Cartridges / Carton	25 lbs / Carton	500 linear ft / Carton	M,I,P	CAR
Black One-Part Pourable Sealer	W563589090	4x 2L Pouches / Carton	25 lbs / Carton	2 Liter (122 in ³) per Pouch	M,I,P	CAR
White One-Part Pourable Sealer	W563587080	2 Liters / Pouch	25 lbs / Carton	2 Liter (122 in ³) per pouch	M,I,P	CAR
One-Part Pourable Sealer Nozzle	W563587081	40 Nozzles / Carton	1 lb / Bag	See TIS	M,I,P	CAR
RubberGard EPDM Solvent-free BA	W563587029	5 Gallon Pail	42 lbs / Pail	120-150 sq ft / Gallon	M,I,P	GAL
Bonding Adhesive ¹ (BA-2004 T)	W563587052	5 Gallon Pail	40 lbs / Pail	45-60 sq ft / Gallon	M,I,P	GAL
Jet Bond Spray Adhesive	W56RACSADC	Canister	48 lbs / Can	See TIS	M,I,P	CAN
LVOC Canister Flush Solution	W56RAC16DC	Canister	13.5 lbs / Can	See TIS	M,I,P	CAN
Spray Gun (for vertical apply)	W56RACINTH	Spray Gun	1.1 lbs	1 Spray Gun / Carton	M,I,P	EA
Spray Gun w/ Extension (for horizontal apply)	W56RACINTI	Spray Gun	1.5 lbs	1 Spray Gun / Carton	M,I,P	EA
60° Spray Tip - 5 pack	W56RACINTJ	Spray Tips	.15 lb	5pk / Carton	M,I,P	EA
Canister Hose - 6 foot	W56RACIAPRL	Hose	1 lb	1 Hose / Carton	M,I,P	EA
Canister Hose - 12 foot	W56RACIAPRM	Hose	1.5 lbs	1 Hose / Carton	M,I,P	EA
Canister Hose - 18 foot	W56RACIAPRN	Hose	2 lbs	1 Hose / Carton	M,I,P	EA
Single-Ply LVOC BA 1168	W56358705LC	5 Gallon Pail	47 lbs / Pail	45-60 sq ft / Gallon	M,I,P	GAL
Single-Ply LVOC BA	W56358715L	5 Gallon Pail	40 lbs / Pail	45-60 sq ft / Gallon	M,I,P	GAL
Splice Adhesive 3-gal ¹	W563587059	3 Gallon Pail	24 lbs / Pail	150 linear ft / Gallon	M,I,P	GAL
Splice Adhesive 1-gal ¹	W563587058	4x 1 Gallon Pails / Carton	8 lbs / Pail	150 linear ft / Gallon	M,I,P	GAL
Splice Wash SW100 ¹	W563587066	5 Gallon Pail	30 lbs / Pail	200-250 sq ft / Gallon	M,I,P	GAL
QuickPrime Plus 3 gal ²	W563587044	3 Gallon Pail	26 lbs / Pail	200-225 linear ft / Gallon	M,I,P	GAL
QuickPrime Plus 1 gal ²	W563587041	1 Gallon Pail	8 lbs / Pail	200-225 linear ft / Gallon	M,I,P	GAL
LVOC Quick Prime Plus 3ga	W563587043	3 Gallon Pail	26 lbs / Pail	75 Pails / Pallet	M,I,P	GAL
LVOC Quick Prime Plus 1ga	W563587045	1 Gallon Pail	8 lbs / Pail	4 / Case	M,I,P	GAL
Universal Pipe Flashing (Non-Taped) ³	W563581033	1" to 6-7/8" O.D.	8 lbs / Carton	10 bts & rings / Carton	M,I,P	CAR
60-mil EPDM FormFlash	W563581508	6" x 100'	.42 lbs / sqft	2 Rolls / Carton	LT	FT ²
	W563581509	9" x 100'		2 Rolls / Carton	LT	
	W563581510	12" x 100'		2 Rolls / Carton	LT	
	W563581512	24" x 100'		1 Roll / Carton	LT	

NOTE : FormFlash is not a Quickseam product.

¹ Sold in packaged quantities only.

² Coverages are estimated. Actual field application may vary.

³ Items available as a direct shipment from vendor

PRODUCT REFERENCE INDEX

TPO

UltraPly™ TPO - Membrane

DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
45-mil UltraPly TPO 5' Membrane		W56TPM3060	5' x 100'	0.23 lb / sqft	15 / Pallet	FT²
		W56TPM3260	5' x 200'		10 / Pallet	
		W56TPMLT060	5' x 100'		15 / Pallet	
		W56TPMG060	5' x 100'		10 / Pallet	
60-mil UltraPly TPO 5' Membrane		W56TPM3660	5' x 100'	0.31 lb / sqft	10 / Pallet	FT²
		W56TPM3L60	5' x 200'		10 / Pallet	
		W56TPMLT660	5' x 100'		6 / Pallet	
		W56TPMG660	5' x 100'		6 / Pallet	
80-mil UltraPly Platinum TPO 5' Membrane		W56TPM3860	5' x 100'	0.42 lb / sqft	10 / Pallet	FT²
		W56TPMLT860				
		W56TPMG860				
45-mil UltraPly TPO 6' 2" Membrane		W56TPM3M074	6' 2" x 100'	0.23 lb / sqft	15 / Pallet	FT²
60-mil UltraPly TPO 6' 2" Membrane		W56TPM3M674	6' 2" x 100'	0.31 lb / sqft	10 / Pallet	FT²
		W56TPMLTM674				
		W56TPMGM674				
80-mil UltraPly Platinum TPO 6' 2" Membrane		W56TPM3M874	6' 2" x 100'	0.42 lb / sqft	6 / Pallet	FT²
45-mil UltraPly TPO 8' Membrane For perimeter sheets use 5' of same membrane thickness		W56TPM3096	8' x 100'	0.23 lb / sqft	15 / Pallet	FT²
		W56TPM3296	8' x 200'		6 / Pallet	
		W56TPMLT096	8' x 100'		15 / Pallet	
		W56TPMG096	8' x 100'		6 / Pallet	
60-mil UltraPly TPO 8' Membrane For perimeter sheets use 5' of same membrane thickness		W56TPM3696	8' x 100'	0.31 lb / sqft	10 / Pallet	FT²
		W56TPM3L96	8' x 200'		6 / Pallet	
		W56TPMLT696	8' x 100'		10 / Pallet	
		W56TPMG696	8' x 100'		6 / Pallet	
80-mil UltraPly Platinum TPO 8' Membrane		W56TPM3896	8' x 100'	0.42 lb / sqft	10 / Pallet	FT²
		W56TPMLT896				
		W56TPMG896				

PRODUCT REFERENCE INDEX

TPO

UltraPly™ TPO - Membrane						
DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
45-mil UltraPly TPO 10' Membrane		W56TPM3099	10' x 100'	0.23 lb / sqft	15 / Pallet	FT²
		W56TPM3299	10' x 200'		See TIS	
		W56TPMLT099	10' x 100'		15 / Pallet	
		W56TPMG099	10' x 100'		See TIS	
60-mil UltraPly TPO 10' Membrane		W56TPM3699	10' x 100'	0.31 lb / sqft	10 / Pallet	FT²
		W56TPM3L99	10' x 200'		See TIS	
		W56TPMLT699	10' x 100'		See TIS	
		W56TPMG699	10' x 100'		See TIS	
80-mil UltraPly Platinum TPO 10' Membrane		W56TPM3899	10' x 100'	0.42 lb / sqft	See TIS	FT²
		W56TPMLT899				
		W56TPMG899				
45-mil UltraPly TPO 12' 4" Membrane		W56TPM3M09W	12' 4" x 100'	0.23 lb / sqft	See TIS	FT²
		W56TPM3M09X				
		W56TPMLTM09W				
		W56TPMGM09W				
60-mil UltraPly TPO 12' 4" Membrane		W56TPM3M69W	12' 4" x 100'	0.31 lb / sqft	See TIS	FT²
		W56TPM3M69X				
		W56TPMLTM69W				
		W56TPMLTM69X				
		W56TPMGM69W				
80-mil UltraPly Platinum TPO 12' 4" Membrane		W56TPM3M89W	12' 4" x 100'	0.42 lb / sqft	See TIS	FT²
		W56TPMLTM89W				

PRODUCT REFERENCE INDEX

TPO

UltraPly™ TPO - Membrane						
DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
45-mil UltraPly TPO XR 100 Membrane		W56TXRM3099	10' x 100'	0.27 lb / sqft	See TIS	FT²
		W56TXRLTM099				
		W56TXRGM099				
60-mil UltraPly TPO XR 115 Membrane		W56TXR3M699	10' x 100'	0.32 lb / sqft	See TIS	FT²
		W56TXRLTM699				
		W56TXRGM699				
80-mil UltraPly TPO XR 135 Membrane		W56TXR3MY99	10' x 50'	0.38 lb / sqft	See TIS	FT²
		W56TXRLTM3T99				
60-mil UltraPly TPO SA 10' Membrane		W56TSA3699	10' x 100'	0.36 lb / sqft	See TIS	FT²
		W56TSALT699				
		W56TSAG699				

Minimum Thickness TPO						
DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
45-mil Minimum Thickness TPO		W56TPM3060MTR	5' x 100'	0.23 lb / sqft	15 / Pallet	FT²
60-mil Minimum Thickness TPO		W56TPM3660MTR	5' x 100'	0.31 lb / sqft	10 / Pallet	FT²
		W56TPM3699MTR	10' x 100'		10 / Pallet	
		W56TPM3L60MTR	5' x 200'		10 / Pallet	
80-mil Minimum Thickness Platinum TPO		W56TPM3860MTR	5' x 100'	0.42 lb / sqft	10 / Pallet	FT²
		W56TPM3899MTR	10' x 100'		See TIS	

PRODUCT REFERENCE INDEX

TPO

UltraPly™ TPO - Flashings and Accessories						
DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
UltraPly TPO Coated Metal		W56TPO3023	4' x 10'	34 lbs	10 / Pallet	EA
		W56TPOLT023		67 lbs / Sheet		
		W56TPOG023		67 lbs / Sheet		
TPO Walkway Pad 2.5' x 50'		W56TPO3024	0.156"	0.59 lbs / sqft	30"x 50' Roll	FT²
UltraPly TPO X-Tred Walkway Pads		W56TPO301X	0.540"	1.3 lbs / sqft	30"x 30' Roll	FT²
		W56TPO303X				
		W56TPO302X				
60-mil UltraPly TPO 8" Cover Strip		W56TPO3S08	8" x 50'	23 lbs / Carton	2 Rolls / Carton	CAR
		W56TPOLTS08				
		W56TPOGS08				
UltraPly TPO Inside / Outside Molded Corners		W56TPO301C	See TIS	8 lbs / Carton	20 Corners / Carton	CAR
		W56TPOLT01C				
		W56TPOG01C				
UltraPly TPO T-Joint Covers		W56TPO3027	4" x 4"	4 lbs / Carton	100 / Carton	CAR
		W56TPOLT027				
		W56TPOG027				

PRODUCT REFERENCE INDEX

TPO

UltraPly™ TPO - Flashings and Accessories

DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
UltraPly TPO Universal Pipe Boot		W56TPO301U	1" to 6"	15 lbs / Carton	10 Boots & Clamps / Carton	CAR
		W56TPOLT01U				
		W56TPOG01U				
UltraPly TPO Large Pipe Flashing		W56TPO3013	6" to 8"	16 lbs / Carton	10 Boots & Clamps / Carton	CAR
		W56TPOLT013				
		W56TPOG013				
UltraPly TPO Split Pipe Boots		W56TPO3SB3	1" to 3"	8 lbs / Carton	10 Boots & Clamps / Carton	CAR
		W56TPO3SB6	3" to 5.5"	10 lbs / Carton		
		W56TPO3SB9	5.5" to 8"	14 lbs / Carton		
		W56TPOLTSB3	1" to 3"	8 lbs / Carton		
		W56TPOLTSB6	3" to 5.5"	10 lbs / Carton		
		W56TPOLTSB9	5.5" to 8"	14 lbs / Carton		
		W56TPOGSB3	1" to 3"	8 lbs / Carton		
		W56TPOGSB6	3" to 5.5"	10 lbs / Carton		
		W56TPOGSB9	5.5" to 8"	14 lbs / Carton		
UltraPly TPO Penetration Pockets		W56TPO301L	See TIS	7 lbs / Carton	6 Pockets / Kit	CAR
		W56TPOLT01L				
		W56TPOG01L				
UltraPly TPO Reinforced Curb Corners		W56TPO3C07	7"	7 lbs / Carton	12 Corners / Carton	CAR
		W56TPO3C13	13"	11 lbs / Carton		
		W56TPO3C19	19"	16 lbs / Carton		
		W56TPO3C25	25"	20 lbs / Carton		
		W56TPO3C31	31"	24 lbs / Carton		
		W56TPO3C37	37"	29 lbs / Carton		
		W56TPOGC07	7"	7 lbs / Carton		
		W56TPOGC13	13"	11 lbs / Carton		
		W56TPOGC19	19"	16 lbs / Carton		
		W56TPOGC25	25"	20 lbs / Carton		
		W56TPOGC31	31"	24 lbs / Carton		
		W56TPOGC37	37"	29 lbs / Carton		
60-mil UltraPly TPO Unsupported Flashing		W56TPO3017	24"	30 Rolls / Pallet	50' Roll	RL
		W56TPOLT026				
		W56TPOG026				
UltraPly TPO 18" Curb Flashing		W56TPO3018	18"	45 Rolls / Pallet	50' Roll	RL

PRODUCT REFERENCE INDEX

TPO

UltraPly QuickSeam™ - Products

DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
UltraPly QuickSeam RMA Strip		W56TPO30T0	10" x 100'	32 lbs / Carton	1 Roll / Carton	CAR
UltraPly QuickSeam RPF Strip		W56TPO30T1	6"	34 lbs / Carton	2 Rolls / Carton	CAR
UltraPly TPO 5.5" QuickSeam Flashing		W56TPO30T7	5.5" x 100'	30 lbs / Carton	2 Rolls / Carton	CAR
		W56TPOLT0T7				
		W56TPOG0T7				
UltraPly TPO 9.5" QuickSeam Flashing		W56TPO30T9	9.5" x 100'	26 lbs / Carton	1 Roll / Carton	CAR
		W56TPOLT0T9		26 lbs / Carton		
		W56TPOG0T9		38 lbs / Carton		
UltraPly QuickSeam Pipe Boot		W56TPO3033	1" to 6.75"	15 lbs / Carton	10 Boots & Clamps / Carton	CAR
UltraPly QuickSeam Outside Corner		W56TPO3031	See TIS	8 lbs / Carton	20 Corners / Carton	CAR
UltraPly QuickSeam T-Joint Covers		W56TPO3034	4" x 4"	4 lbs / Carton	100 / Carton	CAR

PRODUCT REFERENCE INDEX

TPO

UltraPly™ TPO - Adhesives and Sealants

DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
Single-Ply QuickPrime Primer	W56358704A	3 Gallon Pail	24 lbs / Pail	75 Pails / Pallet	GAL
UltraPly TPO Clear Cut Edge Sealant	W56TPOC002	12 Bottles / Carton	12.6 lbs / Carton	60 Cartons / Pallet	CAR
UltraPly TPO Clear Cut Edge Sealant LVOC	W56TPOC01L	12 Bottles / Carton	12.6 lbs / Carton	60 Cartons / Pallet	CAR
UltraPly TPO General Purpose Sealant	W56TPO3002	25 Tubes / Carton	18 lbs / Carton	60 Cartons / Pallet	CAR
UltraPly Bonding Adhesive	W56TPO3005	5 Gallon Pail	41 lbs / Pail	45 / Pallet	GAL
Single-Ply LVOC Bonding Adhesive	W56358715L	5 Gallon Pail	40 lbs / Pail	45 / Pallet	GAL
Single-Ply LVOC Bonding Adhesive - 1168	W56358705LC	5 Gallon Pail	45 lbs / Pail	45 / Pallet	GAL
Jet Bond Spray Adhesive	W56RACSADC	Canister	48 lbs / Can	See TIS	CAN
LVOC Canister Flush Solution	W56RAC16DC	Canister	13.5 lbs / Can	See TIS	CAN
Spray Gun (for vertical application)	W56RACINTH	Spray Gun	1.1 lb	See TIS	EA
Spray Gun with Extension (for horizontal app)	W56RACINTI	Spray Gun	1.5 lb	See TIS	EA
60° Spray Tip - 5 pack	W56RACINTJ	Spray Tips	.15 lb	See TIS	EA
Canister Hose - 6 foot	W56RACIAPRL	Hose	1 lb	See TIS	EA
Canister Hose - 12 foot	W56RACIAPRM	Hose	1.5 lb	See TIS	EA
Canister Hose - 18 foot	W56RACIAPRN	Hose	2 lbs	See TIS	EA
XR Stick™ Membrane Adhesive	W56TPO3400	Carton	See TIS	48 / Pallet	CAR
XR Stick Membrane Adhesive - Part 1	W56TPO3401	5 Gallon Bag in Box	See TIS	32 / Pallet	CAR
XR Stick Membrane Adhesive - Part 2	W56TPO3402	5 Gallon Bag in Box	See TIS	32 / Pallet	CAR
Part 1 XR Stick	W56TPO3403	15 Gallon Drum	45 lbs	See TIS	DR
Part 2 XR Stick	W56TPO3404	15 Gallon Drum	45 lbs	See TIS	DR
White One-Part Pourable Sealer	W563587080	2 Liters	25 lbs / Carton	4 Pouches / Carton	CAR
One-Part Pourable Sealer Nozzle Replacements	W563587081	N/A	1 lb / Carton	40 Nozzles / Carton	CAR

UltraPly™ TPO - Attachment Accessories

DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
HD Plus Seam Plate	W56TPOPL02	2.75"	31 lbs / Pail	500 / Pail	CAR
HD Seam Plate (stacked)	W56TPOPL03	2.375"	48 lbs / Pail	1000 / Pail	CAR
HD Seam Plate	W56TPOPL03T	2.375"	48 lbs / Pail	1000 / Pail	CAR
InvisiWeld™ Plates	W56TPOPL04	3"	35 lbs / Pail	500 / Pail	CAR
InvisiWeld Plates-S	W56TPOPL0S	3"	34 lbs / Pail	500 / Pail	CAR

PRODUCT REFERENCE INDEX

PVC

MAX PVC Membranes						
DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING / PLT	UOM
50-mil MAX PVC Membrane		W56PVW50510	5' x 100'	172 lbs	10	FT²
		W56PVG50510				
		W56PVT50510				
		W56PVC50510				
		W56PVW51010	10' x 100'	347 lbs		
		W56PVG51010				
		W56PVT51010				
		W56PVC51010				
60-mil MAX PVC Membrane		W56PVW60510	5' x 100'	210 lbs	10	FT²
		W56PVG60510				
		W56PVT60510				
		W56PVC60510				
		W56PVW61010	10' x 100'	420 lbs		
		W56PVG61010				
		W56PVT61010				
		W56PVC61010				
80-mil MAX PVC Membrane		W56PVW80565	5' x 65'	228 lbs	10	FT²
		W56PVG80565				
		W56PVT80565				
		W56PVC80565				
		W56PVW81065	10' x 65'	456 lbs	10	
		W56PVG81065				
		W56PVT81065				
		W56PVC81065				
50-mil MAX PVC XR Membrane		W56PVXW50510	5' x 100'	225 lbs	10	FT²
		W56PVXG50510				
		W56PVXT50510				
		W56PVXC50510				
		W56PVXW51010	10' x 100'	355 lbs	10	
		W56PVXG51010				
		W56PVXT51010				
		W56PVXC51010				
60-mil MAX PVC XR Membrane		W56PVXW60510	5' x 100'	242 lbs	10	FT²
		W56PVXG60510				
		W56PVXT60510				
		W56PVXC60510				
		W56PVXW61010	10' x 100'	382 lbs	10	
		W56PVXG61010				
		W56PVXT61010				
		W56PVXC61010				
80-mil MAX PVC XR Membrane		W56PVXW80565	5' x 65'	271 lbs	10	FT²
		W56PVXG80565				
		W56PVXT80565				
		W56PVXC80565				
		W56PVXW81065	10' x 65'	422 lbs	10	
		W56PVXG81065				
		W56PVXT81065				
		W56PVXC81065				

NOTE : For MAX PVC colored & MIN thickness MOQ is 30,000 SQFT

* Item stocked in Plainfield = no MOQ for Plainfield service area

PRODUCT REFERENCE INDEX

PVC

MAX PVC Minimum Thickness Membrane

DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING / PLT	UOM
60-mil MAX PVC Minimum Membrane		W56PVW61010M	10' x 100'	350 lbs	10	FT ²
		W56PVG6510M	5' x 100'	175 lbs		
		W56PVG61010M	10' x 100'	350 lbs		
80-mil MAX PVC Minimum Membrane		W56PVW81065M	10' x 65'	335 lbs	10	FT ²

NOTE : For MAX PVC colored & MIN thickness MOQ is 30,000 SQFT

* Item stocked in Plainfield = no MOQ for Plainfield service area

PVC Membrane

DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
50-mil PVC Membrane		W56PMW50510	5' x 100'	172 lbs	9	FT ²
		W56PMT50510				
		W56PMG50510				
		W56PMW51010	10' x 100'	347 lbs		
		W56PMT51010				
		W56PMG51010				
60-mil PVC Membrane		W56PMW60510	5' x 100'	210 lbs	9	FT ²
		W56PMT60510				
		W56PMG60510				
		W56PMW61010	10' x 100'	420 lbs		
		W56PMT61010				
		W56PMG61010				
80-mil PVC Membrane		W56PMW80565	5' x 65'	177 lbs	9	FT ²
		W56PMT80565				
		W56PMG80565				
		W56PMW81065	10' x 65'	365 lbs	10	
		W56PMT81065				
		W56PMG81065				
60-mil PVC XR Membrane		W56PWX61090	10' x 90'	380 lbs	10	FT ²
		W56PXT61090				
		W56PXG61090				
80-mil PVC XR Membrane		W56PWX81065	10' x 65'	365 lbs	10	FT ²
		W56PXT81065				
		W56PXG81065				

PRODUCT REFERENCE INDEX

PVC

PVC Minimum Thickness Membrane

DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
50-mil PVC MIN Membrane		W56PMW50510M	5' x 100'	172 lbs	9	FT ²
		W56PMT50510M				
		W56PMG50510M				
		W56PMW51010M	10' x 100'	347 lbs		
		W56PMT51010M				
		W56PMG51010M				
60-mil PVC MIN Membrane		W56PMW60510M	5' x 100'	210 lbs	9	FT ²
		W56PMT60510M				
		W56PMG60510M				
		W56PMW61010M	10' x 100'	420 lbs		
		W56PMT61010M				
		W56PMG61010M				
80-mil PVC MIN Membrane		W56PMW80565M	5' x 65'	177 lbs	9	FT ²
		W56PMW81065M	10' x 65'	365 lbs	10	
60-mil PVC XR MIN Membrane		W56PXW61090M	10' x 90'	380 lbs	10	FT ²
		W56PXT61090M				
		W56PXG61090M				
80-mil PVC XR MIN Membrane		W56PXW81065M	10' x 65'	365 lbs	10	FT ²
		W56PXT81065M				
		W56PXG81065M				

NOTE : For colored & minimum thickness MOQ is 50,000 SQFT

PRODUCT REFERENCE INDEX

PVC

PVC KEE Membrane

DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
50-mil PVC KEE Membrane		W56KMW50510	5' x 100'	172 lbs	10	FT²
		W56KMT50510				
		W56KMG50510				
		W56KMW51010	10' x 100'	347 lbs		
		W56KMT51010				
		W56KMG51010				
60-mil PVC KEE Membrane		W56KMW60510	5' x 100'	210 lbs	10	FT²
		W56KMT60510				
		W56KMG60510				
		W56KMW61010	10' x 100'	420 lbs		
		W56KMT61010				
		W56KMG61010				
80-mil PVC KEE Membrane		W56KMW80580	5' x 80'	228 lbs	10	FT²
		W56KMT80580				
		W56KMG80580				
		W56KMW81080	10' x 80'	456 lbs		
		W56KMT81080				
		W56KMG81080				
50-mil PVC KEE XR Membrane		W56KXW57610	76" x 100'	225 lbs	10	FT²
		W56KXT57610				
		W56KXG57610				
		W56KXW51010	10' x 100'	355 lbs		
		W56KXT51010				
		W56KXG51010				
60-mil PVC KEE XR Membrane		W56KXW67690	76" x 90'	242 lbs	10	FT²
		W56KXT67690				
		W56KXG67690				
		W56KXW61090	10' x 90'	382 lbs		
		W56KXT61090				
		W56KXG61090				

NOTE : For colored & minimum thickness MOQ is 50,000 SQFT

PRODUCT REFERENCE INDEX

PVC

PVC KEE Membrane

DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
80-mil PVC KEE XR Membrane		W56KXW87675	76" x 75'	271 lbs	10	FT²
		W56KXT87675				
		W56KXG87675				
		W56KXW81075	10' x 75'	422 lbs		
		W56KXT81075				
		W56KXG81075				
50-mil PVC KEE XRT Membrane		W56KXTW51010	10' x 100'	271 lbs	10	FT²
		W56KXTT51010				
		W56KXTG51010				
60-mil PVC KEE XRT Membrane		W56KXTW67690	76" x 90'	271 lbs	10	FT²
		W56KXTT67690				
		W56KXTG67690				
		W56KXTW61090	10' x 90'	271 lbs		
		W56KXTT61090				
		W56KXTG61090				
80-mil PVC KEE XRT Membrane		W56KXTW87675	76" x 75'	271 lbs	10	FT²
		W56KXTT87675				
		W56KXTG87675				
		W56KXTW81075	10' x 75'	271 lbs		
		W56KXTT81075				
		W56KXTG81075				

NOTE : For colored & minimum thickness MOQ is 50,000 SQFT

PRODUCT REFERENCE INDEX

PVC

PVC KEE Minimum Thickness Membrane

DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
50-mil PVC KEE Minimum Membrane		W56KMW50510M	5' x 100'	172 lbs	10	FT²
		W56KMT50510M				
		W56KMG50510M				
		W56KMW51010M	10' x 100'	347 lbs		
		W56KMT51010M				
		W56KMG51010M				
60-mil PVC KEE Minimum Membrane		W56KMW60510M	5' x 100'	210 lbs	10	FT²
		W56KMT60510M				
		W56KMG60510M				
		W56KMW61010M	10' x 100'	420 lbs		
		W56KMT61010M				
		W56KMG61010M				
80-mil PVC KEE Minimum Membrane		W56KMW80580M	5' x 80'	228 lbs	10	FT²
		W56KMT80580M				
		W56KMG80580M				
		W56KMW81080M	10' x 80'	456 lbs		
		W56KMT81080M				
		W56KMG81080M				
50-mil PVC KEE Minimum XR Membrane		W56KXW57610M	76" x 100'	225 lbs	10	FT²
		W56KXT57610M				
		W56KXG57610M				
		W56KXW51010M	10' x 100'	355 lbs		
		W56KXT51010M				
		W56KXG51010M				
60-mil PVC KEE Minimum XR Membrane		W56KXW67690M	76" x 90'	242 lbs	10	FT²
		W56KXT67690M				
		W56KXG67690M				
		W56KXW61090M	10' x 90'	382 lbs		
		W56KXT61090M				
		W56KXG61090M				
80-mil PVC KEE Minimum XR Membrane		W56KXW87675M	76" x 75'	271 lbs	10	FT²
		W56KXT87675M				
		W56KXG87675M				
		W56KXW81075M	10' x 75'	422 lbs		
		W56KXT81075M				
		W56KXG81075M				

NOTE : For colored & minimum thickness. MOQ is 50,000 SQFT

* Item stocked in Plainfield = no MOQ for Plainfield service area

PRODUCT REFERENCE INDEX

PVC

MAX PVC Accessories

DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
MAX PVC Inside Corner		W56PVAW1001	-	1 lb / Carton	20 / Carton	CAR
		W56PVAG1001				
		W56PVAT1001				
		W56PVAC1001				
MAX PVC Outside Corners		W56PVAW1001	-	1 lb / Carton	20 / Carton	CAR
		W56PVAG1001				
		W56PVAT1001				
		W56PVAC1001				
MAX PVC Closed Stack Flashing		W56PVAW1202	2"	4.3 lbs / Carton	6 / Carton	CAR
		W56PVAG1202				
		W56PVAT1202				
		W56PVAC1202				
		W56PVAW1203	3"	4.6 lbs / Carton		
		W56PVAG1203				
		W56PVAT1203				
		W56PVAC1203				
		W56PVAW1204	4"	4.9 lbs / Carton		
		W56PVAG1204				
		W56PVAT1204				
		W56PVAC1204				
		W56PVAW1205	5"	5.2 lbs / Carton		
		W56PVAG1205				
		W56PVAT1205				
		W56PVAC1205				
		W56PVAW1206	6"	5.2 lbs / Carton		
		W56PVAG1206				
		W56PVAT1206				
		W56PVAC1206				
		W56PVAW1207	7"	5.2 lbs / Carton		
		W56PVAG1207				
		W56PVAT1207				
		W56PVAC1207				
		W56PVAW1208	8"	5.2 lbs / Carton		
		W56PVAG1208				
		W56PVAT1208				
		W56PVAC1208				
		W56PVAW1209	9"	7.9 lbs / Carton		
		W56PVAG1209				
		W56PVAT1209				
		W56PVAC1209				
		W56PVAW1210	10"	7.9 lbs / Carton		
		W56PVAG1210				
		W56PVAT1210				
		W56PVAC1210				
		W56PVAW1211	11"	7.9 lbs / Carton		
		W56PVAG1211				
		W56PVAT1211				
		W56PVAC1211				
		W56PVAW1212	12"	7.9 lbs / Carton		
		W56PVAG1212				
		W56PVAT1212				
		W56PVAC1212				

NOTE : Contact for gray and tan stock status.

PRODUCT REFERENCE INDEX

PVC

MAX PVC Accessories

DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
MAX PVC Open Stack Flashing		W56PVAW1302	2"	4.6 lbs / Carton	6 / Carton	CAR
		W56PVAG1302				
		W56PVAT1302				
		W56PVAC1302				
		W56PVAW1303	3"	4.9 lbs / Carton		
		W56PVAG1303				
		W56PVAT1303				
		W56PVAC1303				
		W56PVAW1304	4"	4.9 lbs / Carton		
		W56PVAG1304				
		W56PVAT1304				
		W56PVAC1304				
		W56PVAW1305	5"	5.2 lbs / Carton		
		W56PVAG1305				
		W56PVAT1305				
		W56PVAC1305				
		W56PVAW1306	6"	5.5 lbs / Carton		
		W56PVAG1306				
		W56PVAT1306				
		W56PVAC1306				
		W56PVAW1307	7"	5.5 lbs / Carton		
		W56PVAG1307				
		W56PVAT1307				
		W56PVAC1307				
		W56PVAW1308	8"	5.5 lbs / Carton		
		W56PVAG1308				
		W56PVAT1308				
		W56PVAC1308				
		W56PVAW1309	9"	7.9 lbs / Carton		
		W56PVAG1309				
		W56PVAT1309				
		W56PVAC1309				
		W56PVAW1310	10"	7.9 lbs / Carton		
		W56PVAG1310				
		W56PVAT1310				
		W56PVAC1310				
		W56PVAW1311	11"	8.2 lbs / Carton		
		W56PVAG1311				
		W56PVAT1311				
		W56PVAC1311				
		W56PVAW1312	12"	8.2 lbs / Carton		
		W56PVAG1312				
		W56PVAT1312				
		W56PVAC1312				
MAX PVC Metal Pitch Pan		W56PVAW1001	6" x 6"	5 lbs	Shipped per Unit	EA
		W56PVAG1001				
		W56PVAT1001				
		W56PVAC1001				
		W56PVAW1001	8" x 8"	7 lbs		
		W56PVAG1001				
		W56PVAT1001				
		W56PVAC1001				

NOTE : Contact for gray and tan stock status.

PRODUCT REFERENCE INDEX

PVC

MAX PVC Accessories						
DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
MAX PVC Vinyl Rib		W56PVAW1501	10'	95 lbs / Carton	10 / Carton	CAR
		W56PVAVG1501				
		W56PVAVT1501				
		W56PVAVC1501				
MAX PVC Walkway Pad		W56PVAWW1630	30" x 60"	10 lbs / PAD	5 Pads / Each	EA
		W56PVAWT1630				
		W56PVAWG1630				
		W56PVAWY1630				
MAX PVC Clad Metal		W56PVAW4001	4' x 10'	43.2 lbs / Sheet	30 Sheets / Pallet	PAL
		W56PVAG4001				
		W56PVAT4001				
		W56PVAC4001				
60-mil MAX PVC Flashing		W56PVAW3001	10" x 100'	32 lbs / Roll	20 Rolls / Pallet	RL
		W56PVAG3001				
		W56PVAT3001				
		W56PVAC3001				
		W56PVAW3030	30" x 100'	96 lbs / Roll		
		W56PVAG3030				
		W56PVAT3030				
		W56PVAC3030				
80-mil MAX PVC Flashing		W56PVAW3101	10" x 65'	28 lbs / Roll	30 Rolls / Pallet	RL
		W56PVAG3101				
		W56PVAT3101				
		W56PVAC3101				
		W56PVAW3130	30" x 65'	86 lbs / Roll		
		W56PVAG3130				
		W56PVAT3130				
		W56PVAC3130				
MAX PVC T-Joint Cover		W56PVAW2001	4" & 6"	2 lbs / Carton	100 / Carton	CAR
		W56PVAG2001				
		W56PVAT2001				
		W56PVAC2001				
MAX PVC Safety Strip		W56PVAY06100	6" x 100'	11 lbs / Roll	1 Roll	RL

NOTE : Contact for gray and tan stock status.

PRODUCT REFERENCE INDEX

ASPHALT

SBS Modified Bitumen Membranes							
DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	APPROX. COVERAGE	UOM
BaseGard SA	Black	W71FSP70SA	39.4" x 65.4"	87 lbs	20 Rolls	196 sqft	RL
SBS Base Sheet	Black	W71FSS0825	39.4" x 50'	93 lbs	25 Rolls	150 sqft	RL
SBS Premium Base	Black	W71GSS0925	39.4" x 50'	94 lbs	25 Rolls	150 sqft	RL
SBS Premium Poly Base	Black	W71HSS1600	39.4" x 33'6"	114 lbs	20 Rolls	100 sqft	RL
SBS Poly Base	Black	W71PSS0925	39.4" x 50'	96 lbs	25 Rolls	150 sqft	RL
SBS Glass Torch Base	Black	W71FSP1225	39.4" x 33'6"	87 lbs	25 Rolls	100 sqft	RL
SBS Glass Torch Base 1.5 Square	Black	W71FSP0925	39.4" x 50'	97 lbs	25 Rolls	150 sqft	RL
SBS Poly Torch Base	Black	W71PSP1625	39.4" x 33'6"	85 lbs	25 Rolls	100 sqft	RL
SBS Smooth	Black	W71PSS1400	39.4" x 33'6"	100 lbs	20 Rolls	100 sqft	RL
SBS Cap	UltraWhite	W71PNUWS1600	39.4" x 33'6"	103 lbs	20 Rolls	100 sqft	RL
	White	W71PWS1600N		109 lbs			
	Black	W71PBS1600N		109 lbs			
SBS Torch	UltraWhite	W71PNUWP160T	39.4" x 33'6"	102 lbs	20 Rolls	100 sqft	RL
	White	W71PWP160TN		111 lbs			
	Black	W71PBP160TN		110 lbs			
SBS FR	UltraWhite	W71PNUWS160F	39.4" x 33'6"	102 lbs	20 Rolls	100 sqft	RL
	White	W71PWS160FN		109 lbs			
	Black	W71PBS160FN		102 lbs			
SBS FR Torch	UltraWhite	W71PNUWP16FT2	39.4" x 33'6"	106 lbs	20 Rolls	100 sqft	RL
	White	W71PWP16FT2N		114 lbs			
	Black	W71PBP16FT2N		106 lbs			
SBS Glass	UltraWhite	W71FNUWS1600	39.4" x 33'6"	105 lbs	20 Rolls	100 sqft	RL
	White	W71FWS1600N		108 lbs			
	Black	W71FBS1600N		105 lbs			
SBS Glass FR	UltraWhite	W71FNUWS160F	39.4" x 33'6"	104 lbs	20 Rolls	100 sqft	RL
	White	W71FWS160FN		109 lbs			
	Black	W71FBS160FN		104 lbs			
SBS Glass FR Torch	UltraWhite	W71FNUWP16FT	39.4" x 33'6"	105 lbs	20 Rolls	100 sqft	RL
	White	W71FWP16FTN		108 lbs			
	Black	W71FBP16FTN		105 lbs			
SBS Premium	UltraWhite	W71HNUWS160P	39.4" x 33'6"	104 lbs	20 Rolls	100 sqft	RL
	White	W71HWS160PN		113 lbs			
	Black	W71HBS160PN		109 lbs			
SBS Premium SRG	Smog Red. White	W71HWS160SR	39.4" x 33'6"	115.5 lbs	20 Rolls	100 sqft	RL
	Smog Red. Gray	W71HGS160SR		114.5 lbs			
SBS Premium Torch	UltraWhite	W71HNUWS160PT	39.4" x 33'6"	105 lbs	20 Rolls	100 sqft	RL
	White	W71HWS160PTN		105 lbs			
	Black	W71HBS160PTN		113.5 lbs			
SBS Premium Torch SRG	Smog Red. White	W71HWS160PTSR	39.4" x 33'6"	113.5 lbs	20 Rolls	100 sqft	RL
	Smog Red. Gray	W71HGS160PTSR		113.5 lbs			
SBS Premium FR	UltraWhite	W71HNUWS160F	39.4" x 33'6"	104 lbs	20 Rolls	100 sqft	RL
	White	W71HWS160FN		115.5 lbs			
	Black	W71HBS160FN		117.5 lbs			
SBS Premium FR SRG	Smog Red. White	W71HWS160FSR	39.4" x 33'6"	115.5 lbs	20 Rolls	100 sqft	RL
	Smog Red. Gray	W71HGS160FSR		117.5 lbs			
SBS Premium FR Torch	UltraWhite	W71HNUWS16FT	39.4" x 33'6"	106 lbs	20 Rolls	100 sqft	RL
	White	W71HWS16FTN		106 lbs			
	Black	W71HBS16FTN		113.5 lbs			
SBS Premium FR Torch SRG	Smog Red. White	W71HWS160PTSR	39.4" x 33'6"	113.5 lbs	20 Rolls	100 sqft	RL
	Smog Red. Gray	W71HGS160PTSR		113.5 lbs			
SBS Metal Flash-AL	UltraWhite	W71RACALCL	39.4" x 33'6"	94 lbs	20 Rolls	100 sqft	RL

ASPHALT

SBS Modified Bitumen Membranes - AVAILABLE ONLY IN CANADA							
MEMBRANE	TOP SURFACING Granule Color	MATERIAL # SKU	ROLL SPECIFICATIONS				
			Roll Dimensions	Net Coverage	Membrane Thickness	Roll Weight	UOM
SBS 180 Base	Smooth / Sand	W71PSS180	39.4" x 50'	149 sqft (13.8 m2)	90 mil (2.3 mm)	96 lbs (44 kg)	RL
SBS 180 Torch Base	Smooth / Sand	W71PSS180T	39.4" x 33' 6"	98 sqft (9.1 m2)	120 mil (3.0 mm)	85 lbs (39 kg)	RL
SBS 250	UltraWhite	W71HNUWS250	39.4 " x 33' 6"	98 sqft (9.1 m2)	160 mil (4.1 mm)	113 lbs (51 kg)	RL
	White	W71HWS250	39.4 " x 33' 6"	98 sqft (9.1 m2)	160 mil (4.1 mm)	113 lbs (51 kg)	
	Black	W71HBS250	39.4 " x 33' 6"	98 sqft (9.1 m2)	160 mil (4.1 mm)	113 lbs (51 kg)	
SBS 250 Torch	UltraWhite	W71HNUWS250T	39.4 " x 33' 6"	98 sqft (9.1 m2)	160 mil (4.1 mm)	90 lbs (41 kg)	RL
	White	W71HWS250T	39.4 " x 33' 6"	98 sqft (9.1 m2)	160 mil (4.1 mm)	90 lbs (41 kg)	
	Black	W71HBS250T	39.4 " x 33' 6"	98 sqft (9.1 m2)	160 mil (4.1 mm)	90 lbs (41 kg)	
SBS 250 FR	UltraWhite	W71HNUWS250F	39.4 " x 33' 6"	98 sqft (9.1 m2)	160 mil (4.1 mm)	113 lbs (51 kg)	RL
	White	W71HWS250F	39.4 " x 33' 6"	98 sqft (9.1 m2)	160 mil (4.1 mm)	113 lbs (51 kg)	
	Black	W71HBS250F	39.4 " x 33' 6"	98 sqft (9.1 m2)	160 mil (4.1 mm)	113 lbs (51 kg)	
SBS 250 FR Torch	UltraWhite	W71HNUWS250FT	39.4 " x 33' 6"	98 sqft (9.1 m2)	160 mil (4.1 mm)	114 lbs (52 kg)	RL
	White	W71HWS250FT	39.4 " x 33' 6"	98 sqft (9.1 m2)	160 mil (4.1 mm)	114 lbs (52 kg)	
	Black	W71HBS250FT	39.4 " x 33' 6"	98 sqft (9.1 m2)	160 mil (4.1 mm)	114 lbs (52 kg)	

PRODUCT REFERENCE INDEX

ASPHALT

APP Modified Bitumen Membranes**							
DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	APPROX. COVERAGE	UOM
APP 80 Glass Base	Black	W70FTS0802	39.4" x 65'4"	106 lbs	20 Rolls	196.7 sqft	RL
APP Premium Base	Black	W70BTS0802	39.4" x 65'4"	103 lbs	20 Rolls	196.7 sqft	RL
APP 160	Black	W70APP0162	39.4" x 32'10"	105 lbs	20 Rolls	98 sqft	RL
APP 160 Cool	Black	W70PTT1600	39.4" x 32'10"	107 lbs	20 Rolls	98 sqft	RL
APP 170	Black	W70APP0172	39.4" x 32'10"	117 lbs	20 Rolls	98 sqft	RL
APP 170 Cool	Black	W70PTT1700	39.4" x 32'10"	110 lbs	20 Rolls	98 sqft	RL
APP 180	UltraWhite	W70PNUWP1800	39.4" x 32'10"	103 lbs	20 Rolls	98 sqft	RL
	White	W70PWP1800N		109 lbs			
	Black	W70PBP1800N		109 lbs			
APP 180 Cool	White	W70PWS180CN	39.4" x 32'10"	113 lbs	39.4" x 33'6"	98 sqft	RL
	Black	W70PBS180CN		104 lbs			
APP 180 FR	UltraWhite	W70PNUWP180F	39.4" x 32'10"	103 lbs	20 Rolls	98 sqft	RL
	White	W70PWP180FN		109 lbs			
	Black	W70PBP180FN		103 lbs			
APP 180 FR Cool	UltraWhite	W70PNUW180FC	39.4" x 32'10"	106 lbs	20 Rolls	98 sqft	RL
		W70PWS180FCN		111 lbs			
	Black	W70PBT180FCN		106 lbs			

** Available only in the United States

PRODUCT REFERENCE INDEX

ASPHALT

Asphalt Built-Up-Roofing Felt Ply Sheets - BUR

DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	APPROX. COVERAGE	UOM
Ply IV (4) M Felt	Black	W70RAC8740	39.4" x 164.5'	40 lbs	25 Rolls	500 sqft	RL
Ply VI (6) M Felt	Black	W70RAC8760	39.4" x 164.5'	45 lbs	25 Rolls	500 sqft	RL

Asphalt Roofing - Base Sheets, Underlayments, Barriers

DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	APPROX. COVERAGE	UOM
MB Base Sheet	Black	W70RAC8500	39.4" x 98.7'	75 lbs	25 Rolls	300 sqft	RL
Channel Venting Base	Black	W70RACCVBS	3' 3" x 32' 11"	74 lbs	25 Rolls	100 sqft	RL
V-Force Vapor Barrier	Black	W56358900V25	45" x 133.75'	80 lbs / Roll	25 Rolls	Se TIS	RL

Asphalt Roofing - Accessories and Granules

DESCRIPTION	COLOR	ITEM CODE	SIZE	WEIGHT	PACKAGING	APPROX. COVERAGE	UOM
Multi-Purpose MB Cold Adhesive	UltraWhite	W70RACMCA5P	4.75 Gallon Pail	53 lbs / pail	45 Pails / Pallet	1.5 – 2.0 Gallons per 100 sqft	PL
Multi-Purpose MB Cold Adhesive	UltraWhite	W70RACMCADP	55 Gallon Lined Drum	2,300 lbs / Pallet	4 / Pallet	1.5 – 2.0 Gallons per 100 sqft	DR
Multi-Purpose MB Cold Adhesive	UltraWhite	W70RACMCAT	275 Gallon Plastic Tote	2,900 lbs / Tote	Tote	1.5 – 2.0 Gallons per 100 sqft	GAL
Multi-Purpose MB Flashing Cement	UltraWhite	W70RACMFC5P	5 Gallon Pail	50 lbs / Pail	45 Pails / Pallet	2.0 – 3.0 Gallons per 100 sqft	PL
SA Primer	UltraWhite	W70RACSAP5	5 Gallon Pail	42 lbs / Pail	45 Pails / Pallet	100 – 125 sqft per Gallon ~ porosity of substrate	GAL
SEBS Mopping Asphalt** (DS)	UltraWhite	W70RACAPSL	50 lb Keg	2,080 lbs / Pallet	32 Kegs / Pallet	See TIS	LB
Ceramic Roofing Granules ¹	White	W70RACGGWHN	See TIS	50 lbs / Pail	5 Gallon Pail	See TIS	PL
Ceramic Roofing Granules (Buff) (Special Order)	UltraWhite	W70RACGGBF	See TIS	50 lbs / Pail	5 Gallon Pail	See TIS	PL
Ceramic Roofing Granules ¹	Black	W70RACGGBKN	See TIS	50 lbs / Pail	5 Gallon Pail	See TIS	PL
Roofing Granules ¹	UltraWhite	W70RACGGNUW	See TIS	40 lbs / Pail	5 Gallon Pail	See TIS	PL
MB 2" Barbed Metal Lap Plate** (DS)	UltraWhite	W56RAC4183	1000 pcs./pail	1,375 lbs / Pallet	40 Pails / Pallet	See TIS	CAR

** All shipments FOB Halls, TN, 7-10 days notice necessary.

¹ Granules are matched for all APP and SBS granule styles produced at Beech Grove, IN.

² Totes are non-returnable. Elevate will provide a list of recyclers to assist in disposal.

Pricing: All prices are subject to change without notice. Items will be invoiced at the prices in effect on date of shipment.

PRODUCT REFERENCE INDEX

ASPHALT

UltraFlash - Liquid Flashing*						
DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	APPROX. COVERAGE	UOM
UltraFlash One-Part Liquid Flashing	W70UFLF08B	Box of 2 1-Gallon Cans	20.2 lbs / Box	Box of 2	Pail Covers 50 sqft	CAR
UltraFlash One-Part Liquid Flashing	W70UFLF08A	One 5-gallon Can	48.5 lbs / Can	5-Gallon Can	Pail Covers 250 sqft	PL
UltraFlash Two-Part Liquid Flashing Part A	W70UFLF07A	3 Gallon Pail (2.66 Gallons of Liquid)	22 lbs / Pail	24 Pails / Pallet	See TIS	PL
UltraFlash Two-Part Liquid Flashing Part A	W70UFLF01A	0.8 Gallon Can	26 lbs / Carton	4 Cans / Car	See TIS	CAR
UltraFlash Two-Part Liquid Flashing Part B Activator	W70UFLF11B	11 fl oz Bottle	13 lbs / Carton	4 Bottles / Car	See TIS	CAR
UltraFlash Two-Part Liquid Flashing Dual Cartridges	W70UFLF002	28.7 oz Cartridge	29 lbs / Carton	4 Cartridges / Carton	See TIS	CAR
UltraFlash Static Mixers	W70UFSM002	1 Carton	6 lbs / Carton	48 / Carton	See TIS	CAR
UltraFlash LVOC Primer	W70UFPR004	1 Quart Spray Bottle	8 lbs / Carton	4 Bottles / Carton	POROUS: 300 sqft/Gallon NON-POROUS: 600 sqft/Gallon	CAR
UltraFlash MIXING JIG (Red)	W70UFMJ004	Each	11 lbs	1 / Box	See TIS	EA
UltraFlash Fabric 6" x 100 yds	W70UF06300	1 Roll	3.3 lbs / roll	75 Rolls / Box	See TIS	RL
UltraFlash Fabric 12" x 100 yds	W70UF12300	1 Roll	6.7 lbs / roll	25 Rolls / Box	See TIS	RL
UltraFlash Fabric 24" x 100 yds	W70UF24300	1 Roll	13.3 lbs / roll	25 Rolls / Box	See TIS	RL
UltraFlash Fabric 40" x 108 yds	W70UF40300	1 Roll	22 lbs / roll	25 Rolls / Pallet	See TIS	EA

** All shipments FOB Halls, TN, 7-10 days notice necessary.

¹ Granules are matched for all APPand SBS granule styles produced at Beech Grove, IN.

² Totes are non-returnable. Elevate will provide a list of recyclers to assist in disposal.

Pricing: All prices are subject to change without notice. Items will be invoiced at the prices in effect on date of shipment.

PRODUCT REFERENCE INDEX

PMMA

PMMA Membranes & Accessories

DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	APPROX. COVERAGE	UOM
AC Primer	W70CFAPMMA	1.32 Gallons	22.0 lbs	See TIS	See TIS	PL
AC Catalyst Powder 3.5 oz	W70CFACP100G	.22 lbs	.4 lbs	3.5 oz / Bag	See TIS	BAG
AC Catalyst Powder 10.6 oz	W70CFACP300G	.22 lbs	1.2 lbs	2 bags / Carton	See TIS	BAG
AC Fast FR Workpack - White	W70CFAWPKWH	3.96 Gallons	36.4 lbs	33 lb / pl	See TIS	PL
AC Fast FR Workpack - Gray	W70CFAWPKGR	3.96 Gallons	36.4 lbs	33 lb / pl	See TIS	PL
AC Fleece 120	W70CFAF120413	164' x 41.3"	15.6 lbs	See TIS	See TIS	RL
AC Fleece 120	W70CFAF120207	164' x 20.7"	7.8 lbs	See TIS	See TIS	RL
AC Fleece 120	W70CFAF120138	164' x 13.8"	5.2 lbs	See TIS	See TIS	RL
AC Fleece 120	W70CFAF120103	164' x 10.3"	3.9 lbs	See TIS	See TIS	RL
AC Fleece 120	W70CFAF12041	164' x 4.1"	1.4 lbs	See TIS	See TIS	RL

PRODUCT REFERENCE INDEX

COVERBOARD

DensDeck®

DESCRIPTION	ITEM CODE	PCS / BDL	BDL / TL	APPROX. COVERAGE	UOM
.25" - 4' x 8'	W56RAC8625	42	28	33,600 - 43,008 sqft / Truckload	FT ²
.50" - 4' x 8'	W56RAC8650	30	24	23,040 - 24,000 sqft / Truckload	FT ²
.625" - 4' x 8'	W56RAC8662	30	18	17,280 - 18,240 sqft / Truckload	FT ²

DensDeck® Prime

DESCRIPTION	ITEM CODE	PCS / BDL	BDL / TL	APPROX. COVERAGE	UOM
.25" - 4' x 4'	W56RAC8724	60	40	38,400 - 40,320 sqft / Truckload	FT ²
.25" - 4' x 8'	W56RAC8725	42	28	33,600 - 43,008 sqft / Truckload	FT ²
.50" - 4' x 4'	W56RAC8754	50	28	23,200 - 24,000 sqft / Truckload	FT ²
.50" - 4' x 8'	W56RAC8750	30	24	23,040 - 24,000 sqft / Truckload	FT ²
.625" - 4' x 4'	W56RAC8764	40	28	17,280 - 17,920 sqft / Truckload	FT ²
.625" - 4' x 8'	W56RAC8762	30	18	17,280 - 18,240 sqft / Truckload	FT ²

StormX

DESCRIPTION	ITEM CODE	PCS / BDL	BDL / TL	APPROX. COVERAGE	UOM
.625" - 4' x 4'	W56RAC8862	34	27-28	14,688 - 15,232 sqft / Truckload	FT ²
.625" - 4' x 4'	W56RAC8864	26	18-19	14,976 - 15,808 sqft / Truckload	FT ²

- LTL orders requiring a stopover will pay \$150.00 stopover fee.
- All shipments are subject to a fuel and transportation surcharge.
- Jobsite ship dates and delivery times are not guaranteed.
- Loads purchased at LTL pricing will be pooled and shipped at earliest possible ship date.

PRODUCT REFERENCE INDEX

MULTI-SYSTEM ACCESSORIES

Bonding Adhesives & Sealants						
DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	APPROX COVERAGE	UOM
Black One-Part Pourable Sealer	W563589090	4x 2L Pouches / Carton	25 lbs / Carton	See TIS	122 in ³ per pouch	CAR
White One-Part Pourable Sealer	W563587080	2 Liters / Pouch	25 lbs / Carton	See TIS	122 in ³ per pouch	CAR
Pourable Sealer* S10	W563587065	4x 1 Gallon / Carton	46 lbs / Carton	See TIS	185 cu in/gal	GAL
Part B Pourable Sealer	W56SPL0015	4 Cans / Carton	2 lbs / Carton	See TIS	See TIS	CAR
One-Part Pourable Sealer Nozzle Replacmnts	W563587081	40 Nozzles / Carton	1 lb / Bag	See TIS	See TIS	CAR
WaterBlock Seal* S20	W563587071	25 Cartridges / Carton	27 lbs / Carton	See TIS	250 lin ft/car	CAR
AP Sealant (tubes)*	W563587078	30 Cartridges / Carton	25 lbs / Carton	See TIS	2760 Fastener Heads / Carton	CAR
Single-Ply LVOC Bonding Adhesive	W56358715L	5 Gallon Pail	41 lbs / Pail	See TIS	45-60 sqft / Gallon	GAL
Single-Ply LVOC Bonding Adhesive - 1168	W56358705LC	5 Gallon Pail	47 lbs / Pail	See TIS	45-60 sqft / Gallon	GAL
Splice Wash SW-100	W563587066	5 Gallon Pail	38 lbs / Pail	See TIS	200-250 sqft / Gallon	GAL
Single Ply LVOC Primer 3 gal	W563587110	3 Gallon Pail	24 lbs / Pail	See TIS	200-250 sqft / Gallon	GAL
Single Ply LVOC Primer 1 gal	W563587111	4x 1 Gallon Pails	32 lbs / Carton	See TIS	200-250 sqft / Gallon	CAR
Single Ply LVOC Splice Wash	W563587113	3 Gallon Pail	20 lbs / Pail	See TIS	250-300 sqft / Gallon	GAL
UltraPly Bonding Adhesive	W56TPO3005	5 Gallon Pail	41 lbs / Pail	See TIS	45-60 sqft / Gallon	GAL
Flashing Foam Part A & Kit (large)	W56RACIASFFLA	See TIS	115.7 lbs	See TIS	See TIS	CAN
Flashing Foam Part B (large)	W56RACIASFFLB	See TIS	115.7 lbs	See TIS	See TIS	CAN
Flashing Foam Part A & Kit (portable)	W56RACIAFFPA	See TIS	41 lbs	See TIS	See TIS	CAN
Flashing Foam Part B (portable)	W56RACIAFFPB	See TIS	41 lbs	See TIS	See TIS	CAN

Jet Bond Spray Adhesive						
DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	APPROX COVERAGE	UOM
Jet Bond Sprayable Bonding Adhesive	W56RACSADC	Canister	48 lbs / Can	See TIS	See TIS	CAN
LVOC Canister Flush Solution	W56RAC16DC	Canister	13.5 lbs / Can	See TIS	See TIS	CAN
Spray Gun (vertical apply)	W56RACINTH	Spray Gun	1.1 lbs	See TIS	1 Spray Gun / Carton	EA
Spray Gun with Extension (horizontal apply)	W56RACINTI	Spray Gun	1.5 lbs	See TIS	1 Spray Gun / Carton	EA
60° Spray Tip - 5 pack	W56RACINTJ	Spray Tips	1.5 lbs	See TIS	5 Packs / Carton	EA
Canister Hose - 6 foot	W56RACIAPRL	Hose	1 lb	See TIS	1 Hose / Carton	EA
Canister Hose - 12 foot	W56RACIAPRM	Hose	1.5 lbs	See TIS	1 Hose / Carton	EA
Canister Hose - 18 foot	W56RACIAPRN	Hose	2 lbs	See TIS	1 Hose / Carton	EA

PRODUCT REFERENCE INDEX

MULTI-SYSTEM ACCESSORIES

Universal System Accessories

DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	APPROX COVERAGE	UOM
Metal Batten Strips	W56RAC3053	1" x 10'	88 lbs / Tube	See TIS	500 linear ft / Tube (50 pieces)	TU
Polymer Batten Strips	W56RAC3071	0.75" x 250'	9 lbs / Carton	See TIS	250 linear ft / Carton	CAR
Coiled Metal Batten Strip	W56RAC3052	1" x 220'	32 lbs / Carton	See TIS	220 ft / Carton	CAR
Polymer Auger Batten Strip (Metal) ***	W56RAC3059	1" x 10'	105 lbs / Tube	See TIS	500 linear ft / Tube	TU
Protection Mat - 4.5 ounce	W563589000	15' x 320'	196 lbs / Roll	See TIS	4,800 sqft	FT2
Drain Bar (Includes Fasteners, Extruded Aluminum)	W563583065	4" x 10'	42 lbs / Tube	See TIS	100 linear ft / Tube	TU
Termination Bar (Aluminum)	W56RAC3061	.087" x 1.08" x 10'	72 lbs / Tube	See TIS	500 linear ft / Tube (50 pieces)	TU
Quickseam Yellow Safety Strip	W56RAC1870	5.5" x 100'	18 lbs / Carton	See TIS	100 linear ft	CAR
3" Drain Insert	W56RAC2713	3" Reroof Drain	9 lbs / Carton	See TIS	1 / Carton	CAR
4" Drain Insert	W56RAC2714	4" Reroof Drain	10 lbs / Carton	See TIS	1 / Carton	CAR
6" Drain Insert	W56RAC2716	6" Reroof Drain	12 lbs / Carton	See TIS	1 / Carton	CAR
Red Replacement Dome	W56RAC2710	9.5"	See TIS	See TIS	5 / Carton	CAR

Universal Coatings

DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	APPROX COVERAGE	UOM
Elevate AcryliTop PC-100 Coating White	W56RACTOPW	5 Gallon	58.5 lbs / Pail	See TIS	See TIS	PL
Elevate AcryliTop PC-100 Coating Tan	W56RACTOPT	5 Gallon	58.5 lbs / Pail	See TIS	See TIS	PL
Elevate AcryliTop PC-100 Coating Gray	W56RACTOPG	5 Gallon	58.5 lbs / Pail	See TIS	See TIS	PL
Elevate VOC-Free Membrane Prewash	W56RACMEMPW	5 Gallon	58.5 lbs / Pail	See TIS	400 sqft / Pail	PL

V-Force Vapor Barrier

DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	APPROX COVERAGE	UOM
V- Force Vapor Barrier Membrane	W56358900V25	45" x 133' Roll	83 lbs	See TIS	See TIS	RL
V- Force FR Vapor Barrier Membrane	W56358900VFR	60" x 100' Roll	48 lbs	See TIS	See TIS	RL
SA-LVOC Primer	W563587092	5 Gallon Pail	35 lbs	See TIS	See TIS	PL
V-Force WB Primer	W563587091	5 Gallon Pail	42.5 lbs / Pail	See TIS	See TIS	PL
V-Force SB Primer	W563587090	5 Gallon Pail	41.6 lbs / Pail	See TIS	See TIS	PL

Roof Edge Systems

DESCRIPTION	
AnchorGard	CONTACT: estimating@hbcim.com for quoting
EdgeGard	
Coping	

Advanc-R Vacuum Insulation Panel

DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	APPROX COVERAGE	UOM
1" Advanc-R VIP 2x2	W56RACVIP22	22.4" x 24" x .94"	See TIS	66 Pieces / Pallet	3.74 sqft per Panel	FT ²
1" Advanc-R VIP 2x4	W56RACVIP24	22.4" x 24" x .94"	See TIS	33 Pieces / Pallet	7.49 sqft per Panel	FT ²

Lead time is 100 days from receipt of PO with rolling 6 month forecast

PRODUCT REFERENCE INDEX

ATTACHMENTS

All Purpose Fasteners and Plates					
DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
2" Metal Plates*	W56RAC4180	2"	34 lbs	1000 / Pail	CAR
Insulation Fastening Plate (Round)*	W56RAC4190	3"	42 lbs		CAR
V-Plate*	W56RAC4182	2.25"	28 lbs	500 / Pail	CAR
All-Purpose Fasteners (.235" Thread Diameter)	W56RAC4224	1.5"	14 lbs	1000 / Pail	CAR
	W56RAC4225	2"	17 lbs		
	W56RAC4226	2.5"	21 lbs		
	W56RAC4227	3"	24 lbs		
	W56RAC4228	3.5"	28 lbs		
	W56RAC4229	4"	32 lbs		
	W56RAC4206	4.5"	35 lbs		
	W56RAC4207	5"	38 lbs		
	W56RAC4198	5.5"	41 lbs		
	W56RAC4208	6"	48 lbs		
	W56RAC4209	7"	26 lbs	500 / Pail	
	W56RAC4210	8"	29 lbs		
	W56SPL0019	9"	17 lbs	250 / Pail	
	W56RAC4211*	10"	26 lbs		
	W56RAC4212*	12"	30 lbs		
	Pre-Assembled Fasteners and Insulation Plates #12 (.196" Thread Diameter)	W56RAC4162	2.25"	15 lbs	
W56RAC4163		2.875"	17 lbs		
W56RAC4164		3.25"	17 lbs		
W56RAC4165		3.75"	18 lbs		
W56RAC4166		4.5"	20 lbs		
W56RAC4167		5"	20 lbs		
W56RAC4168		6"	22 lbs	200 / Box	
W56RAC4169		7"	16 lbs		
W56RAC4170		8"	16 lbs		
Elevate #12 Fasteners	W56RAC1201	1.625"	12 lbs	1000 / Pail	CAR
	W56RAC1202	2.25"	16 lbs		
	W56RAC1203	3"	20 lbs		
	W56RAC1204	4"	25 lbs		
	W56RAC1205	5"	32 lbs		
	W56RAC1206	6"	37 lbs		
	W56RAC1207	7"	45 lbs		
	W56RAC1208	8"	49 lbs		

PRODUCT REFERENCE INDEX

ATTACHMENTS

Heavy Duty and HD Plus, Fasteners and Plates					
DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
Heavy Duty Fastener V-Plate	W56RAC4026	6"	26.9 lbs / Box	250 / Carton	CAR
	W56RAC4027	7"	23.6 lbs / Box	200 / Carton	
	W56RAC4028	8"	25.6 lbs / Box		
Heavy Duty Fastener* (.260" Thread Diameter)	W56RAC4230	1.25"	12 lbs / Carton	1000 / Box	CAR
	W56RAC4232	2"	19 lbs / Carton		
	W56RAC4234	3"	29 lbs / Carton		
	W56RAC4236	4"	37 lbs / Carton		
	W56RAC4237	5"	47 lbs / Carton		
	W56RAC4249	6"	28 lbs / Carton	500 / Box	
	W56RAC4239	7"	33 lbs / Carton		
	W56RAC4240	8"	38 lbs / Carton		
	W56RAC4241	10"	46 lbs / Carton		
	W56RAC4242	12"	55 lbs / Carton		
	W56RAC4243	14"	65 lbs / Carton		
HD Fasteners White (.275" Thread Diameter)	W56RAC4390	1.25"	12 lbs / Carton	1000 / Carton	CAR
	W56RAC4391	2"	19 lbs / Carton		
	W56RAC4392	3"	29 lbs / Carton		
	W56RAC4393	4"	37 lbs / Carton		
	W56RAC4394	5"	47 lbs / Carton		
	W56RAC4395	6"	28 lbs / Carton	500 / Carton	
	W56RAC4396	7"	33 lbs / Carton		
	W56RAC4397	8"	38 lbs / Carton		
	W56RAC4398	10"	46 lbs / Carton	250 / Carton	
HD Plus Fasteners ***For Use To Attach Batten Strips or Heavy Duty Plus Seam Plates Only***	W56RAC4282	2"	33 lbs	1000 / Pail	CAR
	W56RAC4283	3"	54 lbs	500 / Pail	
	W56RAC4284	4"	30 lbs		
	W56RAC4285	5"	38 lbs		
	W56RAC4286	6"	48 lbs		
	W56RAC4287	7"	34 lbs		
	W56RAC4288	8"	36 lbs		
	W56RAC4290	10"	39 lbs		
	W56RAC4299	12"	44 lbs		

*Special order may require lead time. Shipped from vendor
Subject to change without notice.
*direct ship from vendor

PRODUCT REFERENCE INDEX

ATTACHMENTS

AccuTrac™ Fasteners and Plates Kits					
DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
AP AccuTrac™ Kits Special Order Only*** Not Stocked In Elevate Locations***	W56RACFB16	1.625"	54 lbs	1000 / Carton	CAR
	W56RACFB22	2.25"	58 lbs		
	W56RACFB30	3"	62 lbs		
	W56RACFB40	4"	62 lbs		
	W56RACFB43	4.375"	70 lbs		
	W56RACFB50	5"	74 lbs		
	W56RACFB60	6"	80 lbs		
HD AccuTrac™ Kits Special Order Only*** Not Stocked In Elevate Locations***	W56RACFA15	1.25"	55 lbs	1000 / Carton	CAR
	W56RACFA20	2"	61 lbs		
	W56RACFA30	3"	71 lbs		
	W56RACFA40	4"	79 lbs		
	W56RACFA50	5"	90 lbs		
	W56RACFA60	6"	98 lbs		
3" AccuTrac™ Plate 1000/CT	W56TPOPL08	3"	43 lbs	1000 / Carton	CAR

IsoFast™ Belted Fasteners and Plates					
DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
IsoFast™ #12 Belted Screws* *Do not use #12 screws for membrane attachment**	W56RACB22A	2.25"	16 lbs	750 / Pail	CAR
	W56RACB22B	2.875"	20 lbs		
	W56RACB23A	3.25"	22 lbs		
	W56RACB23B	3.75"	26 lbs		
	W56RACB24A	4.5"	30 lbs		
	W56RACB25A	5"	34 lbs		
	W56RACB26A	6"	41 lbs		
IsoFast™ Insulation Plates*	W56RACBPIN	2.75" x 2.75"	31 lbs	750 / Pail	CAR
IsoFast™ #15 Belted Screws*	W56RACB52A	2"	31 lbs	1000 / Pail	CAR
	W56RACB53A	3"	35 lbs	1000 / Pail	
	W56RACB54A	4"	23 lbs	500 / Pail	
	W56RACB55A	5"	27 lbs	500 / Pail	
	W56RACB56A	6"	32 lbs	500 / Pail	
IsoFast™ 2.375" Barbed Plates*	W56RACBPME	2.375" diameter	27 lbs	500 / Pail	CAR

AccuTrac and Reel-Fast are registered trademarks of ITW Buildex.

IsoFast is a registered trademark of SFS intec.

Fasteners may be available in longer lengths; contact your Elevate Sales Representative.

PRODUCT REFERENCE INDEX

ATTACHMENTS

HD HailGard™ Fasteners					
DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
HD HailGard Fasteners (.265" Thread Diameter)	W56RAC4405	2.5"	22 lbs	1000 / Pail	CAR
	W56RAC4406	3"	27 lbs	1000 / Pail	
	W56RAC4407	3.5"	31 lbs	1000 / Pail	
	W56RAC4408	4"	36 lbs	1000 / Pail	
	W56RAC4409	4.5"	41lbs	1000 / Pail	
	W56RAC4410	5"	45 lbs	1000 / Pail	
	W56RAC4411	5.5"	25 lbs	500 / Pail	
	W56RAC4412	6"	27 lbs	500 / Pail	
	W56RAC4413	6.5"	30 lbs	500 / Pail	
	W56RAC4414	7"	32 lbs	500 / Pail	
	W56RAC4415	7.5"	35 lbs	500 / Pail	
	W56RAC4416	8"	36 lbs	500 / Pail	
	W56RAC4417	10"	38 lbs	500 / Pail	
	W56RAC4418	12"	40 lbs	500 / Pail	

PRODUCT REFERENCE INDEX

ATTACHMENTS

Miscellaneous Fasteners and Plates					
DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
Purlin Fasteners -Available as a direct shipment from vendor	W56RAC4382	2.75"	26 lbs	1000 / Pail	CAR
	W56RAC4383	3.75"	34 lbs	1000 / Pail	CAR
	W56RAC4385	5.75"	48 lbs	1000 / Pail	CAR
	W56RAC4386	6.75"	54 lbs	1000 / Pail	CAR
	W56RAC4387	7.75"	31 lbs	500 / Pail	CAR
	W56RAC4480	8.75"	38 lbs	500 / Pail	PL
Polymer Fastener Seam Plate	W56RAC4502	2"	27 lbs	1000 / Pail	PL
Polymer Fastener Insulation Plate	W56RAC4503	3"	18 lbs	500 / Pail	CAR
Polymer Fasteners	W56RAC4527	2.75"	15 lbs	500 / Pail	CAR
	W56RAC4530	3"	15 lbs	500 / Pail	CAR
	W56RAC4535	3.5"	17 lbs	500 / Pail	CAR
	W56RAC4540	4"	20 lbs	500 / Pail	CAR
	W56RAC4545	4.5"	21 lbs	500 / Pail	PL
	W56RAC4550	5"	24 lbs	500 / Pail	PL
	W56RAC4555	5.5"	25 lbs	500 / Pail	CAR
	W56RAC4560	6"	25 lbs	500 / Pail	CAR
	W56RAC4565	6.5"	30 lbs	500 / Pail	CAR
	W56RAC4570	7"	18 lbs	250 / Pail	CAR
	W56RAC4575	7.5"	19 lbs	250 / Pail	CAR
	W56RAC4580	8"	20 lbs	250 / Pail	PL
	W56RAC4485*	8.5"	20 lbs	250 / Pail	PL
	W56RAC4490*	9.0"	20 lbs	250 / Pail	CAR
	W56RAC4495*	9.5"	20 lbs	250 / Pail	CAR
	W56RAC4499*	10"	20 lbs	250 / Pail	CAR
	W56RAC4491*	11"	23 lbs	250 / Pail	CAR
	W56RAC4492*	12"	24 lbs	250 / Pail	CAR
	W56RAC4493*	13"	25 lbs	250 / Pail	CAR
	W56RAC4494*	14"	25 lbs	250 / Pail	CAR
Lightweight Concrete Base-Ply Fasteners**	W56RAC4256	1.2"	37 lbs	1000 / Pail	CAR
	W56RAC4257	1.7"	41 lbs	1000 / Pail	
Lite Deck Fasteners	W560055222	2.875"	32 lbs	500 / Carton	CAR
	W560055223	3"	36 lbs	500 / Carton	
	W560055224	4"	47 lbs	500 / Carton	
	W560055225	5"	30 lbs	250 / Carton	
	W560055226	6"	36 lbs	250 / Carton	
	W560055227	7"	41 lbs	250 / Carton	
	W560055228	8"	46 lbs	250 / Carton	
	W560055229	9"	26 lbs	125 / Carton	
	W560055230	10"	29 lbs	125 / Carton	
	W560055231	12"	34 lbs	125 / Carton	
3" Lite Deck Plate	W560055006	3"	19 lbs	500 / Carton	CAR
Lite Deck Bar	W560055007	1" X 10'	80 lbs	50 / Tube	CAR
Two Piece Impact Nail***	W56RAC4258	1.4"	26 lbs	500 / Pail	EA
	W56RAC4259	1.8"	28 lbs	500 / Pail	RL

* Special Order

**Available direct from vendor

+Prepaid Freight on 25,000+ pieces

PRODUCT REFERENCE INDEX

ATTACHMENTS

Miscellaneous Fasteners and Plates (Continued)

DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
Concrete Drive Fasteners	W56RAC4320	1.5"	14 lbs	500 / Pail	CAR
	W56RAC4321	2"	17 lbs	500 / Pail	
	W56RAC4322	2.5"	20 lbs	500 / Pail	
	W56RAC4323	3"	23 lbs	500 / Pail	
	W56RAC4324	3.5"	27 lbs	500 / Pail	
	W56RAC4325	4"	29 lbs	500 / Pail	
	W56RAC4326	4.5"	31 lbs	500 / Pail	
	W56RAC4327	5"	35 lbs	500 / Pail	
	W56RAC4328	5.5"	39 lbs	500 / Pail	
	W56RAC4349	6"	21 lbs	250 / Pail	
	W56RAC4350	6.5"	23 lbs	250 / Pail	
	W56RAC4351	7"	24 lbs	250 / Pail	
	W56RAC4352	7.5"	26 lbs	250 / Pail	
	W56RAC4353	8"	29 lbs	250 / Pail	
	W56RAC4354*	9"	See TIS	250 / Pail	
	W56RAC4355*	10"	See TIS	250 / Pail	
	W56RAC4336*	11"	See TIS	100 / Pail	
	W56RAC4337*	12"	See TIS	100 / Pail	
	W56RAC4338*	13"	See TIS	100 / Pail	
	W56RAC4339*	14"	See TIS	100 / Pail	
	W56RAC4340*	15"	See TIS	100 / Pail	
	W56RAC4341*	16"	See TIS	100 / Pail	
Coated Drive Pins Nailable	W56RAC4250N	1.25"	23 lbs	1000 / Pail	CAR
Coated Drive Pins	W56RAC4252	2"	16 lbs	500 / Pail	CAR
AP Stainless Steel Fasteners*	W56RAC4361	1.5"	13 lbs	1000 / Pail	CAR
	W56RAC4362	2"	16 lbs	1000 / Pail	
	W56RAC4363	3"	24 lbs	1000 / Pail	
	W56RAC4364	4"	31 lbs	1000 / Pail	
	W56RAC4365	5"	37 lbs	1000 / Pail	
	W56RAC4366	6"	43 lbs	1000 / Pail	
	W56RAC4367	7"	26 lbs	500 / Pail	
	W56RAC4368	8"	30 lbs	500 / Pail	
	W56RAC4370	10"	38 lbs	250 / Pail	
	W56RAC4372	12"	35 lbs	250 / Pail	
RetroDriller Fasteners	W56RACRD04	4"	20 lbs	500 / Pail	CAR
	W56RACRD05	5"	21 lbs	500 / Pail	
	W56RACRD06	6"	27 lbs	500 / Pail	
	W56RACRD07	7"	31 lbs	500 / Pail	
	W56RACRD08	8"	35 lbs	500 / Pail	
	W56RACRD10	10"	40 lbs	500 / Pail	
	W56RACRD12	12"	53 lbs	250 / Pail	

* Special Order

PRODUCT REFERENCE INDEX

ATTACHMENTS

ISO SPRAY™ R, ISO Stick™ Adhesive

DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
I.S.O. Spray R Part A *	W56RACR05A	5 Gallon	51.1 lbs	5 Gallon	PL
	W56RACR15A	15 Gallon Pail	152.7 lbs	15 Gallon Pail	PL
	W56RACR55A	50 Gallon Drum	509 lbs	50 gal drums	DR
I.S.O. Spray R Part B *	W56RACR05B	5 Gallon	41.9 lbs	5 Gallon	PL
	W56RACR15B	15 Gallon Pail	125.4 lbs	15 Gallon Pail	PL
	W56RACR55B	50 Gallon Drum	417.3 lbs	50 Gallon Drum	DR
ISO Stick Insulation Adhesive - Part 1 ***	W56RACIA5B1	5 Gallon Box	55 lbs	5 Gallon Box	CAR
	W56RACIA15D1	15 Gallon Pail	160 lbs	15 Gallon Pail	DR
	W56RACIA5D1	55 Gallon Drum	600 lbs	55 Gallon Drum	DR
ISO Stick Insulation Adhesive - Part 2 ***	W56RACIA5B2	5 Gallon Box	55 lbs	5 Gallon Box	CAR
	W56RACIA15D2	15 Gallon Pail	160 lbs	15 Gallon Pail	DR
	W56RACIA5D2	55 gal drums	600 lbs	55 Gallon Drum	DR
ISO Stick Winter Grade (WG) Insulation Adhesive - Part 1 ***	W56RACIA5B1W	5 Gallon Box	55 lbs	5 Gallon Box	CAR
ISO Stick Winter Grade (WG) Insulation Adhesive - Part 2 ***	W56RACIA5B2W	5 Gallon Box	55 lbs	5 Gallon Box	CAR

ISO Twin Pack

DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
ISO Twin Pack Insulation Adhesive	W56RACINTA	Case	20 lbs	Case	CAR
ISO Twin Pack Insulation Adh Hand Dispenser	W56RACINTG	Each	7 lbs	Each	CAR

Twin Jet

DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
Twin Jet Low Rise Foam Adhesive - Part 1 ***	W56RACIAHFO1	1 Canister	48 lbs	1 Canister	EA
Twin Jet Low Rise Foam Adhesive - Part 2 ***	W56RACIAHFO2	1 Canister	44 lbs	1 Canister	EA
Twin Jet Extension Tubes (10)	W56RACIAPRE	10 Tubes	See TIS	10 Tubes	EA
Twin Jet hose and gun	W56RACIAPRK	Each	See TIS	Each	EA
Twin Jet Mixing Tips (10)	W56RACIAPRT	10 Tips	See TIS	10 Tips	EA

Twin Jet Y

DESCRIPTION	ITEM CODE	SIZE	WEIGHT	PACKAGING	UOM
Twin Jet Y - Part A and Kit	W56RACIAHFOY1	1 Canister	48 lbs	1 Canister	EA
Twin Jet Y - Part B	W56RACIAHFOY2	1 Canister	44lbs	1 Canister	EA
Twin Jet Y Extension Tubes	W56RACIAPREY	17"	1 lb	8 Tubes	EA
Twin Jet Y Replacement Hose and Gun	W56RACIAPRKY	25' Hose	14 lbs	10 Tips	EA
Twin Jet Y Replacement Tips (8 Pack)	W56RACIAPRTY	8 Tips	1 lb	8 Tips	EA
Twin Jet Y Replacement Tips (25 Pack)	W56RACIAPRTFY	25 Tips	1 lb	25 Tips	EA

* Advised the following US states CO, CA, DE, MA, NJ, NY, VT, WA

**Must be purchased seperately.

*** Available as a direct shipment from vendor. These items are not stocked and will be shipped separately. Freight charges will be added.

Subject to change without notice.

*I.S.O.Spray R is shipped in covered vans, originating from Chagrin Falls, OH. Could be 3-5 Day Lead Time.

-I.S.O. Spray R insulation adhesive is a two-part polyurethane adhesive system that requires a high-pressure, heated spray system to apply.

-I.S.O. Spray R may be used to anchor roof insulation to various roof decks and for multi-layer insulation applications.

-I.S.O. Spray R consists of A and B components, which are purchased seperately.

-Actual coverage will vary depending on surface, materials, air temperature and humidity. Rougher surfaces, such as existing gravel-surfaced built-up roofs, will reduce the coverage 25-40%.

Contact your Elevate Sales Representative for further information.



ELEVATE


FOR MORE INFORMATION CONTACT:

U.S. OFFICE

26 Century Boulevard, STE 205
Nashville, TN 37214
1.800.428.4442

CANADIAN OFFICE

6509 Airport Road
Mississauga ON, L4V1S7
1.888.292.6265



VISIT OUR WEBSITE