

## **Clearance Delivery**

- 1. Frequency**
  - 1.1. Mountain Home Delivery: 127.1
- 2. Procedures**
  - 2.1. When Appropriate, inform pilots of the current ATIS information prior to contacting ground control.
- 3. IFR Routing**
  - 3.1. Initial Altitude: 10,000.
  - 3.2. All Operations:
    - 3.2.1. Issue Radar vectors to all aircraft.
  - 3.3. If a pilot cannot accept a departure procedure, issue the following headings for radar vectors to their route, per their departure runway:
    - 3.3.1. Runway 30 - Heading 270
    - 3.3.2. Runway 12 - Heading 100
- 4. Standard Departure Frequencies**
  - 4.1. When appropriate, issue the following frequencies to IFR aircraft:
    - 4.1.1. Mountain Home Approach 124.8
  - 4.2. When appropriate issue the following to VFR aircraft requiring Radar services after departure:
    - 4.2.1. Mountain Home Approach 124.8
- 5. VFR Routing**
  - 5.1. Not applicable

## **Ground**

- 1. Frequency**
  - 1.1. Mountain Home Ground: 120.5
- 2. Airspace**
  - 2.1. All movement areas with the exception of the active runway.
- 3. Procedures**
  - 3.1. Not Applicable
- 4. Departures**
  - 4.1. All aircraft requiring pushback onto the movement area will contact ground prior to pushback and start-up
  - 4.2. All aircraft will contact ground with position and ATIS prior to being issues taxi instructions
- 5. Arrivals**
  - 5.1. All aircraft will remain on ground frequency until off the movement area.

## **Local**

- 1. Frequency**
  - 1.1. Mountain Home Tower (Local): 133.850
- 2. Airspace**

- 2.1. Local: Runway 12/30, and the airspace within 5NM of the center of the field.

### **3. Procedures**

- 3.1. Runway operations
  - 3.1.1. Use runway 30 for arrivals and departures (West) during calm wind operations.
  - 3.1.2. Use runway 12 for arrivals and departures (East) when the tailwind component exceeds 5 knots
- 3.2. LAHSO
  - 3.2.1. Not authorized.
- 3.3. Tower Use of Radar
  - 3.3.1. Full

### **4. Departures**

- 4.1. Departure Notification / Releases
  - 4.1.1. Departure Notification are not required, unless otherwise coordinate by RAPCON
  - 4.1.2. Departures are automatically release unless otherwise coordinate by RAPCON
- 4.2. IFR Departures
  - 4.2.1. Ensure aircraft turn to assigned point/heading and altitude reporting is operating prior to handoff to departure.

### **5. Arrivals**

- 5.1. IFR arrival
  - 5.1.1. Quicklook Radar North
  - 5.1.2. Accept radar handoff of all IFR arrivals, if radar certified and it is operationally beneficial
- 5.2. Missed Approach/Go Around
  - 5.2.1. Acquire the track control for the aircraft conducting a missed approach.
  - 5.2.2. Send a Missed Notification (.MA) for the aircraft executing an unplanned Missed Approach/Go Around to the appropriate RAPCON sector that will be receiving the aircraft for re-sequencing.
  - 5.2.3. VFR aircraft, and/or IFR Category I/II aircraft conducting a visual approach and executing a Go-Around must be instructed to remain in the local pattern, if capable of doing so. The following is considered Primary Climb-Out procedure and does not require any special coordination with Approach Control or Strip marking (Scratchpad entries) other than the basic Missed Notification. Aircraft must not turn prior to the departure end of the runway. Handoff/Comm-Change to the appropriate RAPCON sector must be completed no later than 1 mile off the departure end of the runway.
    - 5.2.3.1. PRIMARY CLIMB OUT PROCEDURE:
      - 5.2.3.1.1. West Flow: Heading 270, Maintain 5,000.
      - 5.2.3.1.2. East Flow: Heading 100, Maintain 5,000.
  - 5.2.4. VFR Traffic join local pattern

### **6. VFR Operations**

- 6.1. VFR Departures
  - 6.1.1. Depart on course at or below 5,500.
  - 6.1.2. Handoff to departure control as soon as clear of any possible conflicts
    - 6.1.2.1. MUO - 124.8
- 6.2. VFR Arrivals
  - 6.2.1. Direct to airport at or below 5,500.
- 6.3. VFR Flight Following
  - 6.3.1. Ensure all aircraft requiring flight following have the appropriate scratch pad entry prior to handoff to departure.

### **Radar North (X RAY North)**

- 1. **Frequency**
  - 1.1. Mountain Home Approach: 124.800
- 2. **Airspace**
  - 2.1. Provide air traffic control service to aircraft within the depicted airspace up to and including 16,000.
    - 2.1.1. If Salt Lake Center is offline FL230 shall be the default.
    - 2.1.2. Mountain Home Approach can flex up to FL230 if coordinated with Salt Lake Center.
  - 2.2. Mountain Home Shelf: Provide air traffic control service to aircraft within the depicted airspace up to and including 10,000.
    - 2.2.1. U76 departures: Issue RNAV capable aircraft the ALKAL ODP. Non-RNAV capable aircraft will be issued Radar vectors first fix, then as filed. Upon readback of clearance, then issue "Enter controlled airspace heading 120, released for departure." then clearance void time.
- 3. **IFR Procedures**
  - 3.1. West Flow
    - 3.1.1. All arrivals be clear direct MUO TACAN or an appropriate IAF
  - 3.2. East Flow
    - 3.2.1. All arrivals be clear direct MUO TACAN or an appropriate IAF

### **Radar South (X RAY South)**

- 1. **Frequency**
  - 1.1. Mountain Home Approach: 134.100
- 2. **Airspace**
  - 2.1. Provide air traffic control service to aircraft with the depicted airspace up to and including 16,000.
    - 2.1.1. If Salt Lake Center is offline FL230 shall be the default.
    - 2.1.2. Mountain Home Approach can flex up to FL230 if coordinated with Salt Lake Center.
- 3. **IFR Procedures**
  - 3.1. West Flow


- 3.1.1. All arrivals be clear direct MUO TACAN or an appropriate IAF
- 3.2. East Flow
  - 3.2.1. All arrivals be clear direct MUO TACAN or an appropriate IAF

### **Cowboy Control**


**N/A**

Appendix A. Airspace Diagrams

1. E Flow

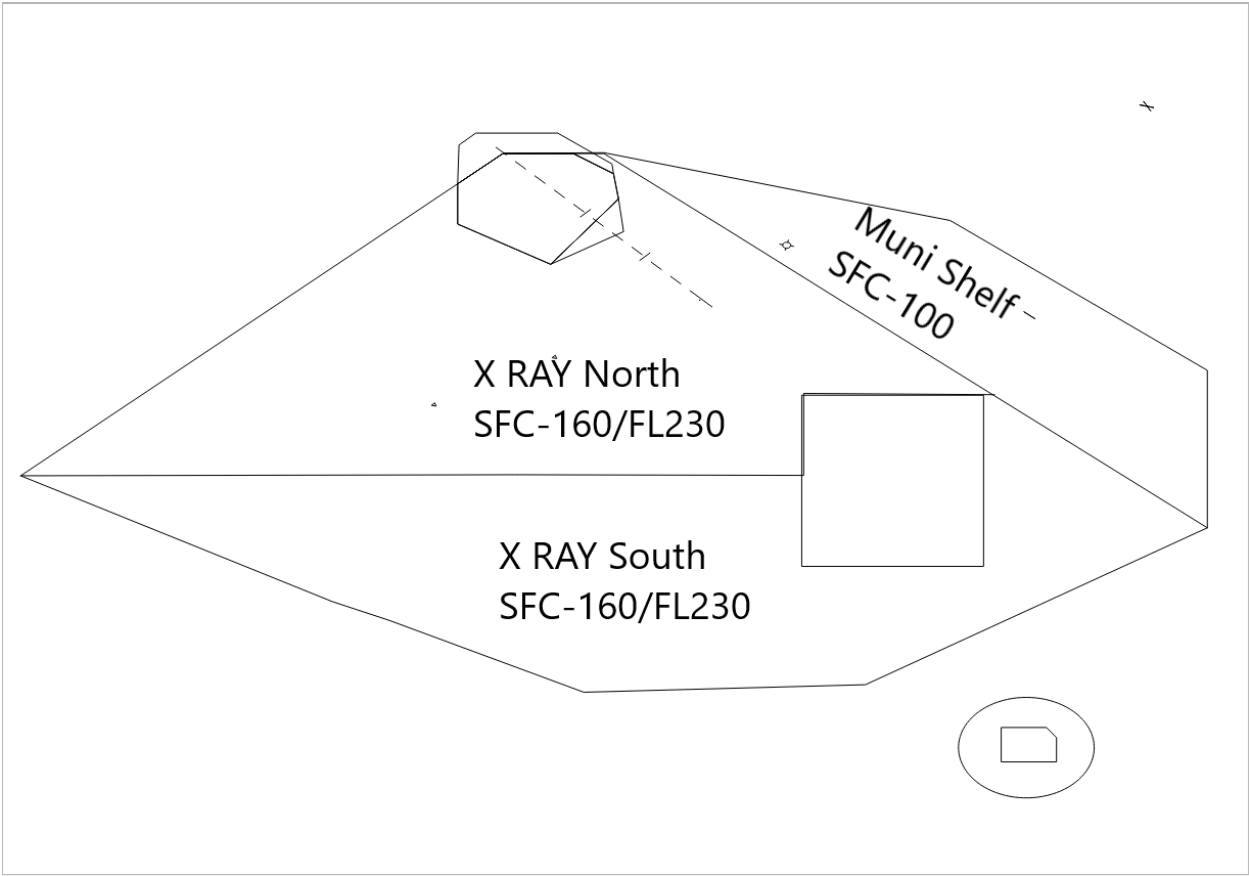

## 2. W Flow

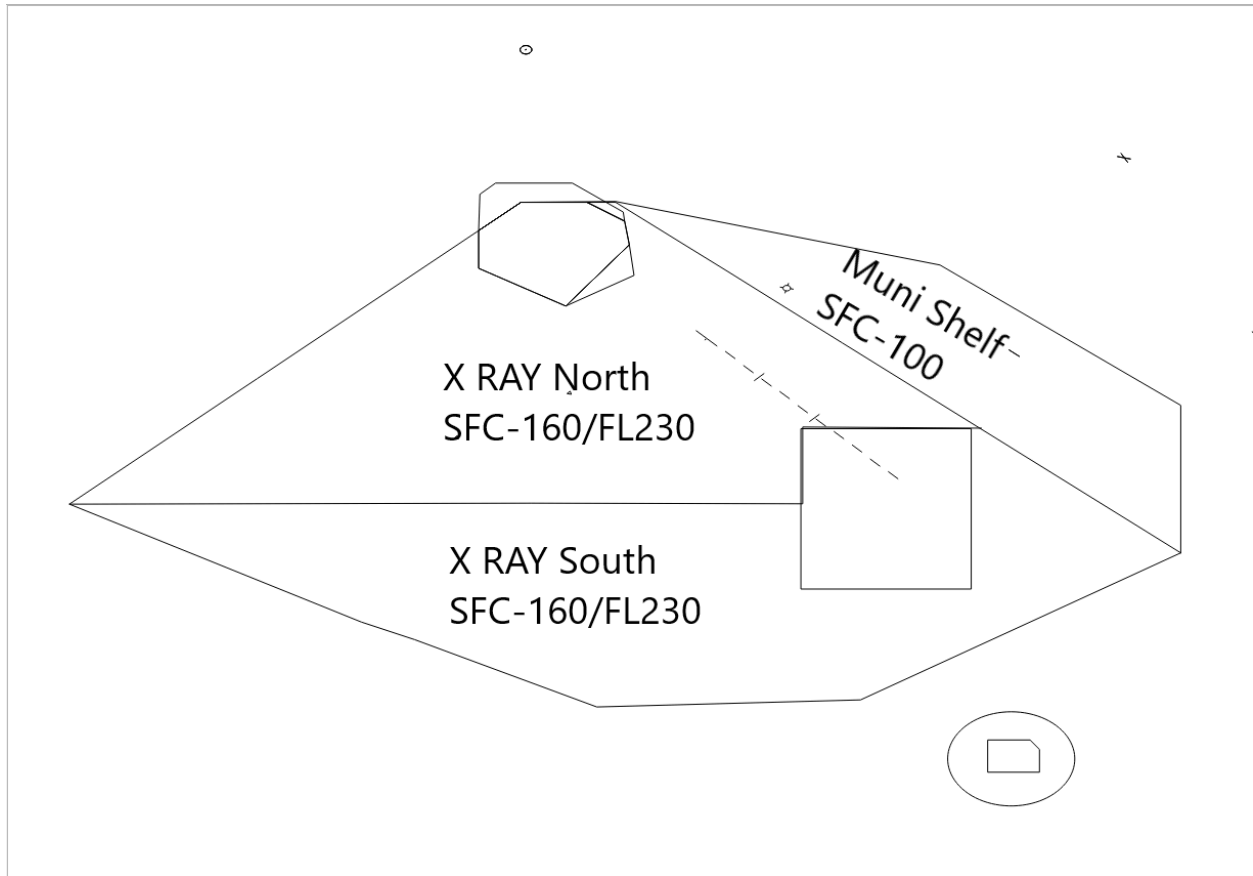

## **Appendix B. Military specific phraseology**