



**ORDER
7110.20C**

Effective Date:
November 1, 2025

SUBJ: S56 TRACON Standard Operating Procedures

This document establishes the Salt Lake City Terminal Radar Approach Control (S56 TRACON) Standard Operating Procedures within the Salt Lake City ARTCC on VATSIM (vZLC). Controllers are required to be familiar with the provisions of this document and to exercise their best judgment if they encounter situations not covered by it. The provisions and procedures described herein are supplemental to vZLC Facility Policy and FAA Order JO 7110.65.

The information contained herein is to be used for flight simulation purposes only on the VATSIM network. It is not intended, nor should it be used for real-world navigation. The Virtual Salt Lake City ARTCC is not affiliated with the FAA, the actual Salt Lake City ARTCC, or any governing aviation body.

Cameron Negrete
Air Traffic Manager
Salt Lake City ARTCC

Record of Changes

[illegible]

--	--	--	--

Explanation of Changes

1-1-4. Cancellation

Rewrote paragraph to indicate cancellation of ZLC 7110.1B.

2-4-4. Establish on RNAV (EOR) Procedures

- a. When utilizing simultaneous independent approaches in accordance with 7110.65 5-9-7:
 - (1) The following approaches are allowed when utilizing *RNAV (RNP) Z RWY 34L*:
All 34R approach procedures.
 - (2) The following approaches are allowed when utilizing *RNAV (RNP) Z RWY 16R*:
All 16L approach procedures.
- b. When utilizing wide spaced simultaneous approaches in accordance with 7110.65 5-9-10:
 - (1) The following approaches are allowed when utilizing *RNAV (RNP) Z RWY 34L*:
All 35 approaches except *RNAV (RNP) Z 35*.
 - (2) The following approaches are allowed when utilizing *RNAV (RNP) Z 16R*: All 17 approaches.

2-3-3. Secondary Scratchpad Entries

Updates to Table 2-3-3

3-8 Valley

Changed U42 to SVR.

Appendix 3-C and E

Updates to Stockton and Jordan airspace diagrams.

Table of Contents

Chapter 1. Introduction	1
Section 1. General	1
1-1-1. Purpose	1
1-1-2. Audience	1
1-1-3. Distribution	1
1-1-4. Cancellation	1
Section 2. Operational Positions	2
Section 3. Airspace	3
1-3-1. Definitions	3
1-3-2. S56 TRACON Airspace	3
1-3-3. VFR Airspace	3
Section 4. Normal Sectorization Splits	4
1-4-1. Alpine Sector	5
Chapter 2. General Control	6
Section 1. General	6
2-1-1. Intra-facility Transfer of Control	6
2-1-2. Compliance with TMIs	6
2-1-3. General Arrival Procedures	6
2-1-4. General Departure Procedures	6
Section 2. Duty Familiarization and Transfer of Position Responsibility	7
2-2-1. Duty Familiarization	7
2-2-2. Transfer of Position Responsibility	7
Section 3. Automation	8
2-3-1. Use of Scratchpads	8
2-3-2. Approved Primary Scratchpad Entries (IFR)	8
2-3-3. Secondary Scratchpad Entries (SLC)	9
2-3-4. Secondary Scratchpad Entries (Satellites)	10
2-3-5. Approved VFR Scratchpad Entries	10
2-3-6. Radar Displays	12
Section 4. Approaches	13
2-4-1. Simultaneous Independent Approaches to Widely Spaced Parallel Runways (SIMULs)	13
2-4-2. Simultaneous Dependent Approaches (Staggers)	13
2-4-3. Visual Approach Procedures	14
Section 5. Pre-Arranged Coordination	15
2-5-1. Definition	15
2-5-2. Requirements	15
2-5-3. P1 Area (North Flow Only)	15
2-5-4. P2 Area (South Flow Only)	15

2-5-5. P3 Area (South Flow & Visual/SIMULs Only)	16
2-5-6. P4 Area (North Flow & Visual/SIMULs Only)	16
2-5-7. Satellite Airport Departures	17
Section 6. Off-Load Procedures and Responsibilities	18
2-6-1. Definitions	18
2-6-2. Categories	18
2-6-3. Routing	18
2-6-4. Automated Point-Outs	18
Chapter 3. Position Responsibilities and Procedures	19
Section 1. Lake Sector	19
3-1-1. Position Responsibilities	19
3-1-2. Procedures	19
Section 2. Gunnison Sector	20
3-2-1. Position Responsibilities	20
3-2-2. Procedures	20
Section 3. Bear Sector	21
3-3-1. Position Responsibilities	21
3-3-2. SLC Arrival Procedures	21
3-3-3. Satellite Arrival Procedures	21
Section 4. Hart Sector	22
3-4-1. Position Responsibilities	22
3-4-2. Procedures	22
Section 5. Final Sector	23
3-5-1. Position Responsibilities	23
3-5-2. General Procedures	23
3-5-2. South Flow Procedures	23
3-5-3. North Flow Procedures	23
Section 6. Jordan Sector	24
3-6-1. Position Responsibilities	24
3-6-2. South Flow Procedures	24
3-6-3. North Flow Procedures	24
3-6-4. Alpine Sector Arrival/Departure Procedures	24
3-6-5. VFR Procedures	25
Section 7. Stockton Sector	26
3-7-1. Position Responsibilities	26
3-7-2. Procedures	26
Section 8. Valley Sector	27
3-8-1. Position Responsibilities	27
3-8-2. Procedures	27
Section 9. Alpine Sector	29
3-9-1. Position Responsibilities	29

3-9-2. Procedures	29
Appendix 1. General Airspace	30
Appendix 1A. Salt Lake City TRACON Gates (North Flow)	30
Appendix 1B. Salt Lake City TRACON Gates (South Flow)	31
Appendix 1C. Salt Lake City ATCT Delegated Airspace	32
Appendix 1D. Salt Lake City Class B Airspace	33
Appendix 2. Pre-Arranged Coordination Areas	34
Appendix 2A. P1 Area (North Flow Only)	34
Appendix 2B. P2 Area (South Flow Only)	35
Appendix 2C. P3 Area (South Flow & Visual/SIMULs Only)	36
Appendix 2D. P4 Area (North Flow & Visual/SIMULs Only)	37
Appendix 3. Delegated Airspace	38
Appendix 3A. Alpine Airspace	38
Appendix 3B. Bear Airspace	39
Appendix 3B-1. Bear Airspace (North Flow)	39
Appendix 3B-2. Bear Airspace (South Flow & SIMULs)	40
Appendix 3B-3. Bear Airspace (South Flow & Visual/Staggers)	41
Appendix 3C. Jordan Airspace	42
Appendix 3C-1. Jordan Airspace (North Flow & SIMULs)	42
Appendix 3C-2. Jordan Airspace (North Flow & Visual/Staggers)	43
Appendix 3C-3. Jordan Airspace (South Flow)	44
Appendix 3D. Lake Airspace	45
Appendix 3D-1. Lake Airspace (North Flow)	45
Appendix 3D-2. Lake Airspace (South Flow)	46
Appendix 3E. Stockton Airspace	47
Appendix 3E-1. Stockton Airspace (North Flow)	47
Appendix 3E-2. Stockton Airspace (South Flow)	48
Appendix 3F. Final Airspace	49
Appendix 3F-1. Final Airspace (North Flow & SIMULs)	49
Appendix 3F-2. Final Airspace (North Flow & Visual/Staggers)	50
Appendix 3F-3. Final Airspace (South Flow & SIMULs)	51
Appendix 3F-4. Final Airspace (South Flow & Visual/Staggers)	52
Appendix 3G. Gunnison Airspace	53
Appendix 3G-1. Gunnison Airspace (North Flow)	53
Appendix 3G-2. Gunnison Airspace (South Flow)	54
Appendix 3H. Hart Airspace	55
Appendix 3H-1. Hart Airspace (North Flow)	55
Appendix 3H-2. Hart Airspace (South Flow)	56
Appendix 3I. Valley Airspace	57
Appendix 3I-1. Valley Airspace (North Flow)	57
Appendix 3I-2. Valley Airspace (South Flow)	58

Chapter 1. Introduction

Section 1. General

1-1-1. Purpose

This document establishes the Salt Lake City Terminal Radar Approach Control (S56 TRACON) Standard Operating Procedures within the Salt Lake City ARTCC on VATSIM (vZLC).

1-1-2. Audience

All vZLC controllers and visitors contained within the vZLC and VATUSA roster.

1-1-3. Distribution

This document is authorized for unrestricted use and release and is available in the Resources Section of the vZLC Website.

1-1-4. Cancellation

This document cancels S56 SOP 7110.1B, effective February 20, 2025.

Section 2. Operational Positions

Table 1-2-1. S56 TRACON Operational Positions Table

Sector/Position	STARS ID	VATSIM Callsign	Frequency
Alpine	A	SLC_A_APP	118.850
Bear	B	SLC_B_APP	124.900
Final	F	SLC_F_APP	125.700
Gunnison	G	SLC_G_APP	126.250
Hart	H	SLC_H_APP	121.100
Jordan	J	SLC_J_APP	128.600
Lake	K	SLC_K_APP	135.500
Stockton	S	SLC_S_APP	128.100
Valley	V	SLC_V_APP	120.900

Bold designates a primary position.

Section 3. Airspace

1-3-1. Definitions

- a. Altitudes are in feet mean sea level (MSL) except when describing cloud ceilings, which are in feet above airport elevation (AAE).
- b. Runway Flow: The primary direction of landing and departing traffic.
- c. North Flow: Operations at Salt Lake City International Airport (SLC) utilizing Runways 34L, 34R, 35, and 32.
- d. South Flow: Operations at SLC utilizing Runways 16L, 16R, 17, and 14.

1-3-2. S56 TRACON Airspace

S56 TRACON airspace is depicted in Appendix 1. The airspace is divided into specific positions of operation depicted in Appendix 3.

1-3-3. VFR Airspace

All operational positions are assigned the 500-foot altitude below their designated airspace altitude except where such airspace overlies Alpine, Valley, and SLC ATCT airspace.

EXCEPTION-

Hart is assigned the 500-foot altitude above HS3 and HN4. See Appendix 3H.

Section 4. Normal Sectorization Splits

Table 1-4-1. North Flow Normal Sectorization Splits

# of Controllers	Active Sector (Associated Sectors)
1	Lake (All)
2	Lake (Lake, Bear, Stockton, Gunnison, & Hart)
	Jordan (Jordan, Final, Alpine, & Valley)
3	Lake (Lake, Bear, Stockton, Gunnison, & Hart)
	Jordan (Jordan & Alpine)
	Final (Final & Valley)
4	Lake (Lake & Gunnison)
	Jordan (Jordan & Alpine)
	Bear (Bear, Stockton, & Hart)
	Final (Final & Valley)
5	Lake (Lake & Gunnison)
	Jordan (Jordan & Alpine)
	Bear (Bear & Hart)
	Stockton
	Final (Final & Valley)

Table 1-4-2. South Flow Normal Sectorization Splits

# of Controllers	Active Sector (Associated Sectors)
1	Lake (All)
2	Lake (Lake, Stockton, Jordan, Gunnison, & Alpine)
	Bear (Bear, Final, Hart, & Valley)
3	Lake (Lake, Jordan, Gunnison, & Alpine)
	Bear (Bear, Stockton, & Hart)
	Final (Final & Valley)
4	Lake (Lake & Gunnison)
	Bear (Bear & Hart)
	Stockton (Stockton, Jordan, & Alpine)
	Final (Final & Valley)
5	Lake (Lake & Gunnison)
	Bear (Bear & Hart)
	Stockton
	Jordan (Jordan & Alpine)
	Final (Final & Valley)

1-4-1. Alpine Sector

Alpine can be split off separate of suggested order due to traffic demand around PVU. This sector's whole purpose is to function as the approach control for PVU. This must only be initiated by the Events Coordinator or CIC.

Chapter 2. General Control

Section 1. General

2-1-1. Intra-facility Transfer of Control

An intra-facility radar handoff and communications transfer constitutes transfer of control for:

- a. 30° turns either side of course.
- b. Climbs/Descents.
- c. Speed control ± 30 knots.

2-1-2. Compliance with TMIs

All controllers must comply with all speed/in-trail restrictions, as mandated by the vATCSCC.

2-1-3. General Arrival Procedures

- a. On initial contact, the responsible radar position must:
 - (1) Ensure receipt of airport arrival information (ATIS, AWOS, or ASOS).
 - (2) Update the scratchpad in accordance with section 2-3. The scratchpad must reflect the aircraft destination and applicable approach information.
- b. All SLC arrival aircraft that have been vectored off of an RNAV arrival must be re-established on the arrival prior to entering the lateral confines of Final airspace. This must be done in accordance with paragraphs 2-5-3 and/or 2-5-4.

2-1-4. General Departure Procedures

Controllers must not use the phrase “climb via SID” when there is conflicting crossing traffic.

Section 2. Duty Familiarization and Transfer of Position Responsibility

2-2-1. Duty Familiarization

Prior to requesting a position relief briefing, controllers must accomplish the following items:

- a. Log-in to position and activate session.
- b. Review current METAR, PIREPs, or any other pertinent weather information.
- c. Review all Traffic Management Programs.
- d. Review pertinent overlying/underlying controller information.

2-2-2. Transfer of Position Responsibility

- a. All position relief briefings must be conducted in accordance with FAA Order 7110.65 Appendix A.
- b. All controllers must follow the Position Relief Briefing Checklist located below.
- c. Controllers must activate the session of the position they are assuming prior to the start of the position relief briefing.
- d. When traffic conditions warrant, the controller being relieved must monitor and observe the position for a minimum of 2 minutes after the conclusion of the briefing.

Position Relief Briefing Checklist
Position Information (which positions are being assumed)
ATIS Letter / Weather Trends / Flight Conditions
Runway Status / Type Approaches / Airspace Configuration
Current TMIs / Special Activity / Holding Aircraft
Point-Outs / Handoffs / Other Coordination
Special Requests or Instructions
Active Traffic

Section 3. Automation

2-3-1. Use of Scratchpads

The use of scratchpads varies based upon whether the aircraft is IFR or VFR.

a. IFR Aircraft:

- (1) The primary scratchpad will automatically populate with the following:
 - (a) The exit fix for departures, or;
 - (b) The three-letter airport identifier for arrivals.
- (2) The primary scratchpad may be used for the following:
 - (a) Speed assignments.
 - (b) Visual separation.
 - (c) Aircraft requesting a specific approach/runway.
 - (d) Other approved entries, in accordance with paragraph 2-3-2.
- (3) The secondary scratchpad must be used for the following:
 - (a) Approach assignment, in accordance with paragraphs 2-3-3 and 2-3-4.

b. VFR Aircraft:

- (1) The primary scratchpad may be used for the following:
 - (a) Altitude restrictions.
 - (b) Practice approach information.
 - (c) Requested/expected runway.
 - (d) Other approved entries, in accordance with paragraph 2-3-5.
- (2) The secondary scratchpad must not be used.

2-3-2. Approved Primary Scratchpad Entries (IFR)

The following entries listed in Table 2-3-1 must be considered coordination when displayed in the primary scratchpad. When any of the entries listed in Table 2-3-1 are displayed in the primary scratchpad, verbal coordination is not required. Example entries are listed in Table 2-3-2.

Table 2-3-1. Approved IFR Primary Scratchpad Entries

Entry	Meaning
xxK	Aircraft assigned specific speed (speed in tens of knots).
VS	Aircraft is maintaining visual separation from the aircraft directly ahead.
Rxx	Aircraft requesting a specific approach/runway into SLC.
S	Aircraft reported destination airport in sight.
HLD	Aircraft holding.
XOX	Pilot has difficulty following instructions.

NOTE-

Entries in Table 2-3-1 with lowercase “xx” denote entries with several possible designators. See Table 2-3-2 for examples.

Table 2-3-2. IFR Primary Scratchpad Entry Examples

Entry	Meaning
19K	Aircraft assigned 190 knots.
21K	Aircraft assigned 210 knots.
RIL	Aircraft requesting ILS to RW 16L/34L.
RD5	Aircraft requesting LDA to RW 35.
RL	Aircraft requesting RW 16L/34L.

2-3-3. Secondary Scratchpad Entries (SLC)

Arrival aircraft into SLC must have an approach assignment entered into the secondary scratchpad. All secondary scratchpad entries for SLC arrivals must conform to the following template:

- First character: Approach type. See Table 2-3-3.
- Second character: Runway designator. See Table 2-3-4.
- Third character: Approach termination (if other than full stop). See Table 2-3-5.

Table 2-3-3. Approach Type Designators

Designator	Approach Type
I	ILS
D	LDA
R	RNAV
G	RNAV Y
Z	RNAV Z
T	TACAN
H	HI-TACAN
O	VOR
V	Visual

Table 2-3-4. SLC Runway Designators

Designator	Runway
L	16L/34L
R	16R/34R
7	17
5	35, following the RNAV/LDA final
35	35, not following the RNAV/LDA final

Table 2-3-5. Approach Termination Designators

Designator	Meaning
F	Full Stop (optional)
O	Option
T	Touch-and-Go
W	Low Approach

NOTE-

When an aircraft is on an approach to Runway 35, is not following the RNAV/LDA final, and is requesting to terminate the approach in anything that is not a full-stop landing, verbally coordinate the termination with SLC ATCT.

2-3-4. Secondary Scratchpad Entries (Satellites)

Arrival aircraft into S56 satellite airports must have an approach assignment and termination designator entered into the secondary scratchpad. Entries listed in Table 2-3-3 and Table 2-3-5 are approved.

NOTE-

A runway designator does not need to be specified for satellite airport scratchpads. Only dual-character entries are required to be made denoting the approach type, unless the aircraft will not make a full-stop landing.

2-3-5. Approved VFR Scratchpad Entries

The following entries listed in Table 2-3-6 must be considered coordination when displayed in the primary scratchpad. When any of the entries listed in Table 2-3-6 are displayed in the primary scratchpad, verbal coordination is not required. Example entries are listed in Table 2-3-8.

Table 2-3-6. Approved VFR Scratchpad Entries

Entry	Meaning
Axx	Aircraft restricted at or above specific altitude (altitude in hundreds of feet).
Bxx	Aircraft restricted at or below specific altitude (altitude in hundreds of feet).
Pxx	Aircraft executing a specific practice approach.
S	Aircraft reported destination airport in sight.
TG	Aircraft requesting touch-and-go.
XOX	Pilot has difficulty following instructions.

NOTE-

Entries in Table 2-3-6 with lowercase “xx” denote entries with several possible designators. See Table 2-3-8 for examples.

Table 2-3-7. VFR Practice Approach Airport Designators

Designator	Airport
A	Salt Lake City International (SLC)
C	Brigham City Regional (BMC)
Z	Hill Air Force Base (HIF)
O	Ogden-Hinckley (OGD)
J	Provo Municipal (PVU)
S	Spanish Fork Municipal (SPK)
T	Bolinder Field-Tooele Valley (TVY)
K	South Valley Regional (SVR)

NOTE-

Use Table 2-3-3 for the second character in practice approach entries. Airport designators in Table 2-3-7 must be used as the third character in practice approach entries. See Table 2-3-8 for examples.

Table 2-3-8. VFR Scratchpad Entry Examples

Entry	Meaning
A85	Aircraft restricted at or above 8,500 feet.
B85	Aircraft restricted at or below 8,500 feet.
PIJ	Aircraft executing a practice ILS approach at PVU.
POO	Aircraft executing a practice VOR approach at OGD.
PTZ	Aircraft executing a practice TACAN approach at HIF.

2-3-6. Radar Displays

- a. Radar displays must be set at a range to ensure a minimum of 5 miles is displayed outside the sector's airspace boundary.
- b. Jordan, Stockton, and Bear radar displays must be set to display arrival aircraft far enough out to take handoffs, or issue alternate instructions in a timely manner, or ensure ZLC has time to avoid TRACON airspace.

Section 4. Approaches

2-4-1. Simultaneous Independent Approaches to Widely Spaced Parallel Runways (SIMULs)

SIMULs are authorized to Runway 16R and 17 or Runway 34L and 35 in accordance with FAA Order 7110.65 5-9-10. The Runway 16R/34L and 17/35 centerlines are at least 9,200 feet apart. The following procedures must be adhered to:

a. Landing Runways 16R and 17:

- (1) Bear must sequence to Runway 17 and clear aircraft for the ILS approach prior to UDUZU at or above 11,000 feet.

NOTE-

Bear must maintain control of aircraft until the SLC ATCT border. See paragraph 2-5-5.

- (2) Final must sequence to Runway 16R. Aircraft must be established on final and cleared for the approach no farther south than RRUFF at or below 9,000 feet, or the Wide Simul Line at or below 8,000 feet.

b. Landing Runways 34L and 35:

- (1) Jordan must sequence to Runway 35 and clear aircraft for the LDA approach prior to HLMET at or above 11,000 feet.

NOTE-

Jordan must maintain control of aircraft until the SLC ATCT border. See paragraph 2-5-6.

- (2) Final must sequence to Runway 34L. Aircraft must turn base 4NM or more outside of PUTER at or below 10,000 feet, or 3NM or more outside of CAMRI at or below 9,000 feet.

c. Final must assume responsibility for separation from Bear/Jordan traffic.

2-4-2. Simultaneous Dependent Approaches (Staggers)

Staggers are authorized to Runway 16L and 16R or Runway 34L and 34R in accordance with FAA Order 7110.65 5-9-6. The Runway 16L/34R and 16R/34L centerlines are approximately 6,155 feet apart. The following procedures must be adhered to:

a. Final must advise Bear/Jordan of the in-trail spacing needed for staggers.

b. In South Flow, Bear must:

- (1) Sequence all arrivals onto the Runway 16L localizer.
- (2) Assign 11,000 feet and 210 knots.
- (3) Handoff to Final prior to IRRON.

NOTE-

Contrary to Simultaneous Independent Approaches, Bear must handoff all traffic to Final rather than working the traffic until SLC ATCT airspace.

- c. In North Flow, Jordan must:
 - (1) Sequence all arrivals onto the Runway 34R localizer.
 - (2) Assign 11,000 feet and 210 knots.
 - (3) Handoff to Final prior to PLAGE.

NOTE-

Contrary to Simultaneous Independent Approaches, Jordan must handoff all traffic to Final rather than working the traffic until SLC ATCT airspace.

2-4-3. Visual Approach Procedures

- a. When visual approaches are in use, the following runway pairings may be utilized:
 - (1) Runway 16L and 16R.
 - (2) Runway 16L and 17.
 - (3) Runway 16R and 17.
 - (4) Runway 34L and 34R.
 - (5) Runway 34L and 35.
 - (6) Runway 34R and 35.
- b. During North Flow (any runway pairing):
 - (1) Final must sequence to the west runway and ensure that aircraft are at or below 9,000 feet prior to aircraft beginning the base turn.
 - (2) Jordan must sequence to the east runway and ensure that aircraft are cleared for the approach prior to entering the P4 Area.
- c. During South Flow (any runway pairing):
 - (1) Final must sequence to the west runway and ensure that aircraft are at or below 8,000 feet prior to aircraft beginning the base turn.
 - (2) Bear must sequence to the east runway and ensure that aircraft are cleared for the approach prior to entering the P3 Area.
- d. Final must assume responsibility for separation from Bear/Jordan traffic.
- e. When clearing an aircraft for a visual approach to Runway 35 and separating from Runway 34R traffic, use the following phraseology:

PHRASEOLOGY-

“(Follow, fly, or track) the localizer to WEEEL, cleared visual approach runway three-five.”

OR

“(Follow, fly, or track) the final approach course to WEEEL, cleared visual approach runway three-five.”

2-4-4. Establish on RNAV (EOR) Procedures

- c. When utilizing simultaneous independent approaches in accordance with 7110.65 5-9-7:
 - (1) The following approaches are allowed when utilizing *RNAV (RNP) Z RWY 34L*:
All 34R approach procedures.
 - (2) The following approaches are allowed when utilizing *RNAV (RNP) Z RWY 16R*:
All 16L approach procedures.
- d. When utilizing wide spaced simultaneous approaches in accordance with 7110.65 5-9-10:
 - (1) The following approaches are allowed when utilizing *RNAV (RNP) Z RWY 34L*:
All 35 approaches except *RNAV (RNP) Z 35*.
 - (2) The following approaches are allowed when utilizing *RNAV (RNP) Z 16R*: All 17 approaches.

Section 5. Pre-Arranged Coordination

2-5-1. Definition

Pre-arranged coordination is a process by which one controller allows an aircraft to penetrate or transit another controller's airspace in a manner which ensures standard separation without individual coordination for each aircraft.

2-5-2. Requirements

- a. Two positions of operation cannot penetrate each other's airspace simultaneously.
- b. Controllers who penetrate another controller's airspace must determine whether the lead aircraft requires wake turbulence separation behind it.

2-5-3. P1 Area (North Flow Only)

- a. Pre-arranged coordination is authorized during North Flow within the airspace depicted in Appendix 2A for the following sectors' departure aircraft:
 - (1) Gunnison (encompassing portions of Bear and Lake airspace).
 - (2) Stockton (encompassing portions of Final, Bear, Gunnison, and Lake airspace).
- b. When pre-arranged coordination is being utilized within the P1 Area, the following restrictions must exist:
 - (1) Stockton must not turn SLC departure aircraft right of the course/route assigned by the SLC ATCT Local Control (LC) position.
 - (2) Gunnison departures off of SLC may climb and turn in the absence of Bear, Lake, and Stockton traffic. Otherwise, Gunnison must assume responsibility for separation.
 - (3) Bear must establish arrivals into the Runway 34L downwind at 11,000 feet.
 - (4) Stockton must establish arrivals into the Runway 34L downwind at 12,000 feet.
 - (5) RNAV Arrival Aircraft:
 - (a) Bear and Stockton must ensure that arrival aircraft are established on the appropriate STAR prior to entering Final airspace.
 - (b) Final must not use a heading west of 170° if the aircraft is vectored off of the RNAV arrival.
 - (6) Non-RNAV Arrival Aircraft:
 - (a) Once aircraft are south of the TCH 249° radial, Bear, Stockton, and Final must not use a heading west of 170°.

2-5-4. P2 Area (South Flow Only)

- a. Pre-arranged coordination is authorized during South Flow within the airspace depicted in Appendix 2B for the following sectors' departure aircraft:
 - (1) Lake (encompassing portions of Stockton, Bear, Jordan, and Final airspace).
 - (2) Gunnison (encompassing portions of Stockton, Lake, Final, and Jordan airspace).
 - (3) Jordan (encompassing portions of Stockton airspace).

- b. When pre-arranged coordination is being utilized within the P2 Area, the following restrictions must exist:

- (1) Arrival Aircraft:

- (a) Stockton must establish arrivals into the Runway 16R downwind at, or descending to, 11,000 feet.
 - (b) Stockton must ensure that RNAV aircraft are established on the appropriate STAR prior to entering Final airspace.

NOTE-

Stockton must ensure RNAV arrivals that are direct MAGNE are not west of a 335° course/heading.

- (c) Once aircraft are north of 2100 South, Stockton and Final must not use a heading west of 335°.

- (2) Departure Aircraft:

- (a) Lake departures off of SLC may climb and turn on course in the absence of Final, Bear, and Stockton traffic. Otherwise, Lake must assume responsibility for separation.
 - (b) Lake must not turn SLC departure aircraft left of the course/route assigned by LC without approval from Gunnison.
 - (c) Gunnison departures off of SLC may climb and turn on course in the absence of Final, Bear, Lake, and Stockton traffic. Otherwise, Gunnison must assume responsibility for separation.
 - (d) Jordan may climb all departure aircraft in the absence of Stockton traffic. Otherwise, Jordan must assume responsibility for separation.

2-5-5. P3 Area (South Flow & Visual/SIMULs Only)

- a. Pre-arranged coordination is authorized during South Flow within the airspace depicted in Appendix 2C for Bear (encompassing portions of Final airspace) to operate.

NOTE-

The P3 Area must not be utilized during a Simultaneous Dependent Approach/Stagger configuration.

- b. When pre-arranged coordination is being utilized within the P3 Area, the following restrictions must exist:

- (1) Bear must comply with the procedures listed in section 2-4 and paragraph 3-3-2.
 - (2) Final must comply with the procedures listed in section 2-4 and paragraph 3-5-2.
 - (3) Final and Bear must quick-look each other.
 - (4) Final must apply the required separation from Bear traffic.

2-5-6. P4 Area (North Flow & Visual/SIMULs Only)

- a. Pre-arranged coordination is authorized during North Flow within the airspace depicted in Appendix 2D for Jordan (encompassing portions of Final airspace) to operate.

NOTE-

The P4 Area must not be utilized during a Simultaneous Dependent Approach/Stagger configuration.

- b. When pre-arranged coordination is being utilized within the P4 Area, the following restrictions must exist:
 - (1) Jordan must comply with the procedures listed in section 2-4 and paragraph 3-6-3.
 - (2) Final must comply with the procedures listed in section 2-4 and paragraph 3-5-3.
 - (3) Final and Jordan must quick-look each other.
 - (4) Final must apply the required separation from Jordan traffic.

2-5-7. Satellite Airport Departures

Any satellite airport departure that will be worked by sectors in addition to the initial departure sector must be coordinated with the initial adjacent sector prior to release.

Section 6. Off-Load Procedures and Responsibilities

2-6-1. Definitions

- a. SOP Runway: Refers to the standard runway that arrivals will land on at SLC. Downwind traffic is sent to the west runway and straight-in traffic is sent to the center or east runway.
- b. Runway Use Plan (RUP): As defined in the S56-SLC LOA.

2-6-2. Categories

Reasons for off-loading SLC arrivals to a runway other than the SOP runway fall into one of two categories listed below:

- a. Arrival is off-loaded for the purpose of maintaining separation or the safety/integrity of the sector.

EXAMPLE-

The downwind is 20 miles long and the Final controller is struggling to keep up with demand. 1 or more aircraft are off-loaded to the center or east runway.

- b. Arrival aircraft prefers to land on a runway other than the SOP runway.

EXAMPLE-

N12345 is inbound via the downwind but prefers to land on the east runway, so they are off-loaded.

NOTE-

Verbal coordination with SLC ATCT is required if off-loading to the departure-only runway during a Departure-Only RUP.

2-6-3. Routing

Off-load arrivals from the downwind must be routed in the following manner:

- a. RNAV aircraft must fly the STAR into the downwind at 12,000 and 210 knots.
- b. Non-RNAV aircraft must be assigned a vector into the downwind (in accordance with paragraph 2-5-3 or 2-5-4) at 12,000 and 210 knots.

2-6-4. Automated Point-Outs

Non-verbal (automated) coordination may be utilized for approval of requested off-load runway between Final and Bear or Jordan sectors, provided the following procedures are adhered to:

- a. Verbal coordination must be used if automated point-outs are not practical.
- b. The initiating controller must ensure that the primary scratchpad indicates the requested runway/approach prior to initiating an automated point-out. See paragraph 2-3-2.
- c. The receiving controller must verbally coordinate any required restrictions prior to accepting the point-out.
- d. After an automated point-out is approved, any subsequent changes must be verbally coordinated.

Chapter 3. Position Responsibilities and Procedures

Section 1. Lake Sector

3-1-1. Position Responsibilities

- a. Monitor the Lake frequency (135.500 MHz).
- b. Provide air traffic control services within the Lake delegated airspace (see Appendix 3D), excluding airspace owned by Valley and SLC ATCT. This is primarily a departure control position.

3-1-2. Procedures

- a. In North Flow, route departure aircraft off of SLC filed along V21/V101, or landing within Hart airspace, through the Antelope Gate (see Appendix 1A) on a heading between 310°-340° and climbing to 10,000 feet.

NOTE-

Hart does not have control of these aircraft until they are within Hart airspace.

- b. In South Flow, route departure aircraft off of SLC filed along V21/V101, or landing within Hart airspace, through the Antelope Gate (see Appendix 1B) on a heading between 330°-340° and climbing to 10,000 feet.
- c. Route VFR Category I & II aircraft landing in, or transiting through, LC airspace from the east over I-80 to I-15 descending to 9,000 with a Class B clearance.
- d. Cross the Heber Shelf "line" at or above 13,000, or 1,000 feet above any other coordinated altitude with ZLC. The Heber Shelf line includes the appropriate lateral separation from ZLC airspace.

Section 2. Gunnison Sector

3-2-1. Position Responsibilities

- a. Monitor the Gunnison frequency (126.250 MHz).
- b. Provide air traffic control services within the Gunnison delegated airspace (see Appendix 3G), excluding airspace owned by Valley and SLC ATCT. This is primarily a departure control position.

3-2-2. Procedures

- a. Route aircraft transiting Gunnison airspace (excluding SLC departure aircraft) and landing at LGU, BMC, OGD, or HIF through the Keyhole Gate (see Appendix 1) on a heading between 330°-340° at 12,000 feet.
- b. For aircraft landing at LGU, BMC, OGD, or HIF, handoff to Hart sector prior to the aircraft passing the Keyhole gate. Hart has control for descent into their airspace.

Section 3. Bear Sector

3-3-1. Position Responsibilities

- a. Monitor the Bear frequency (124.900 MHz).
- b. Provide air traffic control services within the Bear delegated airspace (see Appendix 3B), excluding airspace owned by Valley and SLC ATCT. This is primarily an arrival control position.

3-3-2. SLC Arrival Procedures

- a. South Flow: Unless another runway is coordinated in accordance with paragraph 2-6-4, sequence all IFR and Category III turbojet aircraft to Runway 16L or Runway 17 using the procedures outlined in section 2-4 in addition to the following:
 - (1) During SIMULs:
 - (a) Aircraft sequenced to Runway 17 must be cleared for the approach prior to UDUZU.
 - (b) Scratchpads must be updated (in accordance with paragraph 2-3-3) prior to entering the P3 Area.
 - (c) Transfer communications to LC prior to entering SLC ATCT airspace, but no sooner than 7NM from the lateral boundary of SLC ATCT airspace.
 - (2) During Staggers:
 - (a) Ensure the scratchpad is updated (in accordance with paragraph 2-3-3) prior to beginning the handoff to Final.
 - (b) Sequence all arrivals onto the Runway 16L localizer.
 - (c) Assign 11,000 feet and 210 knots.
 - (d) Handoff to Final prior to IRRON.
 - (3) During visual approaches:
 - (a) Aircraft sequenced to Runway 16L or Runway 17 must be cleared for the approach with the scratchpad updated (in accordance with paragraph 2-3-3) prior to entering the P3 Area.
 - (b) Transfer communications to LC prior to entering SLC ATCT airspace, but no sooner than 7NM from the lateral boundary of SLC ATCT airspace.
- b. North Flow:
 - (1) Sequence all arrival aircraft into the Runway 34L downwind in accordance with paragraph 2-5-3.
 - (2) Except as described in paragraph 2-6-3, all arrival aircraft must be established at 11,000 feet and 210 knots prior to entering Final airspace.

3-3-3. Satellite Arrival Procedures

- a. Obtain approval from Hart prior to issuing an approach clearance for any HI-ILS or HI-TACAN approach to HIF.
- b. Provide initial sequence of IFR Avon/Bird gate arrivals landing at HIF, OGD, or BMC airports. Assign 12,000 feet and handoff to Hart sector.

Section 4. Hart Sector

3-4-1. Position Responsibilities

- a. Monitor the Hart frequency (121.100 MHz).
- b. Provide air traffic control services within the Hart delegated airspace (see Appendix 3H).

3-4-2. Procedures

- a. Route departures off of OGD/HIF/BMC that will transit Lake and/or Gunnison airspace through the Jepson gate (see Appendix 1) on a heading between 240° and 250° at 9,000 feet.
- b. Issue IFR clearances to aircraft departing BMC as follows:

PHRASEOLOGY-

“(ACID) Cleared to the Ogden VORTAC via the Ogden (current number) obstacle departure procedure, maintain 6,000. Expect further clearance at the Ogden VORTAC, departure frequency 121.1, squawk (code). Hold for release.”

Section 5. Final Sector

3-5-1. Position Responsibilities

- a. Monitor the Final frequency (125.700 MHz).
- b. Provide air traffic control services within the Final delegated airspace (see Appendix 3F), excluding airspace owned by Valley and SLC ATCT.

3-5-2. General Procedures

- a. Use scratchpad information on aircraft arriving Runway 16L/34R and Runway 17/35 to apply the appropriate radar separation in accordance with FAA Order 7110.65.

NOTE-

Final is responsible for separation from Bear/Jordan traffic during Visual/SIMULs. See paragraphs 2-4-1 and 2-4-3.

- b. When assigning the 30° turn to final, assigned aircraft speed must not exceed 210 knots.
- c. Transfer communications to LC prior to entering SLC ATCT airspace, but no sooner than 7NM from the lateral boundary of SLC ATCT airspace.

3-5-2. South Flow Procedures

- a. Do not descend aircraft below 11,000 feet until established in the downwind and north of Point NICHOL (see Appendix 1C) and the associated line.
- b. Unless another runway is coordinated in accordance with paragraph 2-6-4, sequence all IFR and Category III turbojet aircraft to Runway 16R using the procedures outlined in section 2-4.

NOTE-

When visual approaches are in use, Final may sequence to Runway 16L if Bear is sequencing to Runway 17.

3-5-3. North Flow Procedures

- a. Do not descend aircraft below 11,000 feet until established in the downwind and abeam the approach end of Runway 34L.
- b. Unless another runway is coordinated in accordance with paragraph 2-6-4, sequence all IFR and Category III turbojet aircraft to Runway 34L using the procedures outlined in section 2-4.

NOTE-

When visual approaches are in use, Final may sequence to Runway 34R if Jordan is sequencing to Runway 35.

Section 6. Jordan Sector

3-6-1. Position Responsibilities

- a. Monitor the Jordan frequency (128.600 MHz).
- b. Provide air traffic control services within the Jordan delegated airspace (see Appendix 3C), excluding airspace owned by Alpine, Valley, and SLC ATCT.

3-6-2. South Flow Procedures

- a. Departure aircraft may climb and turn within the P2 Area in accordance with paragraph 2-5-4.
- b. When Stockton traffic is present, assume responsibility for separation from Stockton traffic.

3-6-3. North Flow Procedures

Unless another runway is coordinated in accordance with paragraph 2-6-4, sequence all IFR and Category III turbojet aircraft to Runway 34R or Runway 35 using the procedures outlined in section 2-4 in addition to the following:

- a. During SIMULs:
 - (1) Aircraft sequenced to Runway 35 must be cleared for the approach prior to HLMET.
 - (2) Scratchpads must be updated (in accordance with paragraph 2-3-3) prior to entering the P4 Area.
 - (3) Transfer communications to LC prior to entering SLC ATCT airspace, but no sooner than 7NM from the lateral boundary of SLC ATCT airspace.
- b. During Staggers:
 - (1) Ensure the scratchpad is updated (in accordance with paragraph 2-3-3) prior to beginning the handoff to Final.
 - (2) Sequence all arrivals onto the Runway 34R localizer.
 - (3) Assign 11,000 feet and 210 knots.
 - (4) Handoff to Final prior to PLAGE.
- c. During visual approaches:
 - (1) Aircraft sequenced to Runway 34R or Runway 35 must be cleared for the approach with the scratchpad updated (in accordance with paragraph 2-3-3) prior to entering the P4 Area.
 - (2) Transfer communications to LC prior to entering SLC ATCT airspace, but no sooner than 7NM from the lateral boundary of SLC ATCT airspace.

3-6-4. Alpine Sector Arrival/Departure Procedures

- a. Alpine will coordinate departure release requests from PVU FCT. If a departure release is approved, Jordan approves entry into their airspace via the aircraft's assigned departure procedure to 9,000 feet.
- b. Clear IFR departure aircraft off of PVU routed via the PROVO# obstacle departure procedure to their destination airport.

NOTE-

- 1. Alpine does not share this responsibility. Jordan must amend the clearance limit of PVU departure aircraft routed via the PROVO#.*
- 2. PVU departure aircraft routed via the DITTI# need not be cleared to their destination airport. PVU FCT must clear aircraft to their destination airport on the ground.*

3-6-5. VFR Procedures

Route VFR Category I & II aircraft landing in, or transiting through, LC airspace from the east over I-80 to I-15 descending to 9,000 with a Class B clearance.

Section 7. Stockton Sector

3-7-1. Position Responsibilities

- a. Monitor the Stockton frequency (128.100 MHz).
- b. Provide air traffic control services within the Stockton delegated airspace (see Appendix 3E), excluding airspace owned by Valley and SLC ATCT.

3-7-2. Procedures

- a. During North Flow, sequence all arrivals into the Runway 34L downwind in accordance with paragraph 2-5-3.

NOTE-

Stockton must ensure sequencing and in-trail spacing is provided with Bear arrival aircraft. Bear does not share this responsibility.

- b. During South Flow, sequence all arrivals into the Runway 16R downwind in accordance with paragraph 2-5-4, except as described in paragraph 2-6-3.
- c. Assign aircraft transiting Stockton airspace and landing at LGU, BMC, OGD, or HIF a heading toward the Keyhole gate (see Appendix 1) at 15,000 feet and 250 knots or less. Handoff to Gunnison sector.
- d. Issue IFR clearances to aircraft departing TVY as follows:

PHRASEOLOGY-

“(ACID), cleared to the STACO intersection via the STACO (current number) departure, climb via SID. Expect further clearance at STACO, departure frequency 128.1, squawk (code). Hold for release.”

Section 8. Valley Sector

3-8-1. Position Responsibilities

- a. Monitor the Valley frequency (120.900 MHz).
- b. Provide air traffic control services within the Valley delegated airspace (see Appendix 3I), excluding airspace owned by SLC ATCT. In addition, Valley may operate to the lateral boundary of its airspace that is outside SLC Class B airspace.

NOTE-

Valley may operate to the sector airspace boundary over I-15. Final, Lake, Jordan, Alpine, and Bear are responsible for ensuring that aircraft remain the appropriate distance from Valley airspace.

3-8-2. Procedures

- a. Route VFR Category I, Category II, and Category III turboprop aircraft in accordance with the SLC-S56 LOA.
- b. Issue IFR clearances to aircraft departing SVR as follows:
 - (1) RNAV-capable aircraft must be assigned the SVALY# departure procedure.

PHRASEOLOGY-

“(ACID), cleared to the Fairfield VORTAC via the South Valley (current number) departure, maintain 9,000. Expect further clearance at Fairfield, departure frequency 120.9, squawk (code). Hold for release.”

- (2) Non-RNAV aircraft must be assigned the SVR ODP.

- (a) Departing Runway 16, to FFU VORTAC climbing to 11,000 feet.
- (b) Departing Runway 34, to TCH VORTAC climbing to 9,000 feet.

PHRASEOLOGY-

“(ACID), cleared to the (Wasatch/Fairfield) VORTAC via the South Valley Regional Obstacle Departure Procedure. Climb and maintain (altitude). Expect further clearance at (TCH/FFU), departure frequency 120.9, squawk (code). Hold for release.”

- c. Issue IFR clearances to aircraft departing BTF as follows:

NOTE-

BTF departure aircraft are strongly encouraged to depart VFR due to proximity with SLC. When a BTF departure aircraft will depart VFR, they must communicate with SLC ATCT.

NOTE-

Coordination must be accomplished with SLC ATCT prior to releasing a BTF IFR departure aircraft. During North Flow, SLC ATCT must hold all departures prior to releasing a BTF IFR departure aircraft.

NOTE-

Prior to issuing an en route clearance to the aircraft (following radar identification), ensure the aircraft is at or above the MIA to guarantee terrain or obstruction avoidance.

NOTE-

In the following phraseology examples, the phrase “no delay expected” must only be used when you are certain the aircraft will not need to enter the hold. Substitute this phrase with an EFC time when holding is expected.

(1) Aircraft filed TCH VORTAC:

PHRASEOLOGY-

“(ACID), cleared to the Wasatch VORTAC. Hold south on the 341 radial, left turns, standard legs. No delay expected. Climb and maintain 9,000. Departure frequency 120.9, squawk (code). Hold for release.”

(2) Aircraft did not file TCH VORTAC:

PHRASEOLOGY-

“(ACID), cleared to the Wasatch VORTAC. Hold south on the 341 radial, left turns, standard legs. No delay expected. Climb and maintain 9,000. Departure frequency 120.9, squawk (code). Verify this clearance will allow compliance with terrain or obstruction avoidance. Hold for release.”

Section 9. Alpine Sector

3-9-1. Position Responsibilities


- a. Monitor the Alpine frequency (118.850 MHz).
- b. Provide air traffic control services within the Alpine delegated airspace (see Appendix 3A).

3-9-2. Procedures


- a. During South Flow, coordinate all IFR aircraft with Jordan.
- b. During North Flow with SIMULs, coordinate all PVU and SPK aircraft with Final and Jordan.
- c. Coordinate with ZLC Sector 32, to protect the missed approach, when conducting RNAV approaches into SPK.

Appendix 1. General Airspace

Appendix 1A. Salt Lake City TRACON Gates (North Flow)

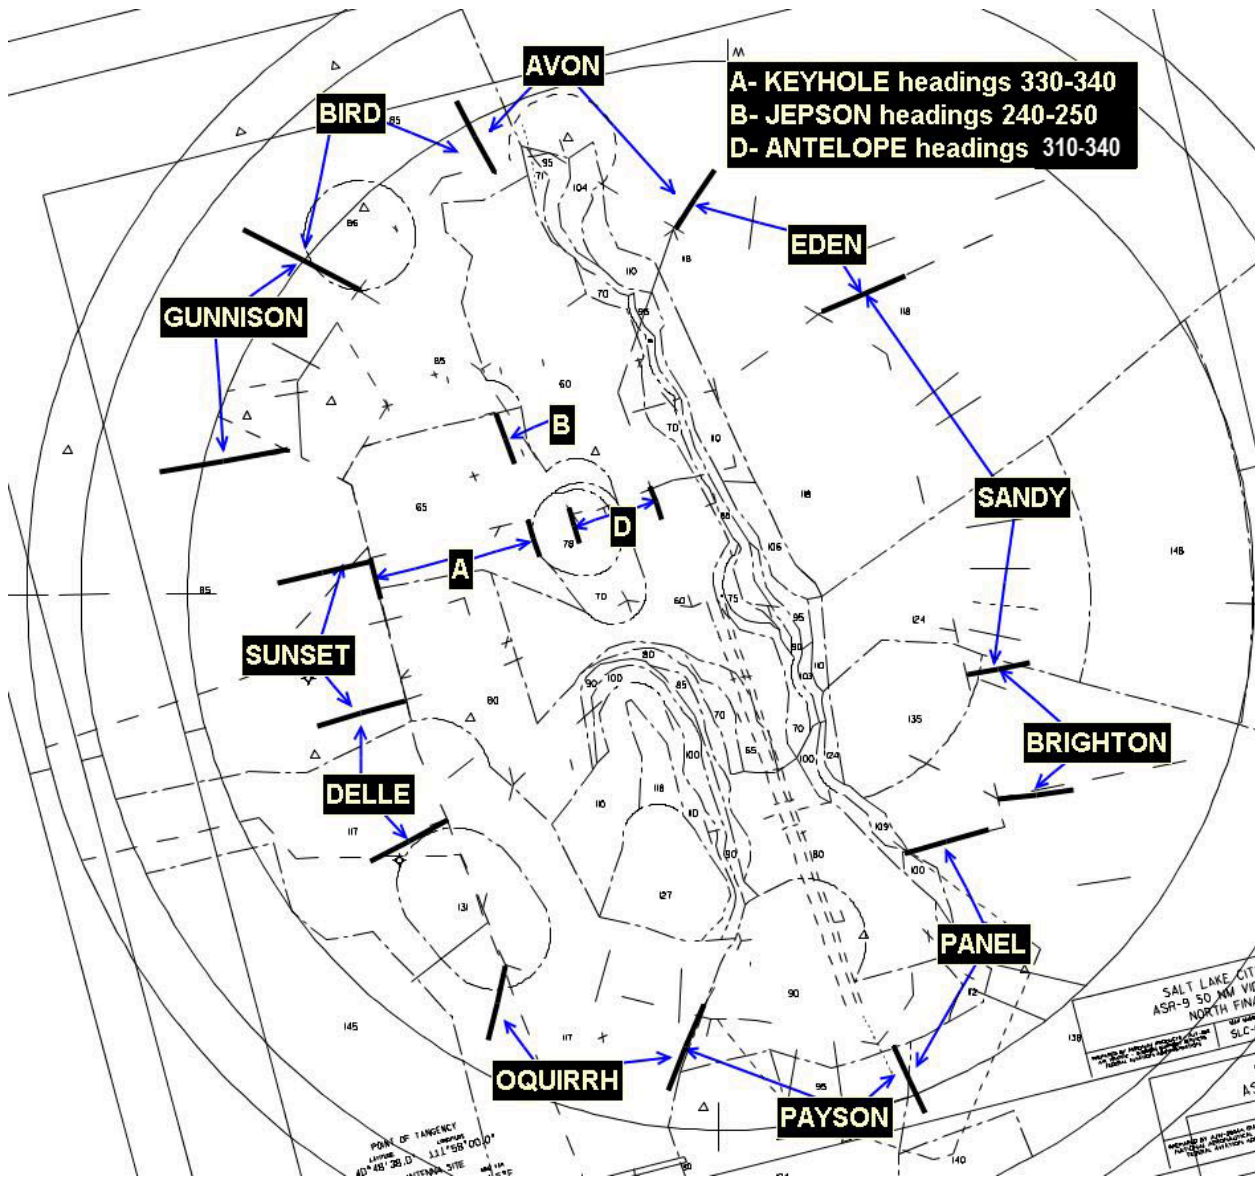


Appendix 1B. Salt Lake City TRACON Gates (South Flow)

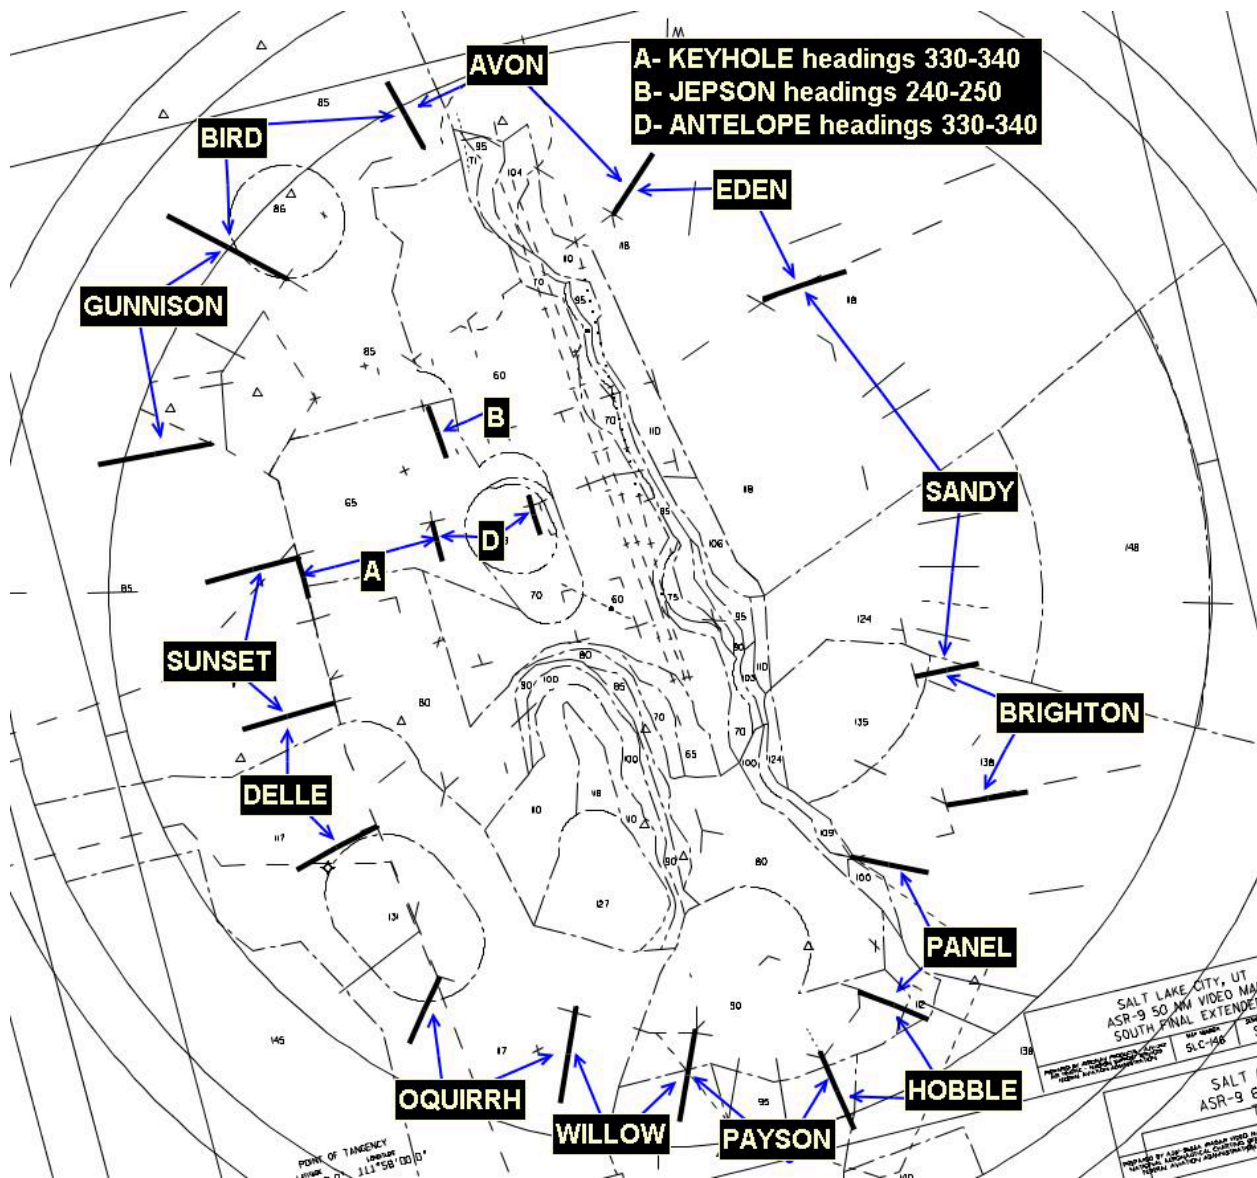

Appendix 1C. Salt Lake City ATCT Delegated Airspace



Appendix 1D. Salt Lake City Class B Airspace

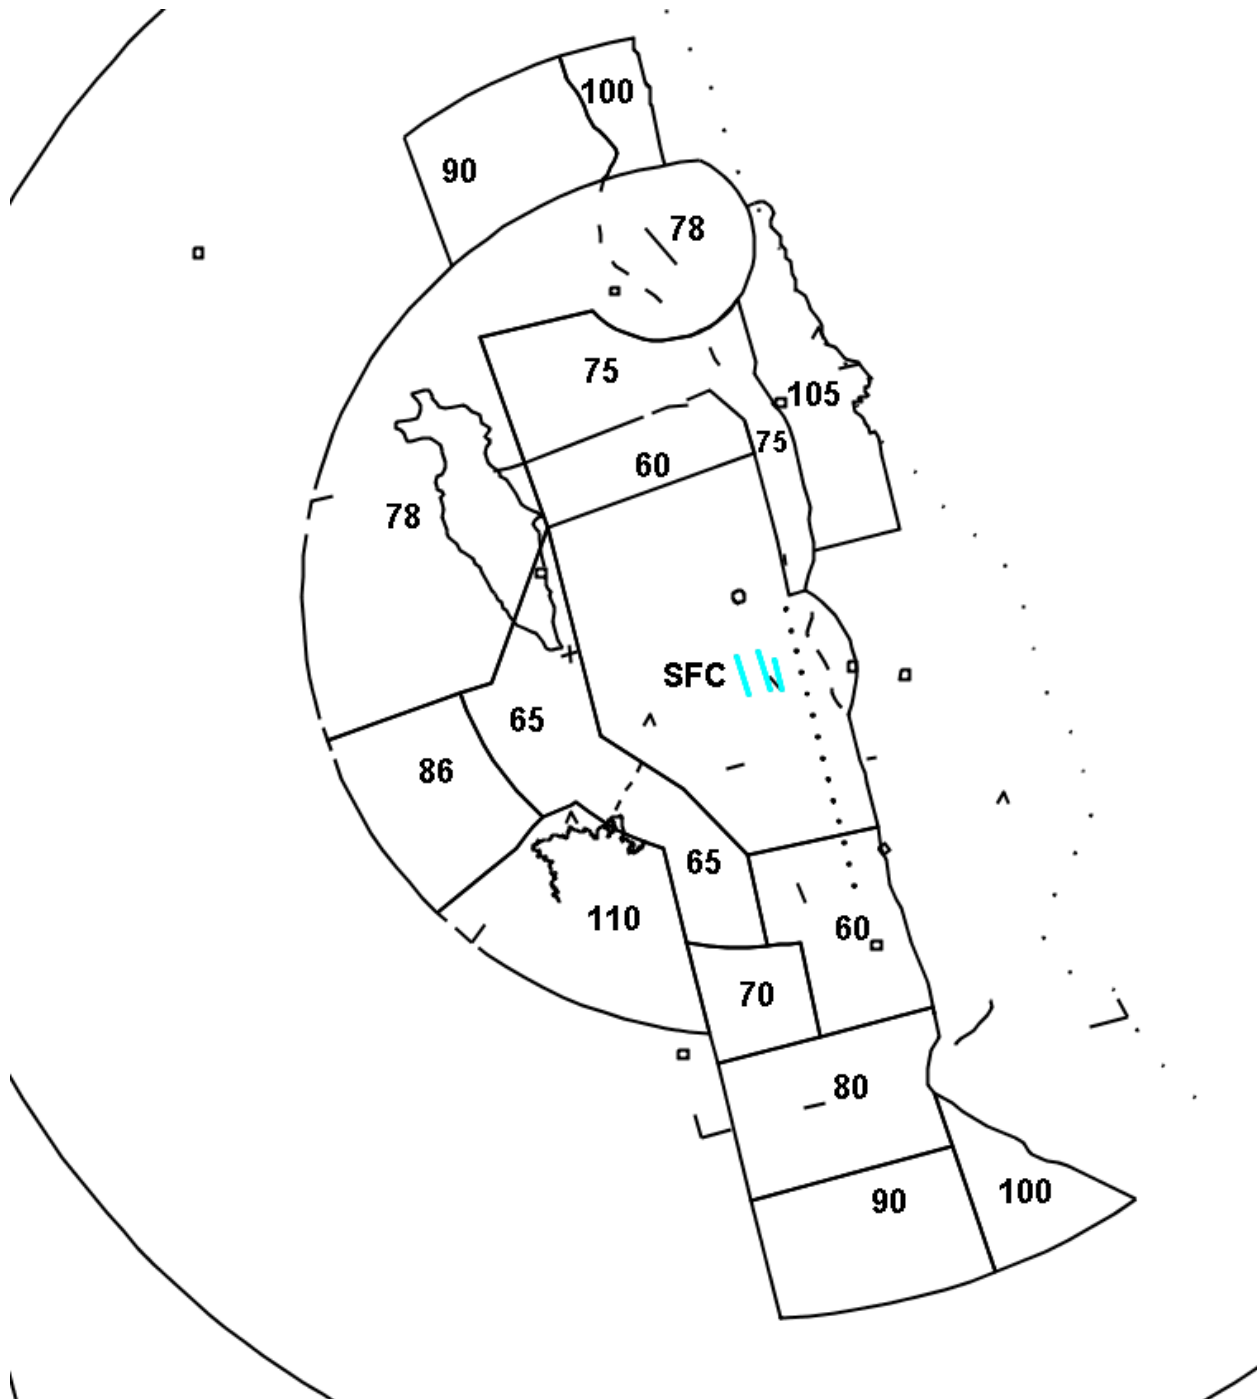


NOTE-


The numbers listed in each quadrant of the Class B airspace represent the bottom altitude of the individual shelves. The top altitude of the Class B in all quadrants is 12,000 feet.

Appendix 2. Pre-Arranged Coordination Areas


Appendix 2A. P1 Area (North Flow Only)

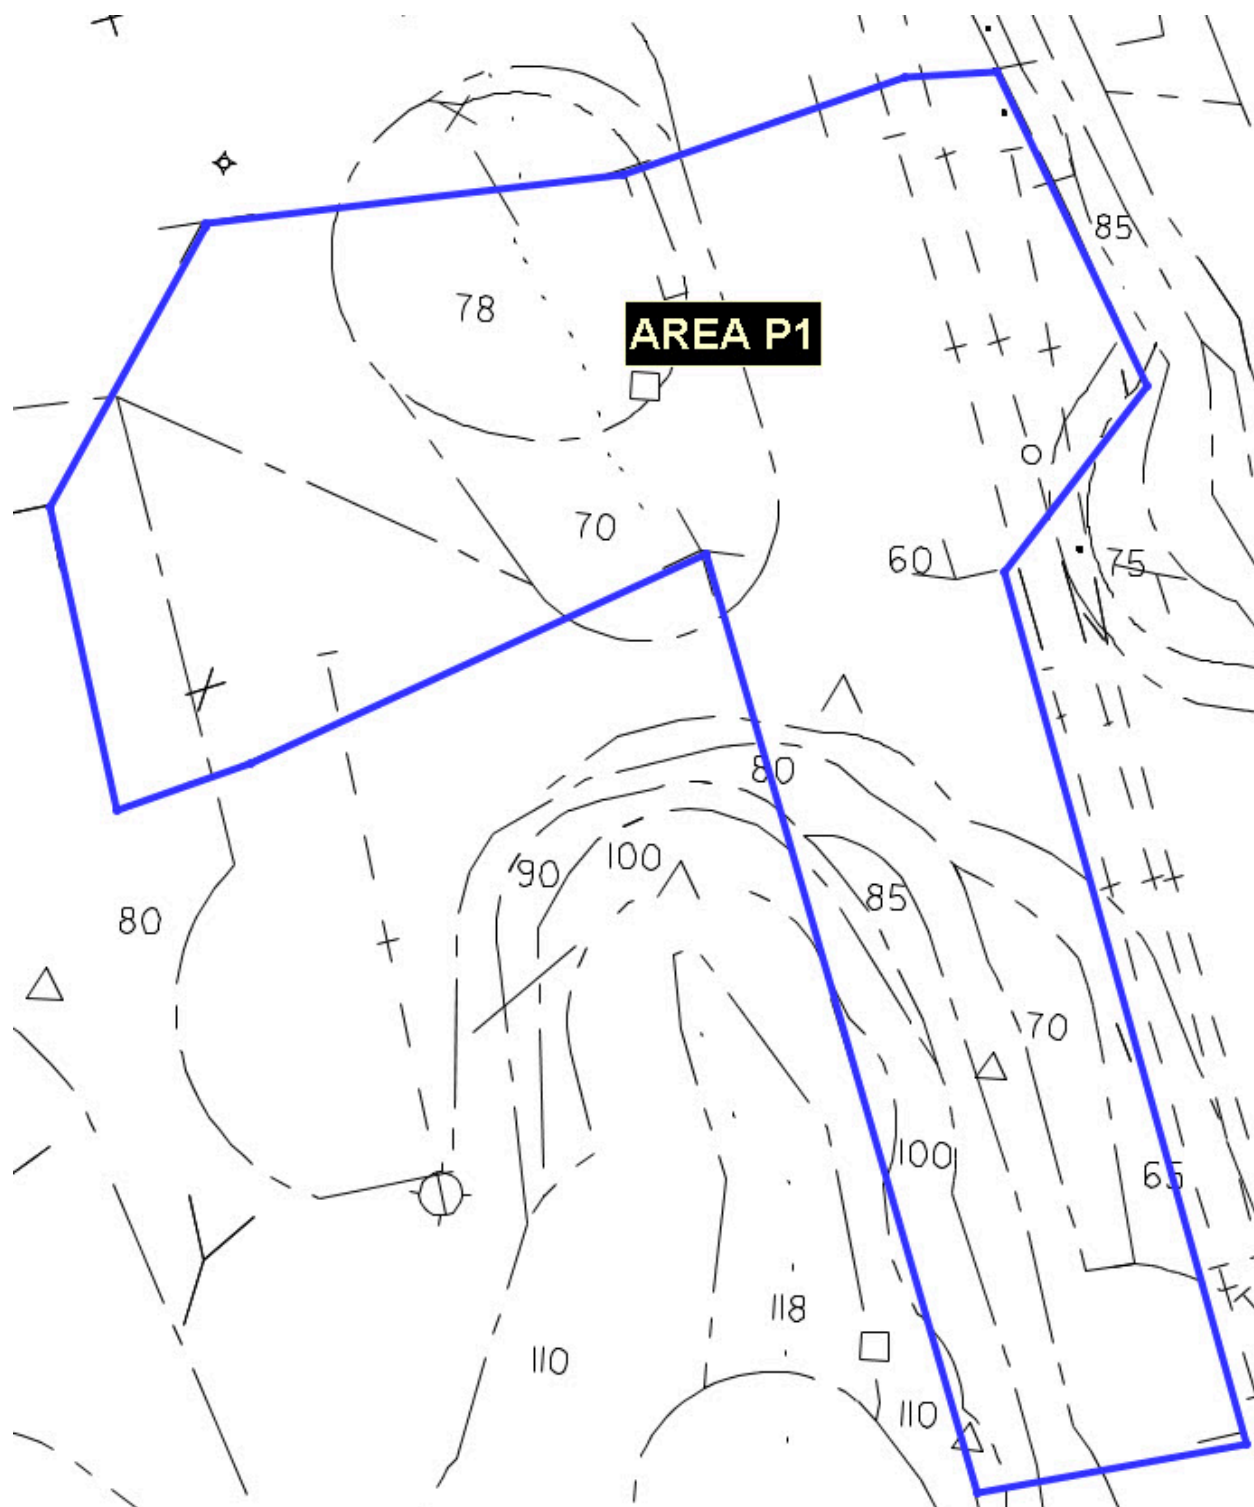


Appendix 2B. P2 Area (South Flow Only)

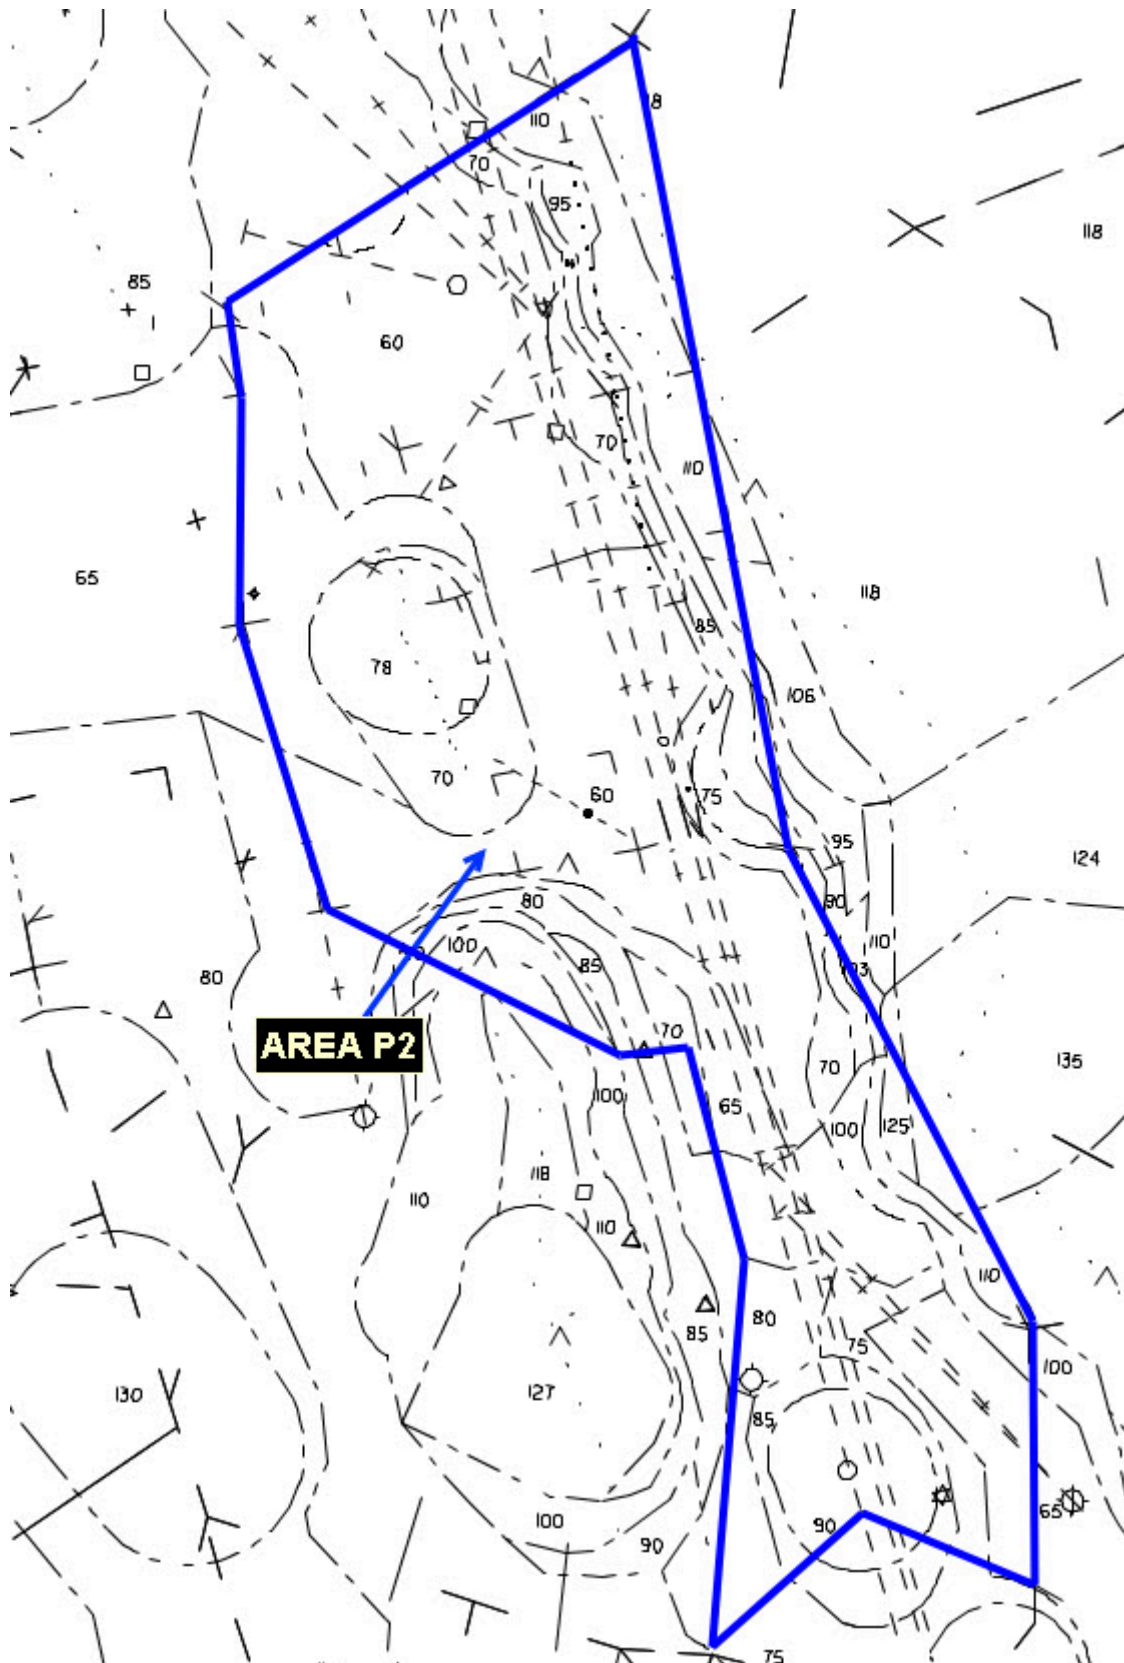

Appendix 2C. P3 Area (South Flow & Visual/SIMULs Only)

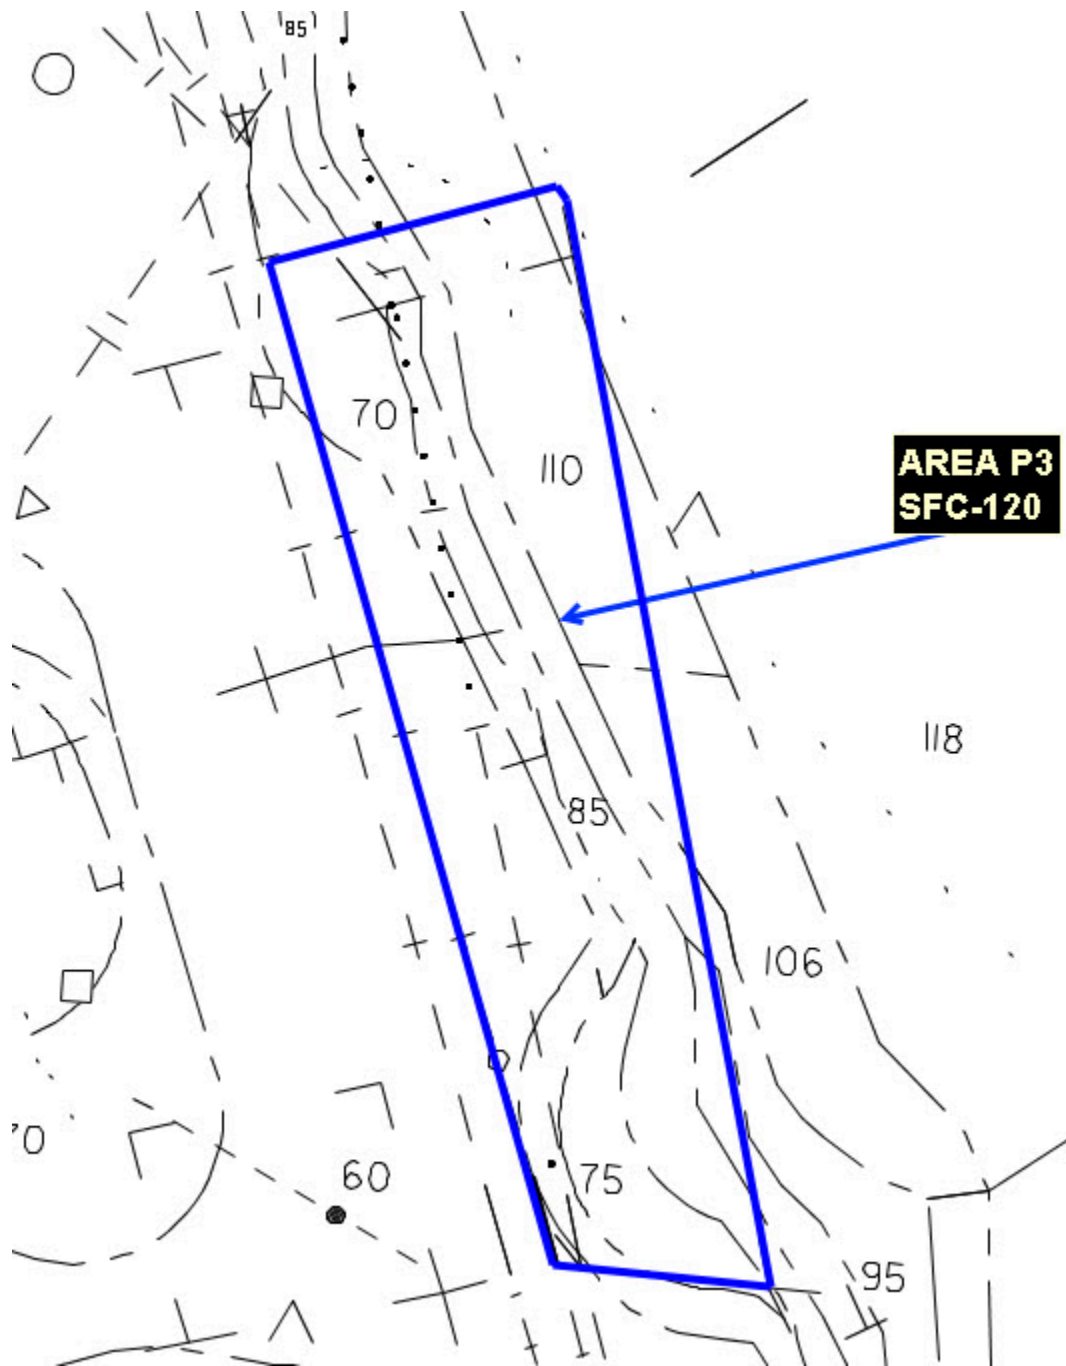


Appendix 2D. P4 Area (North Flow & Visual/SIMULs Only)

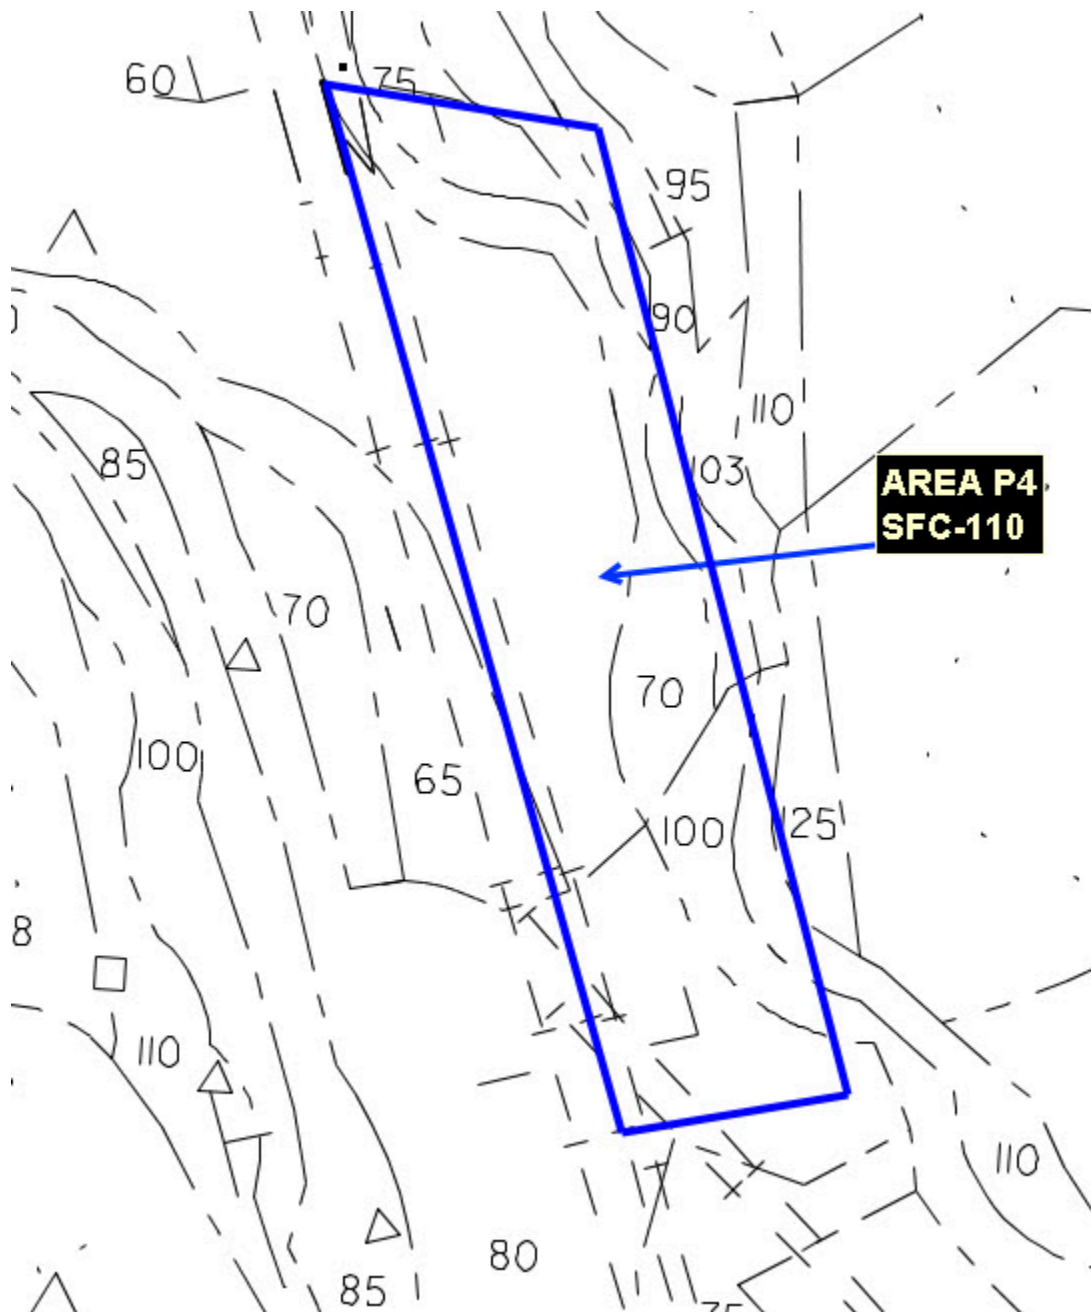


Appendix 3. Delegated Airspace

Appendix 3A. Alpine Airspace

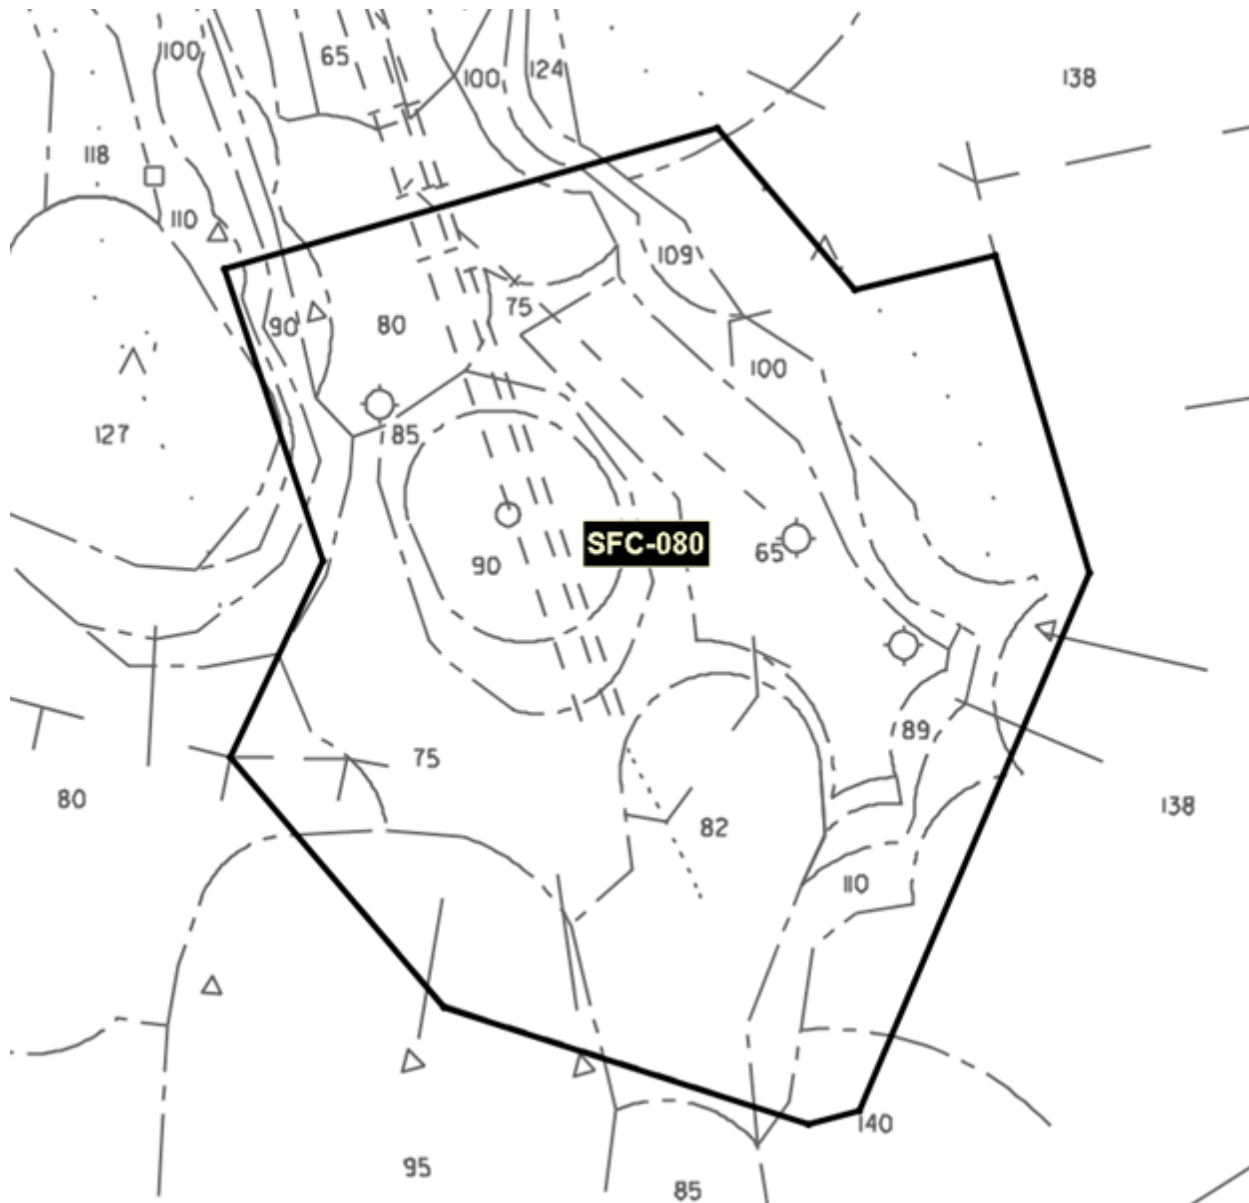


Appendix 3B. Bear Airspace


Appendix 3B-1. Bear Airspace (North Flow)

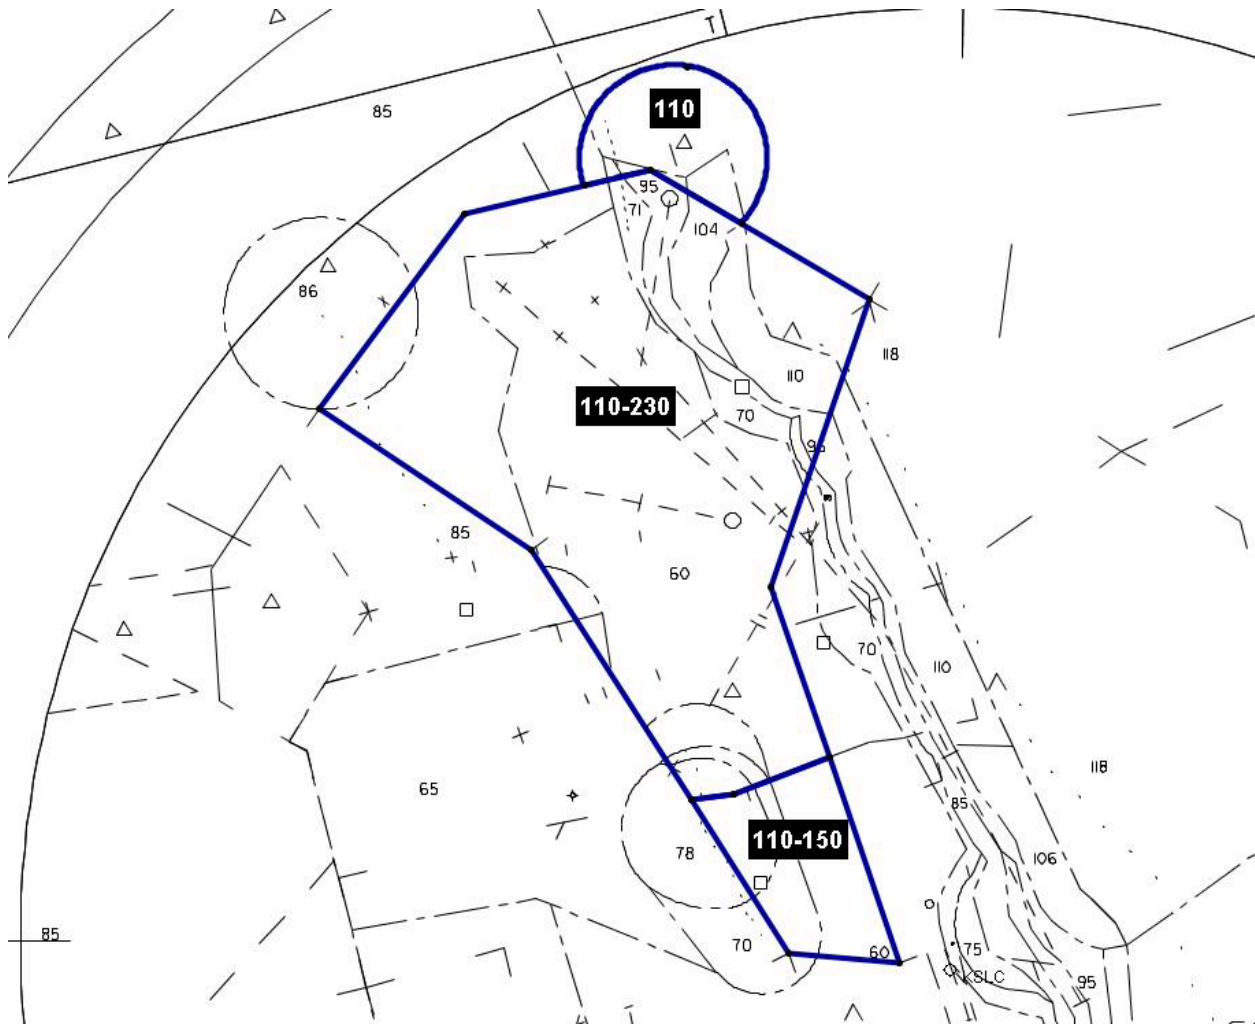

Appendix 3B-2. Bear Airspace (South Flow & SIMULs)

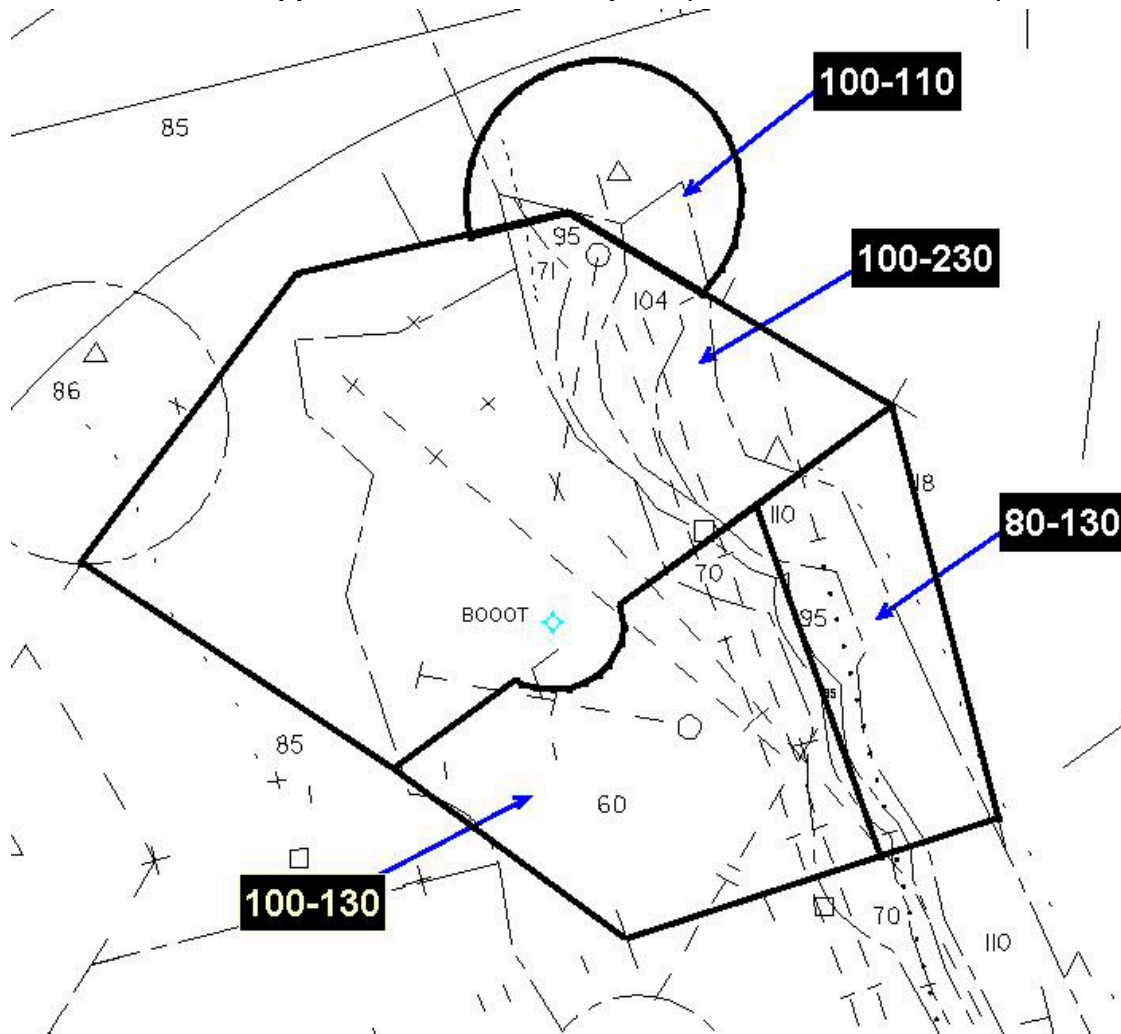


Appendix 3B-3. Bear Airspace (South Flow & Visual/Staggers)

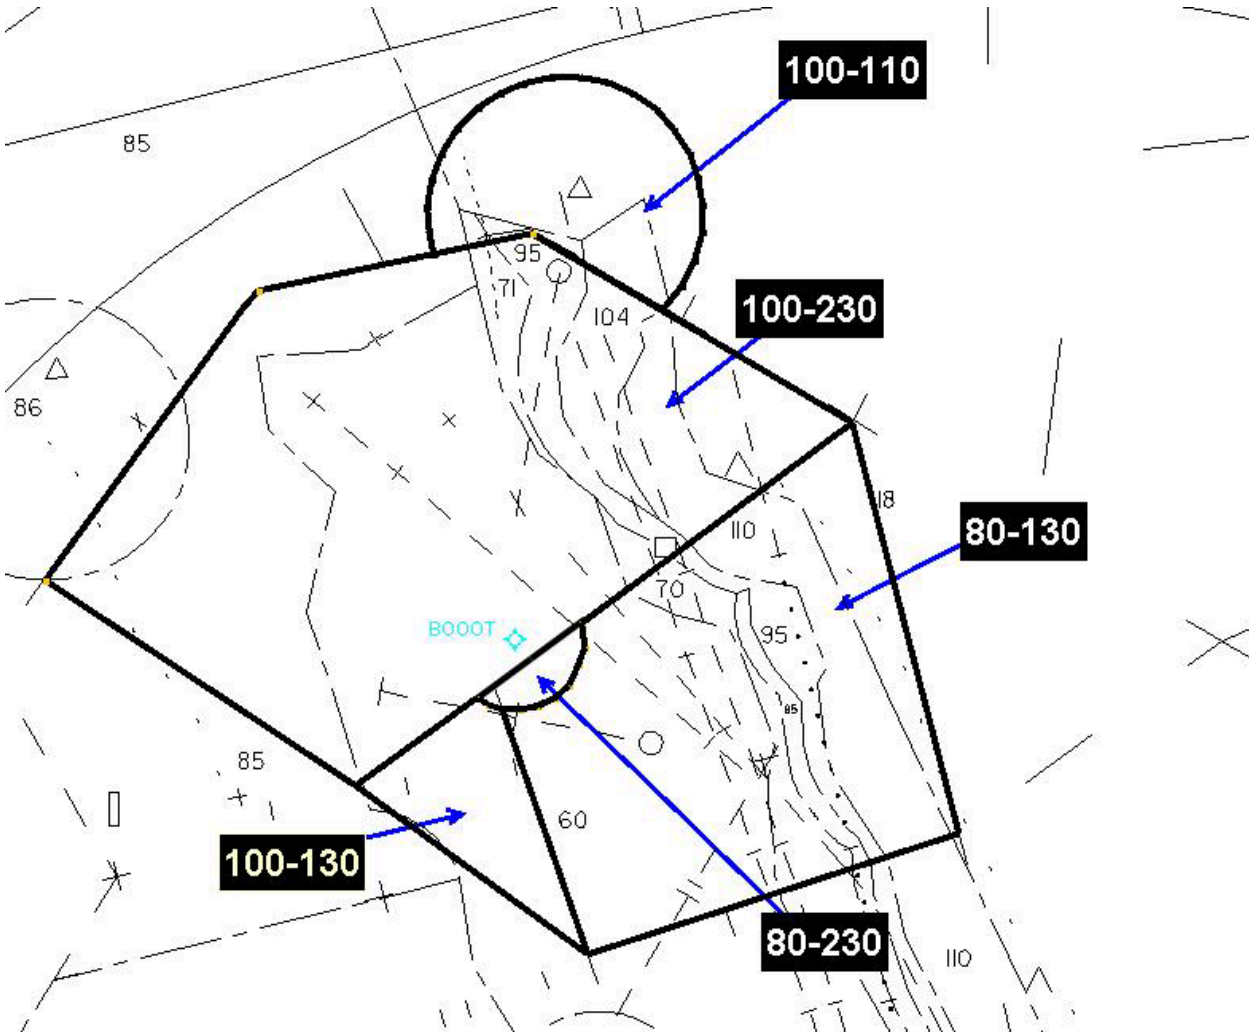


Appendix 3C. Jordan Airspace


Appendix 3C-1. Jordan Airspace (North Flow & SIMULs)

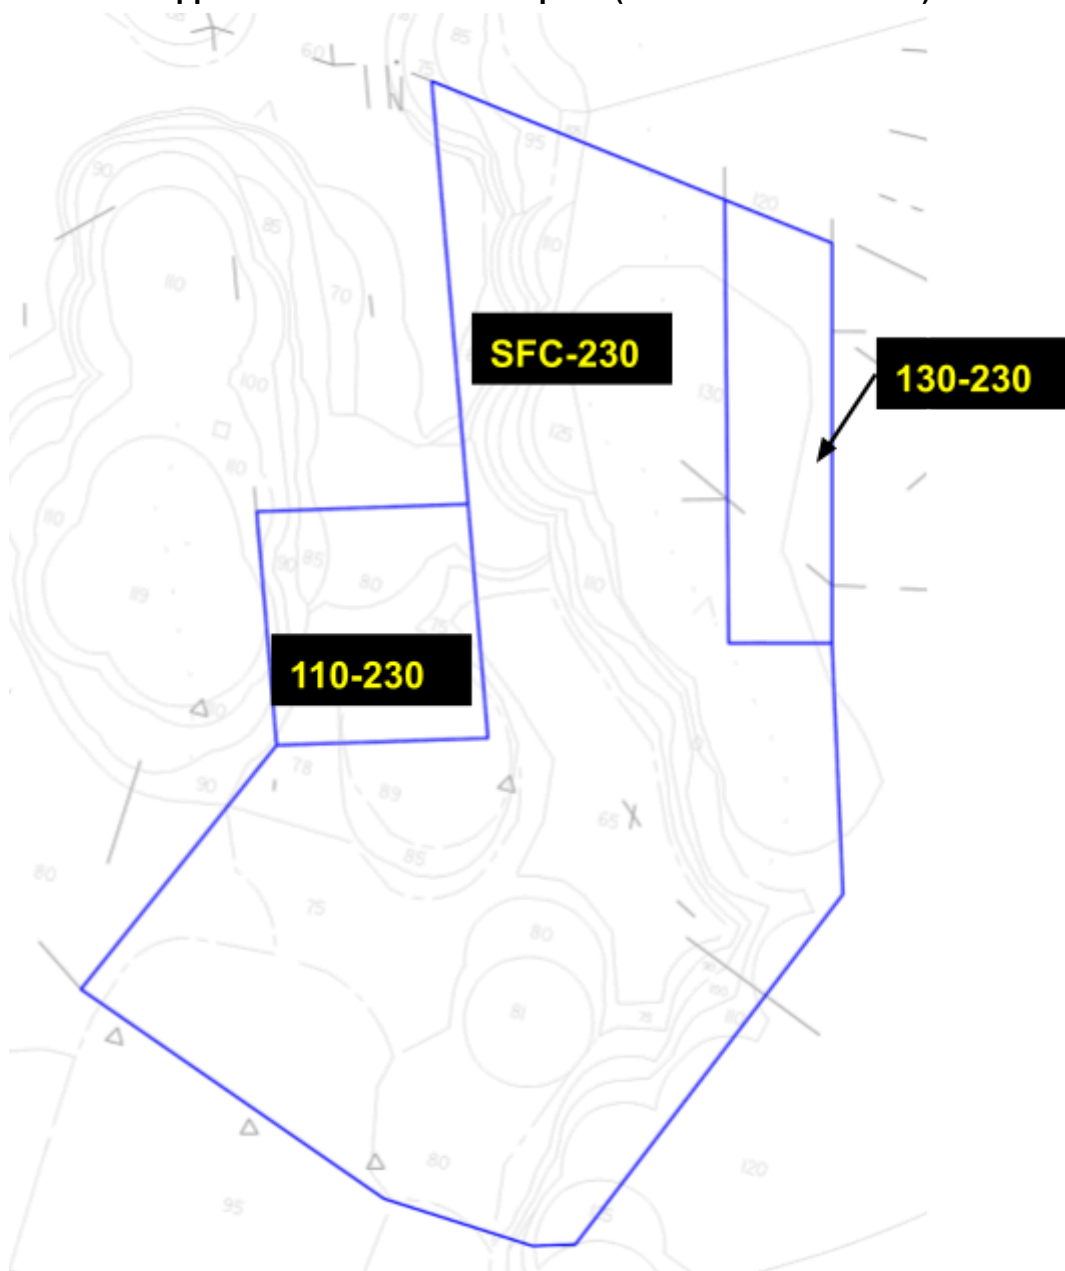

Appendix 3C-2. Jordan Airspace (North Flow & Visual/Staggers)

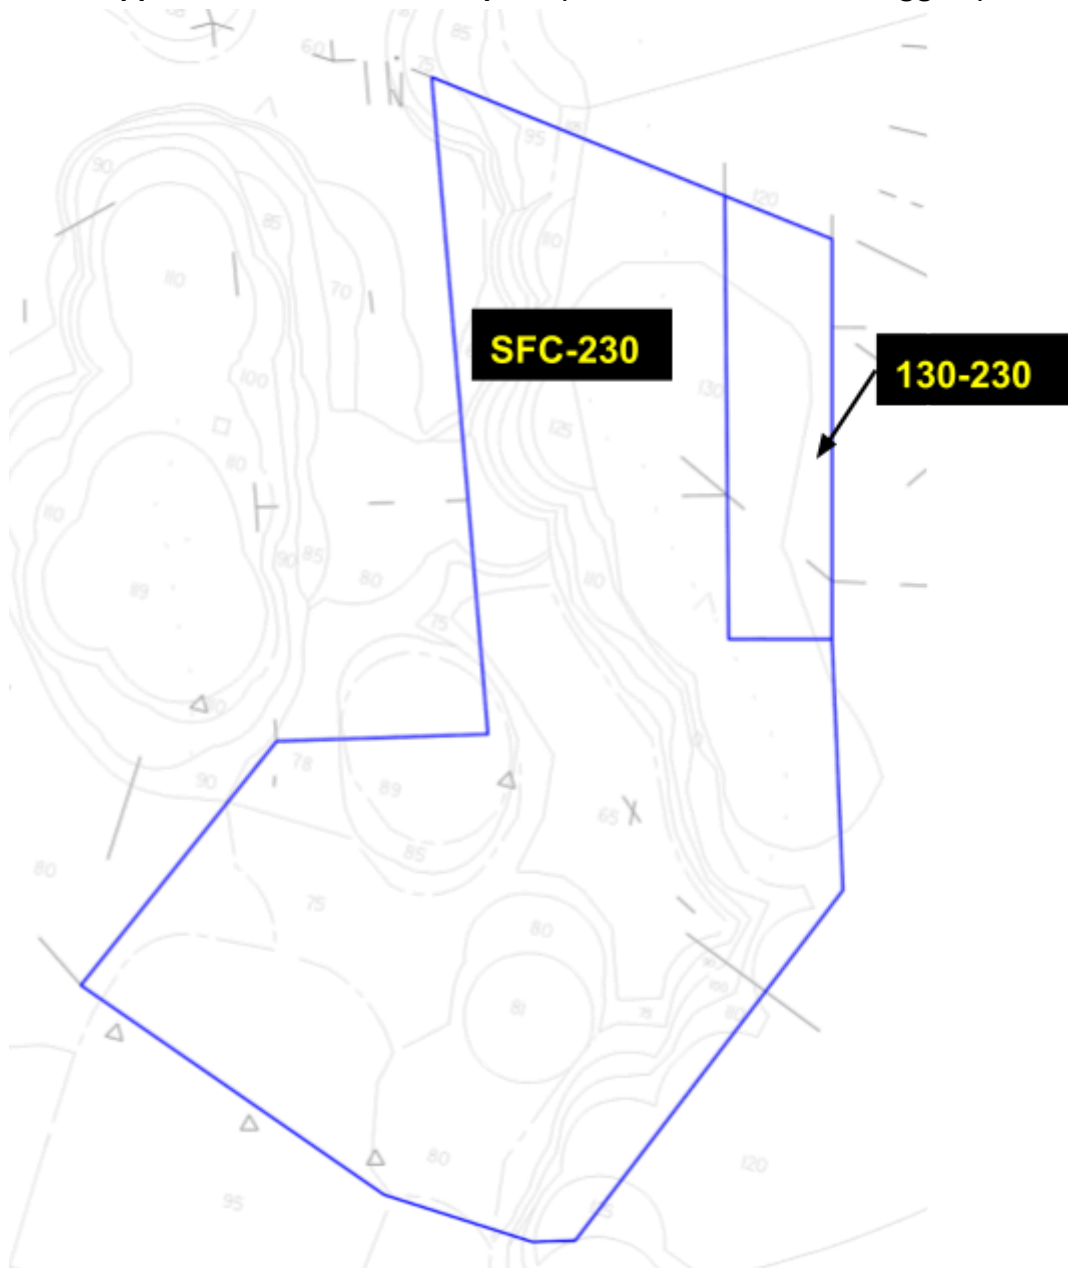


Appendix 3C-3. Jordan Airspace (South Flow)

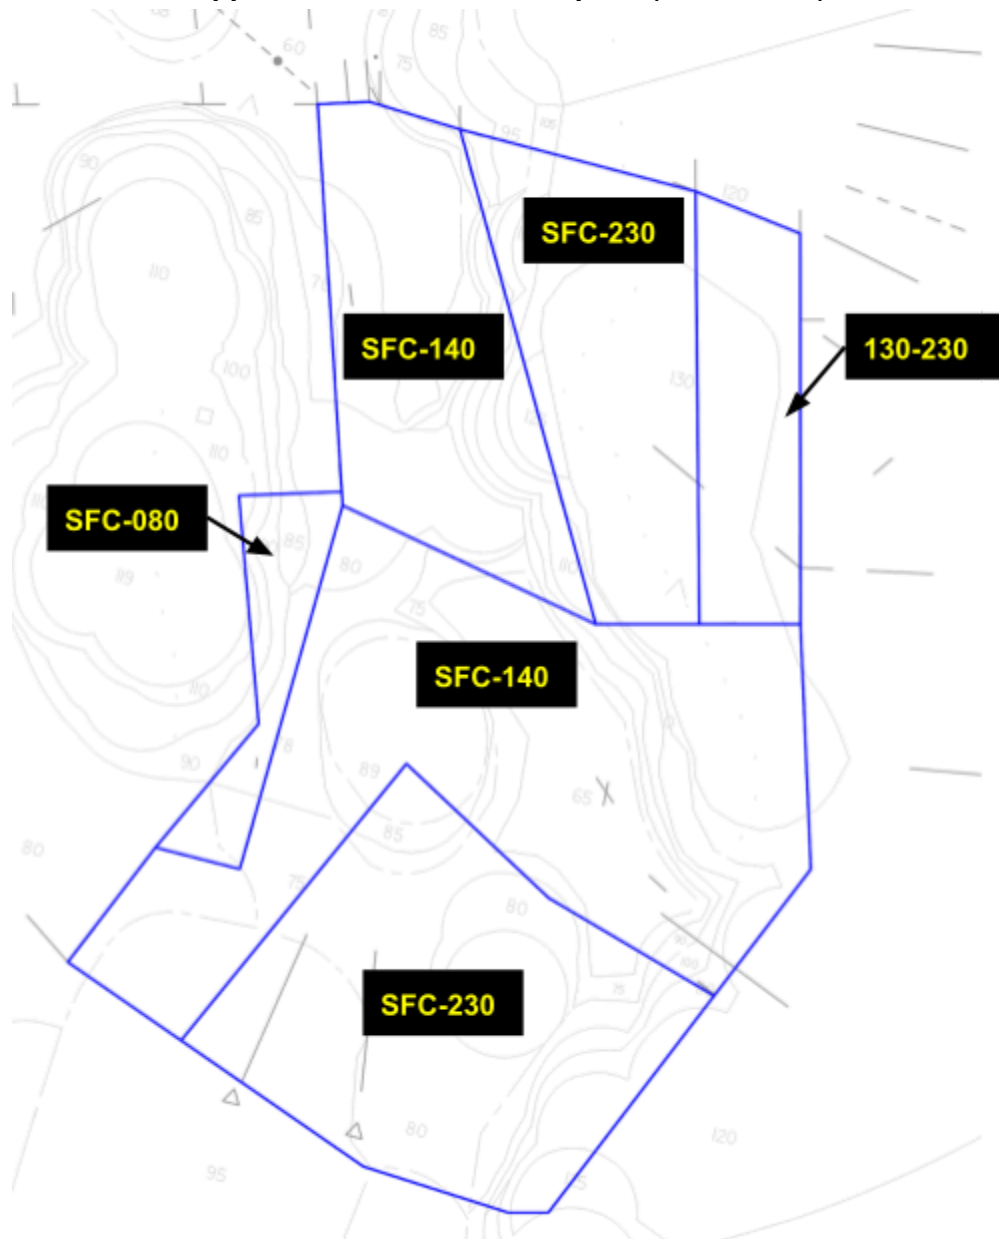


Appendix 3D. Lake Airspace

Appendix 3D-1. Lake Airspace (North Flow)

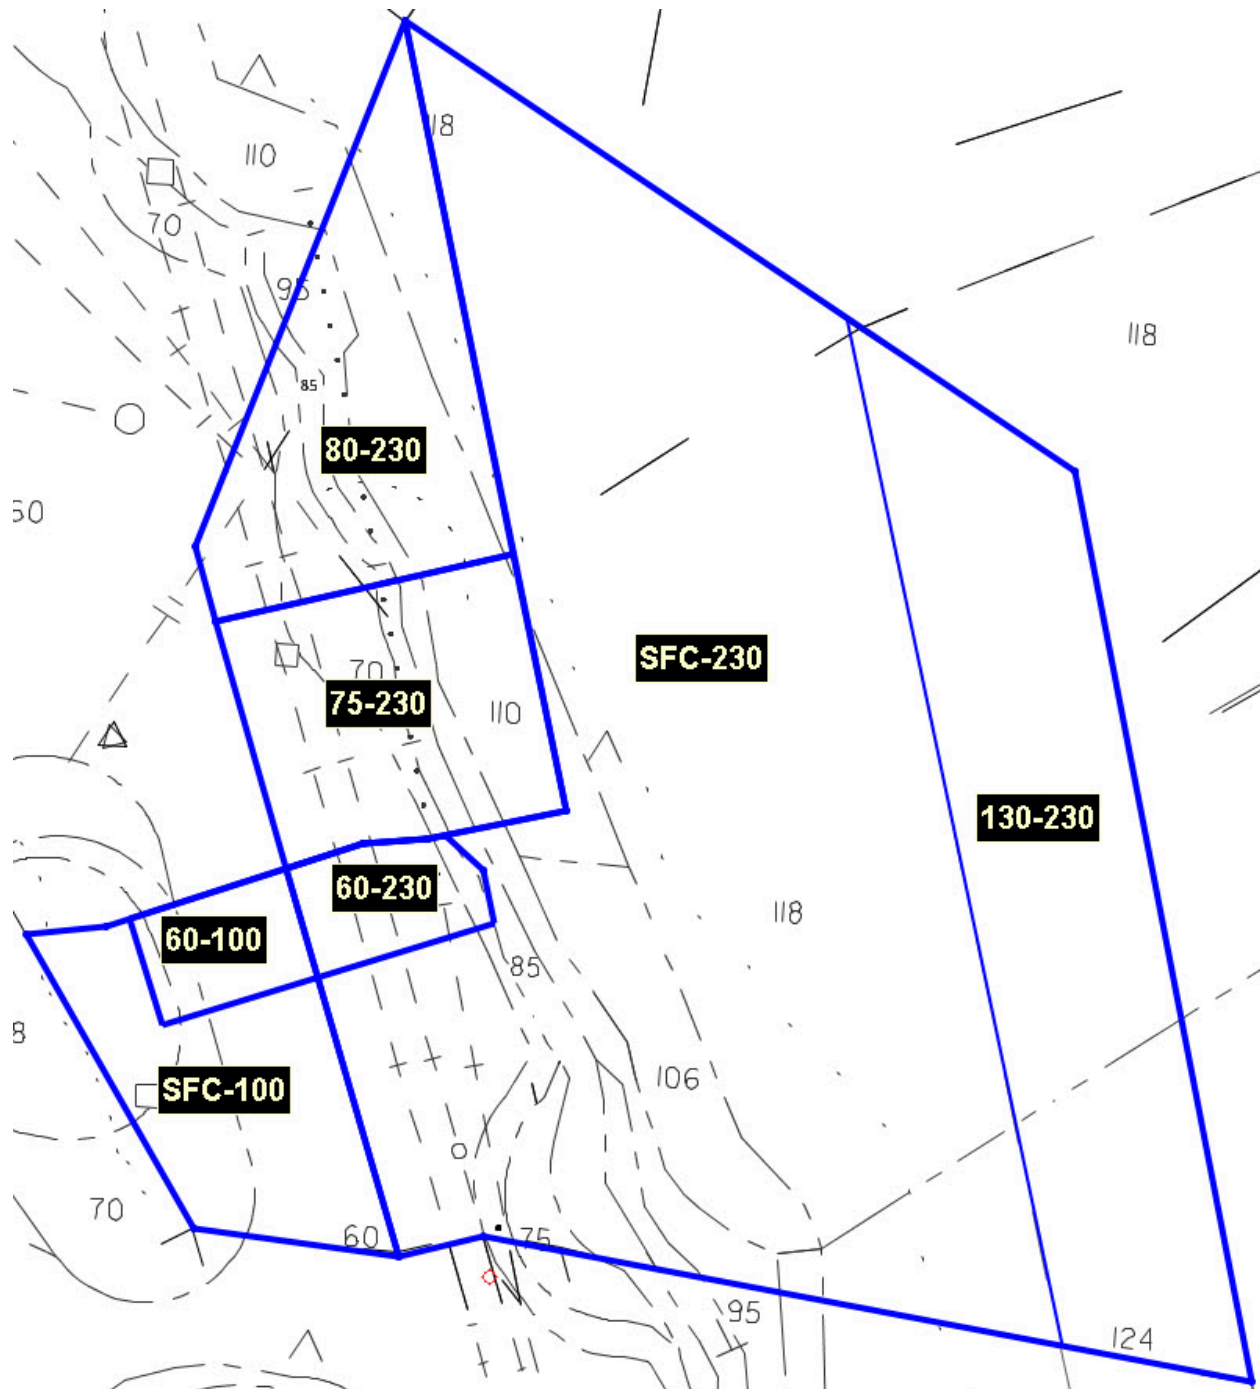


Appendix 3D-2. Lake Airspace (South Flow)

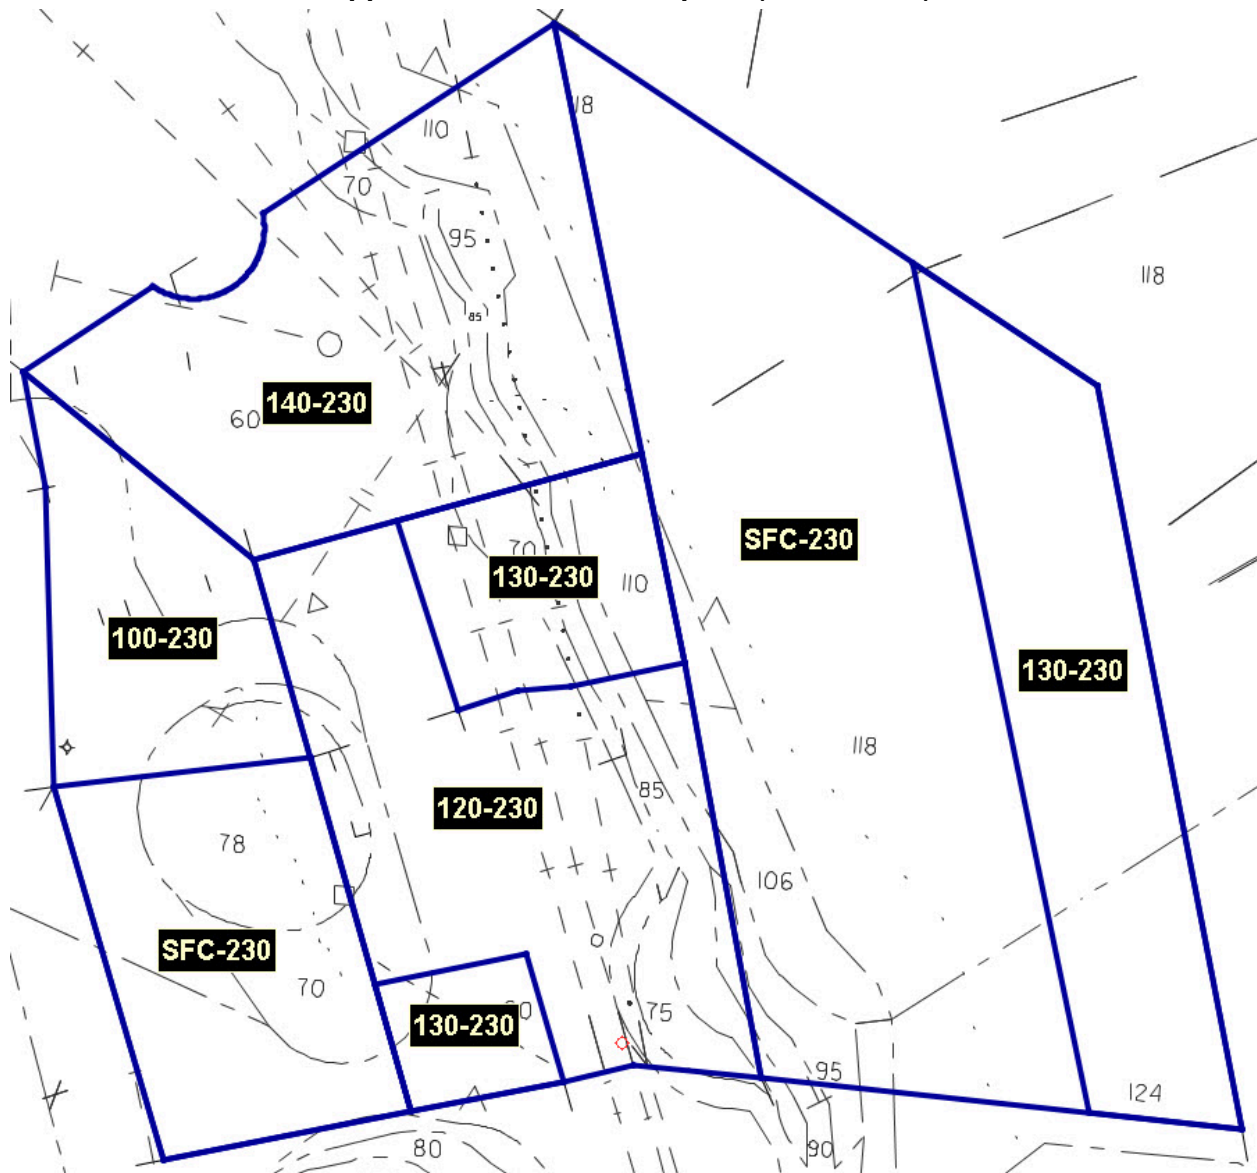


Appendix 3E. Stockton Airspace

Appendix 3E-1. Stockton Airspace (North Flow)

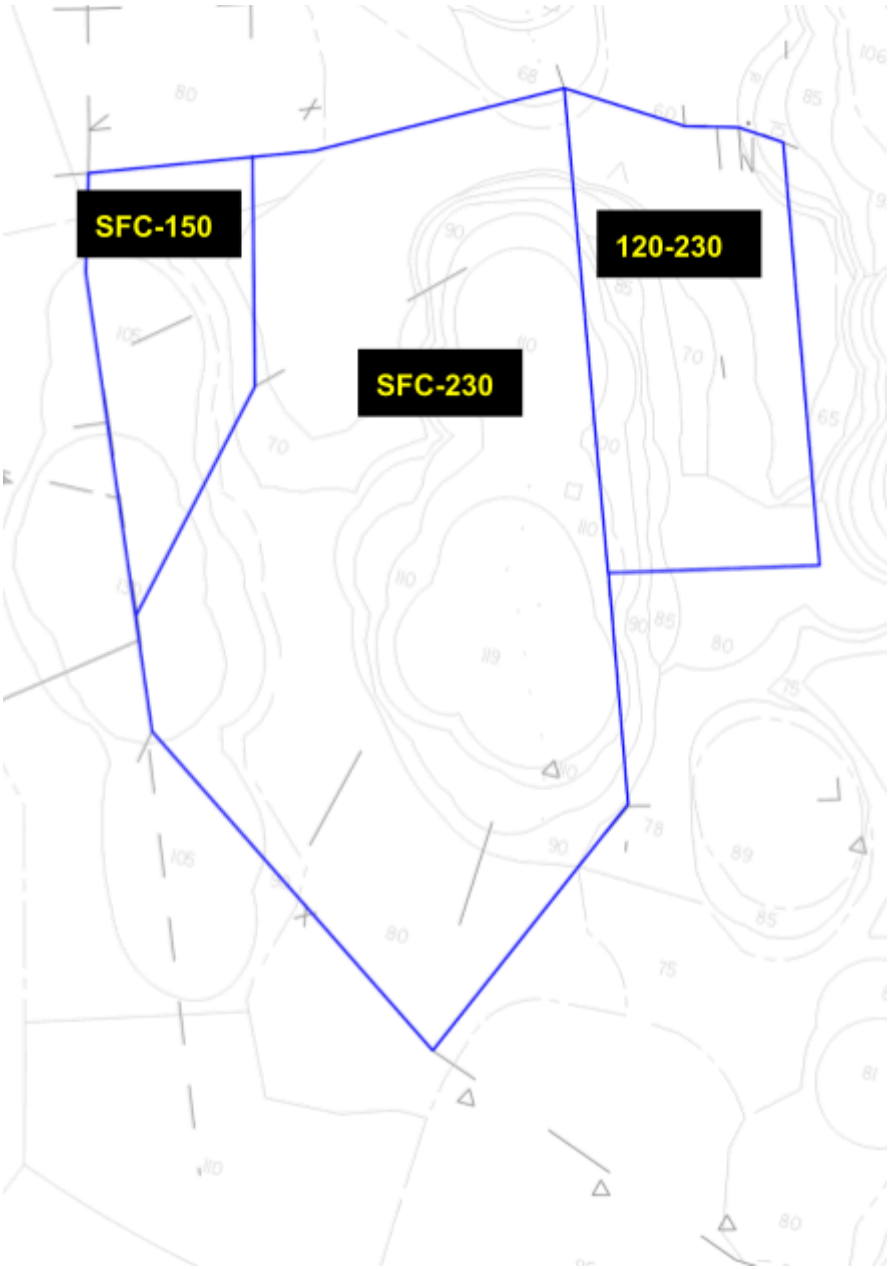


Appendix 3E-2. Stockton Airspace (South Flow)

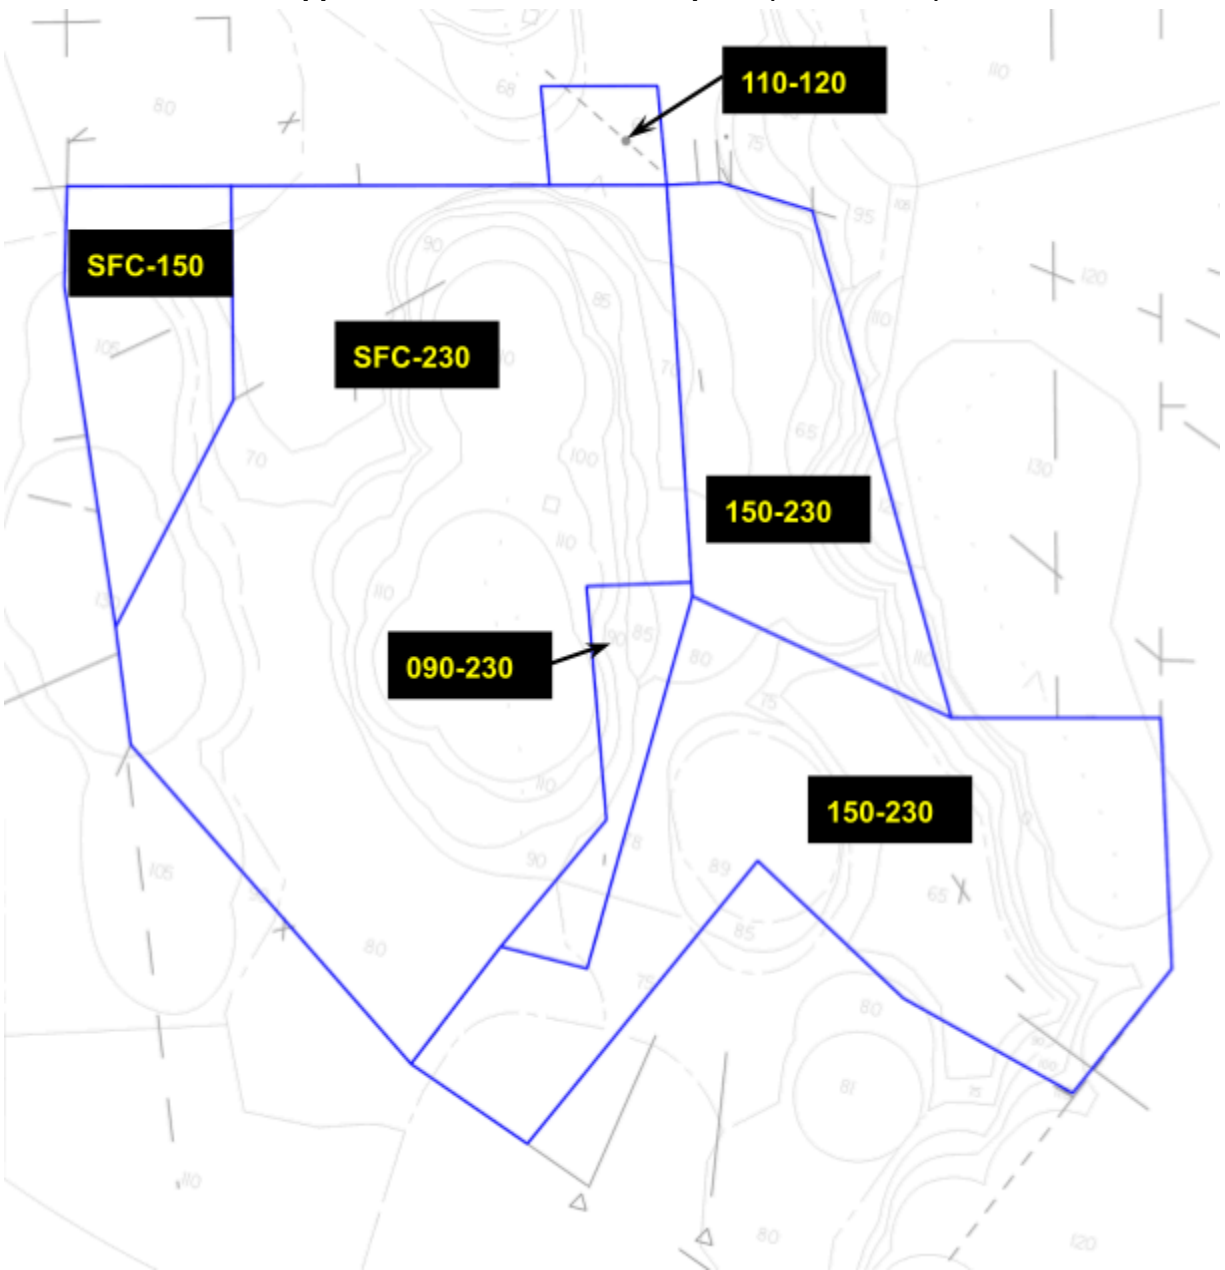


Appendix 3F. Final Airspace


Appendix 3F-1. Final Airspace (North Flow & SIMULs)

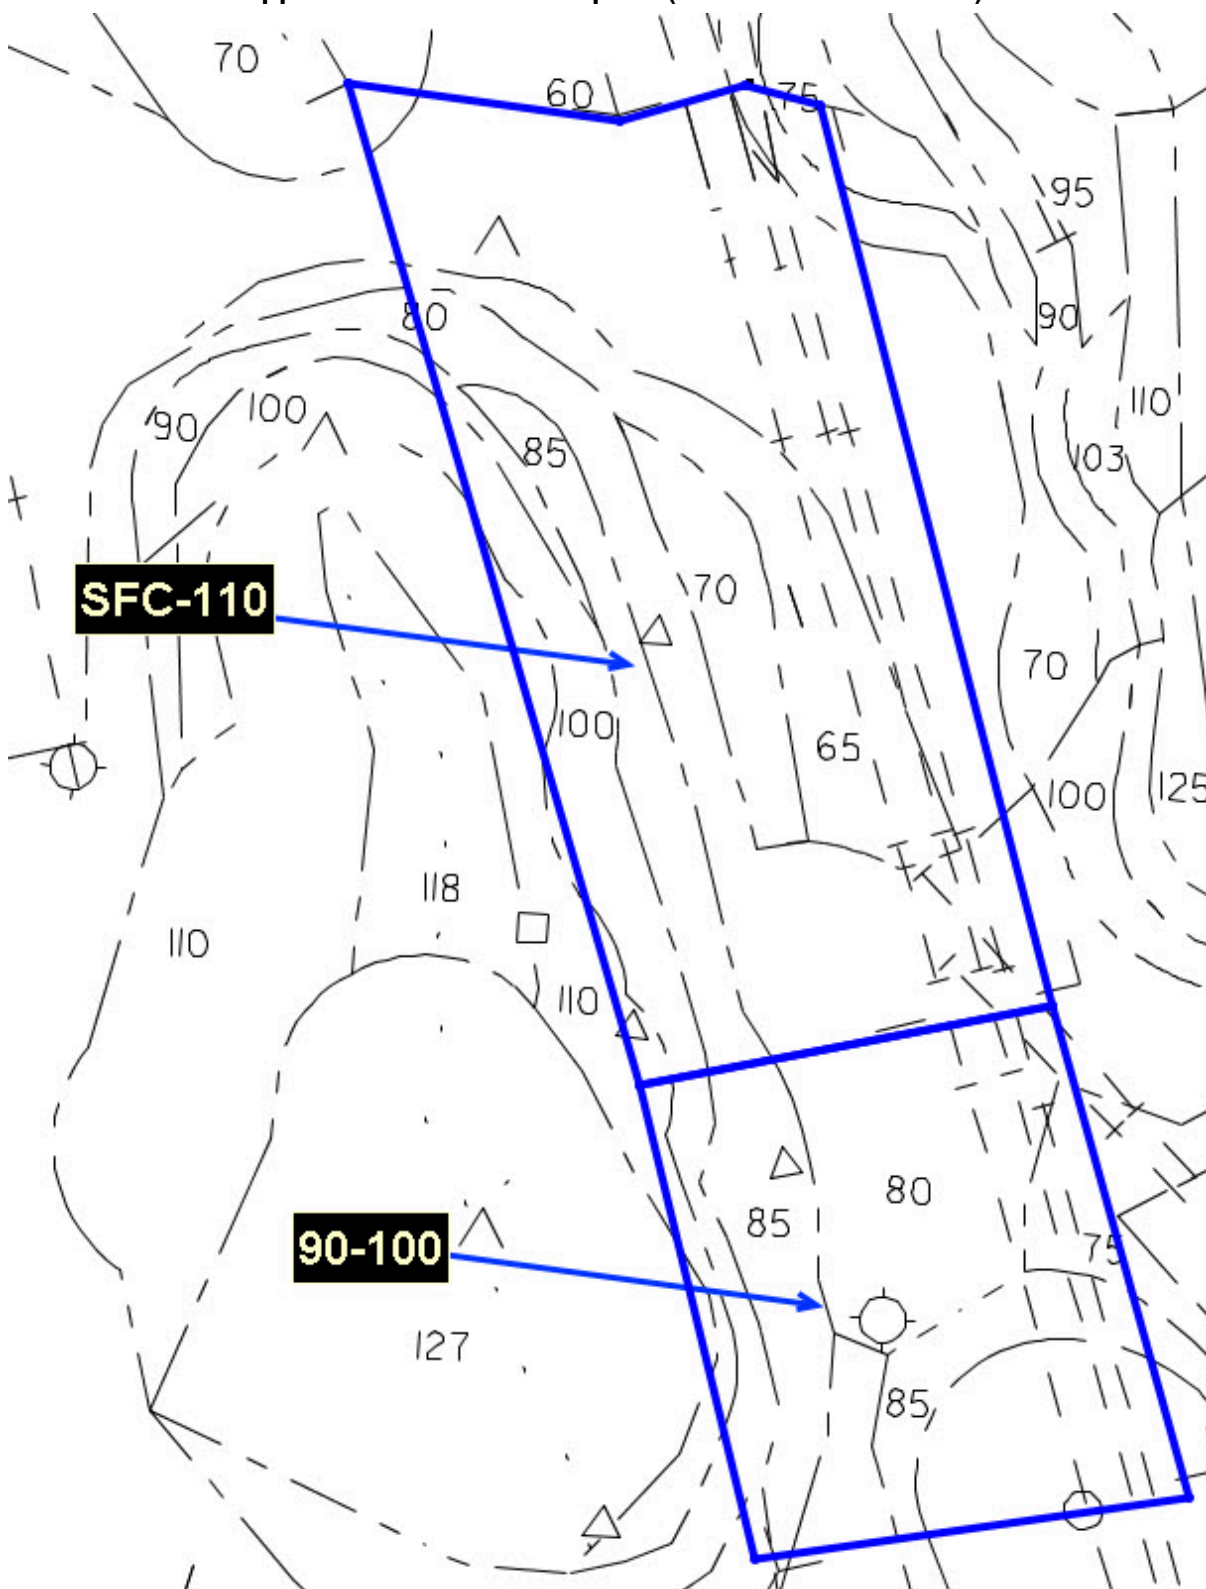


Appendix 3F-2. Final Airspace (North Flow & Visual/Staggers)

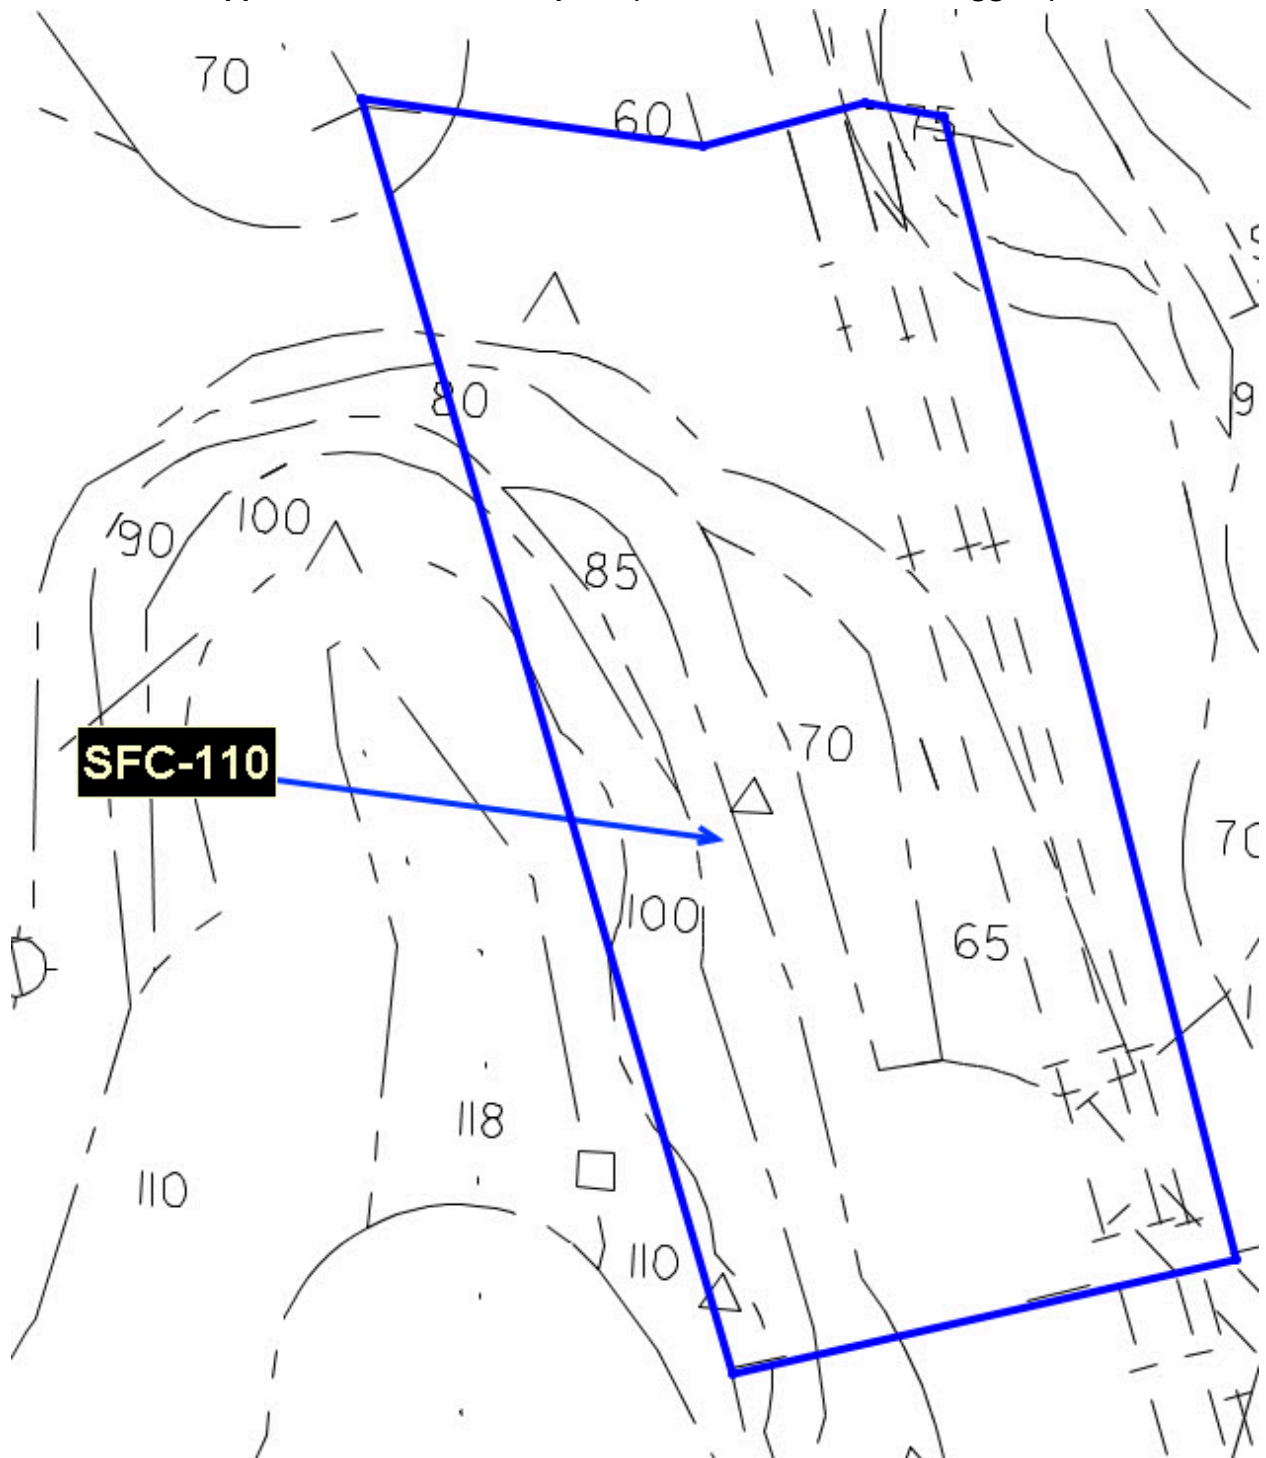

Appendix 3F-3. Final Airspace (South Flow & SIMULs)

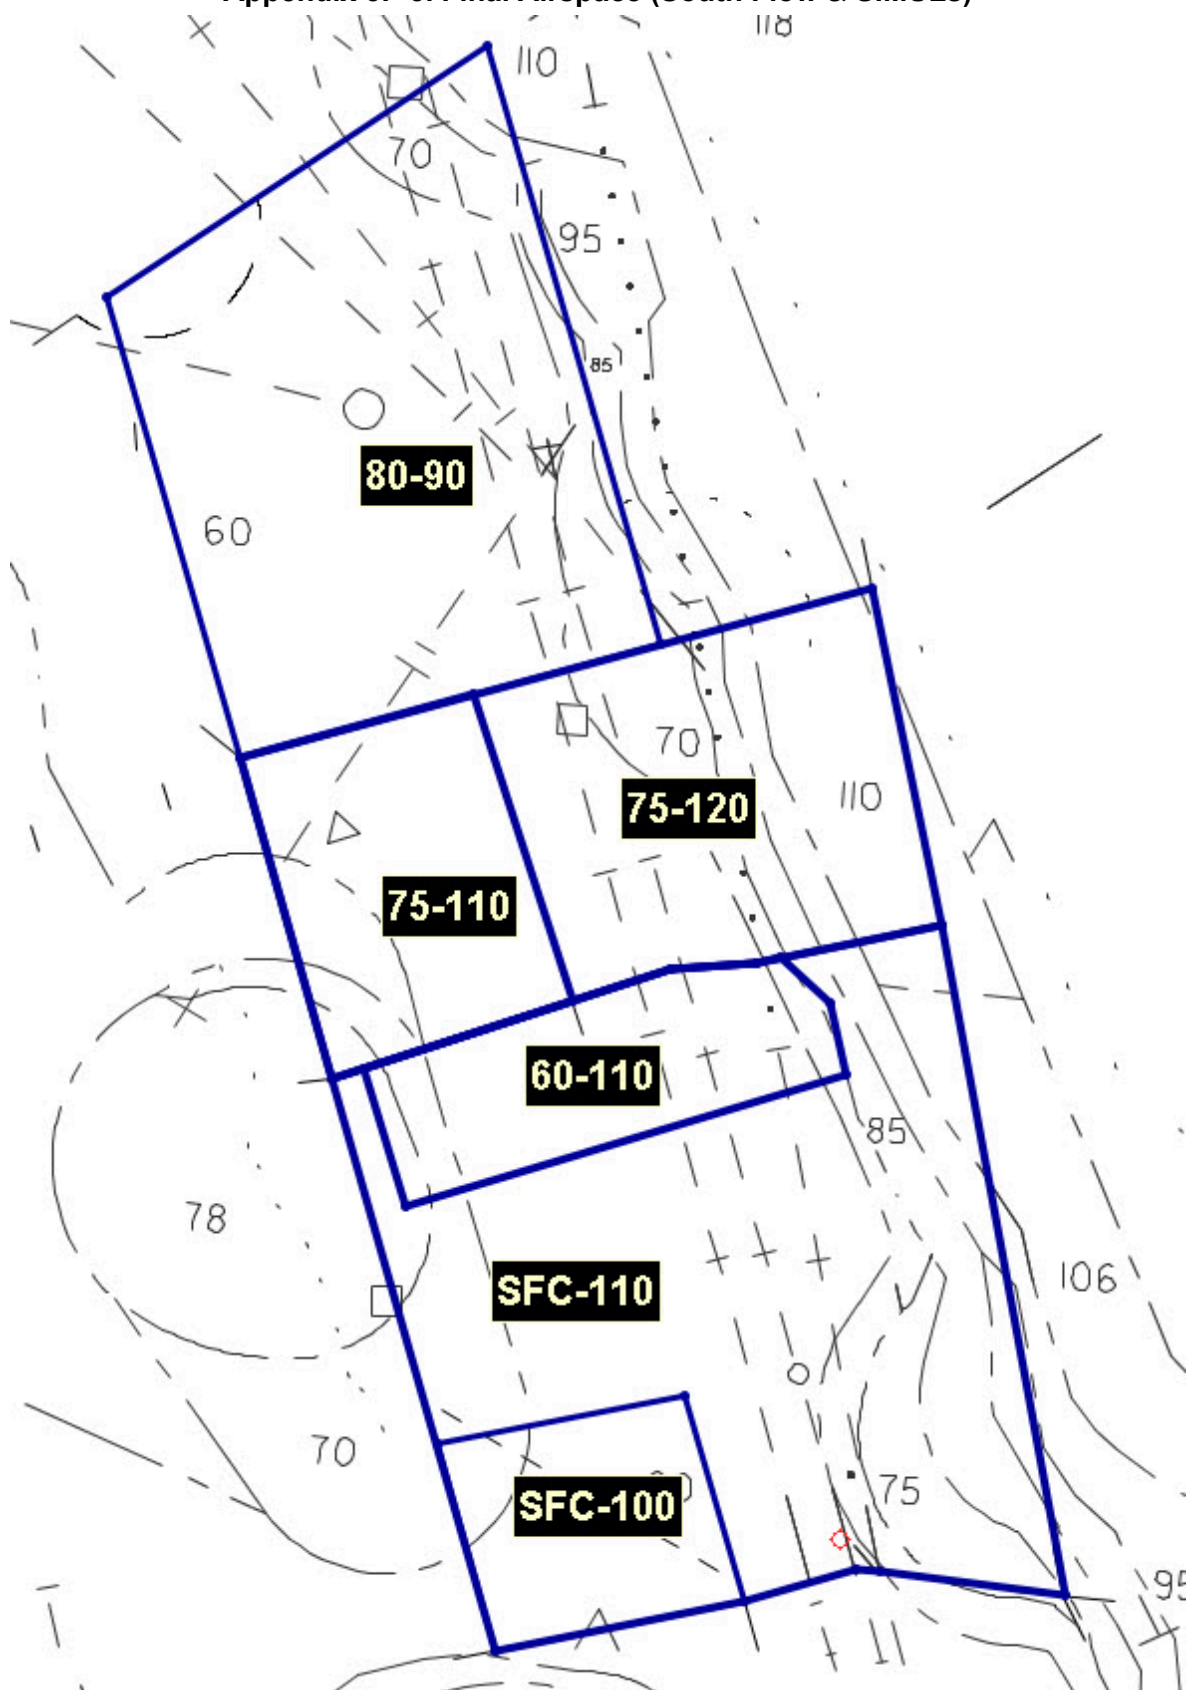


Appendix 3F-4. Final Airspace (South Flow & Visual/Staggers)

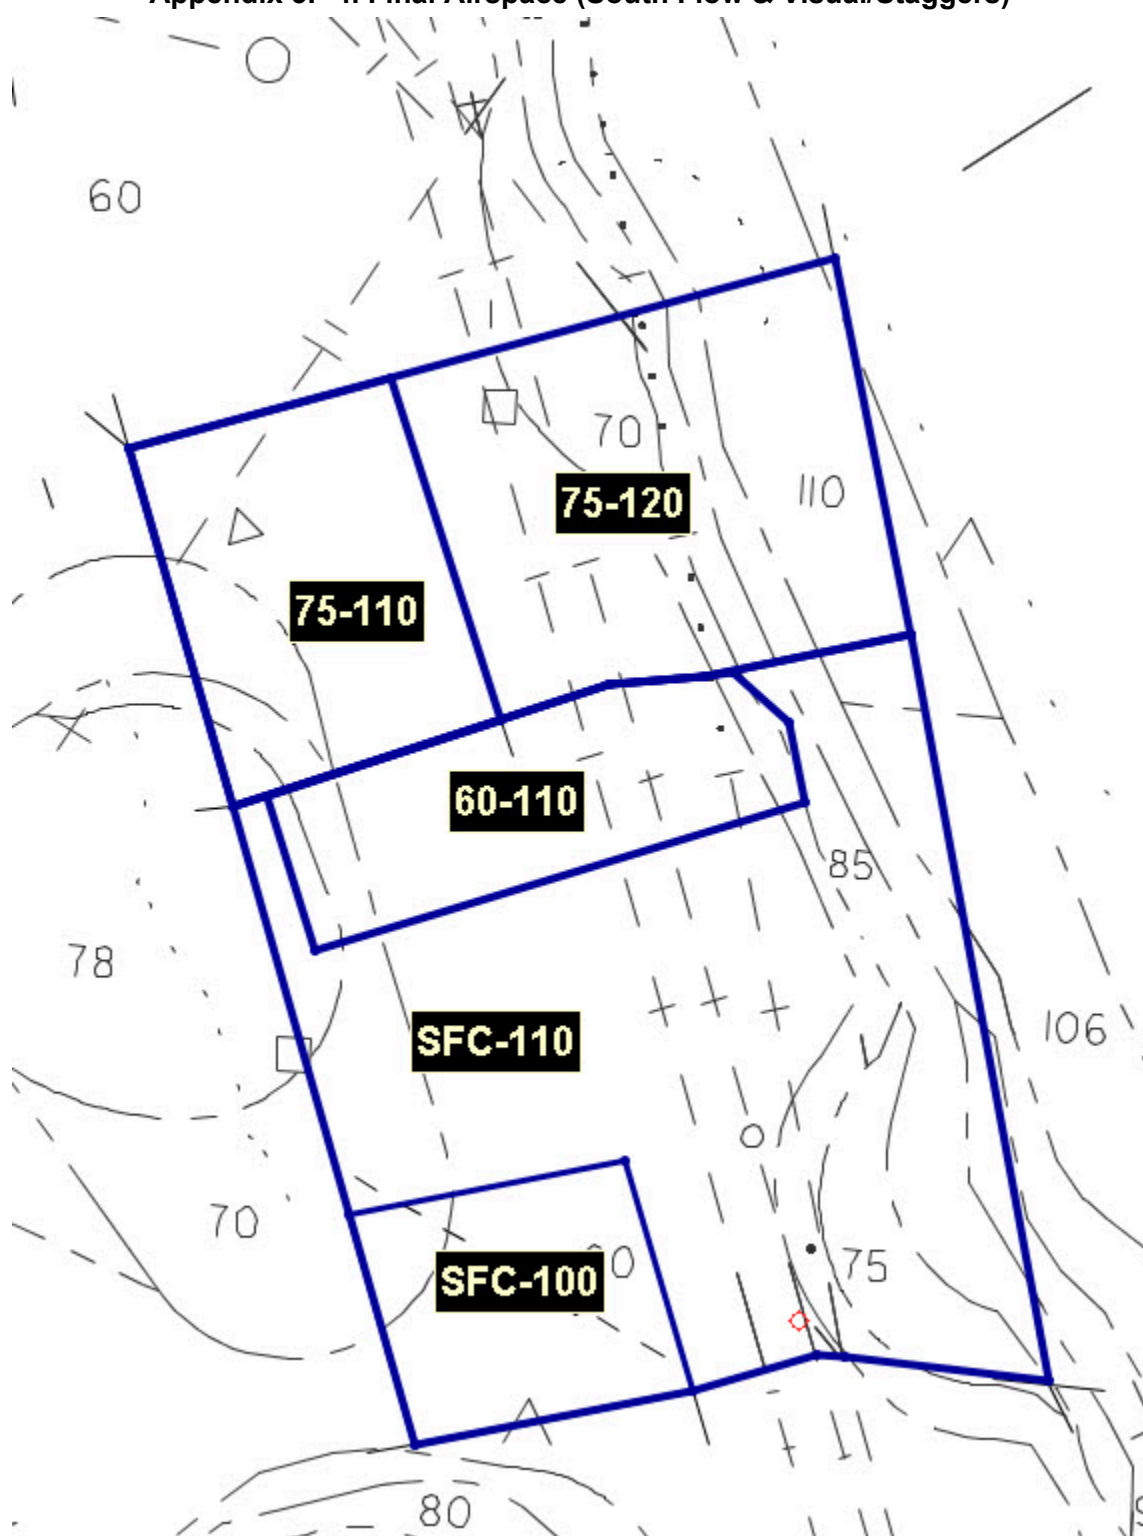


Appendix 3G. Gunnison Airspace

Appendix 3G-1. Gunnison Airspace (North Flow)

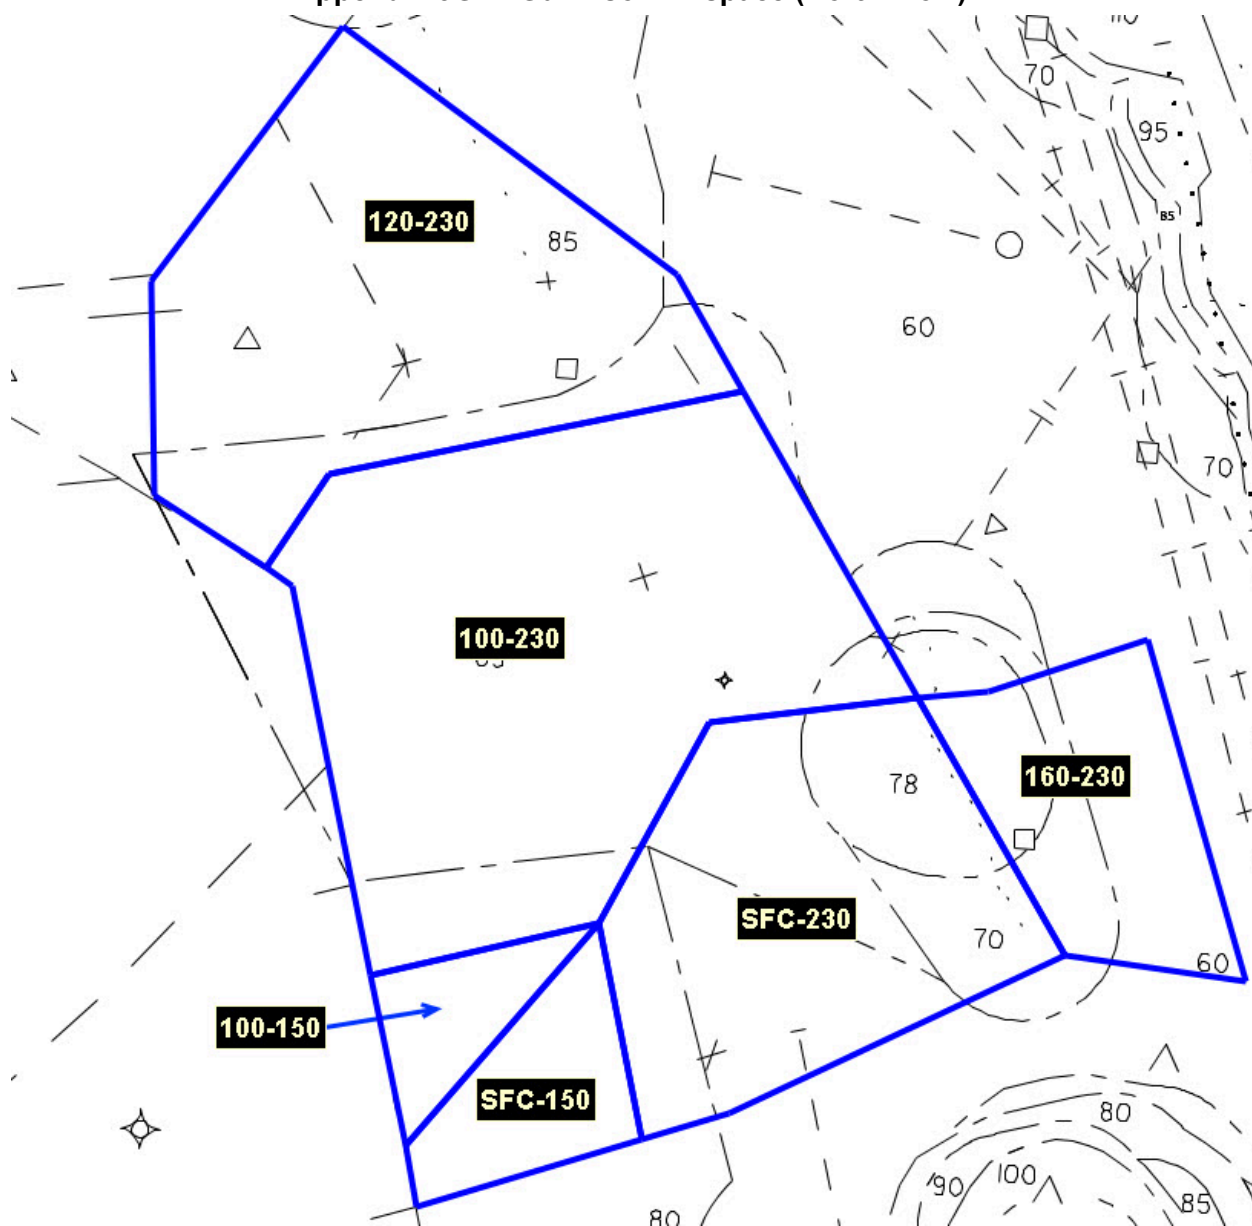


Appendix 3G-2. Gunnison Airspace (South Flow)

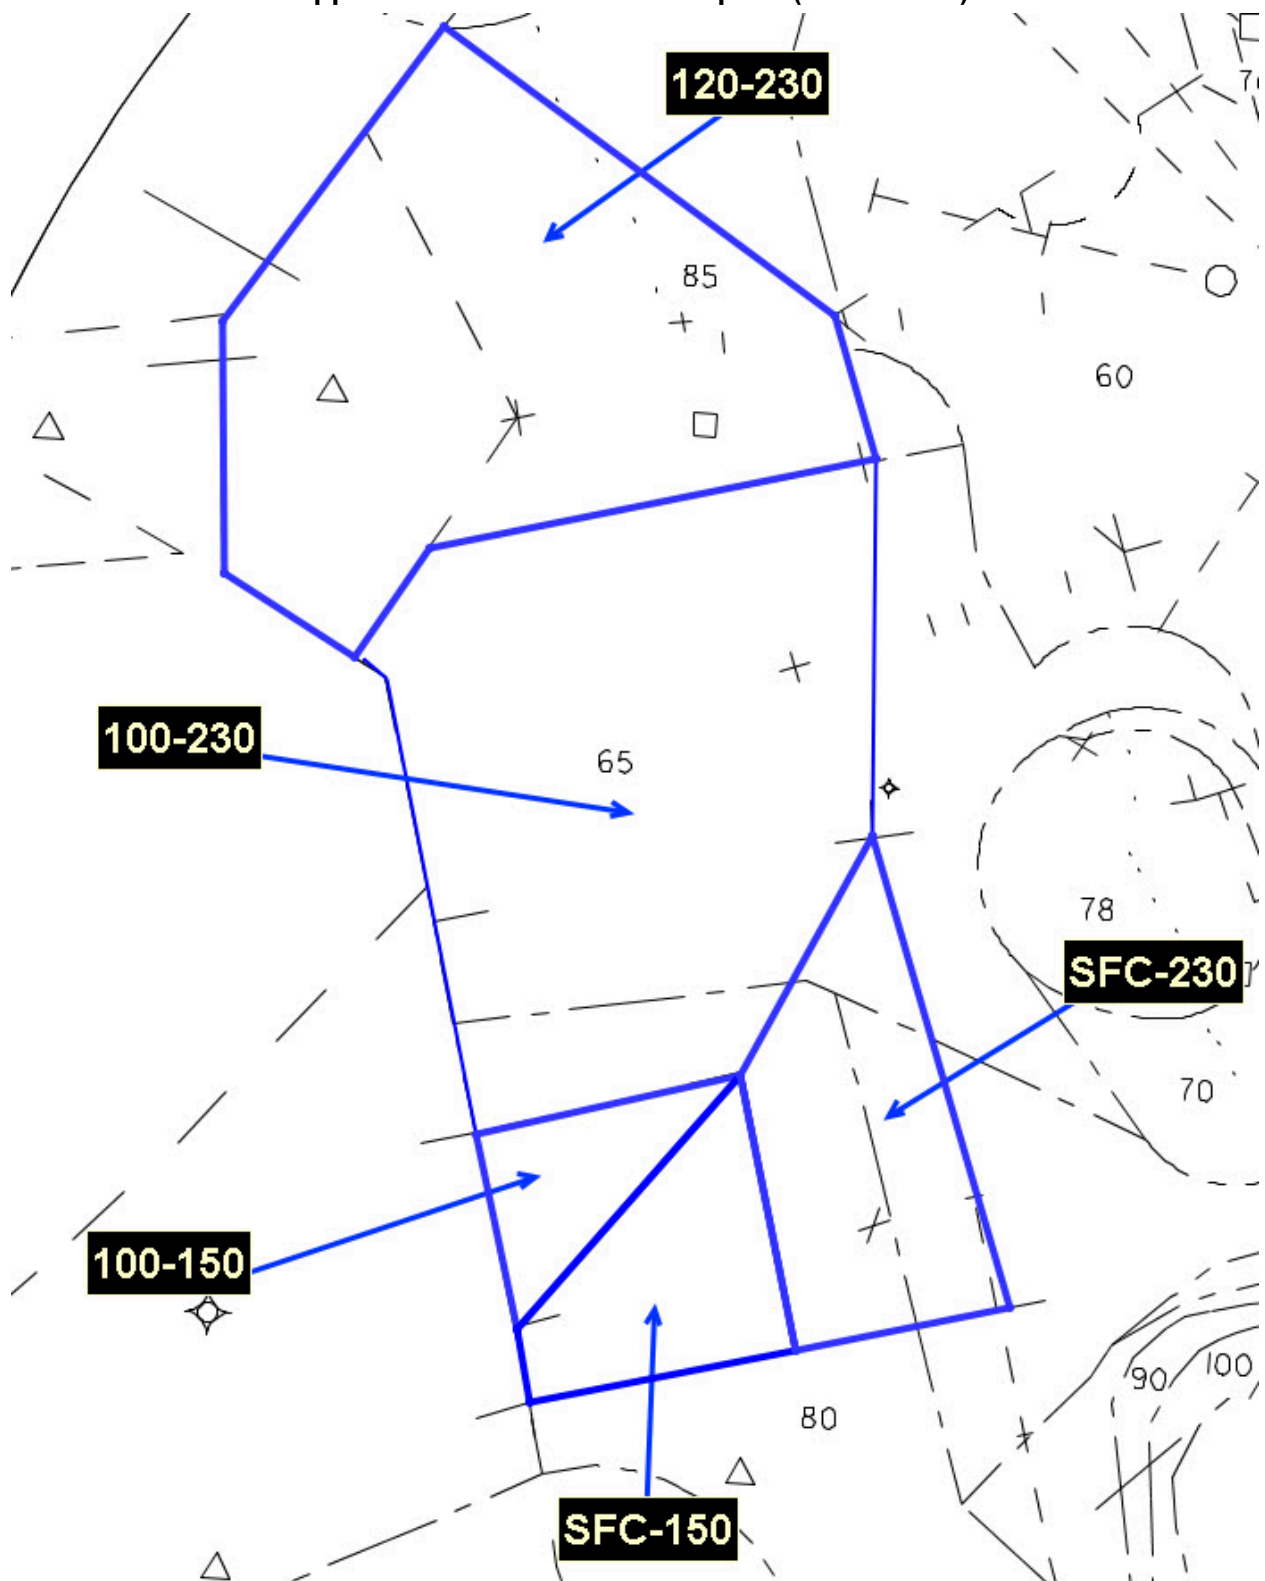


Appendix 3H. Hart Airspace

Appendix 3H-1. Hart Airspace (North Flow)

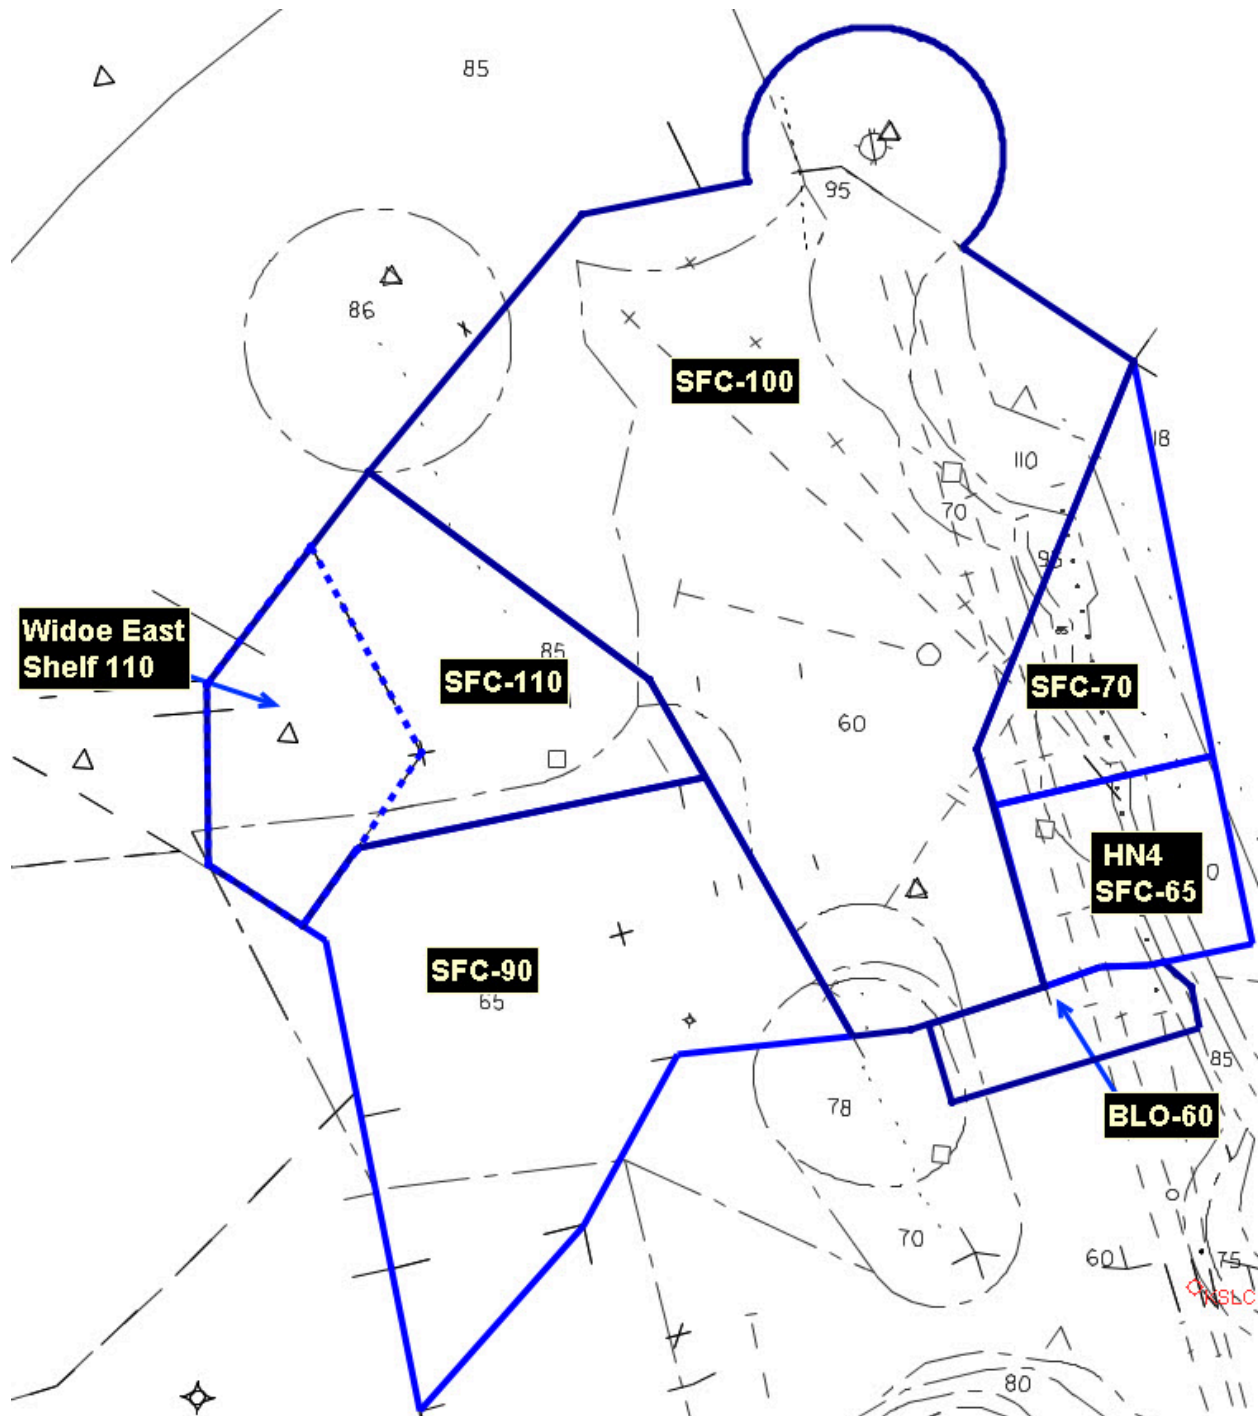


Appendix 3H-2. Hart Airspace (South Flow)

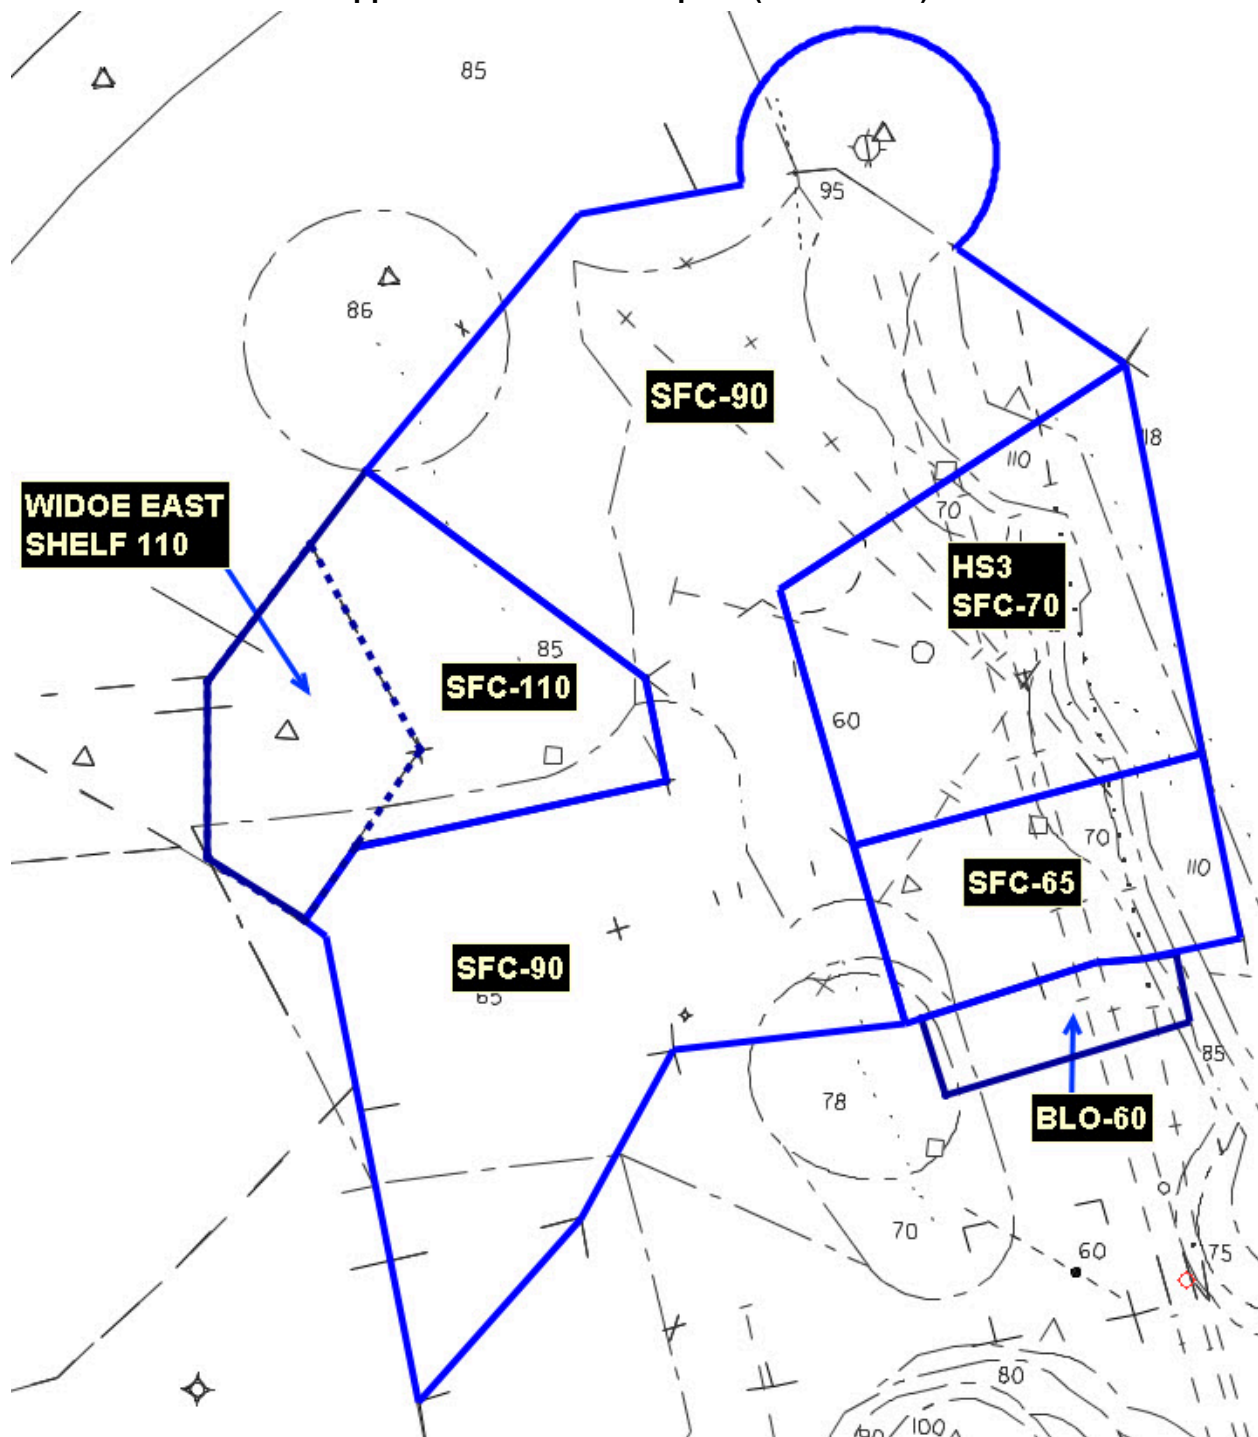

Appendix 3I. Valley Airspace

Appendix 3I-1. Valley Airspace (North Flow)

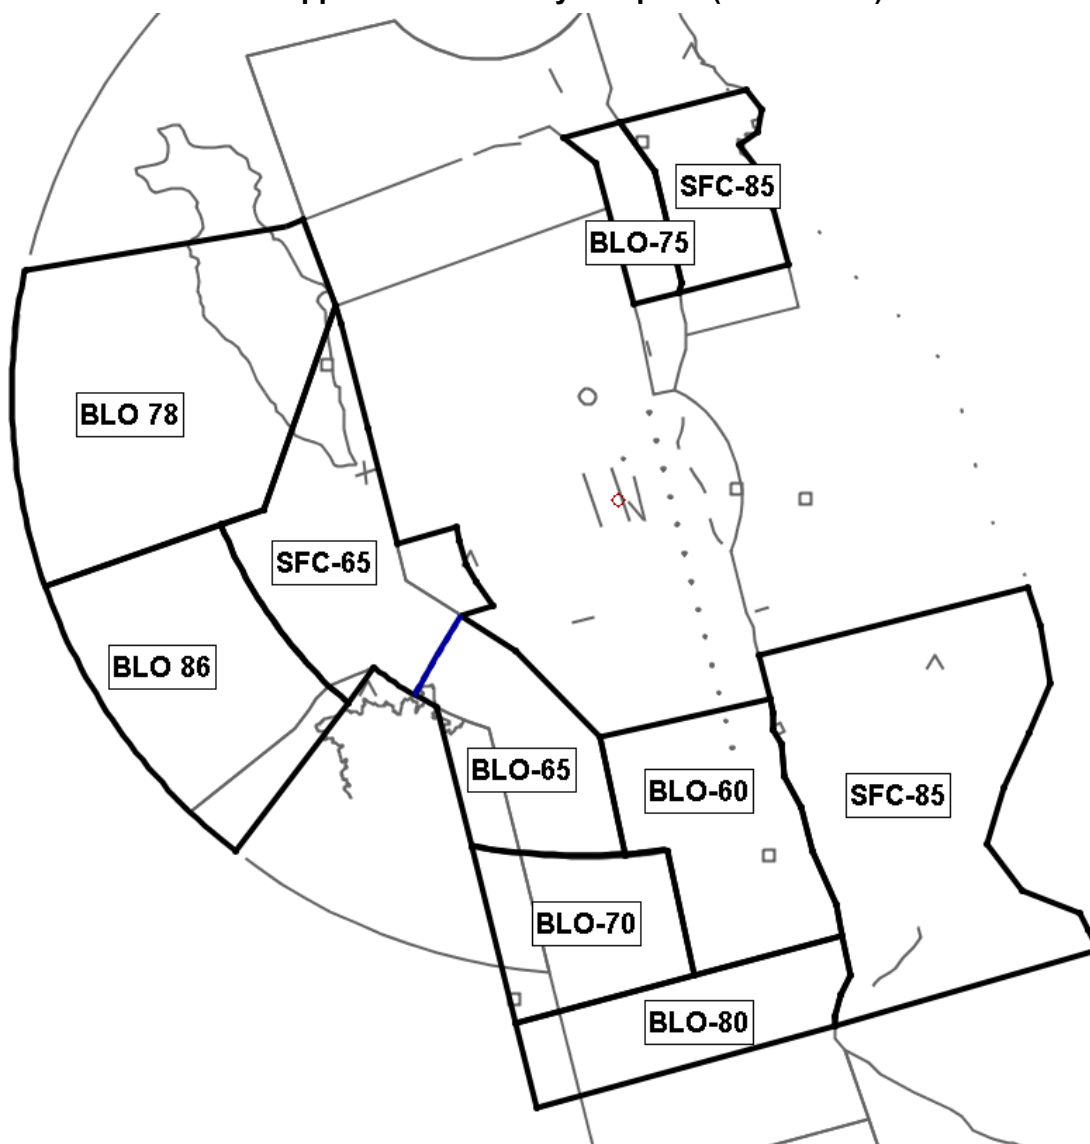

Appendix 3I-2. Valley Airspace (South Flow)

