
mcu_core



File: mcu_core.kicad_sch

usb_entry

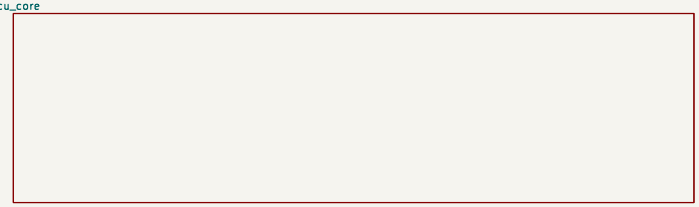


File: usb_entry.kicad_sch


Sheet: /
File: mcu_usb.kicad_sch


Title:


Size: A4	Date:	**Rev:**
KiCad E.D.A. 9.0.2		Id: 3/3

REBUILT 2026-10-28. Camera connector is logical 3V3-side ONLY; isolation NOT implemented.

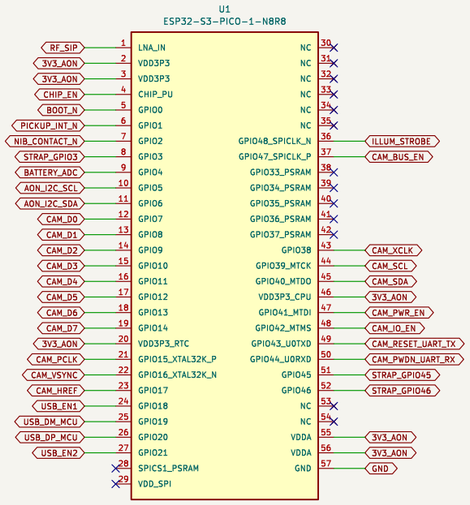























































VDD_SPI pad29 intentionally externally NC per PICO reference. PSRAM pins not GPIO.

EN RC, RF matching and bypass BOM need bench/layout qualification. No MCU PCB.


Sheet: /mcu_core/
File: mcu_core.kicad_sch

Title: 2026-10-28 REBUILD / NO FAB


Size: A3 | Date: | **Rev: R0**
KiCad E.D.A. 9.0.2 | Id: 2/3

USB-C sink / native USB recovery. NO FAB. No PD or sustained overvoltage protection.

J1
USB4105-GF-A16P

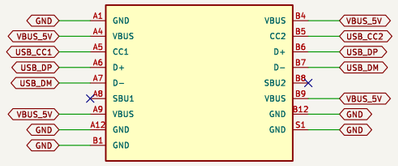

U2
TPD4E05U06DQAR



R10
5.1k 1%



R11
5.1k 1%



R12
22R 5I_TBD




R13
22R 5I_TBD



D1
TPD1E10B06DYAR



J2
LOGICAL_CAMERA_ONLY_NOT_FPC

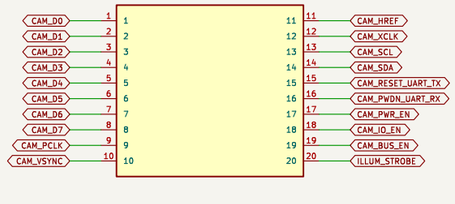

J3
PICKUP_INTERNAL




J4
UART_TEST_CAMERA_OFF_ONLY

J5
ADC_SAFE_EXTERNAL_ONLY




J6
POWER_CORE



J7
CHARGER_MODE



#FLG01
PWR_FLAG



#FLG02
PWR_FLAG



Flags represent power supplied by separate power_core. No physical interconnect defined.

Do not connect BATTERY_ADC directly to pack. Camera IO/rails/isolators remain unresolved.

Sheet: /usb_entry/
File: usb_entry.kicad_sch

Title: 2026-10-28 REBUILD / NO FAB

Size: A3	Date:	**Rev: R0**
KiCad E.D.A. 9.0.2		Id: 3/3