Muneeb Lone, 23i-2623, DS-B

Question 1

```
.386
.model flat,stdcall
.stack 4096
ExitProcess PROTO, dwExitCode:DWORD


.data

.code
main PROC

;mov eal,257
;mov eah,567
mov ah,255
mov al,254
mov ebx,0FF4h
mov ecx,1237o
mov dl,01001001b
mov dh,0Ah

INVOKE ExitProcess,0
main ENDP

END main
```

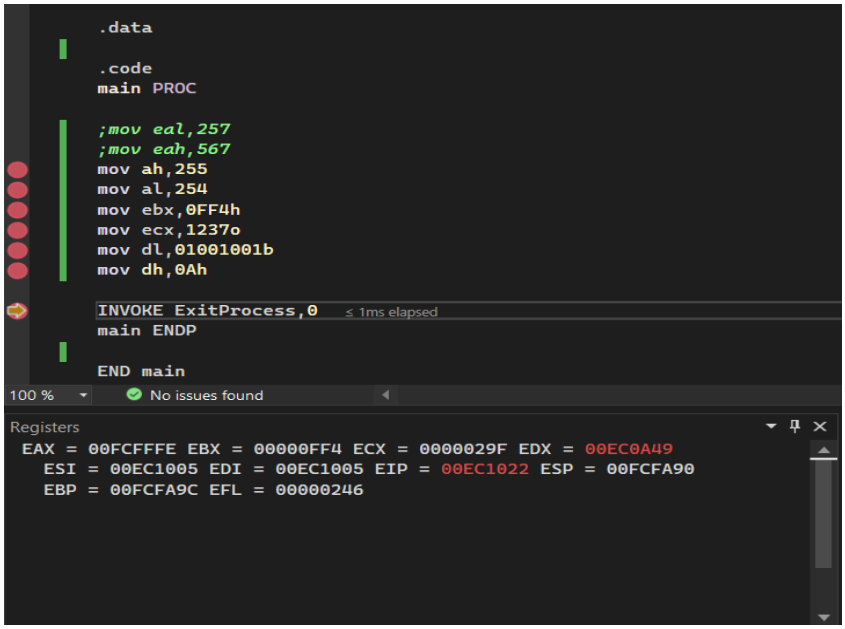

First two lines give errors because AL and AH are 8 bit registers and cannot store more than 255 so the assembler throws errors.

Question 2


```
.386
.model flat,stdcall
.stack 4096
ExitProcess PROTO, dwExitCode:DWORD

.data

.code
main PROC

mov al, 25h
mov eax,70ABh
mov ah,10011000b
mov al,20o
mov ebx,11111111b
mov ecx,1237h
mov dl,0ffh
mov dh,217
INVOKE ExitProcess,0
main ENDP

END main
```

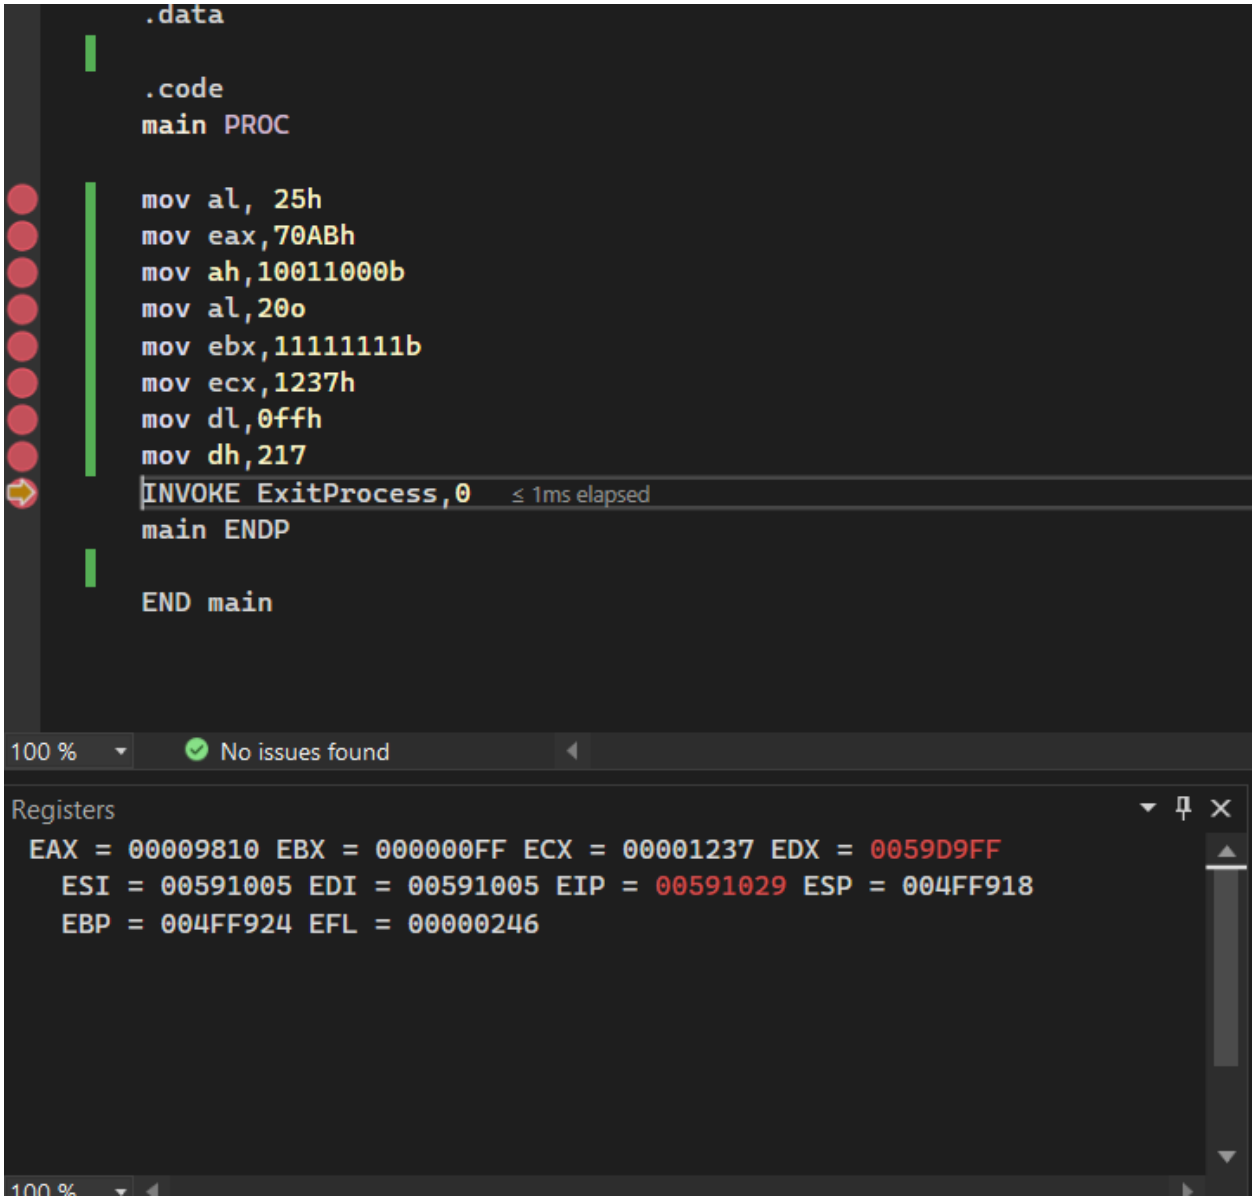
.data
.code
main PROC
mov al, 25h
mov eax,70ABh
mov ah,10011000b
mov al,20o
mov ebx,11111111b
mov ecx,1237h
mov dl,0ffh
mov dh,217
INVOKE ExitProcess,0
≤ 1ms elapsed
main ENDP
END main
100 %
No issues found
Registers
EAX = 00009810 EBX = 000000FF ECX = 00001237 EDX = 0059D9FF
ESI = 00591005 EDI = 00591005 EIP = 00591029 ESP = 004FF918
EBP = 004FF924 EFL = 00000246
100 %