


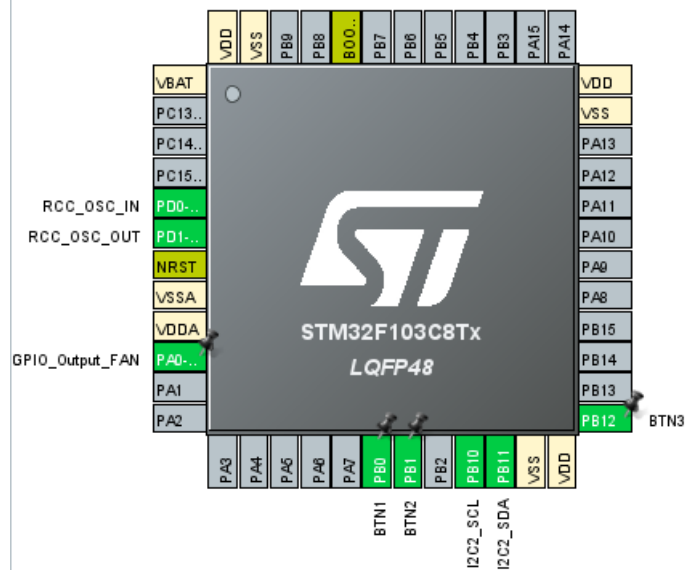

Group By Peripherals

☒ GPIO ☒ I2C ☒ RCC

Search Signals

Search (Ctrl+F)

☐ Show only Modified Pins

Pin Na...	Signal on ...	GPIO outp...	GPIO mode	GPIO Pull...	Maximum ...	User Label	Modified
PA0-WKUP	n/a	Low	Output Pu...	No pull-up...	Low	GPIO_Out...	☒
PB0	n/a	n/a	Input mode	Pull-up	n/a	BTN1	☒
PB1	n/a	n/a	Input mode	Pull-up	n/a	BTN2	☒
PB12	n/a	n/a	Input mode	Pull-up	n/a	BTN3	☒

I2C2 Mode and Configuration

Mode

I2C I2C

☒ GPIO ☒ I2C ☒ RCC

Search Signals

Search (Ctrl+F)

☐ Show only Modified Pins

Pin Na...	Signal on ...	GPIO outp...	GPIO mode	GPIO Pull...	Maximum ...	User Label	Modified
PB10	I2C2_SCL	n/a	Alternate ...	n/a	High		☐
PB11	I2C2_SDA	n/a	Alternate ...	n/a	High		☐

TIM3 Mode and Configuration

Mode

Slave Mode

Disable

Trigger Source

Disable

☒ Internal Clock

Channel1

Disable

Channel2

Disable

Channel3

Disable

Channel4

Disable

Configuration

Reset Configuration

☒ Parameter Settings

☒ User Constants

☒ NVIC Settings

☒ DMA Settings

Configure the below parameters :

Search (Ctrl+F)

Counter Settings

Prescaler (PSC - 16 bits value)

7199

Counter Mode

Up

Counter Period (AutoReload Register - ...)

4999

Internal Clock Division (CKD)

No Division

auto-reload preload

Disable

Trigger Output (TRGO) Parameters

Master/Slave Mode (MSM bit)

Disable (Trigger input effect not delayed)

Trigger Event Selection

Reset (UG bit from TIMx_EGR)

Configuration

Reset Configuration

☒ Parameter Settings

☒ User Constants

☒ NVIC Settings

☒ DMA Settings

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
TIM3 global interrupt	☒	0	0

