

Commands

↳ initialize User environments

① mount -t sys ... /sys



Kernel generate attributes → to access Hw [GPIO]

② mount -t proc ... /proc

Kernel give visibility to the current running process

③ mount -t devtmpfs /dev


Kernel access block & character

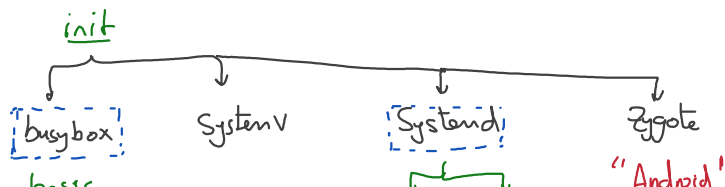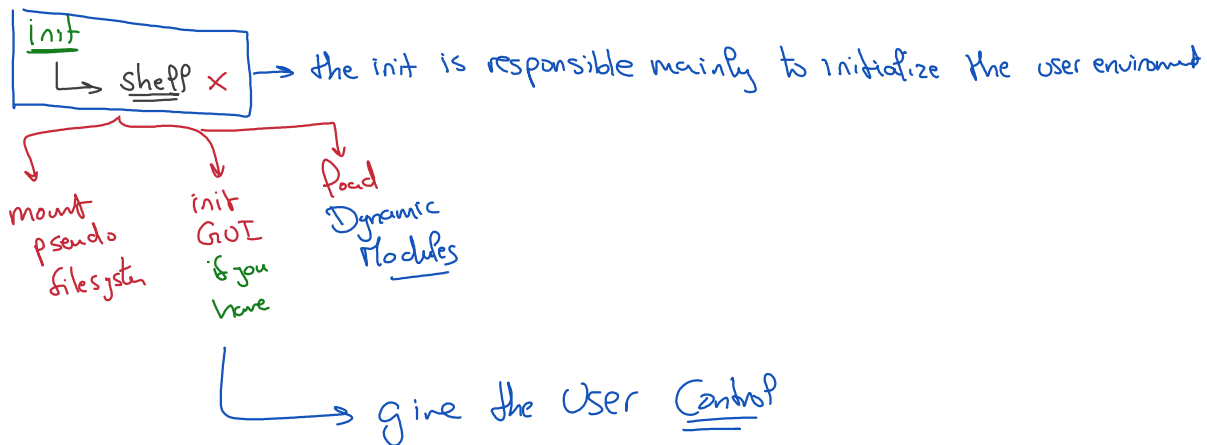

basic

parallel priority

priority

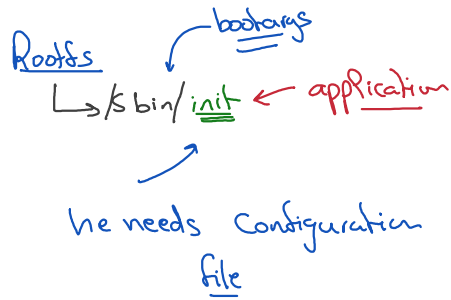

APP Configuration in Linux rootfs
shall be added in etc

mkdir /etc
touch inittab

inittab Syntax

dev :: action : Command or application

↑
not supported in busybox init

runlevels

device → /dev


delete → Console :: action : /bin/bash

delete what are the action

null :: Sysinit : mount -t proc -- /proc
null :: Sysinit : mount -t sysfs -- /sys

Task

C++

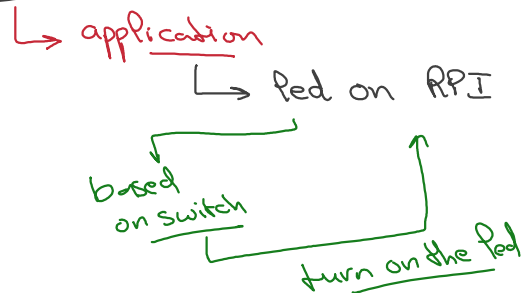

cd sys/class/gpio


echo 27 > export & echo 28 > export

cd gpio27

↳ direction
↳ value

↳ direct in

↳ read value





RPI 1.

① initrab

↳ ::wait: script

ash script

echo 26 > export
echo 27 > export

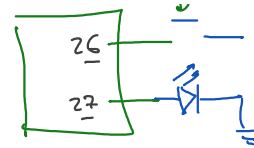

② File descriptors

Class LedOn
Class ReadPIN

Interface

Class Task

↳ member function

↳ read value

↳ turn on led

~~Distribution~~

Class

U-boot

Kernel

Init

bg
::once: ./myled &

←

ash

app = ./myled