CPU Scheduling

Chapter 5

Basic Concepts

- Maximum CPU utilization obtained with multiprogramming
- CPU–I/O Burst Cycle – Process execution consists of a *cycle* of CPU execution and I/O wait
- CPU burst distribution

Alternating Sequence of CPU And I/O Bursts

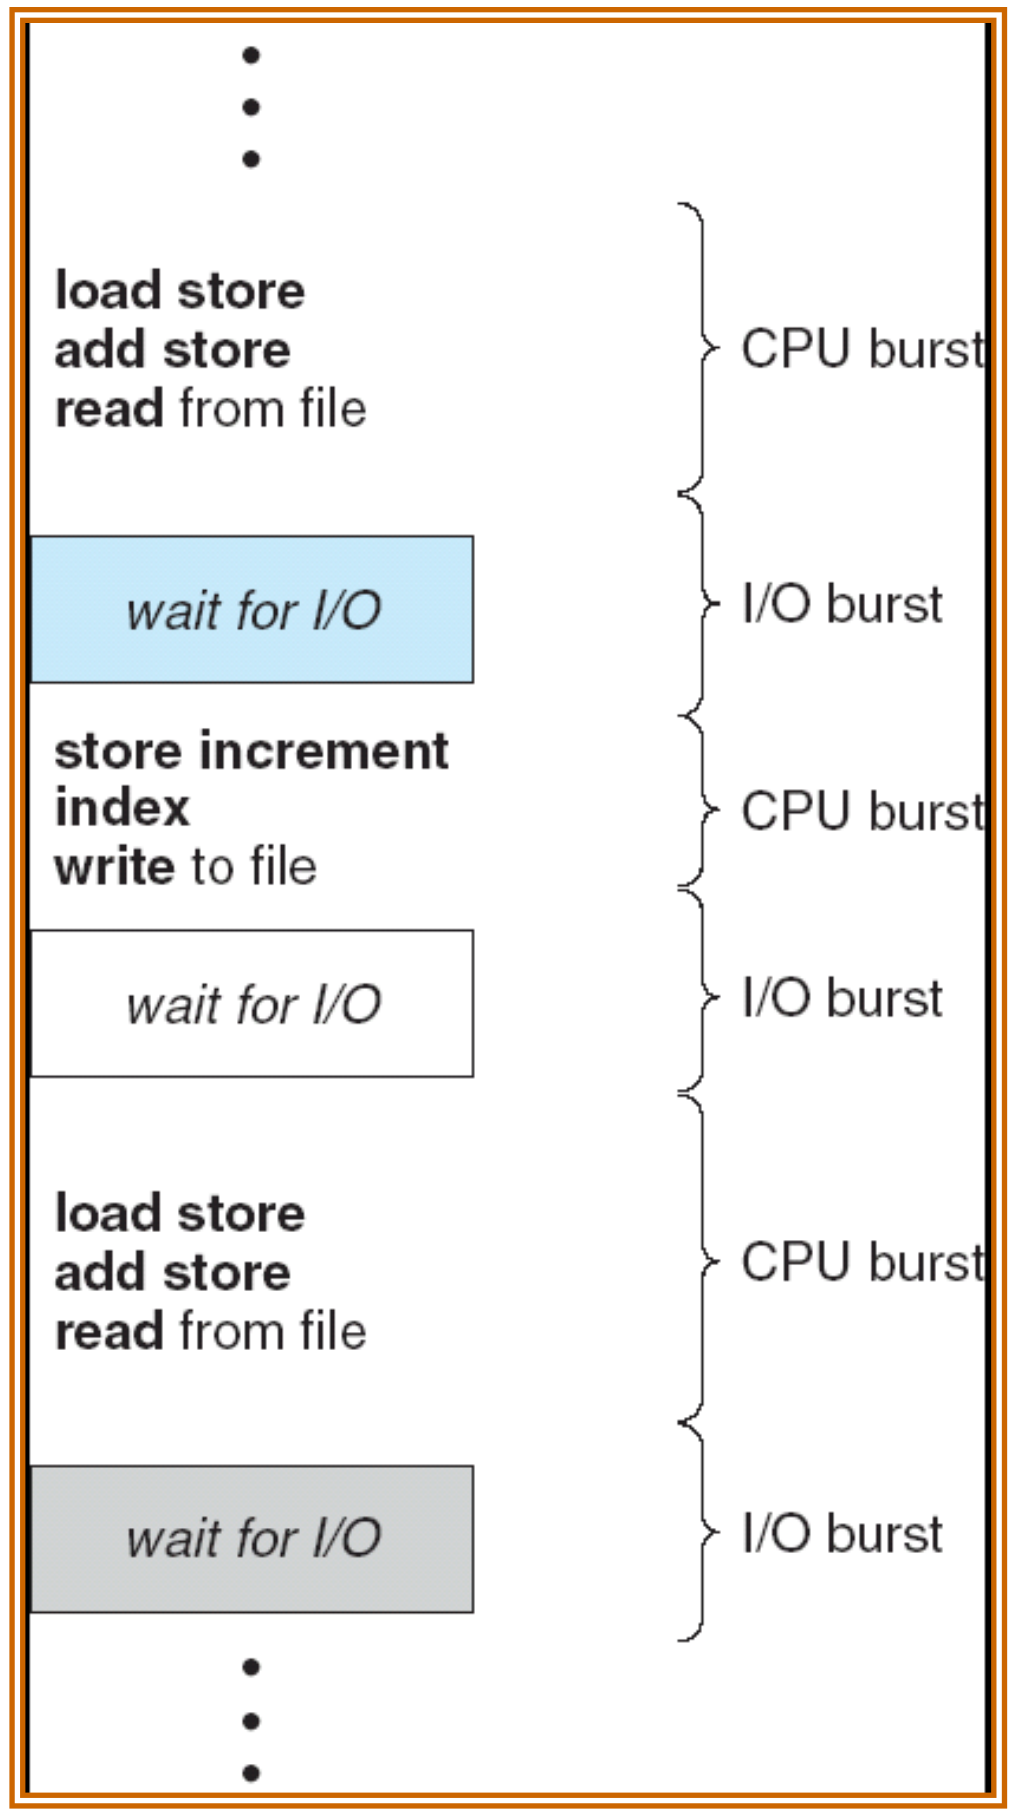

Histogram of CPU-burst Times

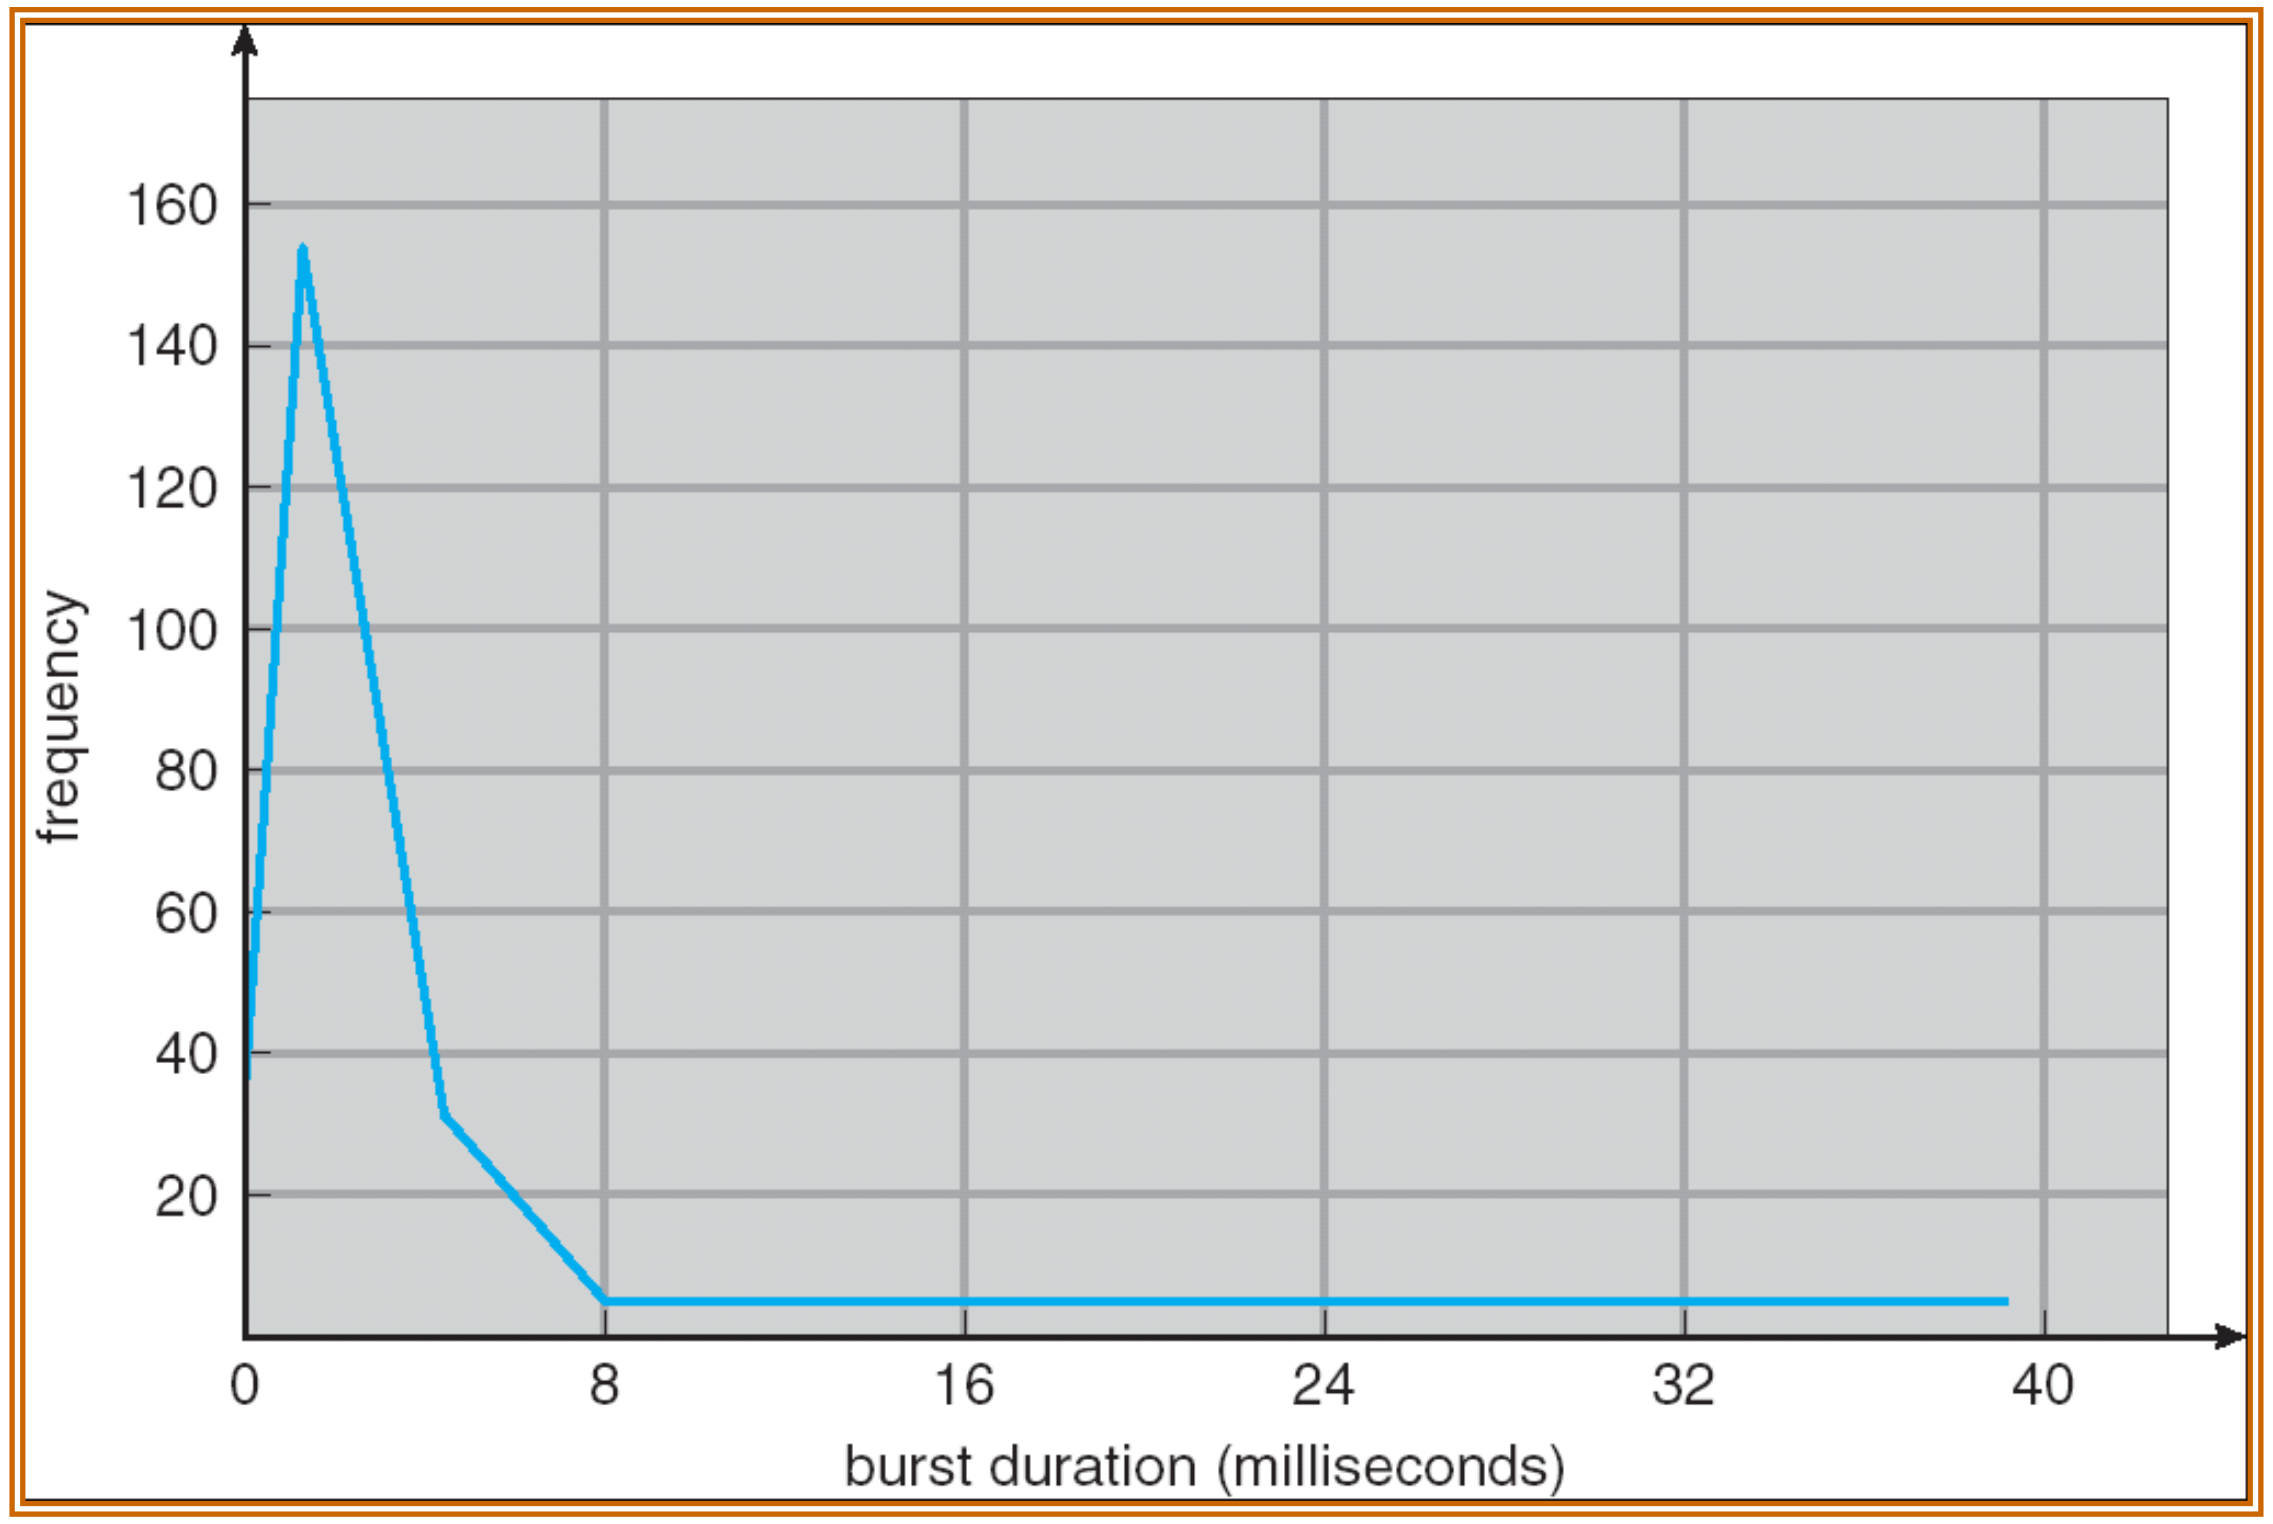

Aim of Scheduling

- Response time
- Throughput
- Processor efficiency

CPU Scheduler

- CPU scheduling decisions may take place when a process:
  1. Switches from running to waiting state
  2. Switches from running to ready state
  3. Switches from waiting to ready
  4. Terminates
- Scheduling under 1 and 4 is *nonpreemptive*
- All other scheduling is *preemptive*

Types of Scheduling

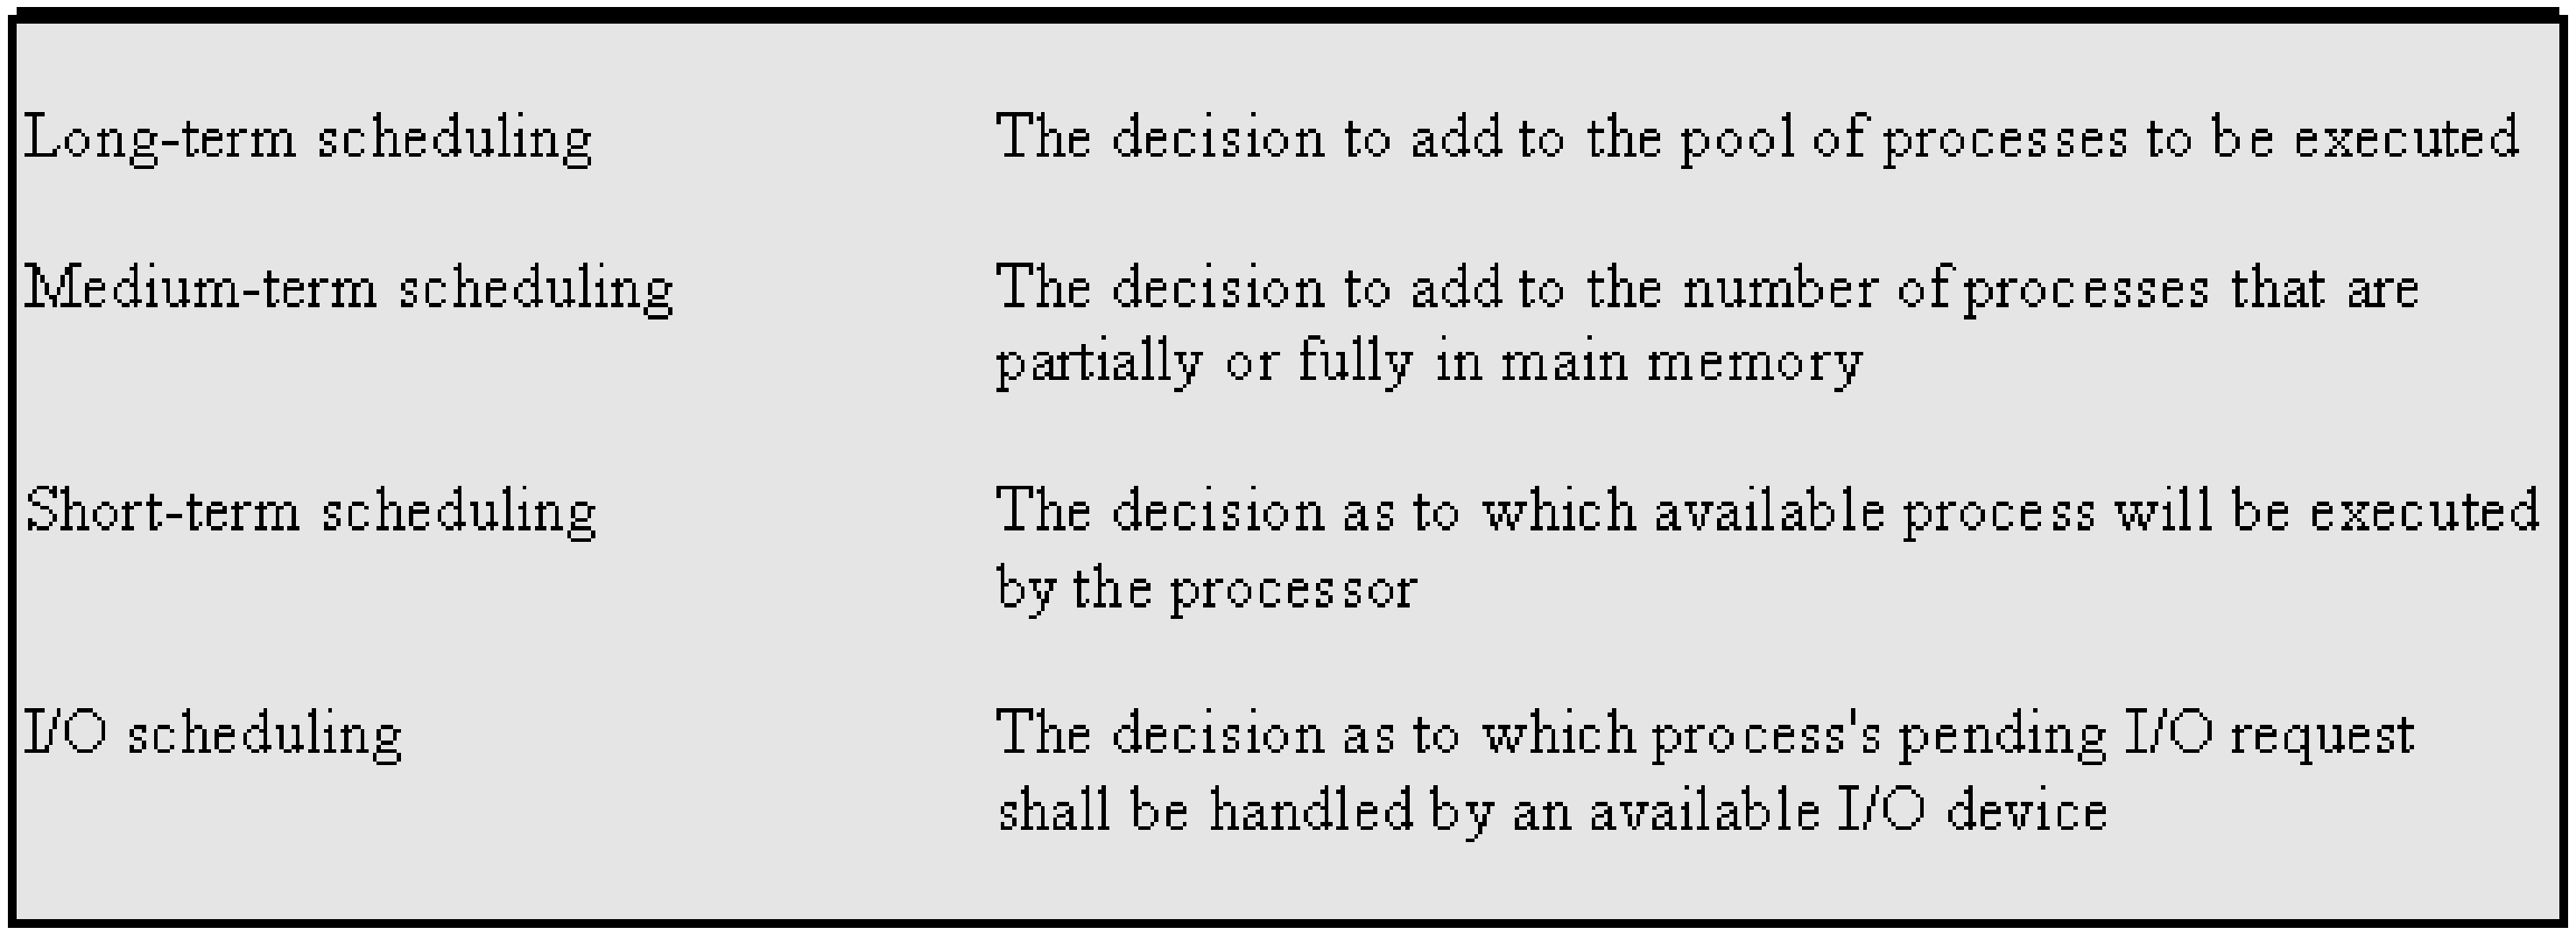

Long-term scheduling	The decision to add to the pool of processes to be executed
Medium-term scheduling	The decision to add to the number of processes that are partially or fully in main memory
Short-term scheduling	The decision as to which available process will be executed by the processor
I/O scheduling	The decision as to which process's pending I/O request shall be handled by an available I/O device

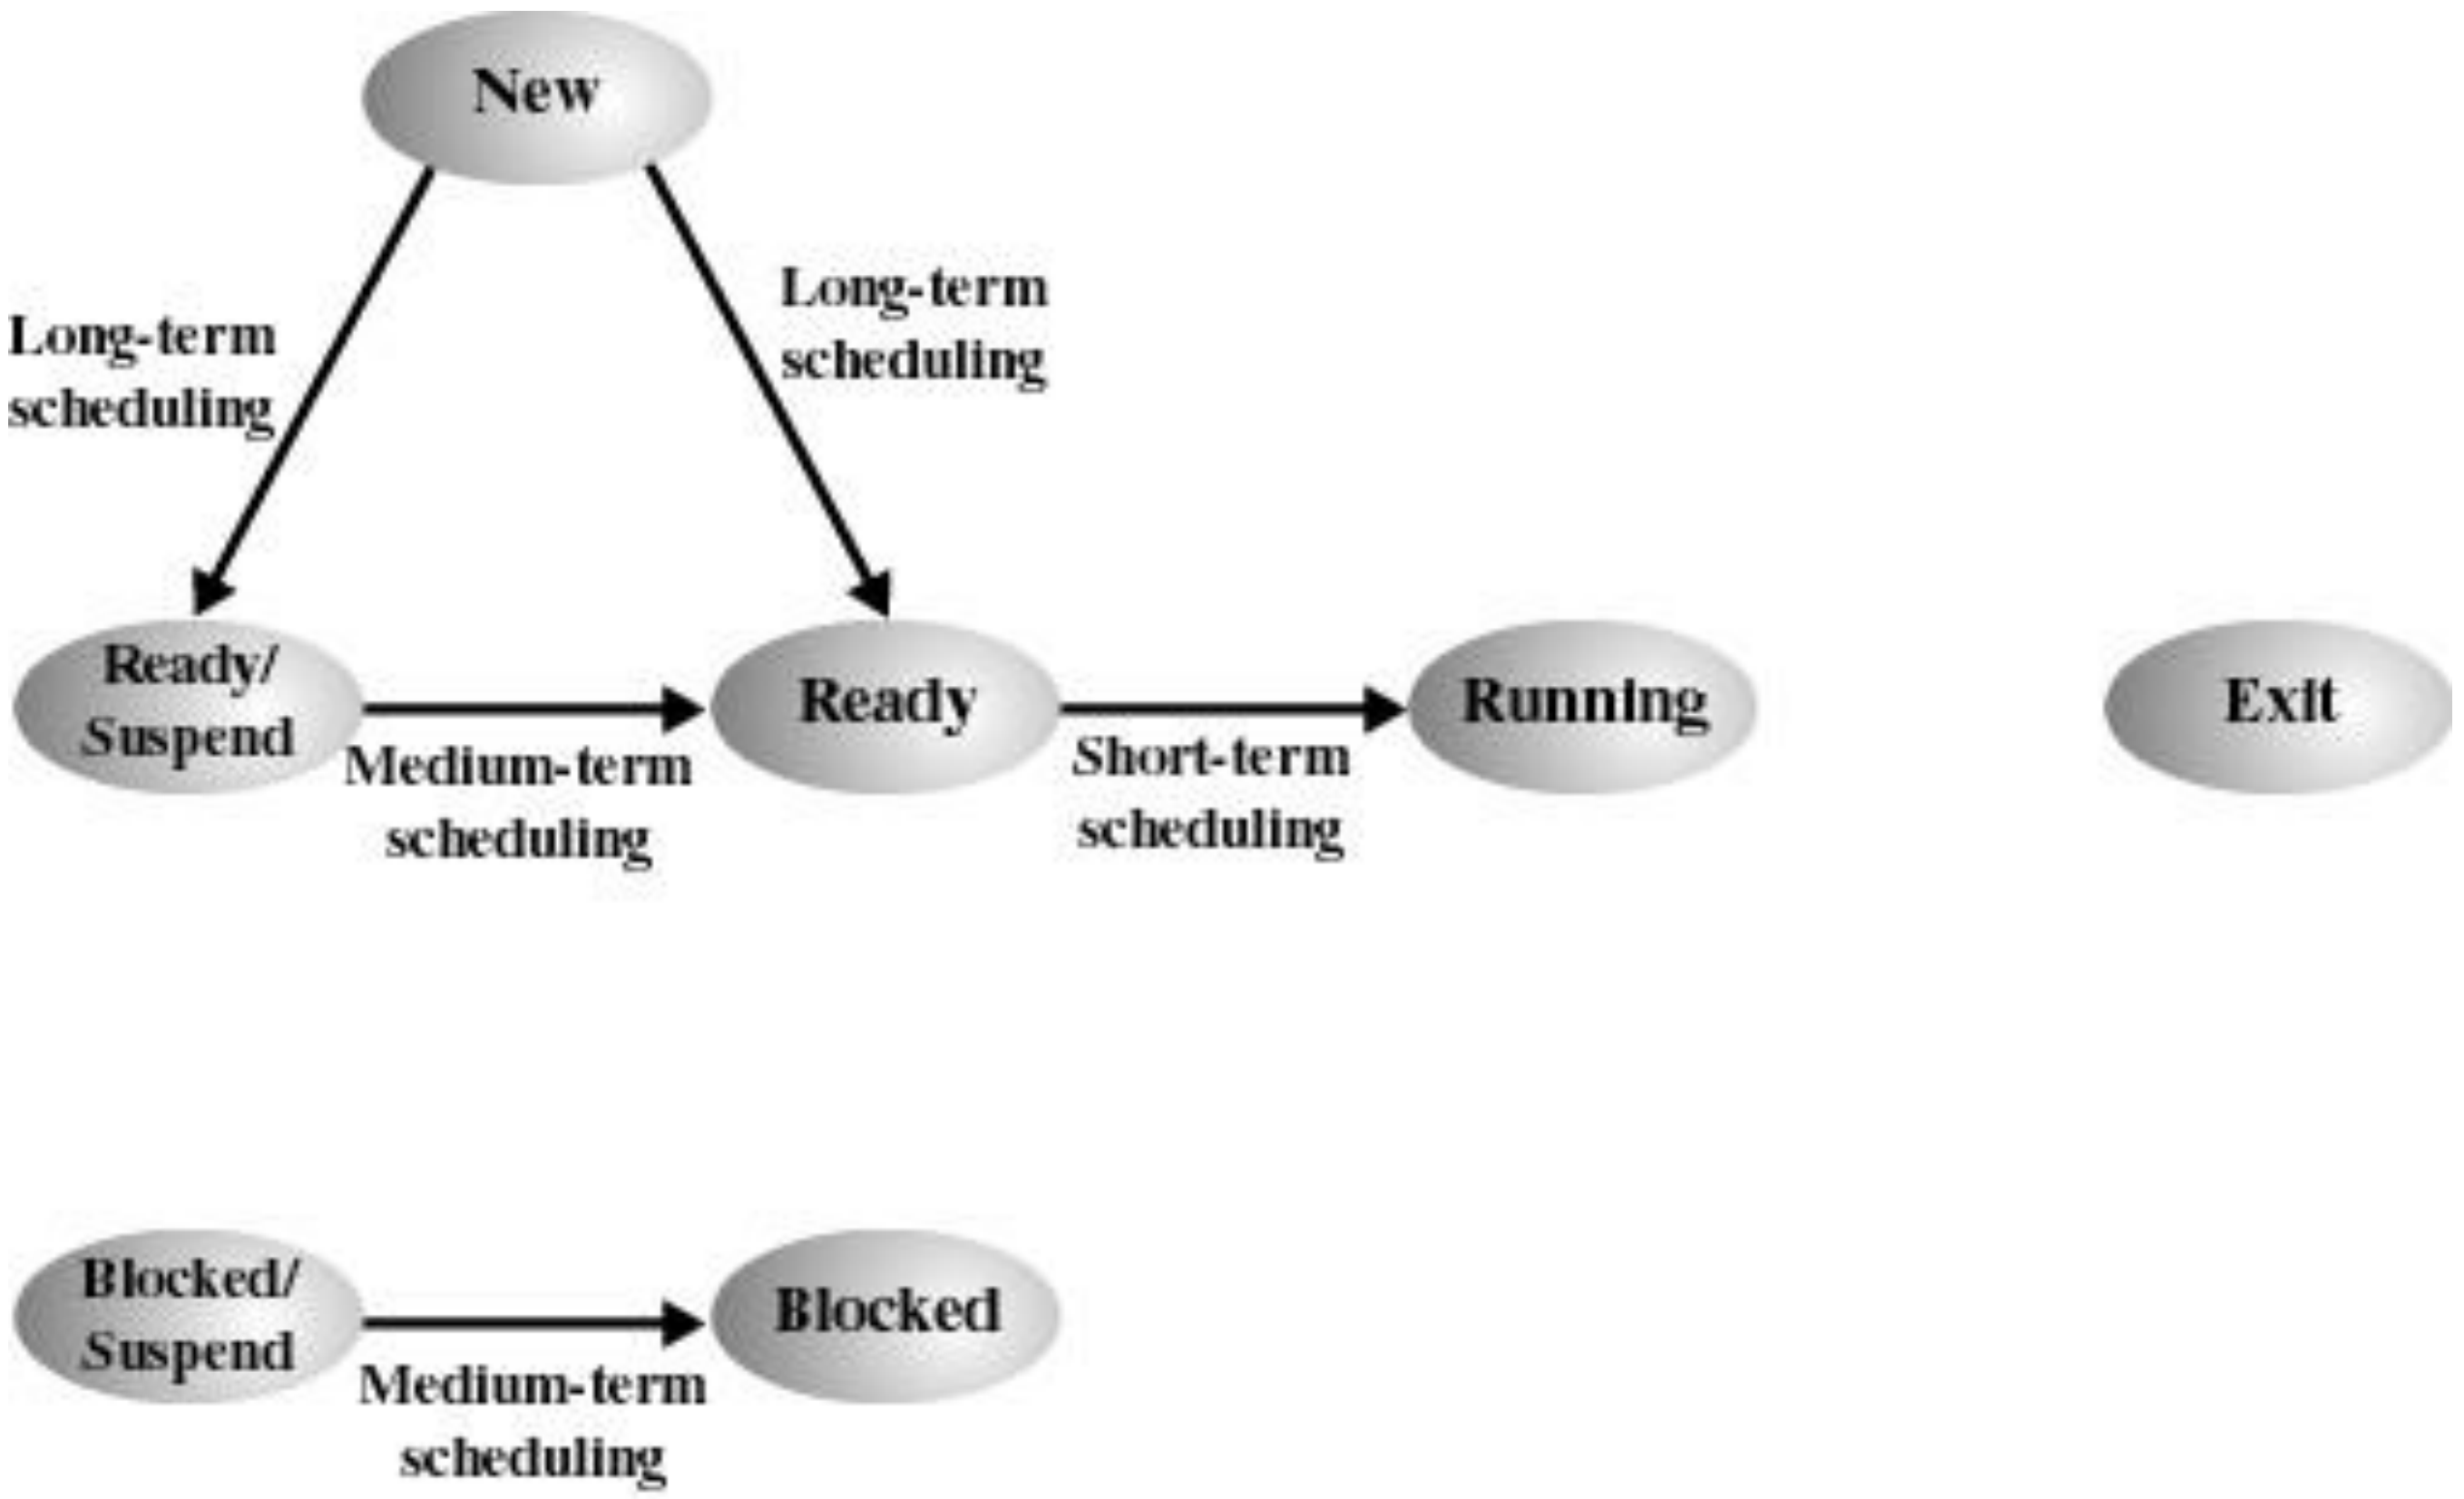
New
Long-term scheduling
Long-term scheduling
Ready/ Suspend
Medium-term scheduling
Ready
Short-term scheduling
Running
Exit
Blocked/ Suspend
Medium-term scheduling
Blocked

Long-Term Scheduling

- Determines which programs are admitted to the system for processing
- Controls the degree of multiprogramming
- More processes, smaller percentage of time each process is executed

Medium-Term Scheduling

- Part of the swapping function
- Based on the need to manage the degree of multiprogramming

Short-Term Scheduling

- Known as the dispatcher
- Executes most frequently
- Invoked when an event occurs
  - Clock interrupts
  - I/O interrupts
  - Operating system calls
  - Signals

Dispatcher

- this involves:
  - switching context
  - switching to user mode
  - jumping to the proper location in the user program to restart that program
- *Dispatch latency* – time it takes for the dispatcher to stop one process and start another running

Optimization Criteria

- Max CPU utilization
- Max throughput
- Min turnaround time
- Min waiting time
- Min response time

First-Come, First-Served (FCFS) Scheduling

Process	Burst Time
P_1	24
P_2	3
P_3	3

- Suppose that the processes arrive in the order: P_1 , P_2 , P_3
  The Gantt Chart for the schedule is:

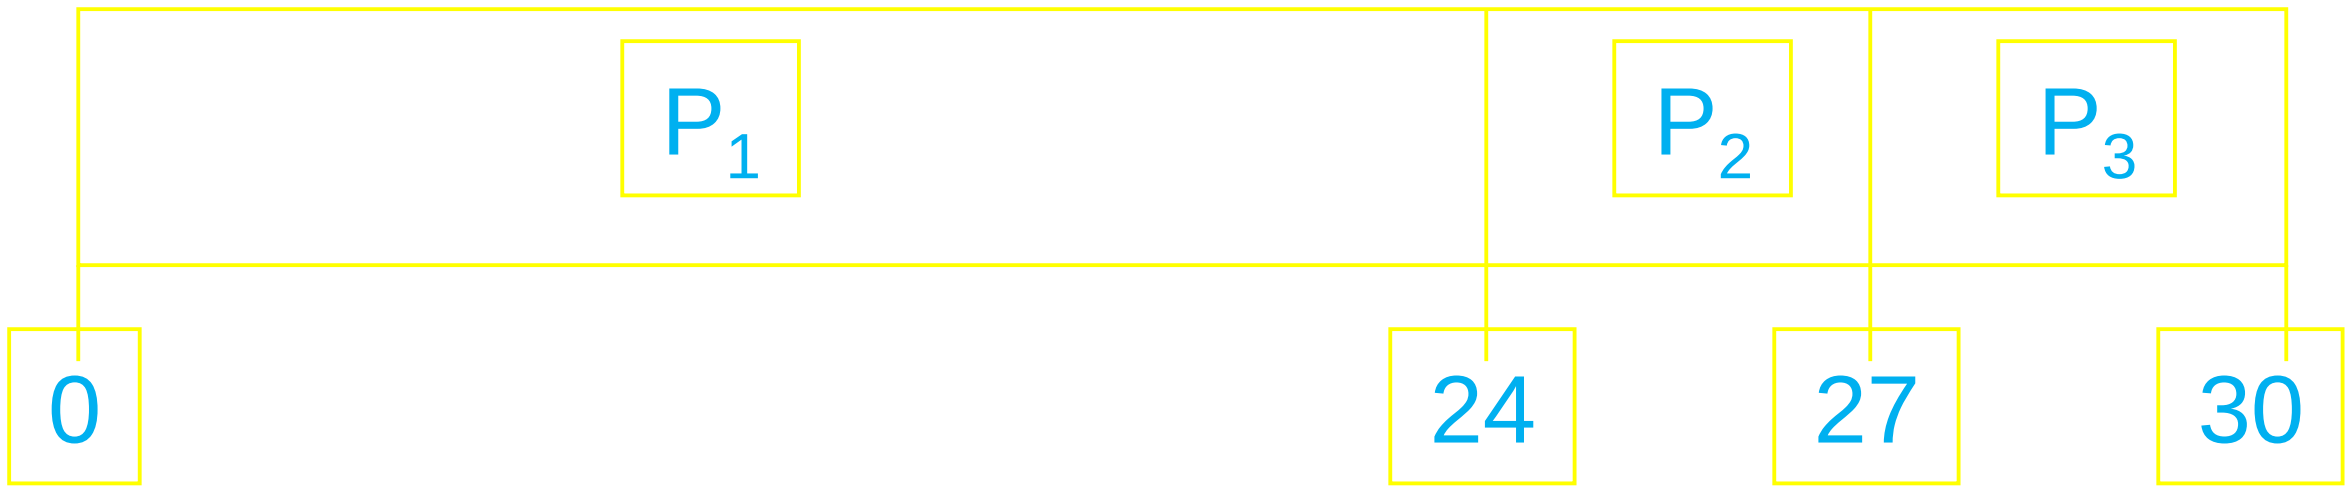

- Waiting time for $P_1 = 0$; $P_2 = 24$; $P_3 = 27$
- Average waiting time: $(0 + 24 + 27)/3 = 17$

FCFS Scheduling (Cont.)

Suppose that the processes arrive in the order

$$P_2 , P_3 , P_1$$

- The Gantt chart for the schedule is:

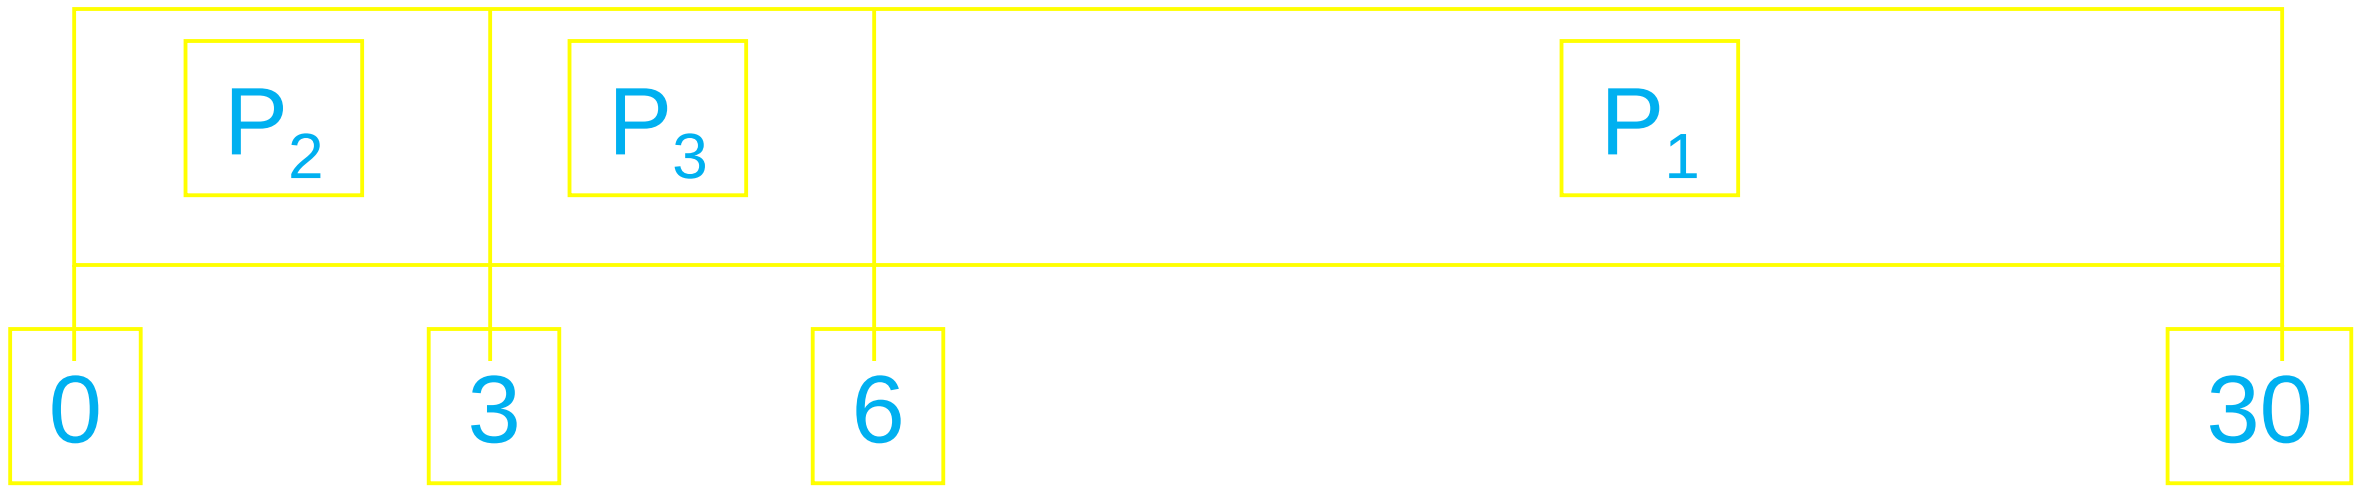

- Waiting time for $P_1 = 6$; $P_2 = 0$; $P_3 = 3$
- Average waiting time: (6 + 0 + 3)/3 = 3
- Much better than previous case
- ***Convoy effect*** short process behind long process

Shortest-Job-First (SJF) Scheduling

- Associate with each process the length of its next CPU burst. Use these lengths to schedule the process with the shortest time
- Two schemes:
  - **nonpreemptive** – once CPU given to the process it cannot be preempted until completes its CPU burst
  - **preemptive** – if a new process arrives with CPU burst length less than remaining time of current executing process, preempt. This scheme is know as the **Shortest-Remaining-Time-First (SRTF)**
- ***SJF is optimal*** – gives minimum average waiting time for a given set of processes

Example of Non-Preemptive SJF

Process	Arrival Time	Burst Time
P_1	0.0	7
P_2	2.0	4
P_3	4.0	1
P_4	5.0	4

- SJF (non-preemptive)

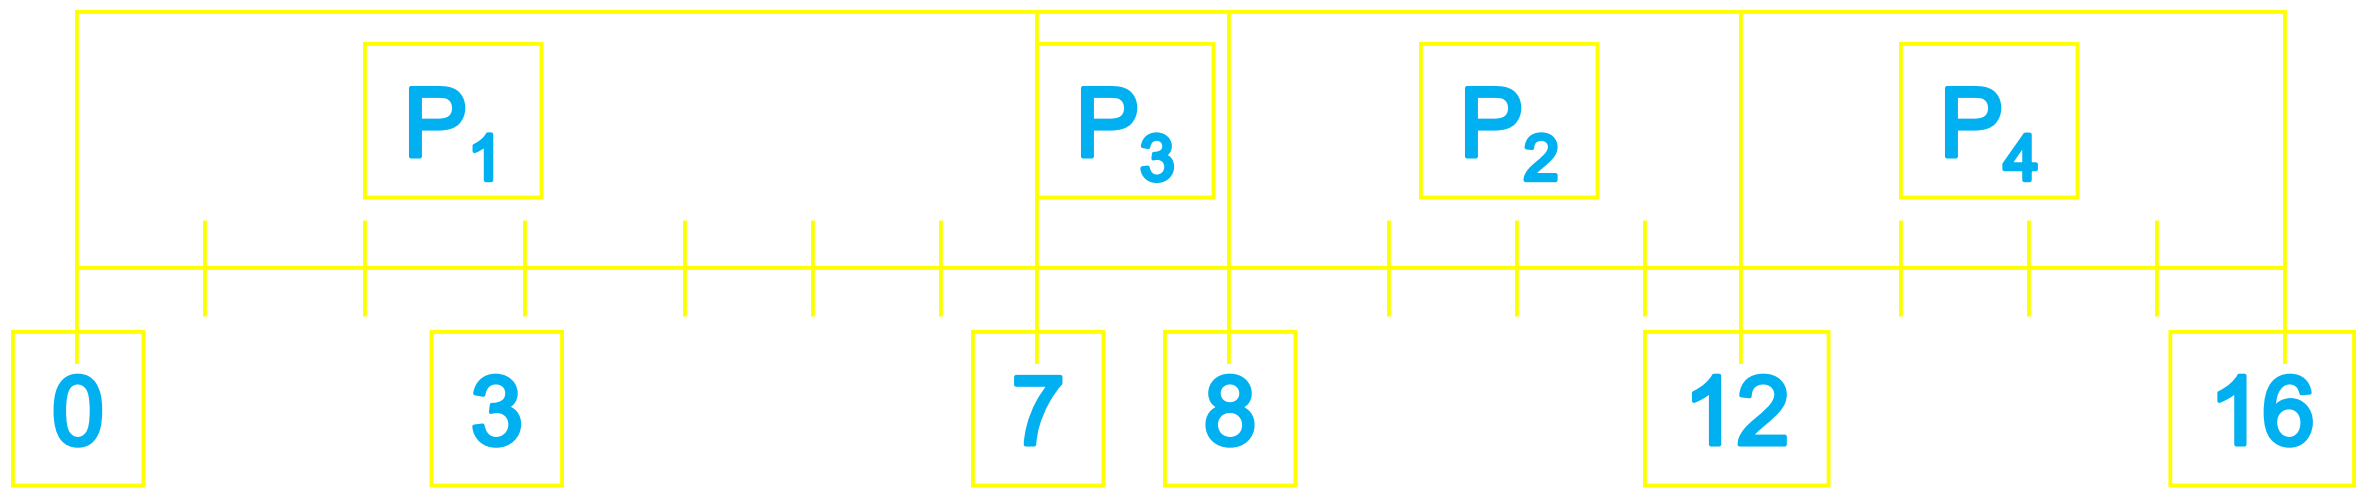

- Average waiting time = (0 + 6 + 3 + 7)/4 = 4

Example of Preemptive SJF

Process	Arrival Time	Burst Time
P_1	0.0	7
P_2	2.0	4
P_3	4.0	1
P_4	5.0	4

- SJF (preemptive)

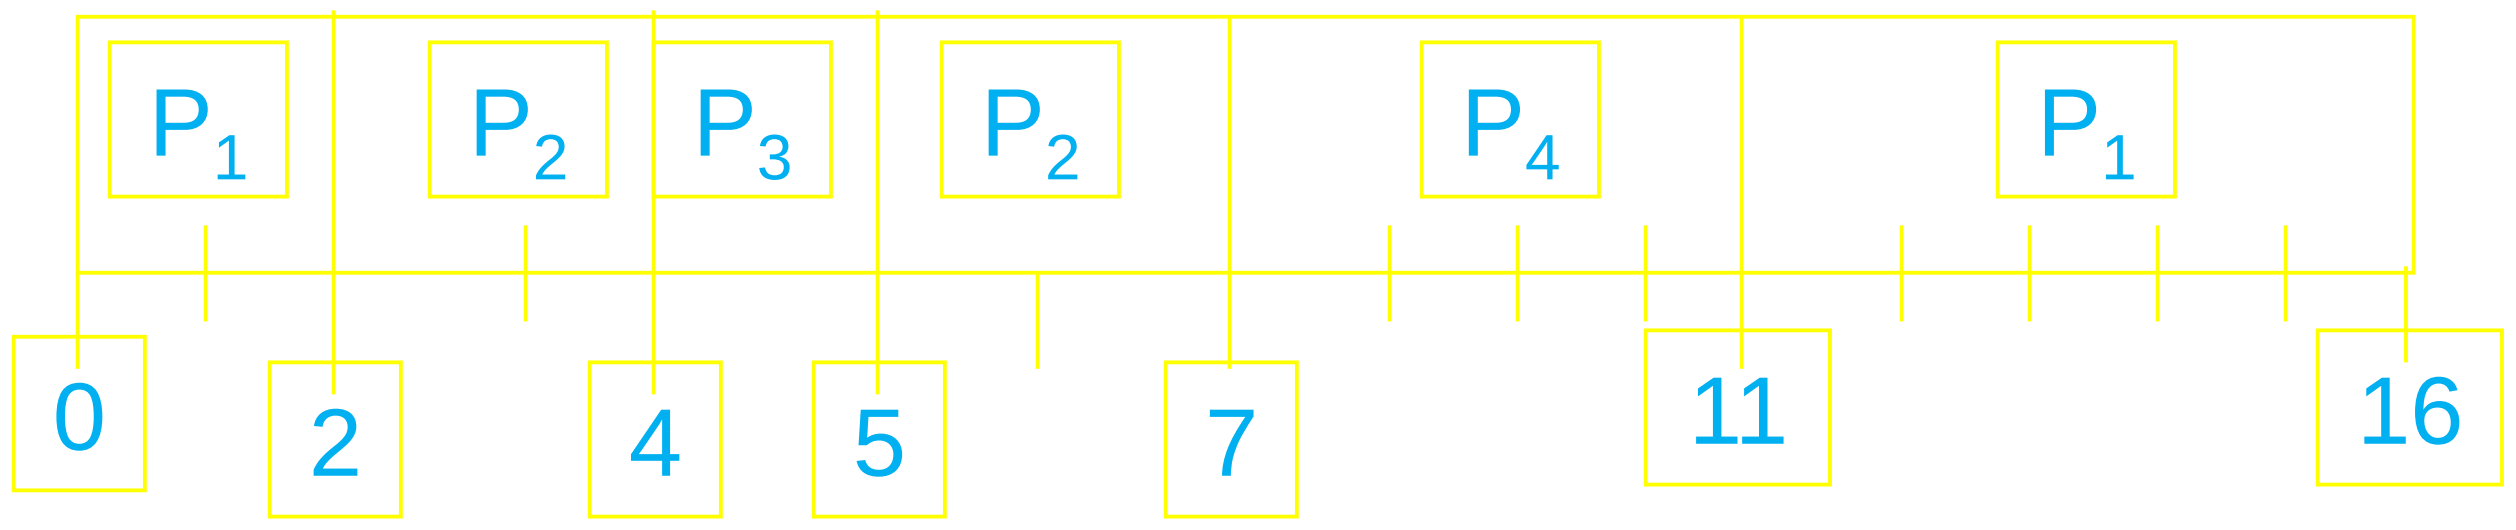

- Average waiting time = (9 + 1 + 0 +2)/4 = 3

Determining Length of Next CPU Burst

- Can only estimate the length
- Can be done by using the length of previous CPU bursts, using exponential averaging

1. $t_n =$ actual length of n^{th} CPU burst
2. $\tau_{n+1} =$ predicted value for the next CPU burst
3. $\alpha, 0 \le \alpha \le 1$
4. Define :

$$\tau_{n+1} = \alpha\, t_n + (1 - \alpha)\tau_n.$$

Prediction of the Length of the Next CPU Burst

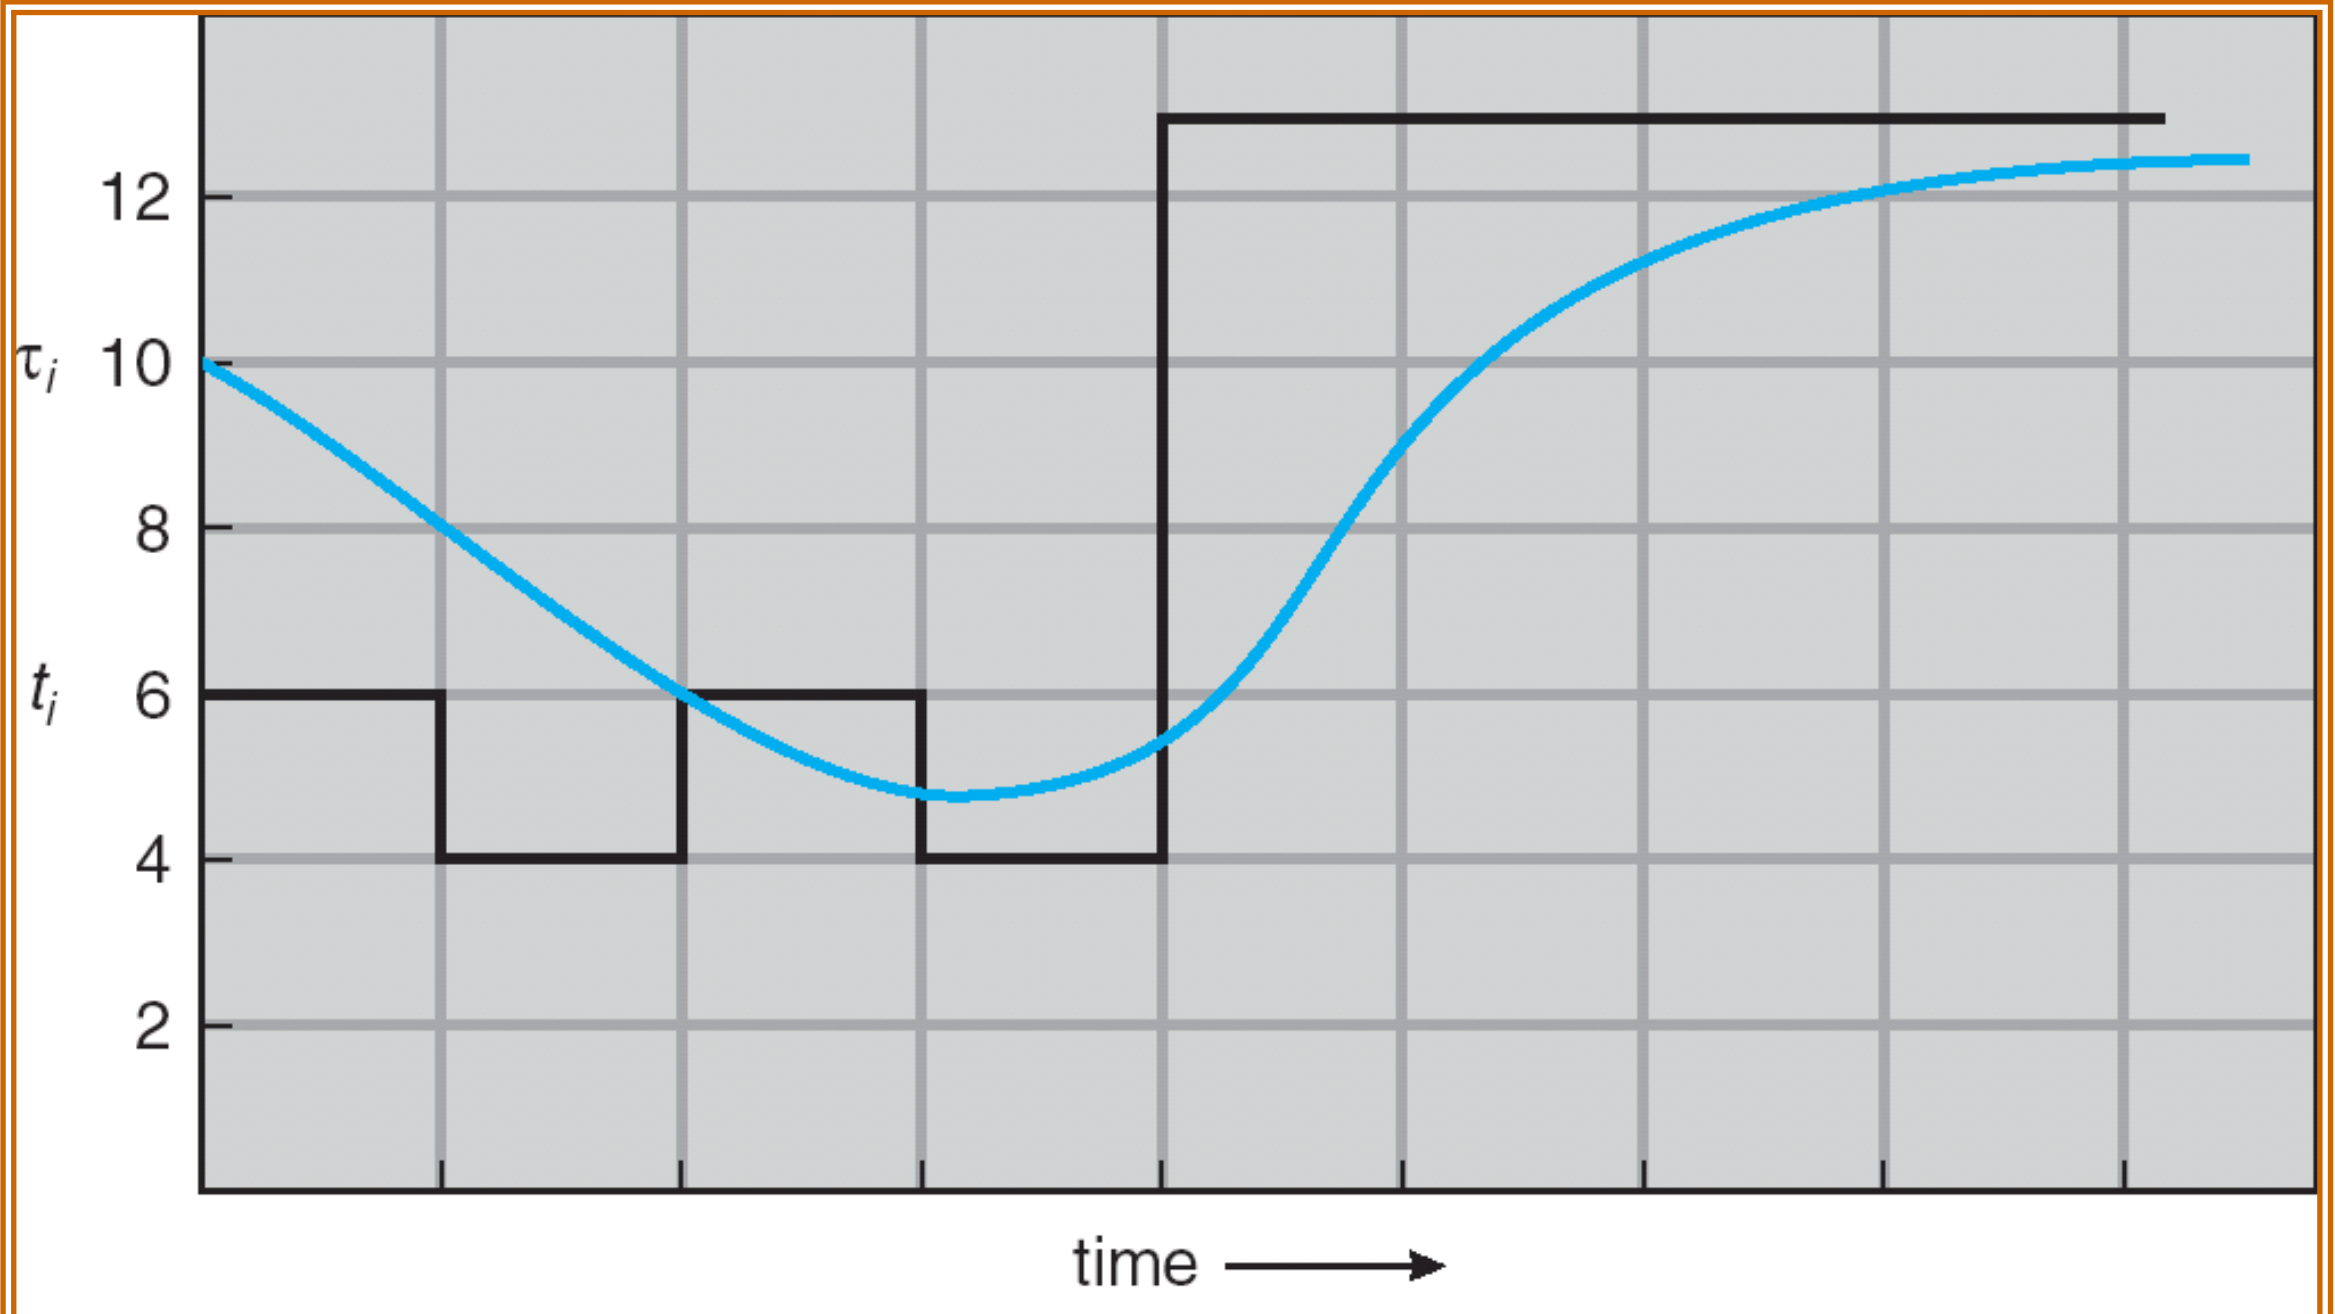

CPU burst (t_i)		6	4	6	4	13	13	13	. . .
"guess" (τ_i)	10	8	6	6	5	9	11	12	. . .

Priority Scheduling

- A priority number (integer) is associated with each process
- The CPU is allocated to the process with the highest priority (smallest integer ≡ highest priority)
  - Preemptive
  - nonpreemptive
- SJF is a priority scheduling where priority is the predicted next CPU burst time
- Problem ≡ Starvation – low priority processes may never execute
- Solution ≡ Aging – as time progresses increase the priority of the process

Round Robin (RR)

- Each process gets a small unit of CPU time (*time quantum*), usually 10-100 milliseconds. After this time has elapsed, the process is preempted and added to the end of the ready queue.
- If there are *n* processes in the ready queue and the time quantum is *q*, then each process gets 1/*n* of the CPU time in chunks of at most *q* time units at once. No process waits more than (*n*-1)*q* time units.
- Performance
  - *q* large $\Rightarrow$ FIFO
  - *q* small $\Rightarrow$ *q* must be large with respect to context switch, otherwise overhead is too high

Example of RR with Time Quantum = 20

Process	Burst Time
P_1	53
P_2	17
P_3	68
P_4	24

- The Gantt chart is:

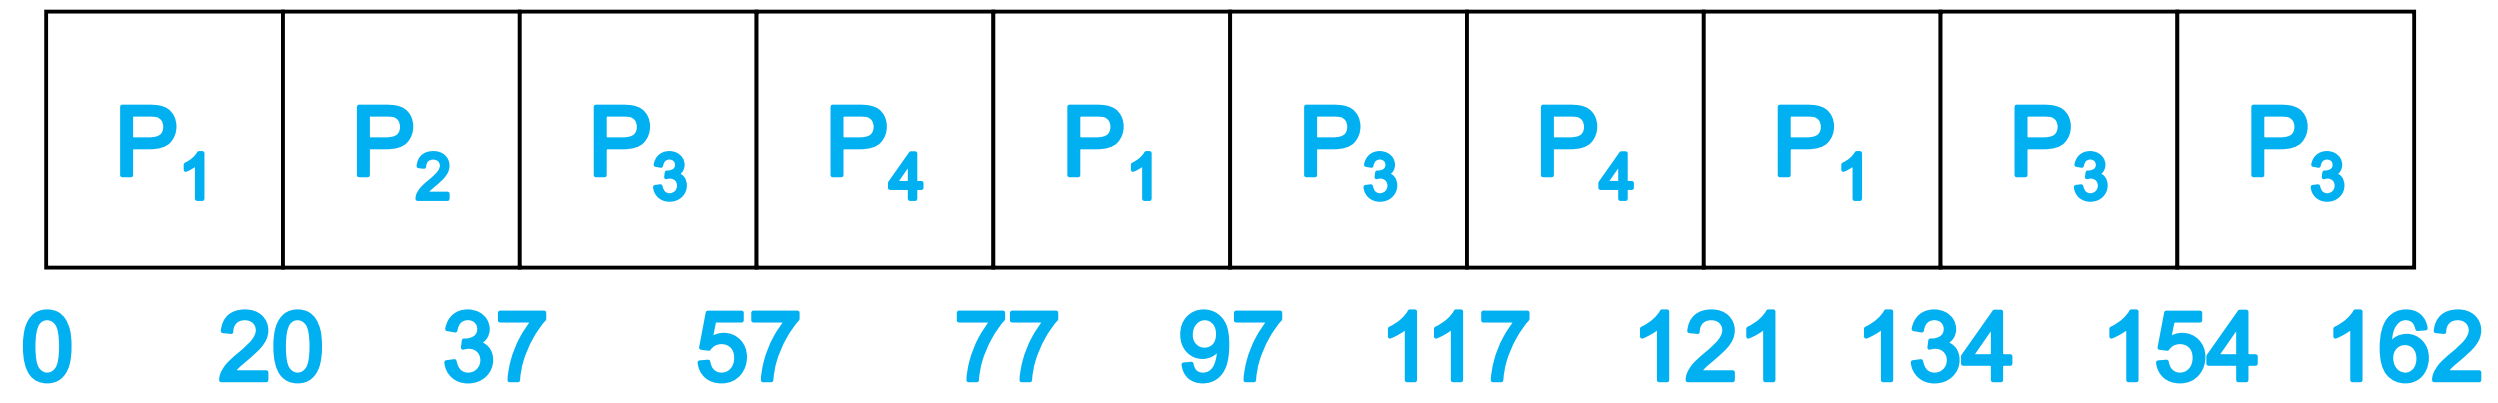

- Typically, higher average turnaround than SJF, but better *response*

Multilevel Queue

- Ready queue is partitioned into separate queues:
  foreground (interactive)
  background (batch)
- Each queue has its own scheduling algorithm
  - foreground – RR
  - background – FCFS
- Scheduling must be done between the queues
  - Fixed priority scheduling; (i.e., serve all from foreground then from background). Possibility of starvation.
  - Time slice – each queue gets a certain amount of CPU time which it can schedule amongst its processes; i.e., 80% to foreground in RR. 20% to background in FCFS

Multilevel Queue Scheduling

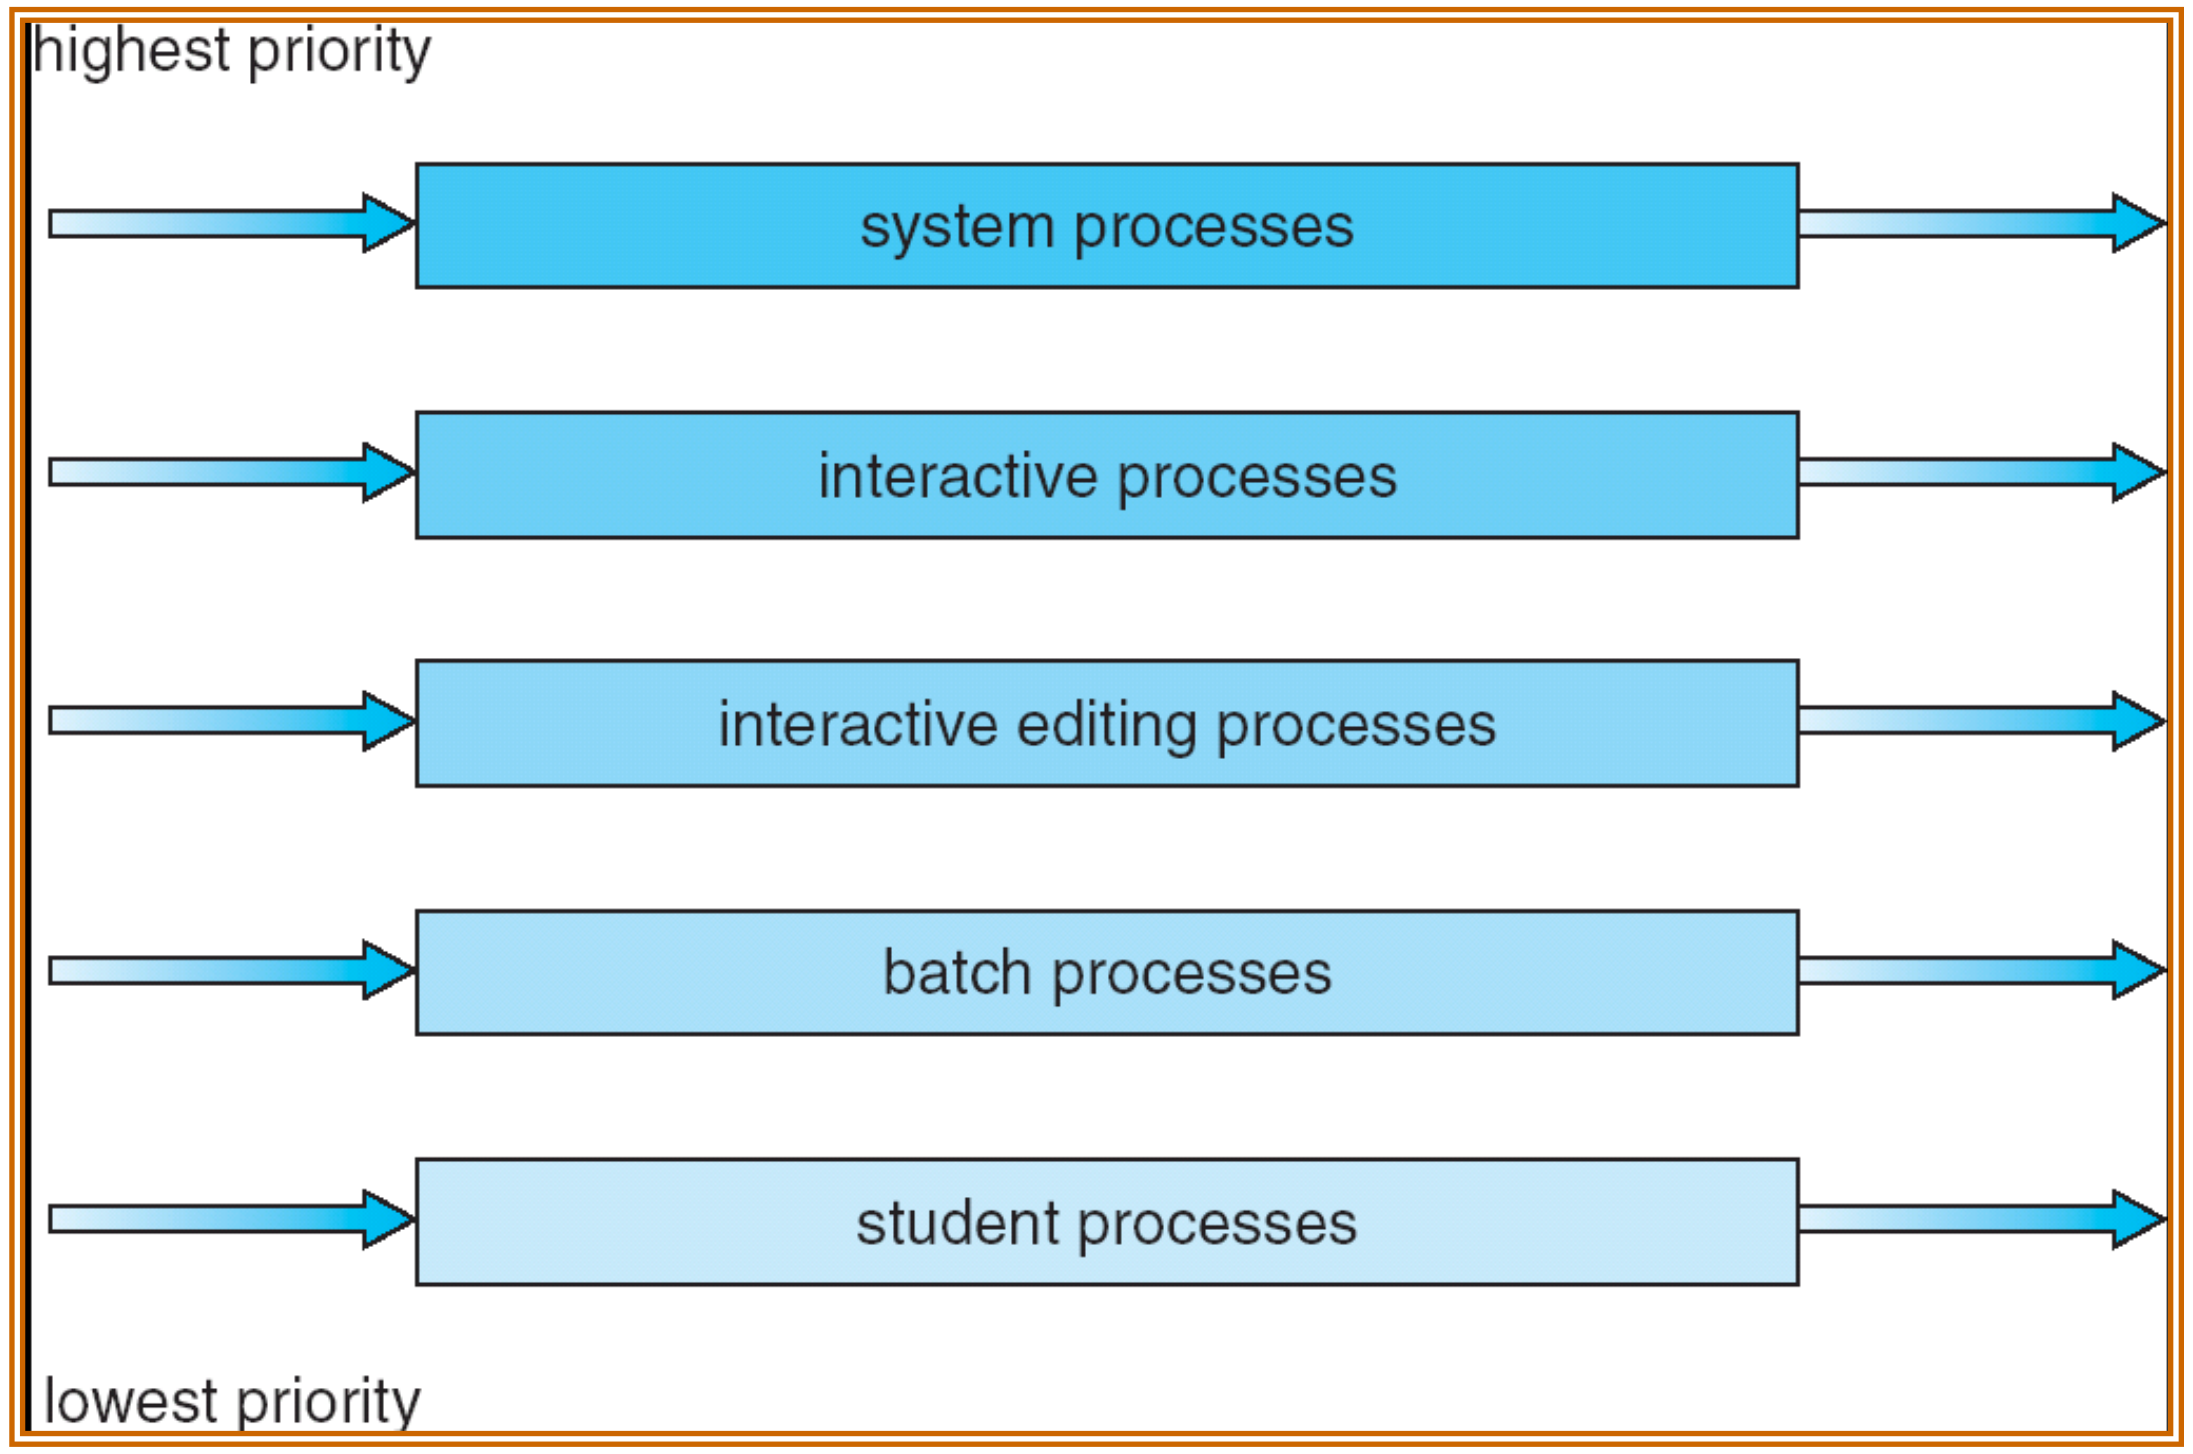

Multilevel Feedback Queue

- A process can move between the various queues; aging can be implemented this way
- Multilevel-feedback-queue scheduler defined by the following parameters:
  - number of queues
  - scheduling algorithms for each queue
  - method used to determine when to upgrade a process
  - method used to determine when to demote a process
  - method used to determine which queue a process will enter when that process needs service

Example of Multilevel Feedback Queue

- Three queues:
  - Q_0 – RR with time quantum 8 milliseconds
  - Q_1 – RR time quantum 16 milliseconds
  - Q_2 – FCFS
- Scheduling
  - A new job enters queue Q_0 which is served RR. When it gains CPU, job receives 8 milliseconds. If it does not finish in 8 milliseconds, job is moved to queue Q_1.
  - At Q_1 job is again served RR and receives 16 additional milliseconds. If it still does not complete, it is preempted and moved to queue Q_2.

Multilevel Feedback Queues

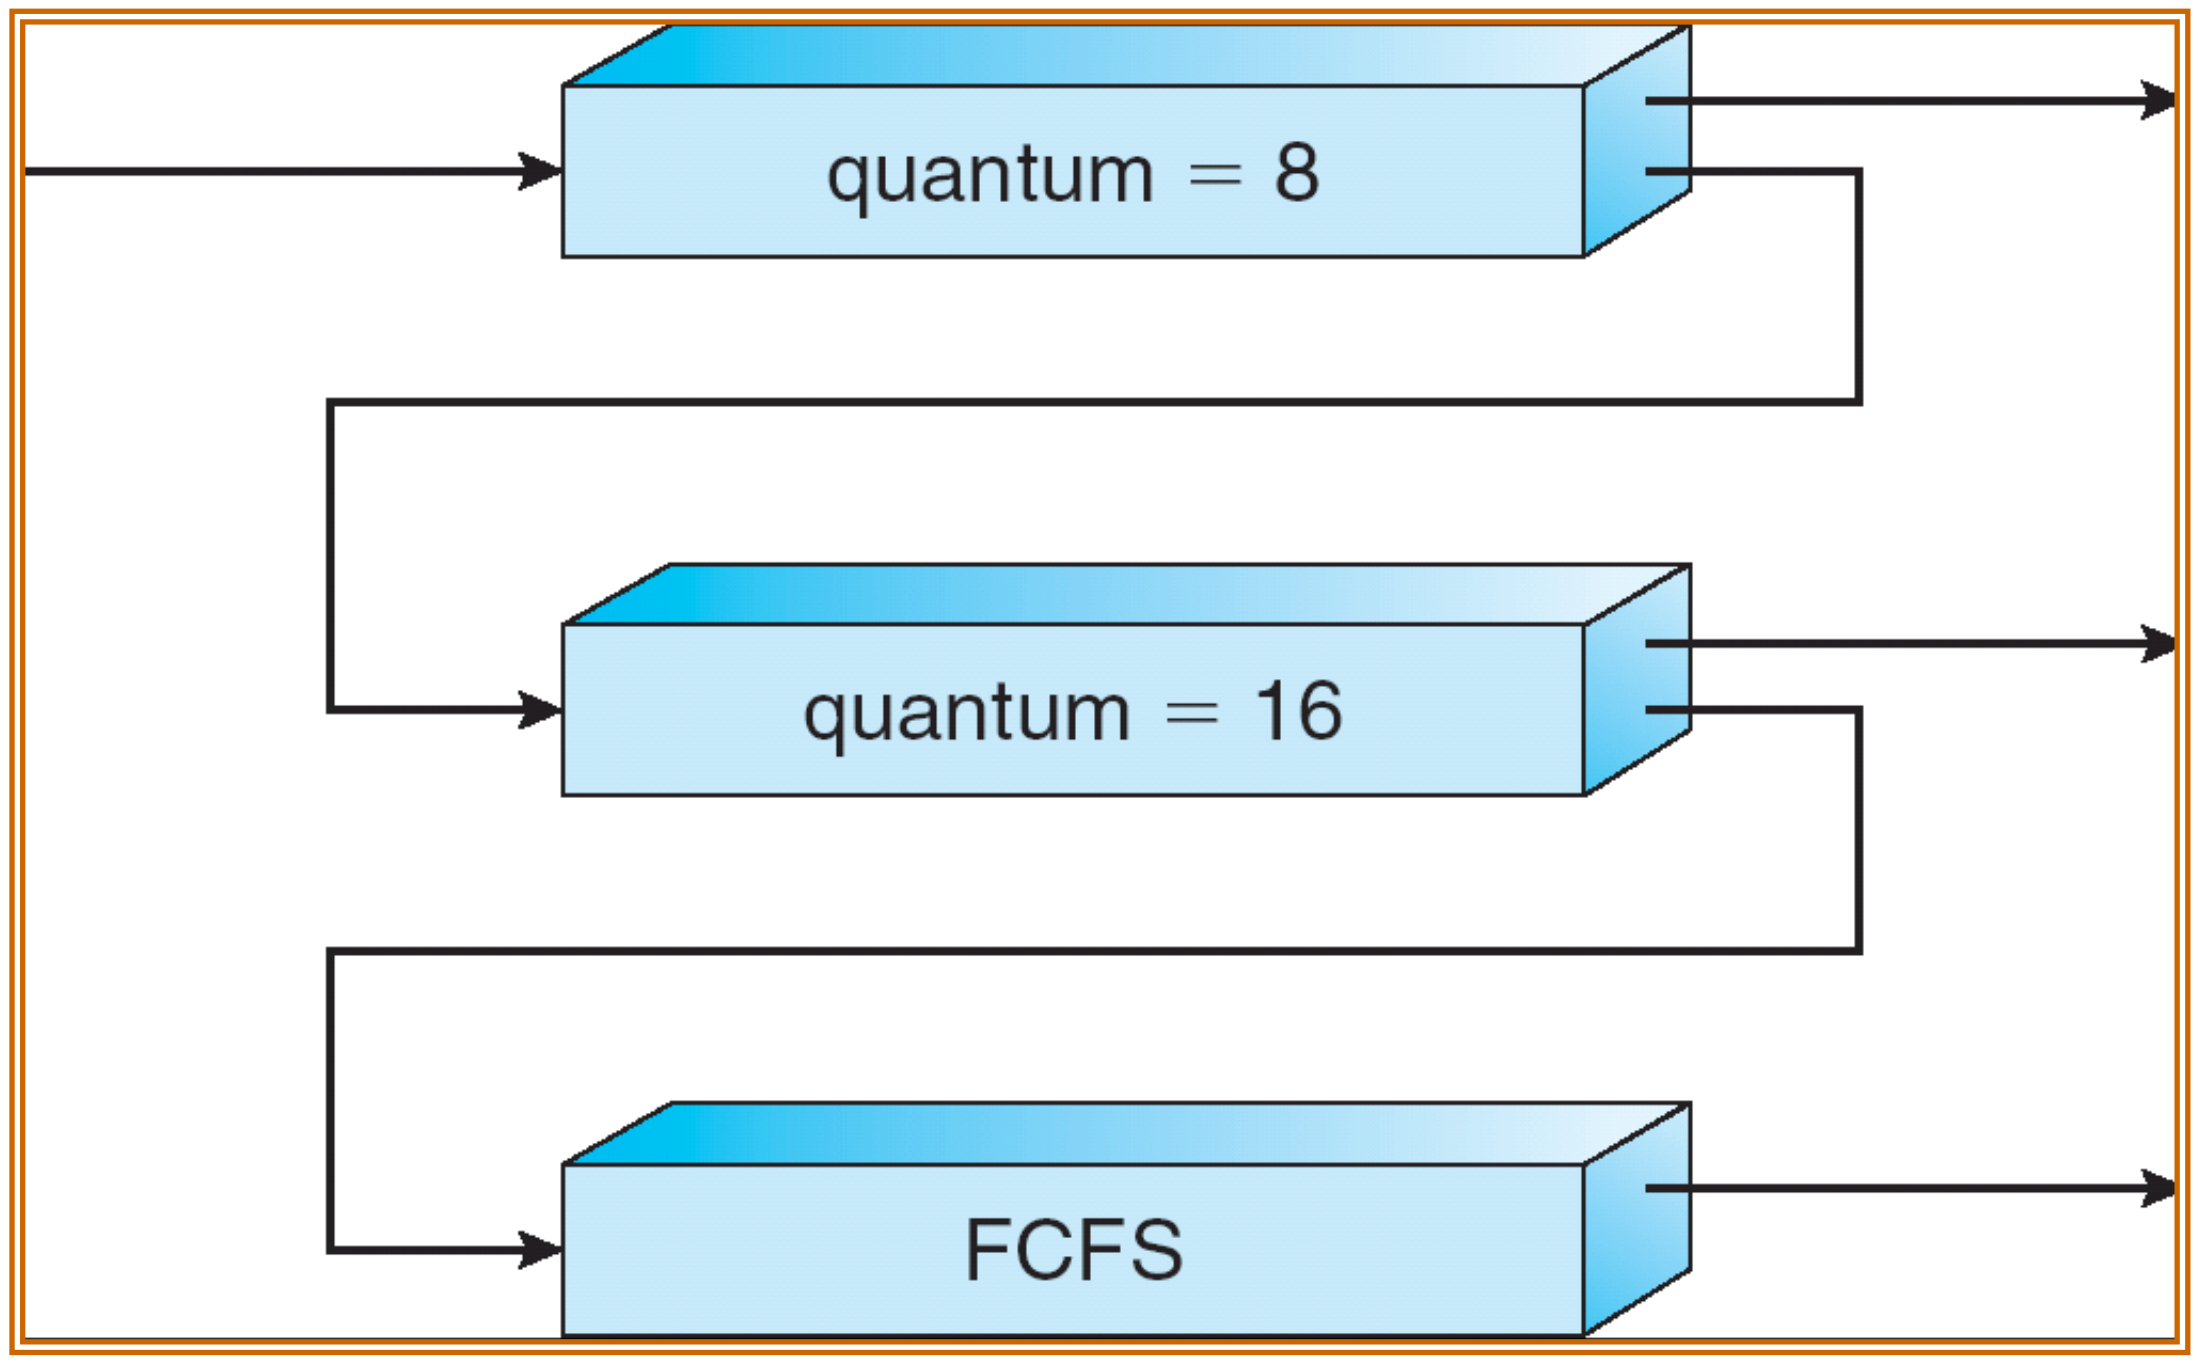
quantum = 8
quantum = 16
FCFS