

Efficient H.264 Encoder with High Profile for High Frame Rate Video Streams



Submitted by:

Fariaa Faheem	2019-EE-001
Marwa Waseem	2019-EE-007
Hamza Akhtar	2019-EE-012
Filza Shahid	2019-EE-151

Supervised by: Dr. Muhammad Tahir

Department of Electrical Engineering
University of Engineering and Technology Lahore

Efficient H.264 Encoder with High Profile for High Frame Rate Video Streams

Submitted to the faculty of Electrical Engineering
of the University of Engineering and Technology Lahore
in partial fulfillment of the requirements for the Degree of
Bachelor of Science
in
Electrical Engineering.

Internal Examiner

External Examiner

Director
Undergraduate Studies

Department of Electrical Engineering
University of Engineering and Technology Lahore

Declaration

I declare that the work contained in this thesis is my own, except where explicitly stated otherwise. In addition this work has not been submitted to obtain another degree or professional qualification.

Signed: _____

Date: _____

Acknowledgments

The acknowledgements and the people to thank go here, don't forget to include your project advisor...

For/Dedicated to/To my...

Contribution to Sustainable Development Goals

Write a short description of how the work carried out in this thesis has contributed to some of the sustainable development goals listed below.

1. No poverty
2. Zero hunger
3. Good health and well-being
4. Quality education
5. Clean water and sanitation
6. Affordable and clean energy
7. Decent work and economic growth
8. Industry, innovation and infrastructure
9. Sustainable cities and communities
10. Responsible consumption and production
11. Climate action
12. Life below water
13. Life on land
14. Peace, justice and strong institutions

Contents

Acknowledgments	iii
Contribution to Sustainable Development Goals	v
List of Figures	viii
List of Tables	ix
Abbreviations	x
Abstract	xi
1 Introduction	1
1.1 H264 Profiles	1
1.1.1 Baseline Profile	1
1.1.2 Main Profile	2
1.1.3 High Profile	2
1.2 H264 Process	2
1.2.1 Forward Path	3
1.2.2 Reconstruction Path	3
1.3 H264 Major Components	3
1.3.1 Prediction	3
1.3.2 Intra-Prediction	4
1.3.3 Inter-Prediction	4
1.3.3.1 Motion Vector Prediction	4
1.3.4 Transform	5
1.3.5 Quantization	5
1.3.6 Entropy Encoding	5
1.4 H264 syntax	6
2 Motivations and Problem Statement	8
2.1 Motivations	8
3 Prediction, Transformation, Quantization and Encoding	9
3.0.1 Intra-Prediction	9
3.0.1.1 4x4 Luma Prediction	9
3.0.1.2 8x8 Chroma Prediction	11
3.0.2 Inter-Prediction	11
3.0.2.1 Block Matching Technique	11

4	Hardware Architecture for Inter-Prediction	13
4.0.1	Full Search ME Algorithm	13
4.0.2	256 PE VBS FS ME Hardware Architecture	14
 References		 17

List of Figures

1.1	Top Level Diagram for H.264 Encoder	3
1.2	Intra-Prediction	4
1.3	Inter-Prediction	4
1.4	Motion Vector Prediction	5
1.5	Overall syntax for h264 encoder	6
3.1	Reference samples for 4x4 Luma	10
3.2	Major Modes for 4x4 Luma Prediction	10
3.3	Major Modes for 8x8 Chroma Prediction	11
3.4	Motion Estimation using Block Matching	12
4.1	265 PE VBS ME Hardware Architecture	14
4.2	16 x 16 PE Matrix	15
4.3	Working of an Adder Tree	15

List of Tables

Abbreviations

AVC	Advance Video Coding
MB	Macro Block
VBS	Variable Block Size
PE	Processing Element
ME	Motion Estimation
FBS	Fixed Block Size
MV	Motion Vector
DCT	Discrete Cosine Transform
QP	Quantization Parameter
FS	Full Search
CAVLC	Context Adaptive Variable Length Coding
RAM	Read Only Memory
NAL	Network Abstraction Layer
VCL	Video Coding Layer
SPS	Sequence Parameter Sets
PPS	Picture Parameter Sets
CBP	Coded Block Pattern
FPGA	Field Programmable Gate Array

Abstract

The Thesis Abstract is written here (and usually kept to just this page). The page is kept centered vertically so can expand into the blank space above the title too...

Chapter 1

Introduction

Digital video refers to a sequence of images displayed on a screen at a predetermined rate. The process of transferring video content from one medium to another depends on both the duration of the video and the size of the encoded bits. **Video compression** techniques are commonly utilized to reduce the overall size of the video, which consequently leads to a decrease in the amount of data required for transmission and storage of digital video signals.

The most current video coding standard is known as **H.264/AVC** or **MPEG-4 Part-10**. This standard was jointly developed by the **ITU-T Video Coding Experts Group** and **ISO/IEC JTC 1 Moving Picture Experts Group**. Compared to typical video coding standards, H.264/AVC provides significantly higher efficiency, capable of reducing bit rate requirements by up to 50% while maintaining the same level of video quality. It is designed to cover a wide range of video resolutions, from QCIF to HDTV. [6]

1.1 H264 Profiles

The H.264 family of standards includes various capabilities. These profiles are mainly used to reduce the frame count by implementing motion prediction and temporal compression. [7] The most common ones are:

- Baseline Profile
- Main Profile
- High Profile

1.1.1 Baseline Profile

In the realm of video encoding, baseline profiles are commonly employed in applications that require low-power consumption and cost-efficiency. These profiles are capable of achieving an impressive compression ratio of 1000:1, resulting in a streamlet of 1

Gbps being compressed down to approximately 1 Mbps. Baseline profiles utilize a 4:2:0 chrominance sampling method, whereby color information is sampled at half the vertical and horizontal resolution of the black-and-white information. This technique enables the reduction of data without significantly impacting the overall quality of the video.

Furthermore, Universal Variable Length Coding (UVLC) and Context Adaptive Variable Length Coding (CAVLC) are employed as the primary entropy encoding techniques within this profile. Such encoding methods contribute significantly to the efficient compression of video data, while ensuring that the encoded video stream is in compliance with relevant standards.

1.1.2 Main Profile

Significant enhancements were made to the Baseline Profile through the introduction of advanced frame prediction algorithms, resulting in the development of the Main Profile. This updated profile is primarily utilized for standard-definition digital TV broadcasts in MPEG-4 format.

However, it should be noted that the Main Profile is not employed in high-definition broadcasts. Rather, alternate profiles are used in such scenarios to ensure optimal video quality and compatibility with relevant standards.

1.1.3 High Profile

Introduced in the year 2004, the High Profile is considered to be the most efficient and powerful profile within the H.264 family. It is primarily utilized in high-definition television applications such as Blu-ray Disc storage and DVB HDTV broadcast services. This profile is capable of achieving an exceptional compression ratio of 2000:1, which is a significant improvement over previous encoding standards. It utilizes an adaptive transform method that allows for the selection of either 4x4 or 8x8 pixel blocks. This enables preservation of video quality while reducing network bandwidth consumption by up to 50 percent.

Furthermore, the application of this compression technique facilitates the compression of a 1 Gbps stream to approximately 512 Kbps, further emphasizing the impressive capabilities of the High Profile.

The overall procedure of H.264 includes various components. The top level block diagram of an H.264 Encoder is shown in Figure 1.1.

1.2 H264 Process

An H264 encoder has a **forward path** and a **reconstruction path** [1]. The forward path uses **intra** and **inter predictions** to encode a video frame to create a bit stream. The reconstruction path is used to decode the encoded frame and to reconstruct the decoded frame. Reconstruction path in encoder ensures that both encoder and decoder make use of similar reference frames for inter and intra prediction. This is to avoid

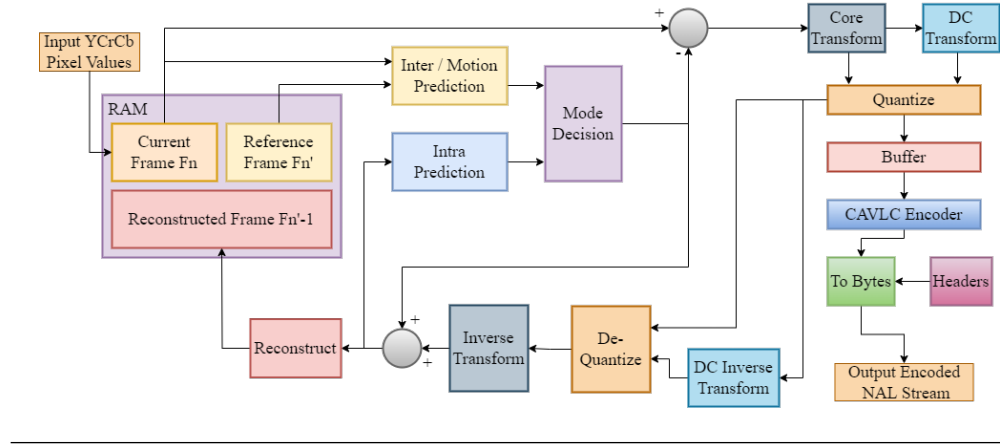


FIGURE 1.1: Top Level Diagram for H.264 Encoder

encoder-decoder mismatches.

1.2.1 Forward Path

The input frame is partitioned into **Macro-Blocks (MB)**. These MB are then encoded in intra or inter mode. This depends on mode decision. The current MB is predicted from reconstructed frame. This predicted MB is generated by intra prediction based on **spatial redundancy**, and by inter prediction based on **temporal redundancy**. The mode is chosen based on better quality and bit rate performance of these 2 modes. The Predicted MB is subtracted from current MB to create a **Residual MB**. Residual data is **transformed** (4x4 integer transform), then **quantized**. The obtained coefficient are re-ordered in a **zig-zag order** which are regarded as **entropy encoded**. These coefficients along with header information form the **compressed bit stream**. This stream is forwarded to NAL for storage or transmission.

1.2.2 Reconstruction Path

This path takes quantized transform coefficients and performs inverse quantization and inverse transform. In this way, reconstructed residual data is generated, but they are not identical to original residual data as quantization is a lossy process. In order to create the reconstructed frame, the reconstructed residual data are added to predicted pixels.

1.3 H264 Major Components

1.3.1 Prediction

In order to guarantee a high compression ratio in H.264 encoders, prediction is a technique utilized [8]. In prediction, a 16x16 pixel block known as a macroblock from a previous video frame or the present frame is utilized to forecast macroblocks in the current frame. Detailed information on predictions and its types are given in chapter 3.

There are basically 2 modes for prediction:

1.3.2 Intra-Prediction

Intra prediction is performed without referring to any data outside the current slice i.e prediction from previously coded data in the same slice. It reduces spatial redundancies by exploiting spatial correlation between adjacent blocks in a given picture. There are 3 choices of block size for luma component i.e. 16x16, 8x8 or 4x4. Whereas for chroma component, a single prediction block is generated. Once, the prediction has been made, it is subtracted from current block to make a residual. The overview of the process is shown in figure 1.2.

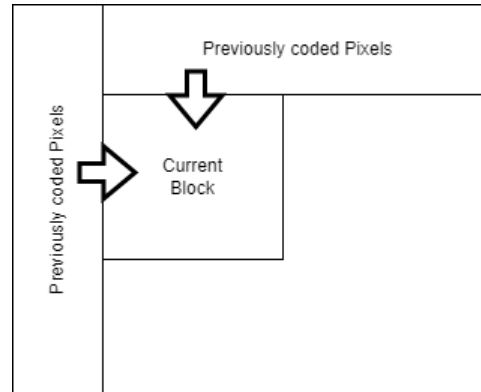


FIGURE 1.2: Intra-Prediction

1.3.3 Inter-Prediction

Inter prediction is the process of predicting a block of luma and chroma samples from a picture that has been previously coded and transmitted i.e reference picture. It uses temporal sampling technique. For this, a prediction region is selected, then a prediction block is generated. After that the prediction block is subtracted from original block of samples to form a residual. The overview of the process is shown in figure 1.3.

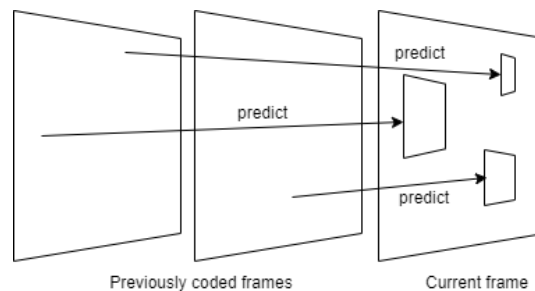


FIGURE 1.3: Inter-Prediction

1.3.3.1 Motion Vector Prediction

In video coding, motion vectors for neighboring partitions are typically closely related, and so each motion vector can be predicted using previously coded vectors from nearby partitions. A predicted vector is created based on these previous motion vectors, and the

difference between the current vector and the predicted vector is encoded and transmitted. The way in which predicted vector is predicted depends on the size of the motion compensation partition and whether there are nearby vectors available for reference.

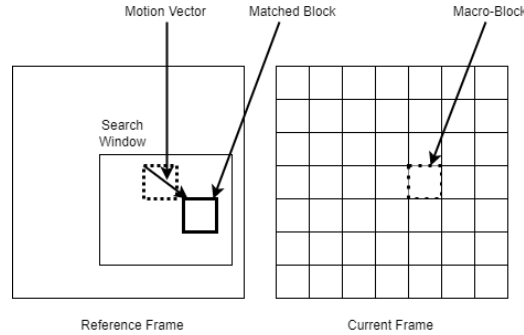


FIGURE 1.4: Motion Vector Prediction

1.3.4 Transform

Once the residual data, which essentially comprises a block of residual coefficients, is obtained, it is subjected to the core transform process. This transform is an integer-based 4x4 or 8x8 transform that provides a scaled approximation to the Discrete Cosine Transform (DCT) [8]. In certain cases, a portion of the output from this integer transform is subject to further transformation through a DC Transform, referred to as the Hadamard transform [8]. The same residual data can be reconstructed using the DC inverse transform, which is carried out prior to rescaling. Finally, the rescaled coefficients are inverse transformed using a 4x4 or 8x8 inverse integer transform.

1.3.5 Quantization

The transformed coefficients are subjected to quantization using a non-uniform quantizer. In this process, each coefficient is divided by an integer value, which reduces the precision of the coefficient values as determined by the Quantization Parameter (QP). The use of a non-uniform quantizer results in a smaller number of bits being used to represent each coefficient value, which in turn reduces the amount of data required to represent the video. The quantized transform coefficients of a block are typically scanned in a zig-zag pattern, which is a common approach for video coding standards.

1.3.6 Entropy Encoding

In H.264 stream or file encoding, the symbols are coded in a series. The quantized transform coefficients are efficiently transmitted using the Context-Adaptive Variable Length Coding (CAVLC) method. The statistical distribution of the quantized transform coefficients typically shows larger values for low-frequency components that decrease gradually towards the high-frequency part. As a result, the number of nonzero quantized coefficients (N) and their size and position are coded separately. This enables the receiver to reconstruct the original signal more accurately. The coefficients are scanned in a zig-zag

pattern, and then quantized to reduce their precision using the quantization parameter (QP). The efficient transmission of quantized transform coefficients in H.264 helps in reducing the size of the compressed video file while maintaining the quality of the video. The final Network Abstraction Layer can be seen in figure 1.5

1.4 H264 syntax

H.264 consists of 2 layers: the **Network Abstraction Layer (NAL)** and the **Video Coding Layer (VCL)** [8]. The NAL consists of a series of NAL Units, with **Sequence Parameter Sets (SPS)** and **Picture Parameter Sets (PPS)** being the most common units that signal certain control parameters to the decoder. In the VCL, coded video data is communicated in the form of slices. An **access unit**, which can be a coded frame or field, is made up of one or more slices. Each slice consists of a Slice Header and Slice Data, with the latter being a series of coded **macro blocks (MB)** and skip macro block indicators signaling that certain macro block positions contain no data.

- **MB type:** I/intra coded, P/inter coded from one reference frame
- **Prediction information:** prediction mode for I macro block, choice reference frame and motion vectors for P macro block
- **Coded Block Pattern CBP:** indicates which luma and chroma blocks contain non zero residual co-efficient
- **Quantization Parameter QP:** for macro blocks with CBP not 0
- **Residual Data:** for blocks containing non-zero residual coefficients

The basic H264 syntax can be seen in figure 1.5

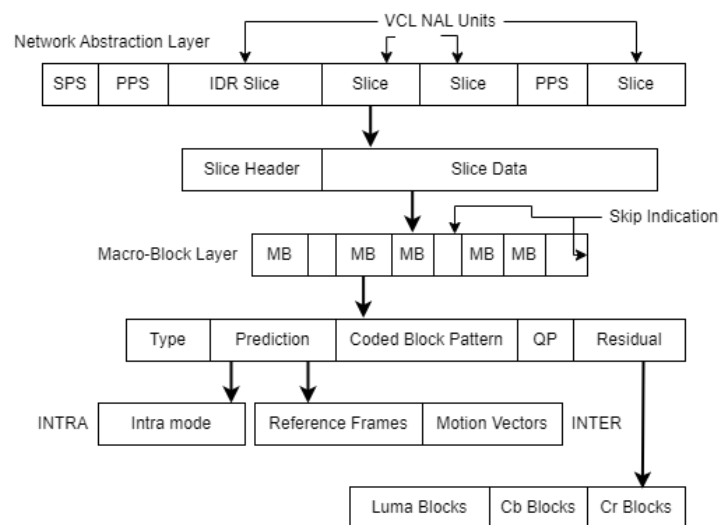


FIGURE 1.5: Overall syntax for h264 encoder

(write something about hardware implementation on FPGA) In this thesis, we developed an FPGA based H.264 intra and inter frame coder hardware targeting **High Profile** (see which one to mention, See from wikipedia)

(write about what is happening in the next chapters)

Chapter 2

Motivations and Problem Statement

2.1 Motivations

(add the relevant info related to our project reason open source camera chip - must , 10x (isp), us (encoder))

With the rapid increase in the development of products and benefits offering full-motion digital video, digital video coding is currently gaining importance and has a considerable monetary impact on computer, imaging and telecommunications technology. Throughout the early phases of technology, there have been many international video coding standards as engines behind the commercial success of digital video compression. In comparison to current existing standards, H264 has many new features that makes it more emphatic. The important features that distinguish H264 from other standards are good video quality at high and low bit rates and network friendliness. [2]

It is proposed that H264 can deliver two times better performance than the previous MPEG-2 coding standard, both in terms of compression efficiency and picture eminence. Moreover, previous H.63 and MPEG-4 implement block-based motion estimation to reduce temporal redundancy between frames. But in H.264, block matching efficiency is improved by some innovative features such as variable block size motion estimation (VBS_ME) and motion vector prediction [5]. The computational complexity of this model is increased by the factor of four due to these features.

Chapter 3

Prediction, Transformation, Quantization and Encoding

Prediction is defined as duplication of the information contained in a macro-block using previously coded data. This duplicated information is subtracted from the macro-block to form a residual. There are 2 types of prediction.

- Intra-Prediction
- Inter-Prediction

3.0.1 Intra-Prediction

Intra-prediction utilizes the space dependency to compress the video. The frames which are intra coded using intra-prediction are called I-frames. Following are the possible prediction modes:

- **4x4 luma:** having 9 directional modes and is suitable for macro blocks that has lot of details
- **8x8 luma:** having 9 directional modes and is for high profiles only.
- **16x16 luma:** having 4 directional modes that is suitable for macro block with smoother area
- **8x8 chroma:** 4 possible prediction modes and used for chrominance components

In our model, 4x4 luma prediction and 8x8 chroma prediction is being implemented.

3.0.1.1 4x4 Luma Prediction

For this type of prediction, each macro block that is of **16x16** (256 pixels each of which is 8 bit wide) is divided into **4x4** block (16 pixels) [3]. Figure 3.1 shows the reference samples for 4x4 luma prediction. 4 pixels **A,B,C,D** (adjacent to current block) of block

a on top of current block, pixels **E,F,G,H** of block **b** on top right corner, **I,J,K,L** of block **c** at adjacent left of current block and 1 pixel **M** of **d** block on top left corner are used for prediction of 16 pixels in the current block.

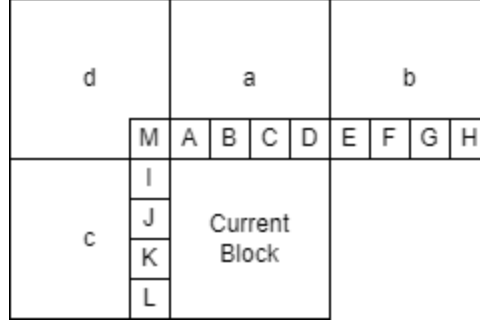


FIGURE 3.1: Reference samples for 4x4 Luma

There are total 9 prediction modes that are supported in this prediction. Major modes that are implemented in our model are as follows:

- **Mode 0 (Vertical):** The predicted block is constructed by using upper samples A,B,C,D of block ‘a’ as shown in figure 3.2. They are extrapolated vertically. It is suitable to predict vertical edges in the block.
- **Mode 1 (Horizontal):** In this mode, left samples I,J,K,L of block c are used. They are extrapolated horizontally and is suitable for horizontal edges. It can be seen in figure 3.2.
- **Mode 2 (DC):** It utilizes average of all adjacent samples (A to D and I to L) to form the prediction of current block. It is suitable for smooth areas. Its process is shown in figure 3.2.

For the details of remaining modes refer to [8]. Figure 3.2 display the above 3 prediction modes. To create a predict sample, every color stands for a particular formula. The encoder determines each prediction direction’s cost by finishing processing for all of the prediction directions, then outputs the one with the lowest cost.

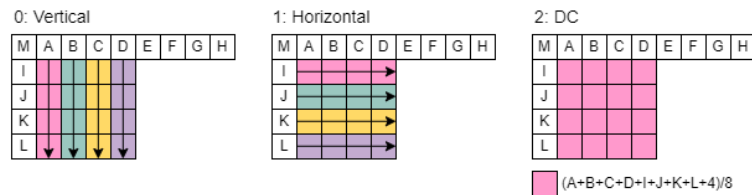


FIGURE 3.2: Major Modes for 4x4 Luma Prediction

3.0.1.2 8x8 Chroma Prediction

This type of prediction applies on chrominance components. It is similar to 16x16 luma prediction which can be referred in [8] except the block size is 8x8 and there is different order of mode number which are:

- Mode 0: DC
- Mode 1: Horizontal
- Mode 2: Vertical
- Mode 3: Plane

The working of first 3 modes is similar to mode 2,1,0 of 4x4 luma prediction respectively. For details of Plane mode refer to [8]. The Implemented mode in our model is DC. These modes are shown in the figure 3.3.

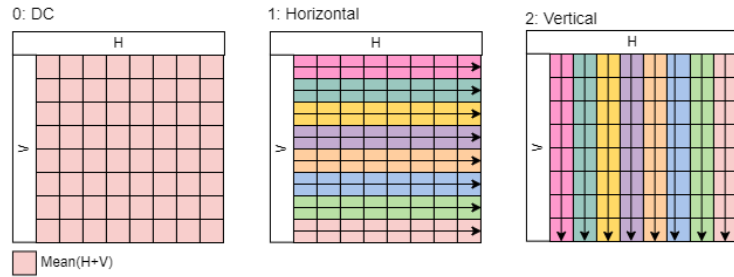


FIGURE 3.3: Major Modes for 8x8 Chroma Prediction

[Explain the hardware architecture of Intra prediction if possible]

3.0.2 Inter-Prediction

The process of predicting a block of luma and chroma samples from a reference picture that has been previously been coded and transmitted i.e. exploits temporal redundancy between successive frames. For this a prediction region is selected, a prediction block is generated and then it is subtracted from original block of samples to form a residual. This is then coded and transmitted. Reference pictures are stored in Decoded Picture Buffer. The offset between position of current block and search region in the reference picture is called motion vector. This prediction is also known as **Motion Estimation** [4]. It has the capability of extracting true motion information thus enhancing the quality of displayed images in video enhancement systems. The preferred technique for motion estimation is the **Block Matching (BM)** Technique.

3.0.2.1 Block Matching Technique

This method divides the current frame into non-overlapping NxN macro-blocks and seeks out the block from the reference frame that most closely resembles the current block

within a specified search range. The Sum of Absolute Difference (SAD), which is appropriate for hardware implementations, is the recommended block matching criterion.

In figure 3.4, (x, y) represents the location of the current frame. The search window in the reference frame is in $[-r, r]$ region in both x and y directions. Both current and reference block lies within the range of search window. The SAD value is calculated by accumulating absolute differences of corresponding pixels in both current and reference blocks. A motion vector is the relative motion of current block in reference frame, they are specified in relative coordinates. Thus if $(x+a, y+b)$ is the location of best matching block in reference frame, then (a, b) represents the motion vector. Motion Estimation is performed on luma component and resulting motion vectors are also used for chroma components.

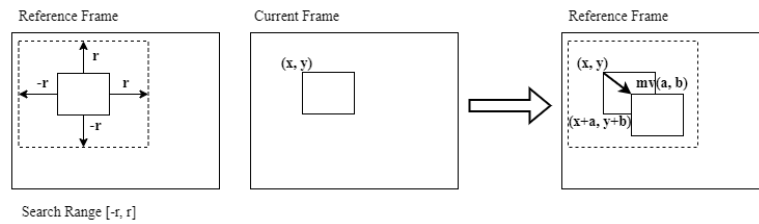


FIGURE 3.4: Motion Estimation using Block Matching

There are several algorithms for Block Matching. Among them mostly used is **Full Search (FS)** algorithm. The SAD values for each search position within a specific search range are calculated by this approach to determine the reference block that most closely resembles the present block. It has the best performance related to other algorithms as it searches all the search locations in a given search range. But its computational complexity is high and its hardware consume a lot of power. For further improvement, instead of **fixed block size (FBS) FS ME** algorithm, **variable block size (VBS) FS ME** algorithm is incorporated. For details of FBS ME algorithm, refer to [that ppr]. VBS FS ME algorithm will be further explained in detail in chapter 4.

Chapter 4

Hardware Architecture for Inter-Prediction

There are many new technologies such as intra prediction, in loop deblocking filter, context based arithmetic coding introduced in the latest H.264/AVC standard. Among all of these amazing technologies, **Variable Block Size Motion Estimation (VBSME)** is one of the powerful techniques. In comparison with the previous Fixed Block Size Motion Estimation (FBSME), VBSME divides one MB into smaller blocks to fit the different motion directions. In this way, the coding performance is proved.

4.0.1 Full Search ME Algorithm

The Full Search Algorithm works in the following way:

- At first, both the search window and current block positions are fixed at the certain point i.e top left corner of frame. The current block starts the loading of the pixels from the top left corner. Absolute difference of each pixel of current block with the corresponding pixel of the search window is calculated.

$$Diff(m, n, k, l) = |S(m + k, n + l) - C(k, l)| \quad (4.1)$$

- After that the Sum of all Absolute Differences (SAD) for that particular position of current block is calculated.

$$SAD(m, n) = \sum_{k=0}^{W-1} \sum_{l=0}^{H-1} Diff(m, n, k, l) \quad (4.2)$$

Then the current block is shifted by 1 row or column of pixels and again SAD is calculated. In this way, several SADs are calculated in a single search window.

- Each SAD when calculated is compared with the previous SAD value and the smaller SAD value is taken. In this way at end, minimum SAD value and the

corresponding motion vectors values are depicted for one search window.

$$SAD_{min} = \min(SAD(m, n)) \quad (4.3)$$

In the above equation (4.1), (4.2) and (4.3) The domain of m and n is $m \in [0, M-1]$ and $n \in [0, N-1]$ respectively. M and N are width and height of search window respectively. H and W are height and width of current block respectively. $C(k, l)$ represents the pixel value of the current block and $S(m+k, n+l)$ is the pixel value from the search window of the reference frame.[5]

4.0.2 256 PE VBS FS ME Hardware Architecture

We designed a parallel **256 PE VBS FSME Hardware Architecture**. [4] This hardware is implemented in System Verilog. First of all, the pixels in the current MB are stored in a Block Ram (**c_BRAM**). The pixels of the search window are also stored in a block RAM (**s_BRAM**). The architecture is shown in the figure 4.1

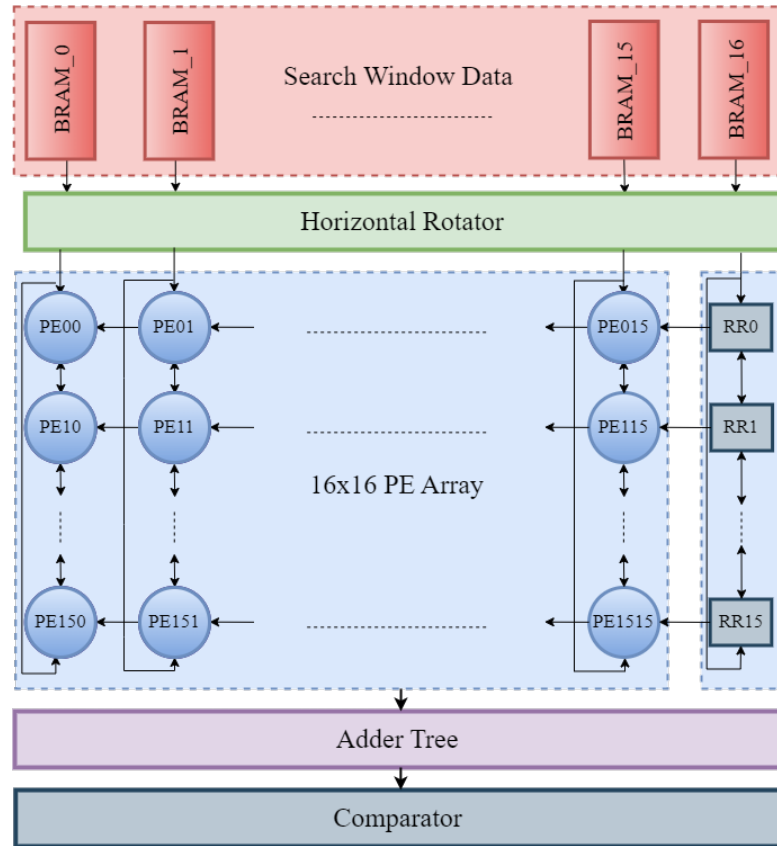


FIGURE 4.1: 256 PE VBS ME Hardware Architecture

In this design, a **2-D systolic PE array** is used. The use of this type of array introduced parallel computing and pipelinability in the structure. There are $16 \times 16 = 256$ PEs (16 rows and 16 columns) interconnected with each other in a form of matrix. All of

them are made capable of shifting data down, up and left. It means that a 16x16 current block can move around the 48x48 search window in down, up and right direction. For a **16x16 MB**, a Motion Vector MV is found in one cycle in a search range of **[-16, 15]** pixels. Pixels are defined as 8 bit positive integers.

As soon as the control signals for loading current and search pixels are enabled, both current block and search window pixels starts loading into PEs. In 1 clk cycle, 16 pixels are loaded for both of them. (1st PE is filled in each of 16 columns). Thus, the whole PE matrix is filled in 16 cycles. As depicted in figure 4.2, **pixel_cpr_in** and **pixel_spr_in** are input array of 16 8-bit pixels from current block and search window of reference block respectively. The **pe_matrix** module concatenates the output signals of each column of processing elements to form the final output signal **ad** which is an array of $8 \times (16 \times 2)$ bits.

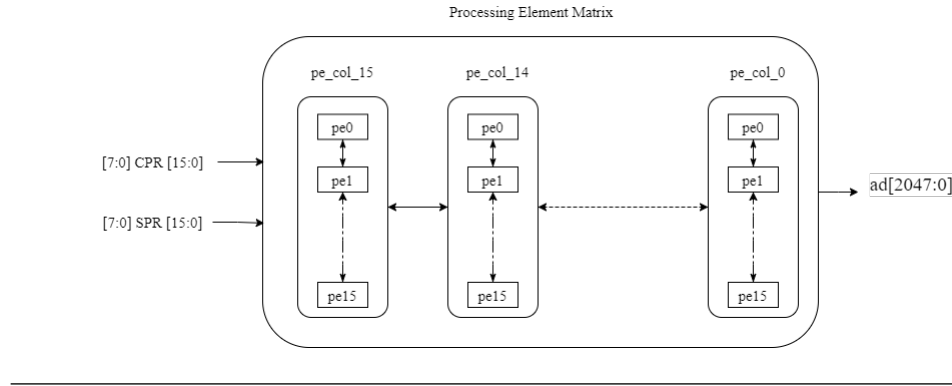


FIGURE 4.2: 16 x 16 PE Matrix

Each PE calculates the absolute difference between current MB pixel and the search window pixel. In this way $16 \times 16 = 256$ absolute differences are obtained in one location and they all are calculated simultaneously with the loading of data in PEs as the design is combinational.

After absolute differences are all calculated, The SAD for that search location is determined by adding the absolute differences calculated by the above PEs as shown in figure. All these absolute differences are added up together using Adder Trees. The working of a simple adder tree is shown in figure 4.3. It can be seen clearly in the figure that there is 2 cycle latency for an adder tree.

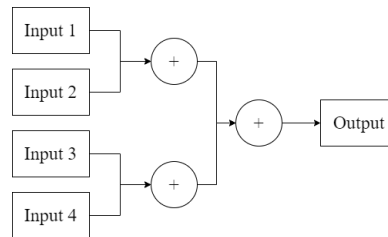


FIGURE 4.3: Working of an Adder Tree

For SAD calculation of a 16x16 current block, we consider **PI-PPSAD** structure.

References

- [1] Esra Şahin. An efficient h.264 intra frame coder hardware design. Master thesis, Sabanci University, Electrical and Electronics Engineering Department (EECS), Istanbul, Turkey, 2006. URL https://suurcan.sabanciuniv.edu/fedora/objects/thesis:395/datastreams/SAHIN_ESRA_thesis_05042007_1217_02/pdf?origin=browser.
- [2] Ihab Amer, Wael Badawy, and Graham Jullien. A high-performance hardware implementation of the h. 264 simplified 8×8 transformation and quantization. In *Advanced Information Processing Systems*, pages 84–89. Springer, 2005.
- [3] Anil Kumar C., Pradeep Kumar B.P., Venu K.N., and Lavanya Vaishnavi D.A. Intra prediction algorithm for video frames of h.264. *Nat. Volatiles & Essent. Oils*, 8(5): 11357–11367, 2021.
- [4] Caglar Kalaycioglu, Onur Can Ulusel, and Ilker Hamzaoglu. *Low power techniques for motion estimation hardware*. 34956 Tuzla, Istanbul, Turkey, 2011.
- [5] Brian MH Li and Philip HW Leong. Serial and parallel fpga-based variable block size motion estimation processors. *IEEE Transactions on Circuits and Systems for Video Technology*, 13(7):624–635, 2003.
- [6] Chia-Chi Lin, Wei-Cheng Chen, Ming-Hsiang Tsai, and Cheng-Wei Tsai. Parallel improved hdtv720p targeted propagate partial sad architecture for variable block size motion estimation in h.264/avc. *IEICE Transactions on Fundamentals of Electronics, Communications and Computer Sciences*, E91-A(4):958–966, 2008.
- [7] RGB. H.264 profiles. <https://www.rgb.com/h264-profiles>, Accessed on May 12, 2023.
- [8] Iain E. Richardson. *The H.264 Advanced Video Compression Standard*. Wiley, UK, 2nd edition, 2010.