Where light lives

Baldr

# WELCOME

To Our World

Baldr

House of Light

**The quality of light determines the quality of life.** Since we believe that everyone has the right to live better, we design smart and versatile lighting solutions to **brighten** spaces more **efficiently, pleasantly,** and **personally.**

This is Baldr

The lighting industry is constantly evolving, providing both challenge and opportunity.
It fascinates us to keep on bringing new design and lighting solutions to the market.
You could consider it a passion to continuously surprise and inspire people with new lighting languages.

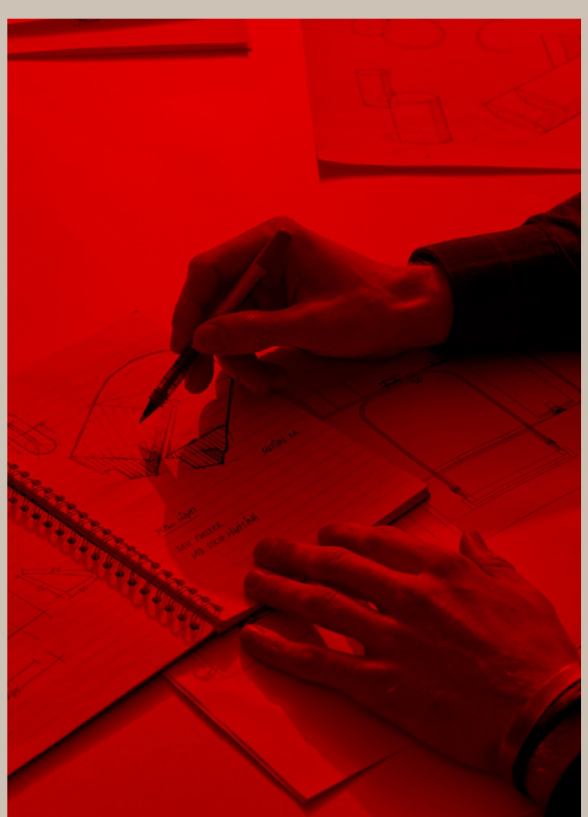

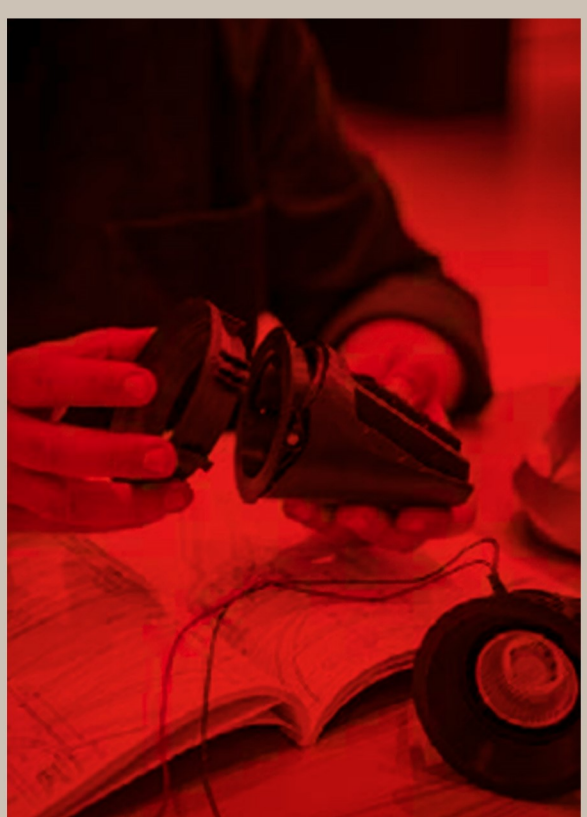

# Origin —
# of the future

Baldr was born from the desire to offer designers and architects minimalist and high-performance lighting solutions. Thanks to a hybrid approach between creativity, essentiality, and efficiency, we can offer tools that open new and infinite design solutions.

1 year guarantee?

## We give you 5 years guarantee!

The quality of our products and the satisfaction
of our customers is of primary importance to us.
For this reason Baldr provides a guarantee of 5 years.

5 year

60 month

1825 day

43800 hours

2628000 minutes

157680000 second

# THINGS TO SEE

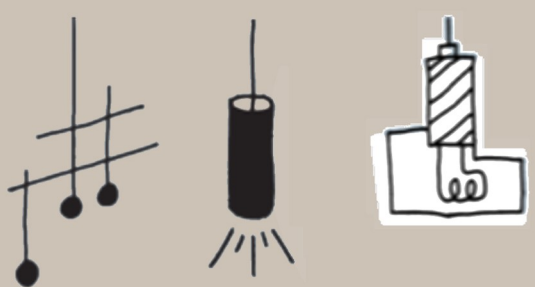

Architectural Lighting 09

Decorative Lighting 81

Outdoor Lighting 147

# Architectural Lighting



Vector
Page 13



Connect System
Page 21

Siza
Page 29

Holl
Page 35

Eero
Page 41



Alto
Page 47



Ito
Page 53

Point
Page 59

Break
Page 63

Rotary
Page 67

Snoop
Page 71

Signal
Page 75



Arte
Page 79

# Vector / Linear Light

For lighting professionals looking for the backbone of a lighting installation for an office or public space project, the Vector LED lighting system offers coherent Vector delivers visual comfort and energy efficiency, combining high performance with impeccable aesthetics and top quality construction. All project needs can be satisfied with combinations of the widths, the various installation options (recessed trim and no trim, surfacemounted and suspended) and diffuse or concentrated glare-free light versions to meet ambient design requirements.

# Vector SM

surface mount linear light (16-49 mm)

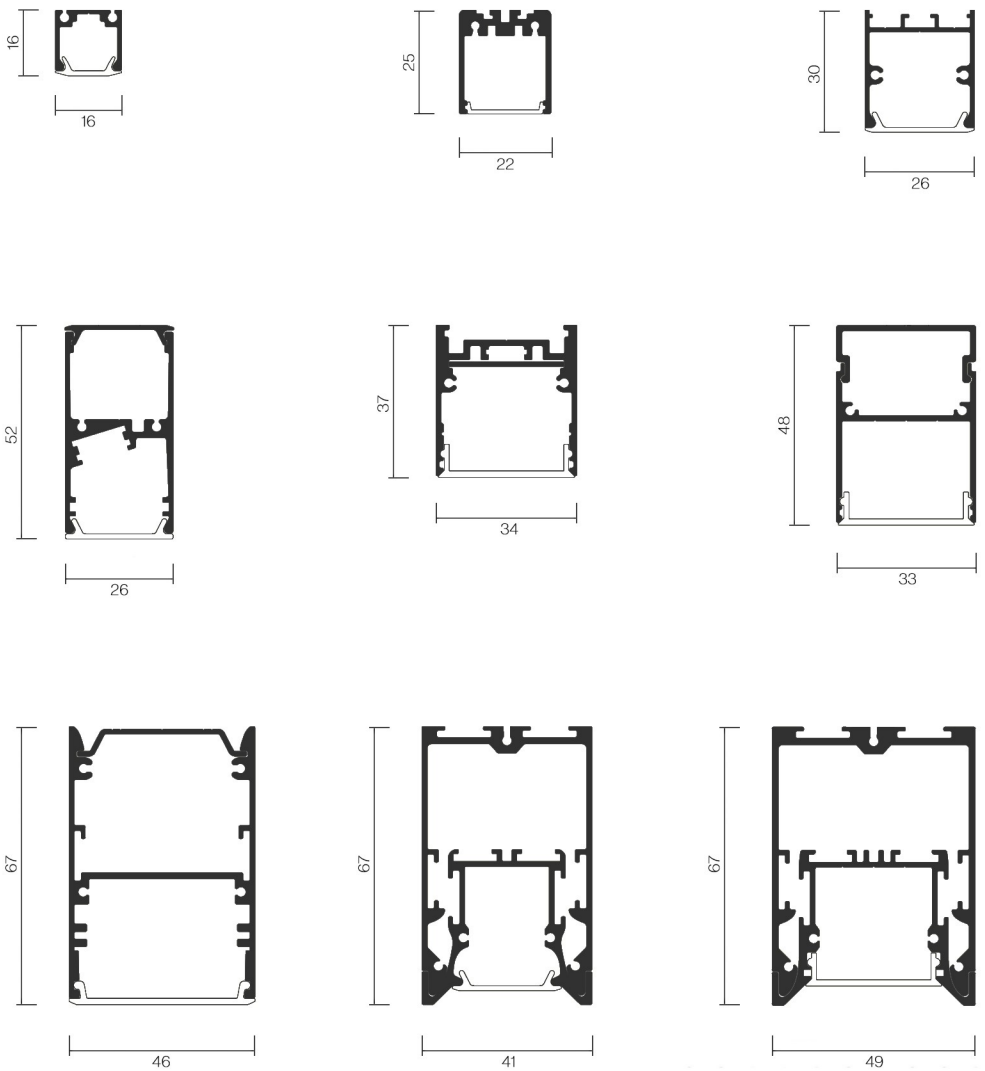

# Vector R

recessed linear light (16-100 mm)




Gap: 18 mm




Gap: 25 mm




Gap: 40 mm




Gap: 35 / 40 mm




Gap: 40 / 45 mm




Gap: 60 / 65 mm

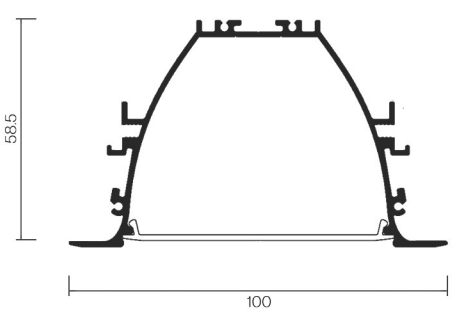


Gap: 80 / 85 mm

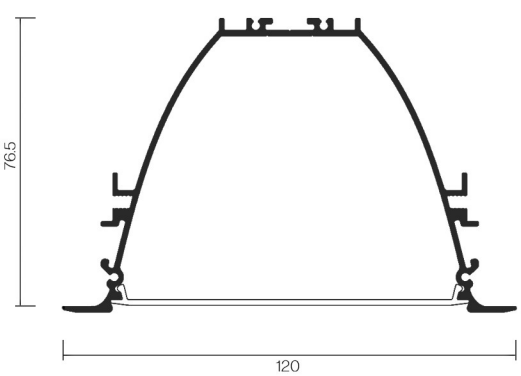


Gap: 100 / 105 mm

# Shadow Line

shadow gap plasterboard trim (16 mm)

Shadowline is designed to create a clean perimeter shadow line and lighting option to Wall/Ceiling junctions. It can be used with either set plasterboard ceilings or suspended grid ceilings.
Shadowline incorporates a dedicated opal diffuser and can be optioned with either high output or super high output LED ribbon.

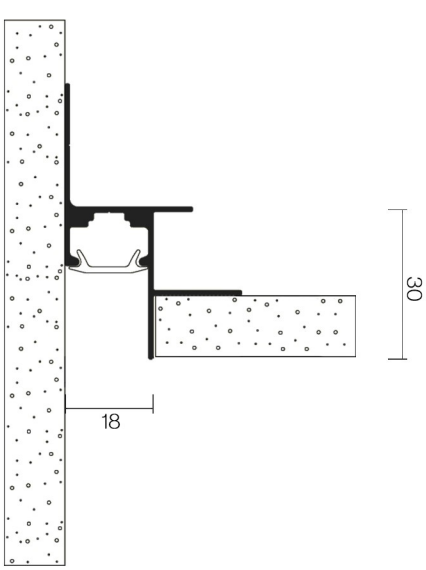

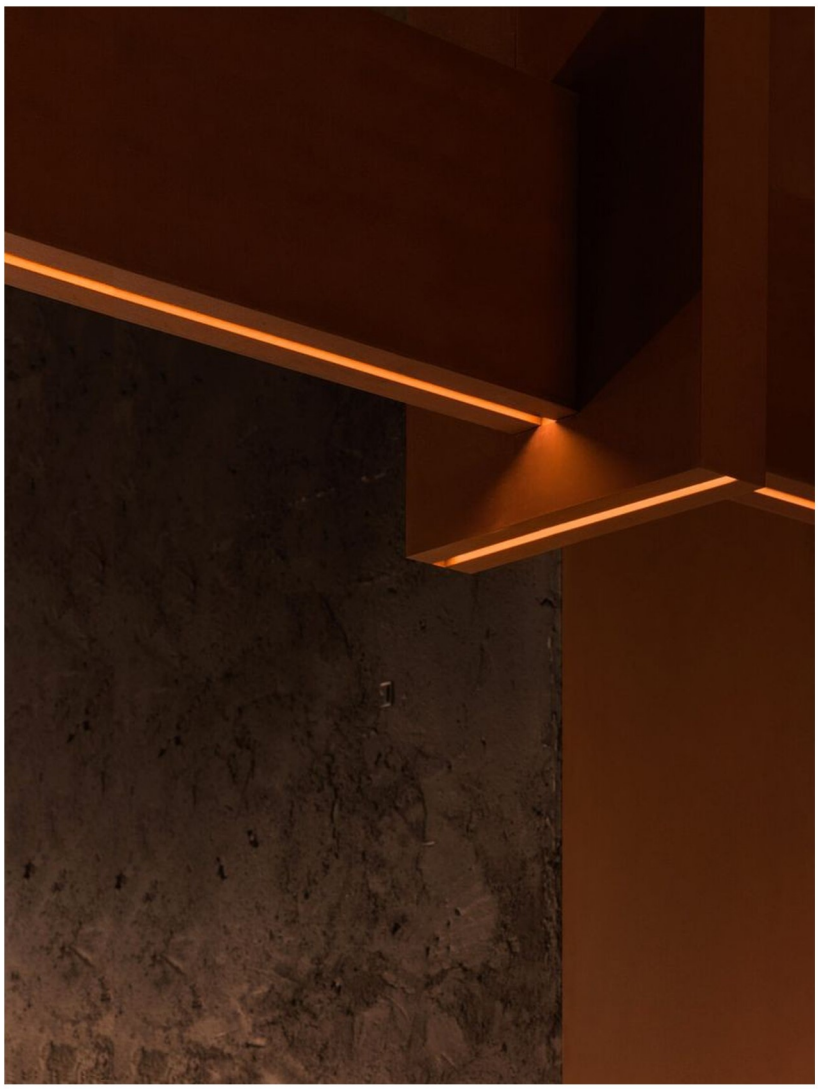

Aluminium shadowline profile 18 mm separated, no cover. it is used to create a shadowline on walls and ceilings to visually separate them.
Designed for gypsum plasterboard systems, it is easy to mount and complements modern design solutions.

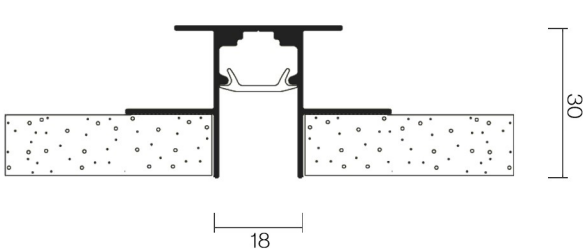



| **Vector** | 16 mm to 100 mm |
|---|---|
| Power | 18 w / 36 w |
| Lumen | 1980lm / 3960 lm |
| CRI | >80 |
| Beam Angle | 120° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 24 v / 220 v |
| IP | IP43 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V / Zigbee |

# Connect System / Magnetic Light

Connect system, offers incredible design freedom fo many applications despite. and in recessed, surface and suspended versions. A wide range of light fixtures is housed inside it using magnetic fastening.

# XS

Ultra Slim Magnetic Light (10 mm)

Surface

Recessed



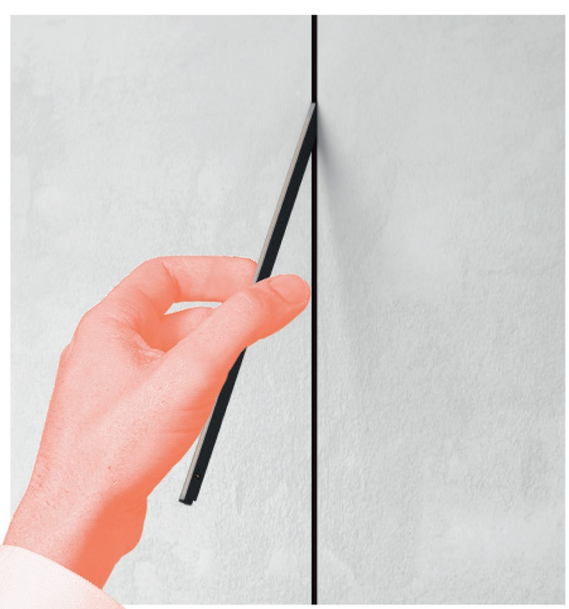

23 ↪ 24

| **Net - XS** | 3 Ø |
|---|---|
| Power | 5 w |
| Lumen | 540 lm |
| CRI | >90 |
| Beam Angle | 24° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | ■ □ |
| Dimmable | DALI / Zigbee |

| **Oreo - XS** | 7 Ø |
|---|---|
| Power | 7 w |
| Lumen | 835 lm |
| CRI | >90 |
| Beam Angle | 38° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | ■ □ |
| Dimmable | DALI / Zigbee |



| **Buble - XS** | 10 Ø |
|---|---|
| Power | 5 w |
| Lumen | 400 lm |
| CRI | >90 |
| Beam Angle | 360° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | ■ □ |
| Dimmable | DALI or Zigbee |

| **Lina Fix - XS** | 60 cm / 100 cm |
|---|---|
| Power | 10 w / 18 w |
| Lumen | 800 lm / 1440 lm |
| CRI | >90 |
| Beam Angle | 360° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | ■ □ |
| Dimmable | DALI / Zigbee |

# S

Slim Magnetic Lighting (22 mm)

Surface




Recessed



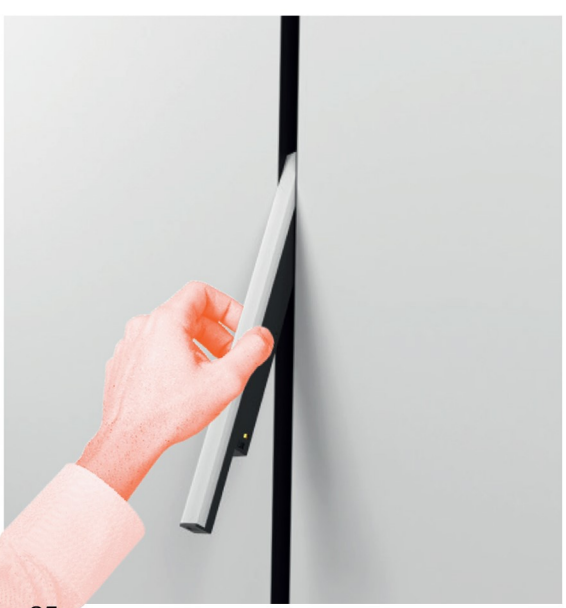

25 ↪ 26

**Net - S** 4 Ø

| | |
|---|---|
| Power | 10 w |
| Lumen | 800 lm |
| CRI | >80 |
| Beam Angle | 24° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |

**Lina Fix - S** 30 cm / 60 cm

| | |
|---|---|
| Power | 12 w / 24 w |
| Lumen | 960 lm / 1920 lm |
| CRI | >80 |
| Beam Angle | 120° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |

**Oreo - S** 8 Ø

| | |
|---|---|
| Power | 9 w |
| Lumen | 720 lm |
| CRI | >80 |
| Beam Angle | 38° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |

**Free - S** 80 cm

| | |
|---|---|
| Power | 20 w |
| Lumen | 1600 lm |
| CRI | >80 |
| Beam Angle | 180° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |

**Pounto Fix - S** 6X / 12X

| | |
|---|---|
| Power | 6 w / 12 w |
| Lumen | 480 lm / 960 lm |
| CRI | >80 |
| Beam Angle | 36° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |

**Nagoya - S** 32 Ø

| | |
|---|---|
| Power | 12 w |
| Lumen | 960 lm |
| CRI | >80 |
| Beam Angle | 80° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | |
| Dimmable | DALI / 0-10V Zigbee |

**Pounto Tilt - S** 6X / 12X

| | |
|---|---|
| Power | 6 w / 12 w |
| Lumen | 480 lm / 960 lm |
| CRI | >80 |
| Beam Angle | 36° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |



**Limb - S** 10 Ø / 15 Ø

| | |
|---|---|
| Power | 5 w |
| Lumen | 400 lm |
| CRI | >80 |
| Beam Angle | 360° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |

# M

Medium Magnetic Lighting (35 mm)

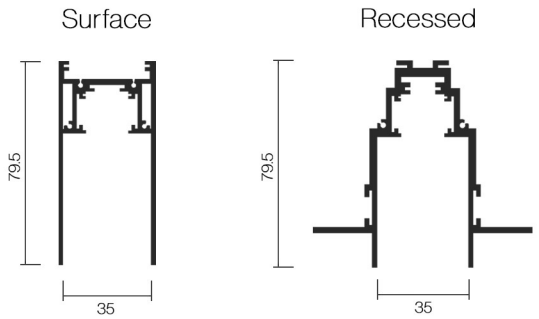

| **Net - M** | 4 Ø / 6 Ø |
|---|---|
| Power | 10 w / 15w |
| Lumen | 800 lm / 1200 lm |
| CRI | >80 |
| Beam Angle | 24° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |

| **Lina Fix - M** | 30 cm / 60 cm |
|---|---|
| Power | 12 w / 24 w |
| Lumen | 960 lm / 1920 lm |
| CRI | >80 |
| Beam Angle | 120° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |

| **Punto Fix - M** | 5X / 10X |
|---|---|
| Power | 5 w / 10 w |
| Lumen | 400 lm / 800 lm |
| CRI | >80 |
| Beam Angle | 36° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |

| **Lina Tilt - M** | 30 cm / 60 cm |
|---|---|
| Power | 12 w / 24 w |
| Lumen | 960 lm / 1920 lm |
| CRI | >80 |
| Beam Angle | 120° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |

| **Pounto Tilt - M** | 5X / 10X |
|---|---|
| Power | 5 w / 10 w |
| Lumen | 400 lm / 800 lm |
| CRI | >80 |
| Beam Angle | 36° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |

| **Pillar - M** | 4 Ø / 6 Ø |
|---|---|
| Power | 10 w / 15 w |
| Lumen | 800 lm / 1200 lm |
| CRI | >80 |
| Beam Angle | 30° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |

| **Soga - M** | 100 cm |
|---|---|
| Power | 18 w |
| Lumen | 1440 lm |
| CRI | >80 |
| Beam Angle | 360° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |

| **Buble - M** | 10 Ø |
|---|---|
| Power | 5 w |
| Lumen | 400 lm |
| CRI | >80 |
| Beam Angle | 360° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |

# SIZA / Frameless Downlight

A collection of recessed elements for interior installations that include avant-garde LED solutions and luminaires with a traditional light source. A wide variety of sizes and finishes that ensure a perfect integration in all environments. Optic body to ensure an excellent visual comfort.


66
38


70
4
41


94
57


101
7
62


101
62

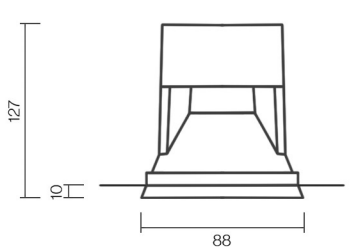
127
10
88

Recessed LED with an unusual design,
tanks to the small edge that defines
the presence of the luminaire.
Comes in three sizes with different optics
for a better personalisation.
Pure lines highlighted with the refined finishes,
in neutral and metal plated versions.

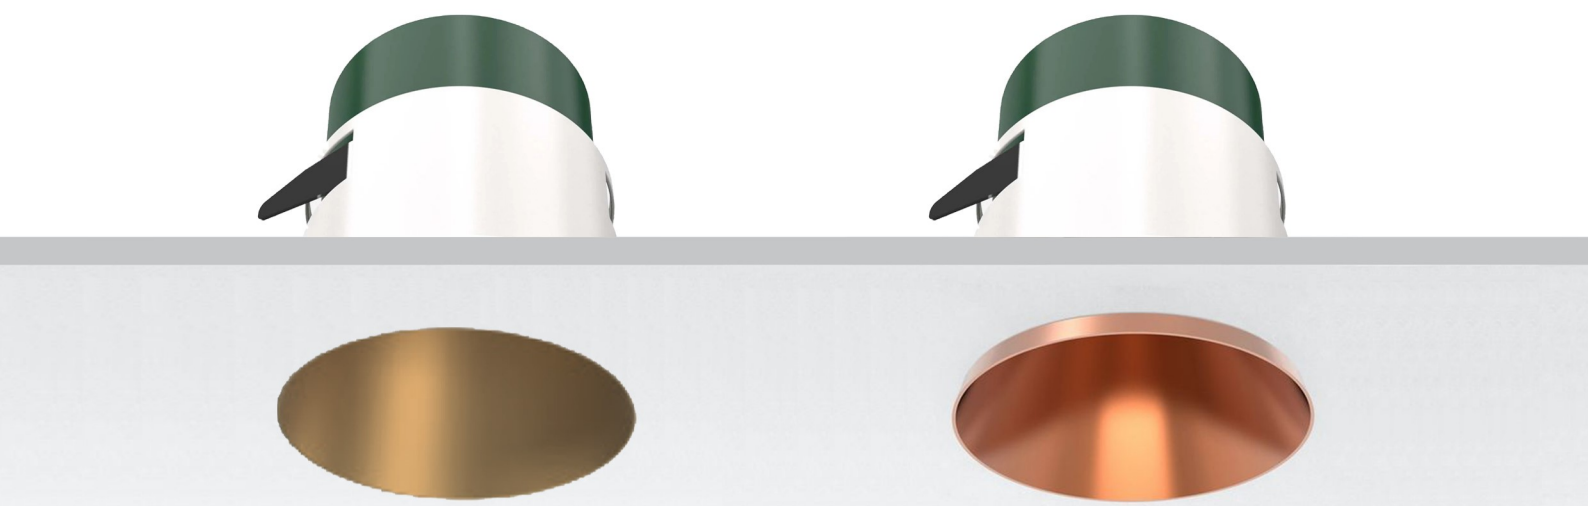

| **Siza - Semi** | 35 Ø / 55 Ø / 75 Ø |
|---|---|
| Power | 8 w / 10 w / 12 w |
| Lumen | 660 lm / 825 lm / 990 lm |
| CRI | >90 |
| Beam Angle | 24°/ 34° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 220 v |
| IP | IP20 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |



| **Siza - Trimless** | 35 Ø / 55 Ø / 75 Ø |
|---|---|
| Power | 8 w / 10 w / 12 w |
| Lumen | 660 lm / 825 lm / 990 lm |
| CRI | >90 |
| Beam Angle | 24°/ 34° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 220 v |
| IP | IP20 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |







## Narrow 24

narrow beam with high light intensity highlight objects and add drama with strong light contrasts

UGR < 19

## Medium 34

highlight objects and stress details set scenes or add drama with strong light contrasts

UGR < 19

# Holl / Recessed Downlight

As recessed spotlights, Holl boldly admit to shining. The round mounting frames are available in several diameters and have an extraordinarily strong character due to the large colored cone with the reflector set low. Different configurations allow for different lighting effects that allow shops or offices to be pleasantly glare-free.


70
55


70
55


85
75


80
85

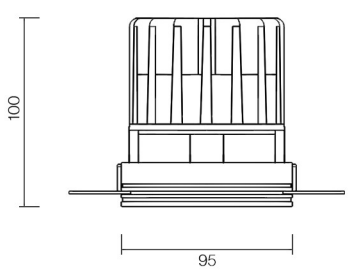
100
95


100
95

Holls are LED recessed light with high performance and efficiency.
The downlights are designed for built-in installation, characterized by exceptional comfort due to low glare; Ideal for even lighting.

| **Holl - Flanged** | 55 Ø / 75 Ø / 95 Ø |
|---|---|
| Power | 10 w / 15 w / 20 w |
| Lumen | 800 lm / 1200 lm / 1600 lm |
| CRI | >80 |
| Beam Angle | 24° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 220 v |
| IP | IP43 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V |



| **Holl - Framless** | 55 Ø / 75 Ø / 95 Ø |
|---|---|
| Power | 7 w / 15 w / 20 w |
| Lumen | 800 lm / 1200 lm / 1600 lm |
| CRI | >80 |
| Beam Angle | 24° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 220 v |
| IP | IP43 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V |




## Narrow 24

narrow beam with high light intensity
highlight objects and add drama with
strong light contrasts

UGR < 19

# Eero / Economy Downlight

eero is the economic downlight solution for public areas with simple appearance design and rigid body. The deep recessed structure brings good glare control and high uniformity. This model Comes with a pre-installed Gu10 LED lamp.

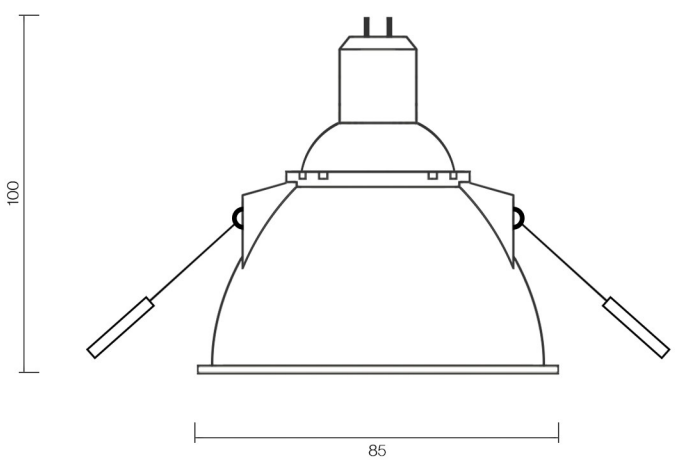
100
85

Eero is the economic downlight solution for public areas with simple appearance design and rigid body. The deep recessed structure brings good glare control and high uniformity. This model Comes with a pre-installed Gu10 LED lamp.

**Eero - Flanged** 8 Ø

| | |
|---|---|
| Power | 7 w |
| Lumen | 560 lm |
| CRI | >80 |
| Beam Angle | 54° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 220 v |
| IP | IP42 |
| Color | ■ □ |
| Dimmable | DALI / Zigbee |




## Flood 54

achieve lux levels suitable for office
spaces wide light cone means
economically less luminaires

UGR < 19

# Alto / Rectangle Downlight

Family of directable lighting devices for surface and recessed installations. The wide variety of finishes available also make the alto stand out as an additional decoration tool. The alto adjustment system made of steel allows the adjustment of the lamp in any directions and on any rotation axes. Recessed optical body which reduces the glaring effect of the lamp.

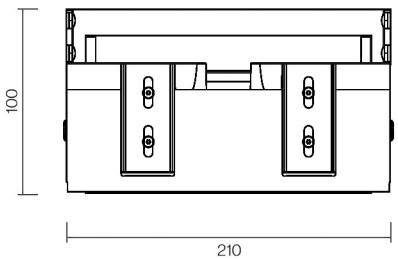
100
210


100
110

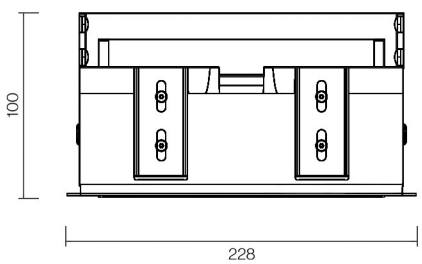
100
228


100
128

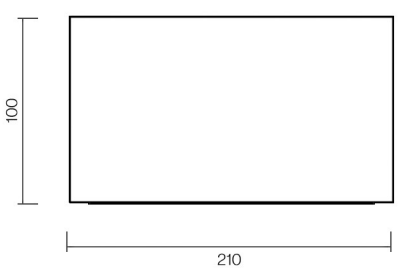
100
210


100
110

For recess mounting in suspended ceilings of up to 30 mm thick. 1 or 2 lamp adjustable-system. Pressed steel powder-coated recessed housing, extruded aluminum recessed trim frame for use with false ceiling systems. Steel “compass-type” adjustment mechanism, powdercoated matt black.
For halogen versions: innovative steel bracket fixing system, painted black, with allen key locking mechanism.



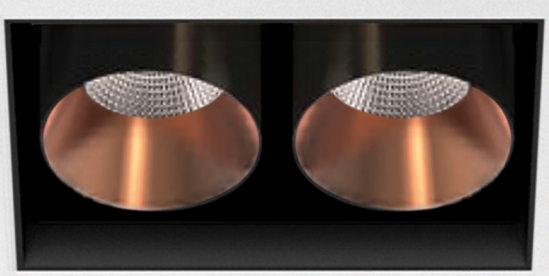



### Alto 1x - Framless

| | |
|---|---|
| Power | 8 w / 12 w |
| Lumen | 660 lm / 990 lm |
| CRI | >90 |
| Beam Angle | 24°/ 34° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 220 v |
| IP | IP54 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |

### Alto D - Framless

| | |
|---|---|
| Power | 16 w / 24 w |
| Lumen | 1320 lm / 1980 lm |
| CRI | >90 |
| Beam Angle | 24°/ 34° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 220 v |
| IP | IP54 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |

### Alto 1x - Flanged

| | |
|---|---|
| Power | 8 w / 12 w |
| Lumen | 660 lm / 990 lm |
| CRI | >90 |
| Beam Angle | 24°/ 34° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 220 v |
| IP | IP54 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |

### Alto D - Flanged

| | |
|---|---|
| Power | 16 w / 24 w |
| Lumen | 1320 lm / 1980 lm |
| CRI | >90 |
| Beam Angle | 24°/ 34° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 220 v |
| IP | IP54 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |



### Alto 1x - Surface

| | |
|---|---|
| Power | 8 w / 12 w |
| Lumen | 660 lm / 990 lm |
| CRI | >90 |
| Beam Angle | 24°/ 34° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 220 v |
| IP | IP54 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |

### Alto D - Surface

| | |
|---|---|
| Power | 16 w / 24 w |
| Lumen | 1320 lm / 1980 lm |
| CRI | >90 |
| Beam Angle | 24°/ 34° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 220 v |
| IP | IP54 |
| Color | |
| Dimmable | DALI / 0-10V / Zigbee |







## Narrow 24

narrow beam with high light intensity highlight objects and add drama with strong light contrasts

UGR < 19

## Medium 34

highlight objects and stress details set scenes or add drama with strong light contrasts

UGR < 19

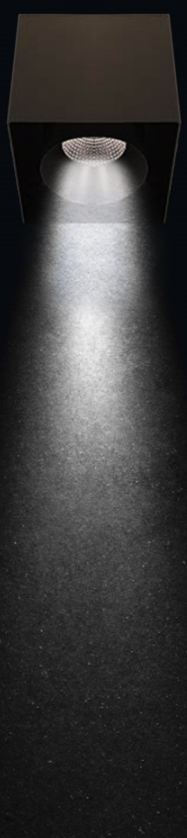

# Ito / Recessed Wall Washer

High-power recessed elements with avant- garde LED modules. Compact size with maximum integration into the architecture. Comes in fixed, wall-washer and adjust-able versions.

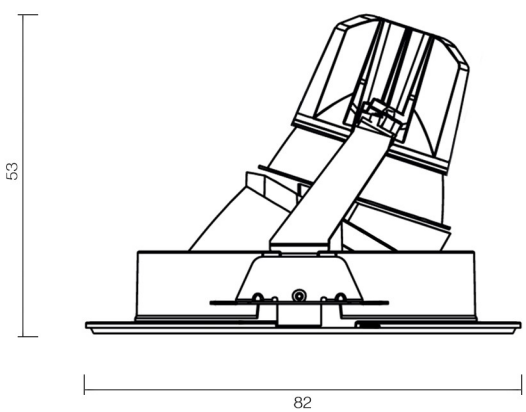
53
82

With its symmetric or asymmetric lighting experience, ito is perfect for any project.
Its identical design allows you to combine both versions, in order to create different lighting effects in the same room. This makes it a very versatile lighting solution.



**Ito**

| | |
|---|---|
| Power | 5 w |
| Lumen | 540 lm |
| CRI | >80 |
| Beam Angle | 110 |
| CCT | 3000 k / 4000 k |
| Input Voltage | 220 v |
| IP | IP54 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V |




## Wallwasher

uniform light distribution on vertical surfaces
generates a contemplative atmosphere and gives space a broader impression
create light effect comparable to diffused daylight

# Point / Surface Mount Downlight

A collection of Surface and pendant elements for interior installations that include avant-garde LED solutions and luminaires with a traditional light source. A wide variety of sizes and finishes that ensure a perfect integration in all environments. Optic body to ensure an excellent visual comfort.

Wires suspend the luminous bodies in the air.
The pendant design is made to be minimalistic, linear shapes for a great visual effect, providing both accent and atmosphere  lighting. Ideal in combination with other fittings, to meet both formal and functional demands.

**Optics**

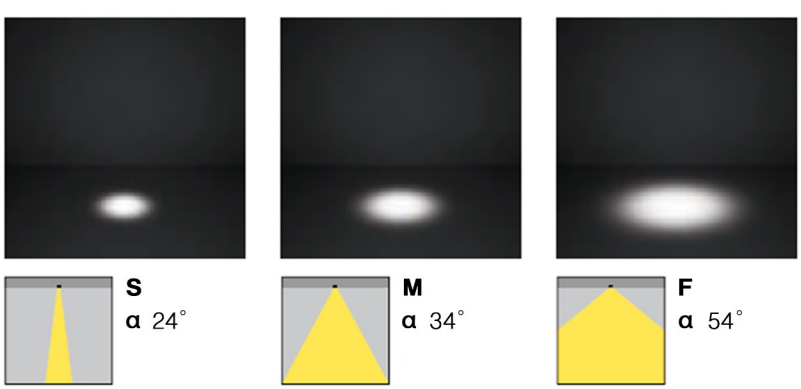

**Point - Surface** 4 Ø / 6 Ø / 8 Ø

| | |
|---|---|
| Power | 7 w / 10 w / 12 w |
| Lumen | 560 lm / 800 lm / 960 lm |
| CRI | >80 |
| Beam Angle | 24°/ 34° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 220 v |
| IP | IP54 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V / Zigbee |

**Point - Wall Light** 4 Ø / 6 Ø

| | |
|---|---|
| Power | 7 w / 10 w / 12 w |
| Lumen | 560 lm / 800 lm / 960 lm |
| CRI | >80 |
| Beam Angle | 24°/ 34° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 220 v |
| IP | IP54 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V / Zigbee |

**Point - Pendant** 4 Ø / 6 Ø

| | |
|---|---|
| Power | 7 w / 10 w / 12 w |
| Lumen | 560 lm / 800 lm / 960 lm |
| CRI | >80 |
| Beam Angle | 24°/ 34° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 220 v |
| IP | IP54 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V / Zigbee |

# Broke / Adjustable Spotlight

Broke is a modern and stylish spotlight with a minimalist design, made of aluminium. The light source provides a nice and good light spread downwards. The surfce -mounted spotlight can also be adjusted in angle.
For example, place several in a row in a longer corridor or several in a group in a larger room.

Broke is a system of adjustable spotlights with a basic shape, yet a rich performance.
A simple cylinder protrudes from the surface with varying heights for the different versions. Its volume is divided to direct emission in space, the mobile part hosts to the source and the optical devices required to produce for different power and different beam angles.

**Optics**

**S**
α 24°

**M**
α 34°

65 ↪ 66

**Broke - Surface**

| | |
|---|---|
| Power | 12 w |
| Lumen | 960 lm |
| CRI | >90 |
| Beam Angle | 24° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 220 v |
| IP | IP43 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V |

# Rotary / Adjustable Spotlight

Two cylindrical bodies which interact with one another to allow limitless lighting solutions thanks to a side pivot. Rotary is an adjustable single emission light for wall or ceiling.

Small but powerful the Rotary is perfect for modern interiors where a high output, surface mounted spot is required. With a 90° tilt, and 350° rotation, it provides adjustable illumination.

**Optics**



**M**
α 34°

| **Rotary - Surface** | 7 Ø / 10 Ø |
|---|---|
| Power | 7 w / 12 w |
| Lumen | 560 lm / 960 lm |
| CRI | >80 |
| Beam Angle | 34° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 220 v |
| IP | IP42 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V |

# Snoop / Recessed Adjustable Spotlight

This is the adjustable pull out recessed spot light module. This allows you to swap between a downlight or spotlight style through a simple mechanism whether you want something more discreet with a straight beam of light or an architectural aesthetic with adjustable beam.

This is the adjustable pull out recessed spot light module. This allows you to swap between a downlight or spot light style through a simple mechanism whether you want something more discreet with a straight beam of light or an architectural aesthetic with adjustable beam. With 2 power versions/sizes available, choose between higher or lower illumination effects or even mix and match for different situations. The head can be tilted from 0-90 degrees and rotated by 355 degrees to light almost any angle which could change depending on the scenario.

**Optics**



**M**
α 34°

| **Snoop - Recessed** | 7 Ø / 10 Ø |
|---|---|
| Power | 5 w / 12 w |
| Lumen | 550 lm / 1320 lm |
| CRI | >90 |
| Beam Angle | 24° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 220 v |
| IP | IP42 |
| Color | ■ □ |
| Dimmable | DALI / Zigbee |

# Signal / Adjustable Spotlight

Versatile light fittings for surface mounted applications, that generate luminous geometries and volumes in the space. Using replaceable optical accessories, these fittings can both be used for general or accent lighting in any interior context combining functionality and elegant design. The rigorous design allows applications in any interior applications, harmonising style and functionality.

## Mounting Options

Multiple mounting options available:
- gearbox with on and off or internal phasedim or DALI driver
- connection box plasterkit for recessed mounting

## Optics

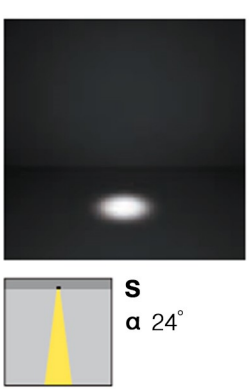

| **Signal - Short** | 4 Ø / 6 Ø |
|---|---|
| Power | 7 w / 10 w / 15 w |
| Lumen | 840 lm / 1200 lm / 1500 lm |
| CRI | >90 |
| Beam Angle | 24°/ 34° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 220 v |
| IP | IP42 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V / Zigbee |

| **Signal - Long** | 4 Ø / 6 Ø |
|---|---|
| Power | 7 w / 10 w / 15 w |
| Lumen | 840 lm / 1200 lm / 1500 lm |
| CRI | >90 |
| Beam Angle | 24°/ 34° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 220 v |
| IP | IP42 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V / Zigbee |

# Arte / Shapeable Spotlight

Arte, specially designed for museums, galleries, exhibitions, residential environments, sales and showroom areas etc. It produces an evenly illuminated “frame” for highlighting artwork, exhibits etc. It uses the framing accessory for sharp-edged and rectangular illumination of surface, the front lens to adjust the sharpness and angle to suit the objects. Lens can be interchangeable for changing different angles. Neat and clear light cut makes the exhibits spectacular themselves.

**Optics**

360° rotation around the vertical axis and +10° -90° angle
on horizontal plane with mechanical aiming lock.

the external metal fi ns are used to adjust and shape the light beam;
the optical group can be rotated by 360° in relation to the optical axis.

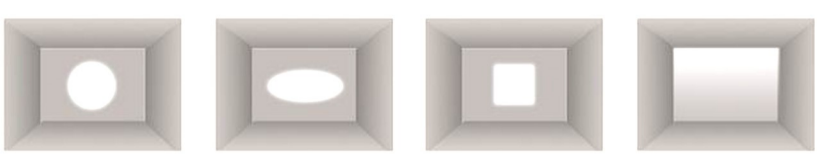

Round Oval Square Wallwash

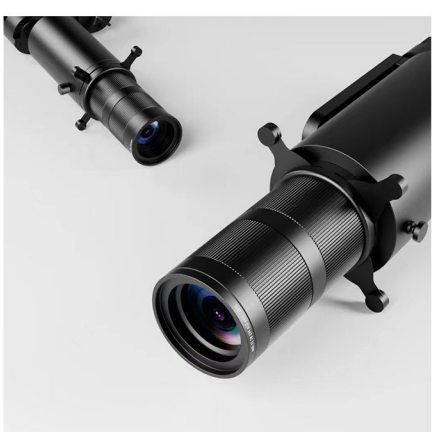

| **Arte - Surface** | 4 Ø |
|---|---|
| Power | 12 w |
| Lumen | 1440 lm |
| CRI | >90 |
| Beam Angle | 20°- 55° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 220 v |
| IP | IP20 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V |

# Keep it coming”

# Decorative Lighting



Beam System

Page 86

Patent System

Page 92



Unity System

Page 100



Loop

Page 114



Glitter

Page 120

Dizzy

Page 126

Ginger

Page 132



Lightsaber

Page 138

Fold

Page 144

# Beam-Structure / Magnetic Light

Tubular structure compatible with a wide range of light fixtures with magnetic fastening and mechanical safety locking. Regulation and control with universal protocols.

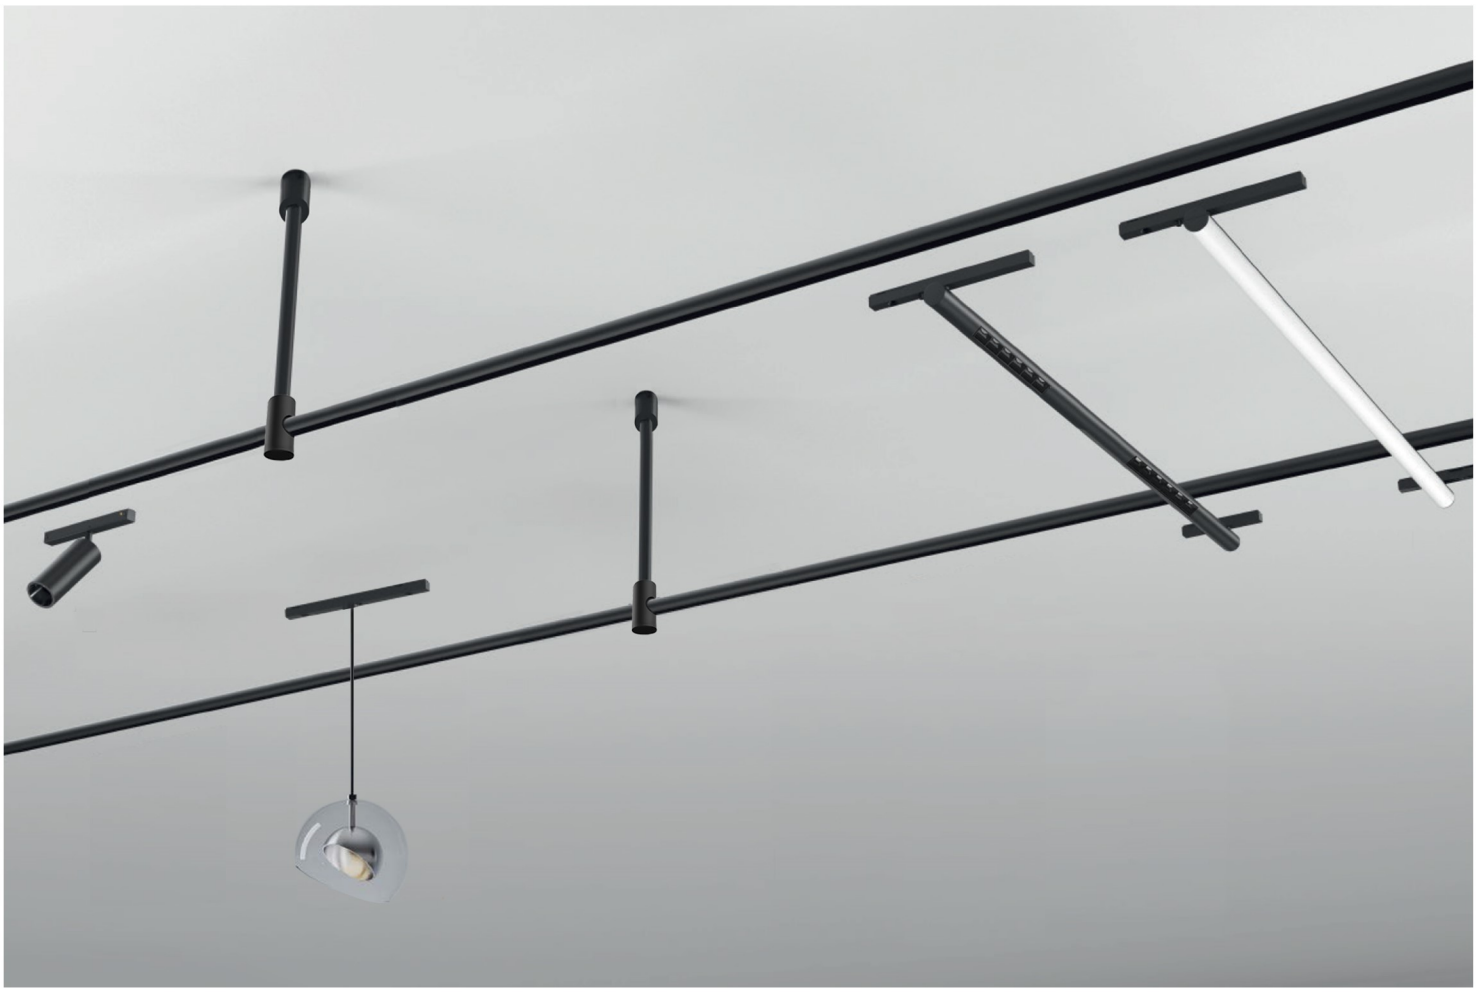

The new icon in lighting structures: thanks to its unique design and magnetic technology Infra-Structure offers a singular way to grow your lighting design in the architectural space. Compatible with all control systems.

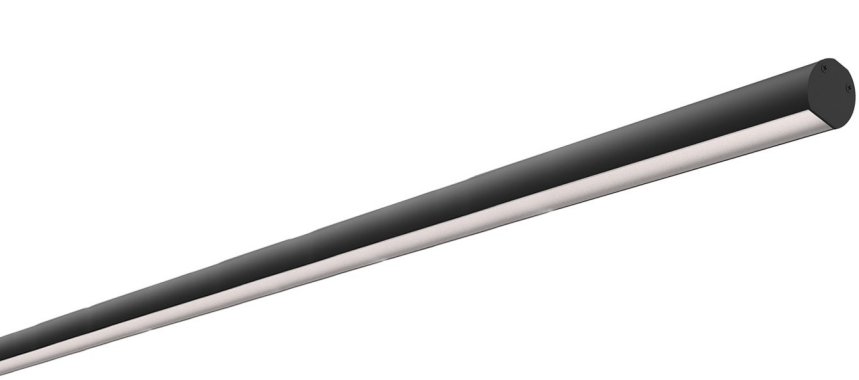

**LIGHT TUBE / SUSPENSION PANEL**
Highly efficient opal diffuser, which allows for uniform distribution and guarantees high levels of visual comfort.

**SUSPENSION SPOT**
Compact projector with integrated controller and optical cut-off.

**SUSPENSION GLASS**
Highly efficient opal diffuser, which allows for uniform distribution and guarantees high levels of visual comfort.

| **Lina - Beam** | 90 cm / 120 cm |
|---|---|
| Power | 12 w / 18 w / 24 w |
| Lumen | 1800 lm / 2400 lm |
| CRI | 90 |
| Beam Angle | 120° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V / Zigbee |

| **Pounto - Beam** | 90 cm / 120 cm |
|---|---|
| Power | 12 w / 24 w |
| Lumen | 1200 lm / 2400 lm |
| CRI | 90 |
| Beam Angle | 36° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V / Zigbee |

| **Net - Beam** | 4 Ø |
|---|---|
| Power | 7 w |
| Lumen | 700 lm |
| CRI | 90 |
| Beam Angle | 24° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V / Zigbee |

| **Hoy - Beam** | 4 Ø |
|---|---|
| Power | 7 w |
| Lumen | 700 lm |
| CRI | 90 |
| Beam Angle | 24° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V / Zigbee |

| **Nagoya - Beam** | 35 Ø |
|---|---|
| Power | 12 w |
| Lumen | 960 lm |
| CRI | 90 |
| Beam Angle | 80° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V / Zigbee |

| **Solaris - Beam** | 11 Ø |
|---|---|
| Power | 5 w / 8 w |
| Lumen | 540 lm / 840 lm |
| CRI | 90 |
| Beam Angle | 36° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V / Zigbee |

| **Apollo - Beam** | 15 Ø |
|---|---|
| Power | 6 w |
| Lumen | 580 lm |
| CRI | 90 |
| Beam Angle | 180° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V / Zigbee |

| **Buble - Beam** | 10 Ø |
|---|---|
| Power | 5 w |
| Lumen | 540 lm |
| CRI | 90 |
| Beam Angle | 360° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 48 v |
| IP | IP20 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V / Zigbee |

# Patent System / Modular Linear Light

Patent is a modular system that is completely changing the approach to high performance diffused direct and indirect lighting. The singular modules are connected by quick connectors, which enable rapid installation and a free 360° rotation.

The different elements allow the composition of continuous lines and edges, with a luminous efficiency and an excellent diffusion degree, through an opaline diffuser in polycarbonate.
The system has been studied to provide user friendly maintenance.
Patent has efficiently solved the problem of replacing LED built-in sources, whereby the compromised lighting elements can be easily changed.

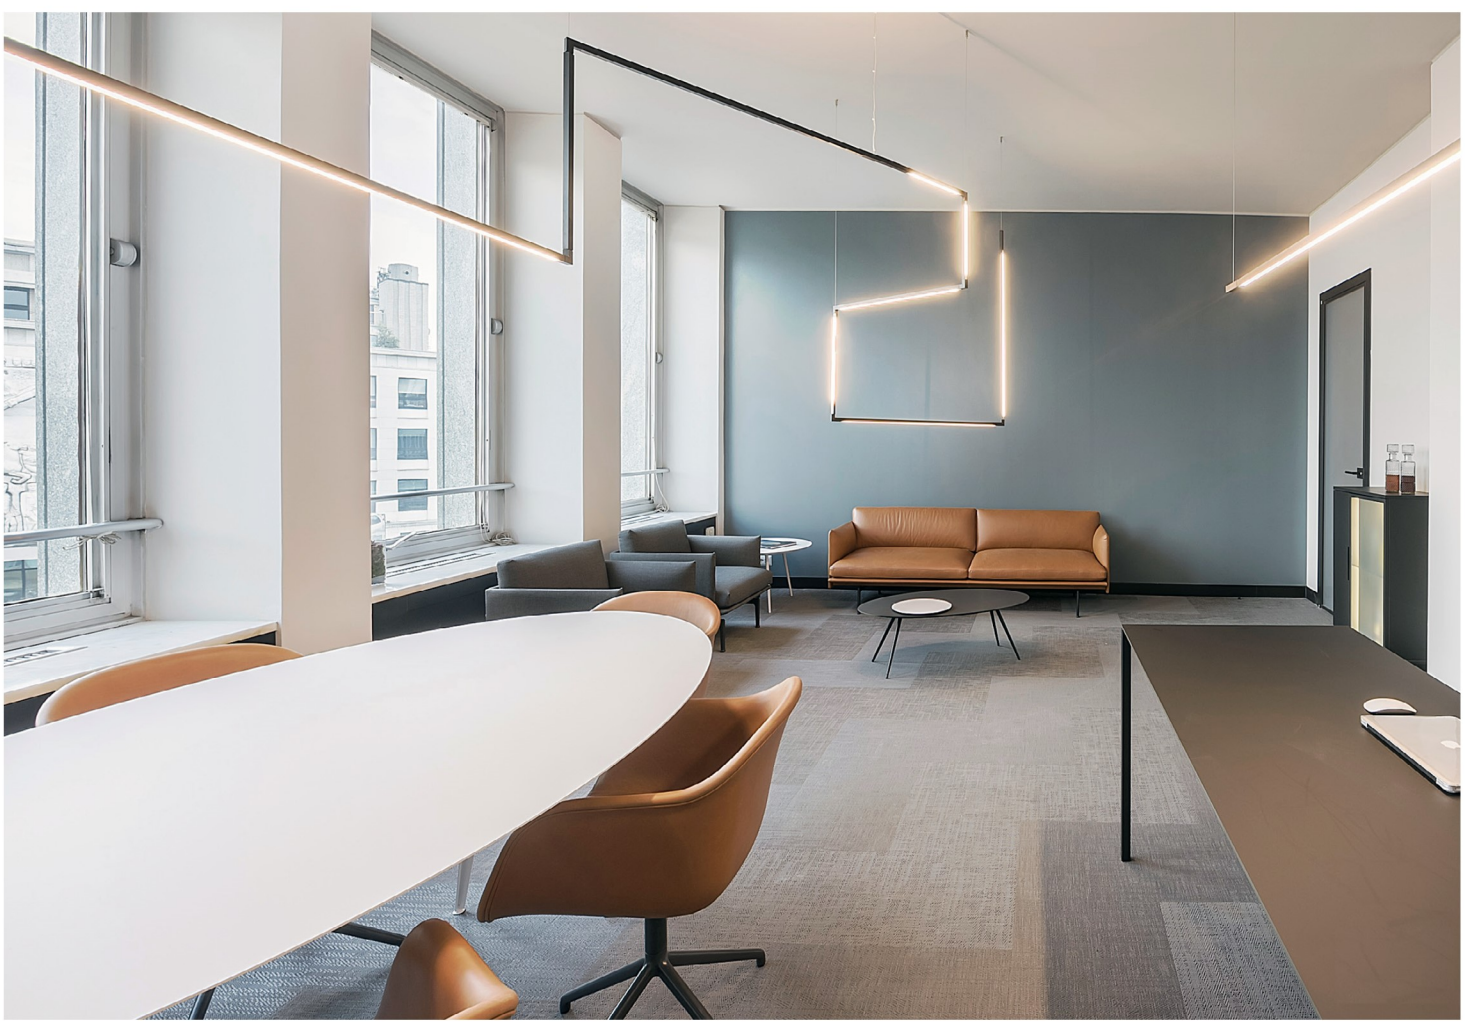

The Segment section includes two types of lighting sources, one with plain diffused LED light, another with wings that increase the visual comfort reducing the glare effect. In addition, there is also a blind bar that is used only as a link.

# Connection

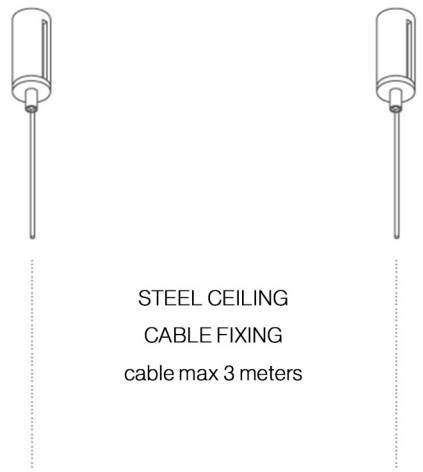










Connection elements built with two or three jacks. Available in black or white liquid painted finish. Metal fixing accessories included  (wire max length 3 meters).

STEEL CEILING
CABLE FIXING
cable max 3 meters







| **Linear - Patent** | 30 cm / 60 cm / 90 cm / 120 cm |
|---|---|
| Power | 7 w / 14 w / 21 w / 28 w |
| Lumen | 700 lm / 1400 lm / 2100 lm / 2800 lm |
| CRI | 80 |
| Beam Angle | 120° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 24 v |
| IP | IP20 |
| Color | ■ □ |
| Dimmable | DALI / 0-10V |

# Unity System / Rod with LED Light

All Views of the Parkes Are Different. symmetrical and Asymmetric but in Balance. Modular Place LED Circuit Boards and Tiny Metal Rods Are The Only Two Basic Elements of this Light Fixture. They Give the Lamp Its Structure and Shape.

straight rod fixtures with CHIP ON BOARD LEDS

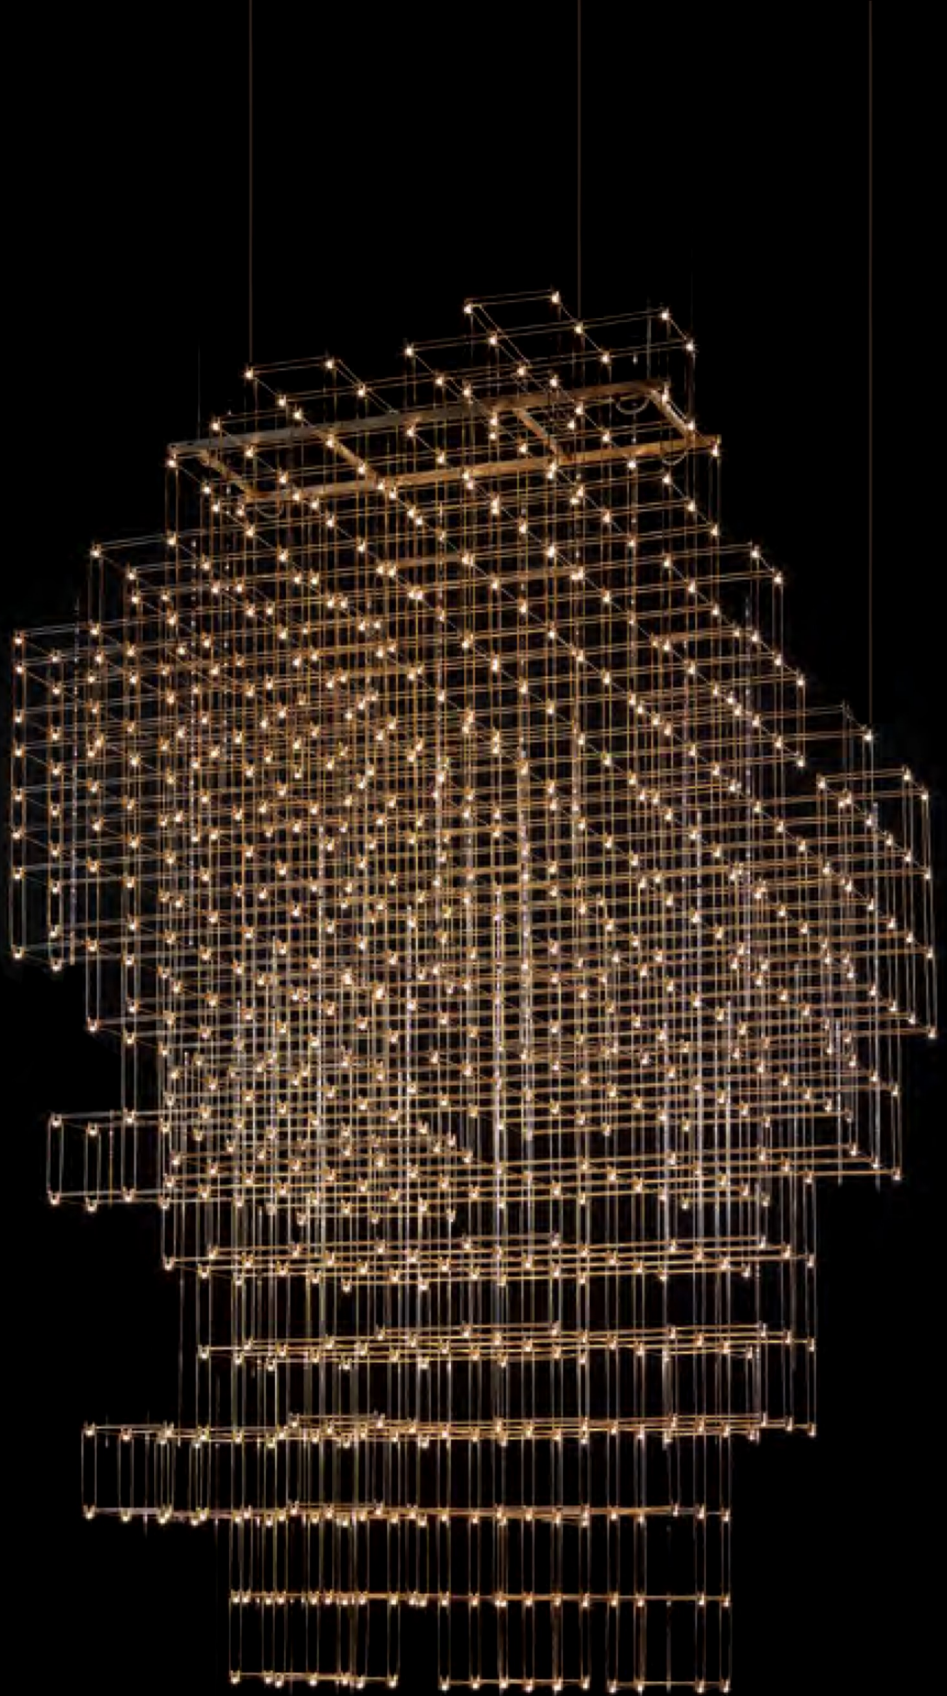

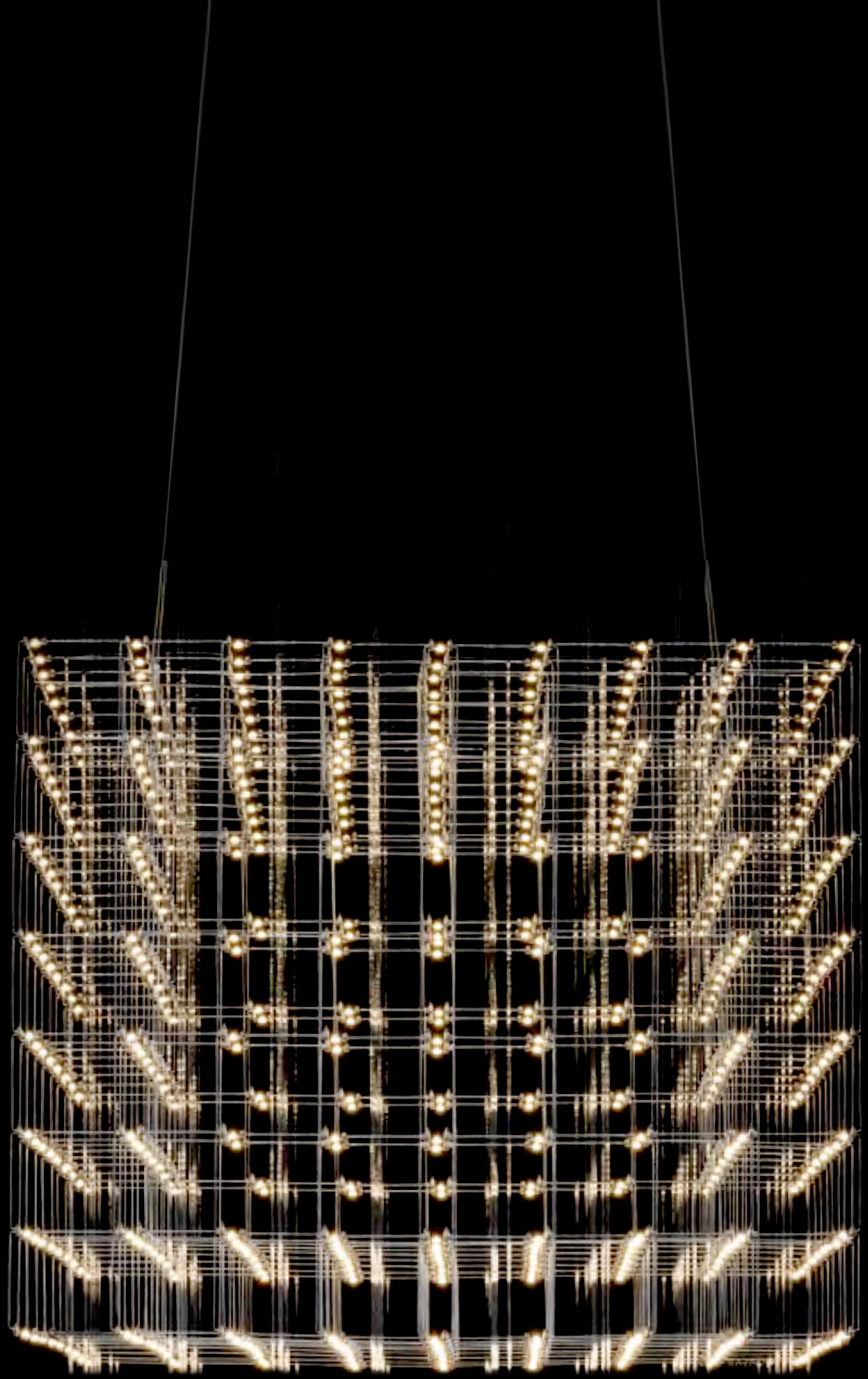

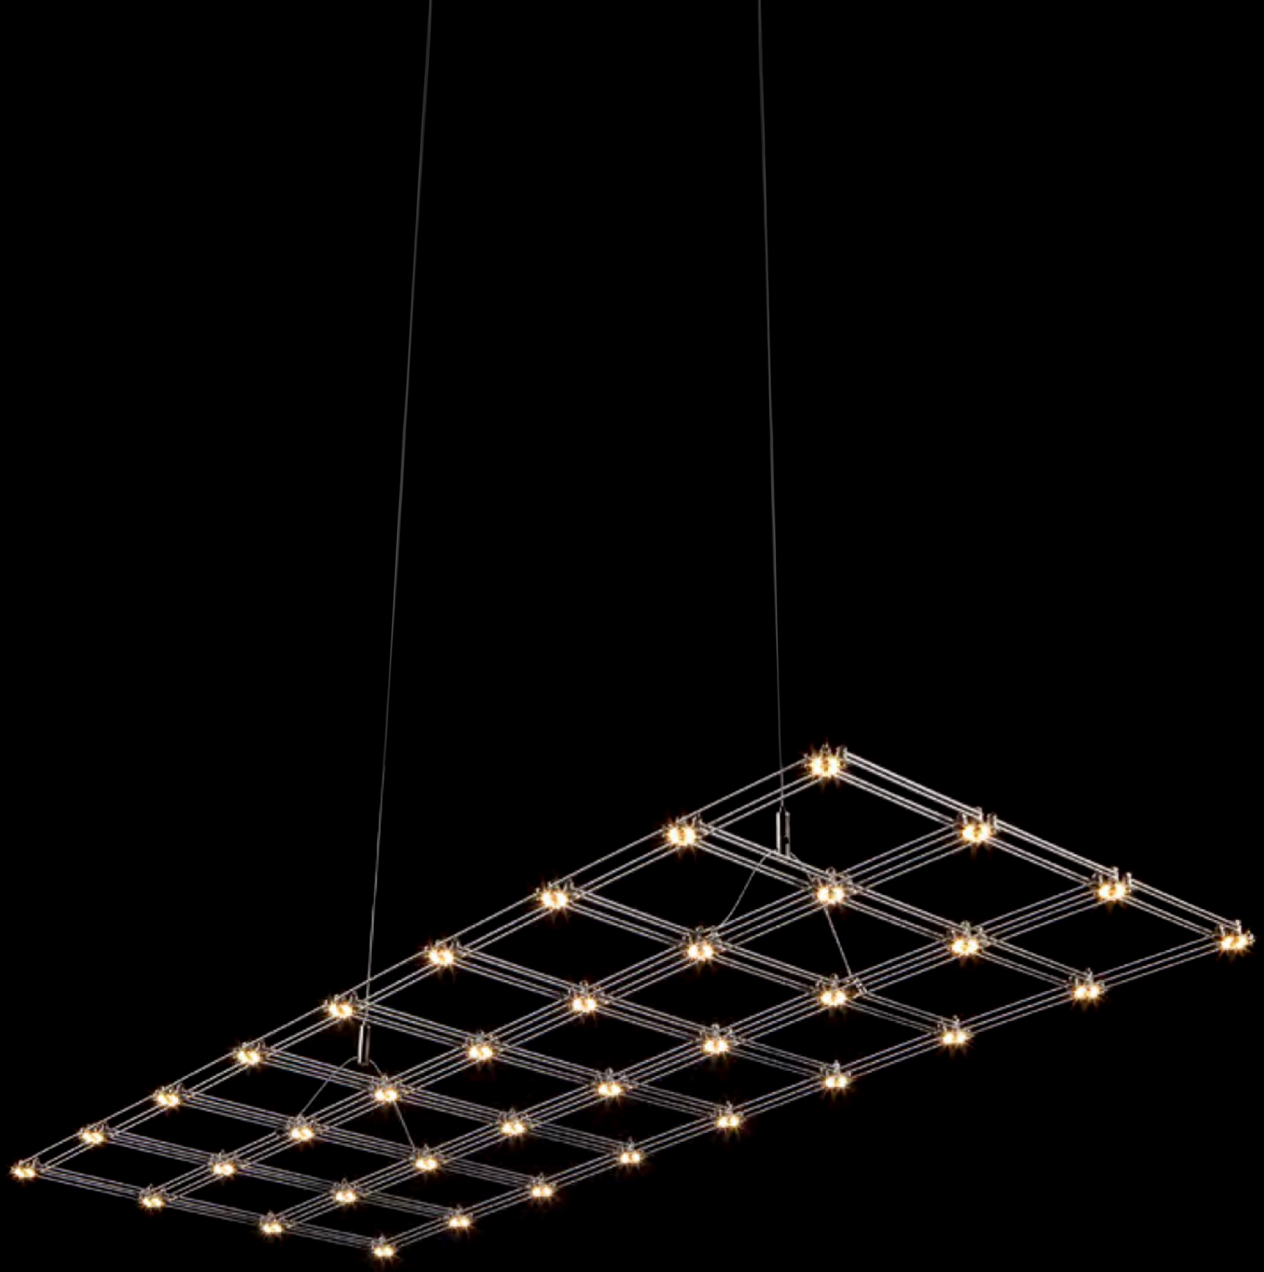

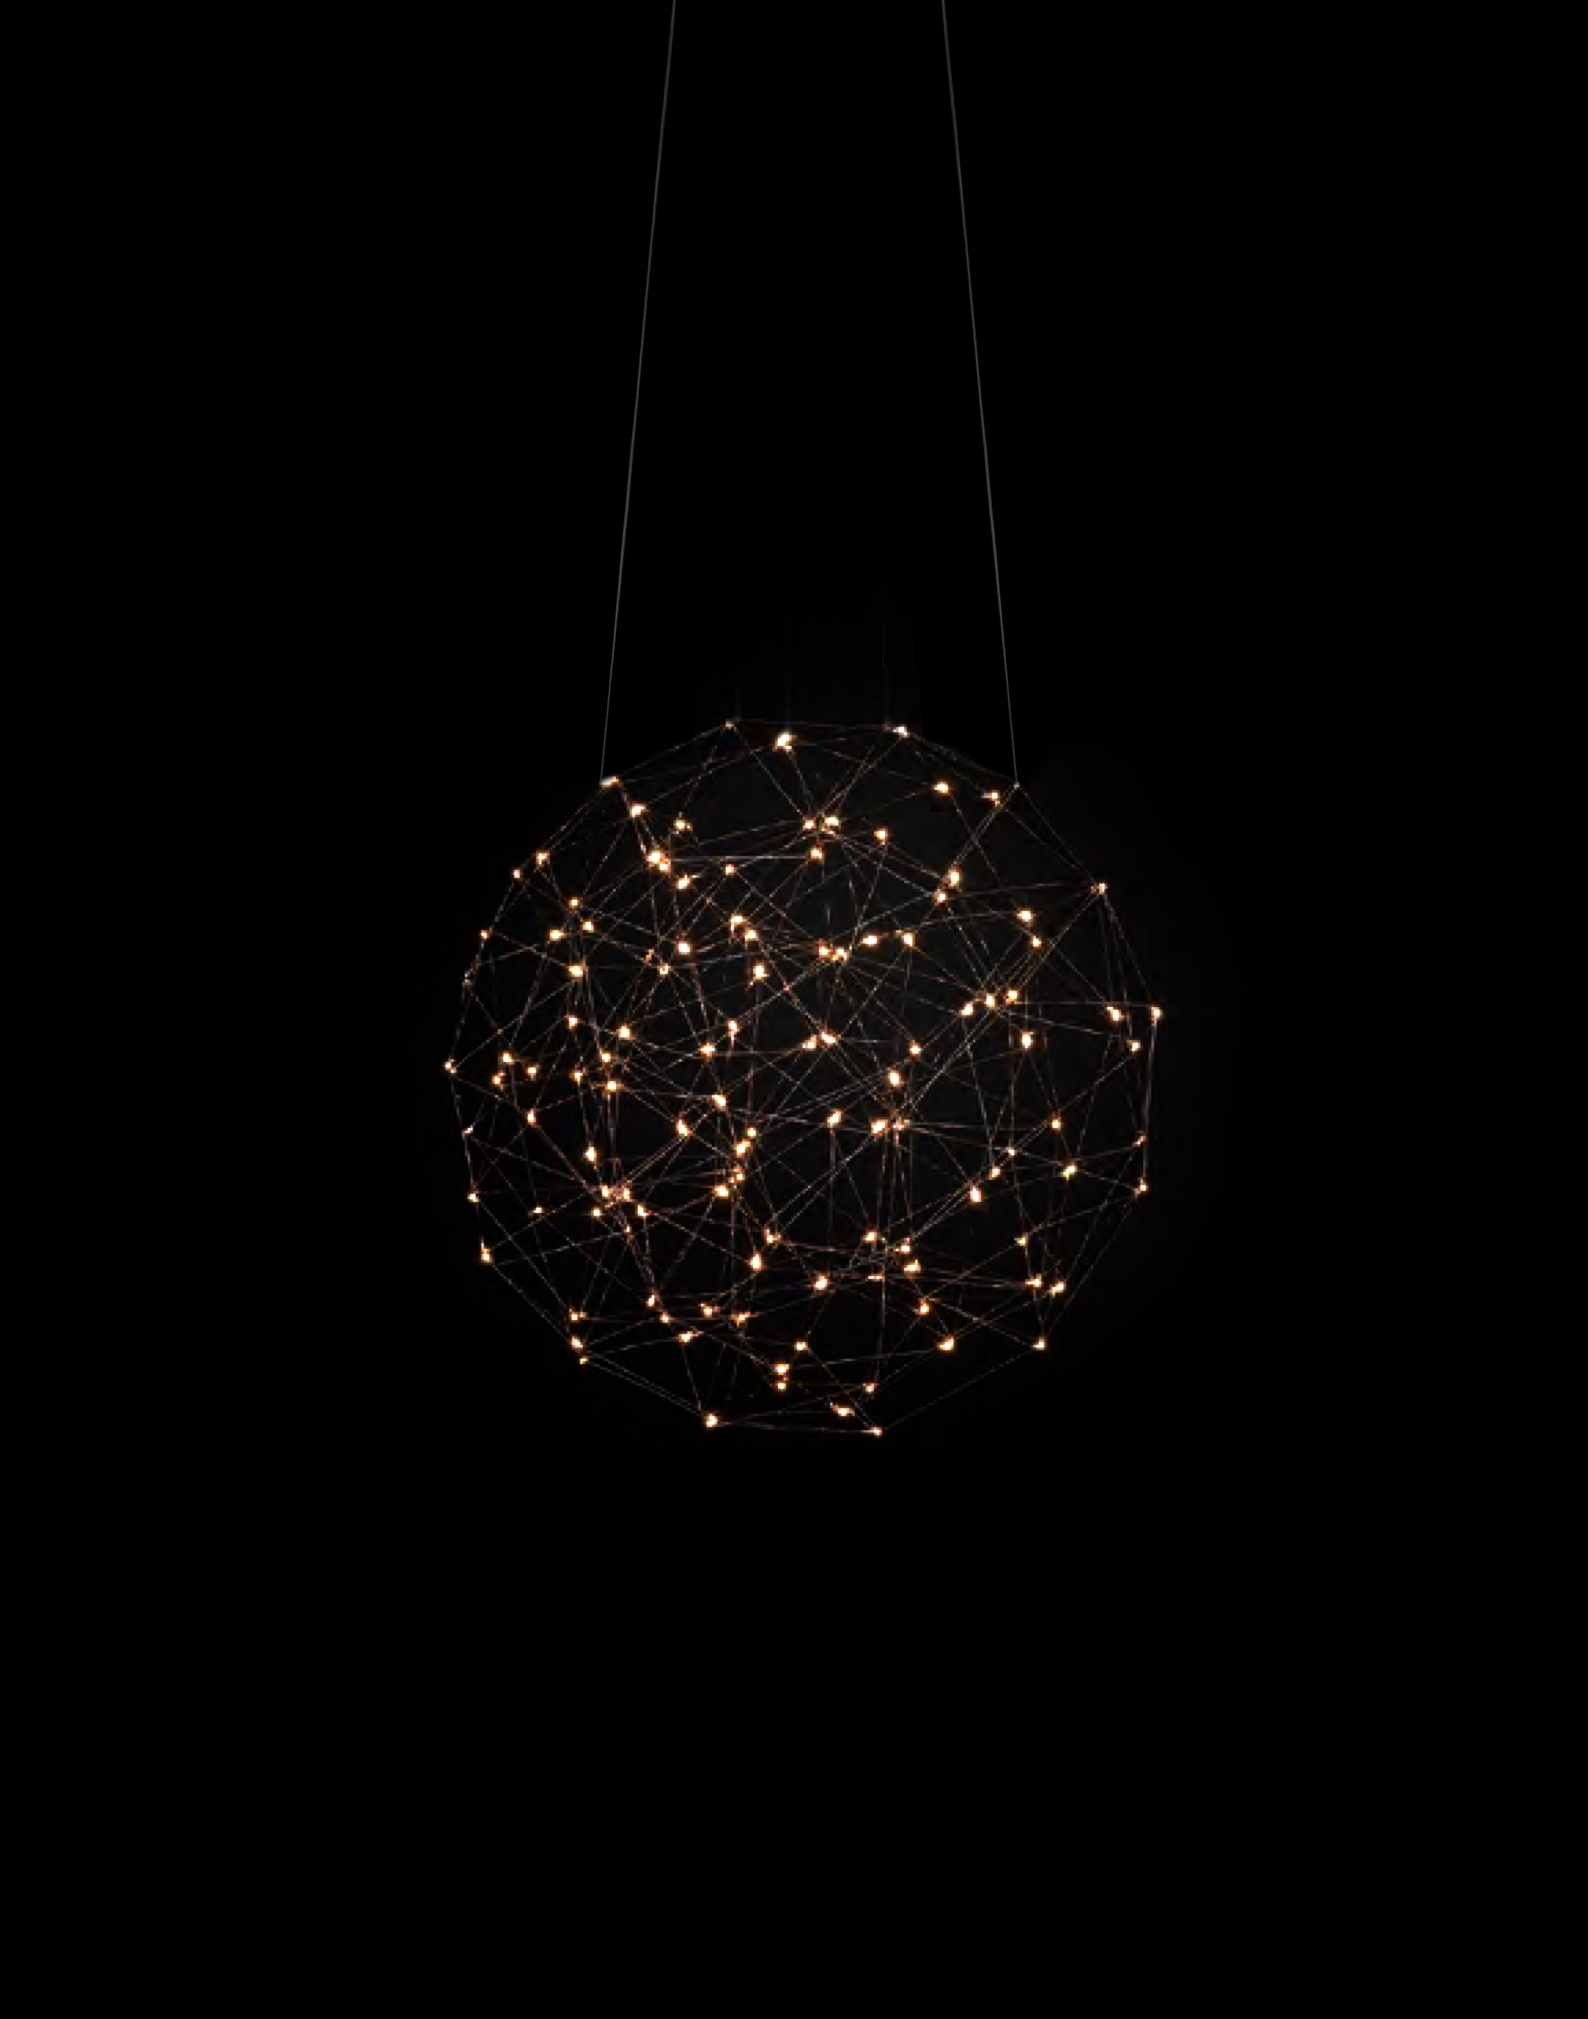

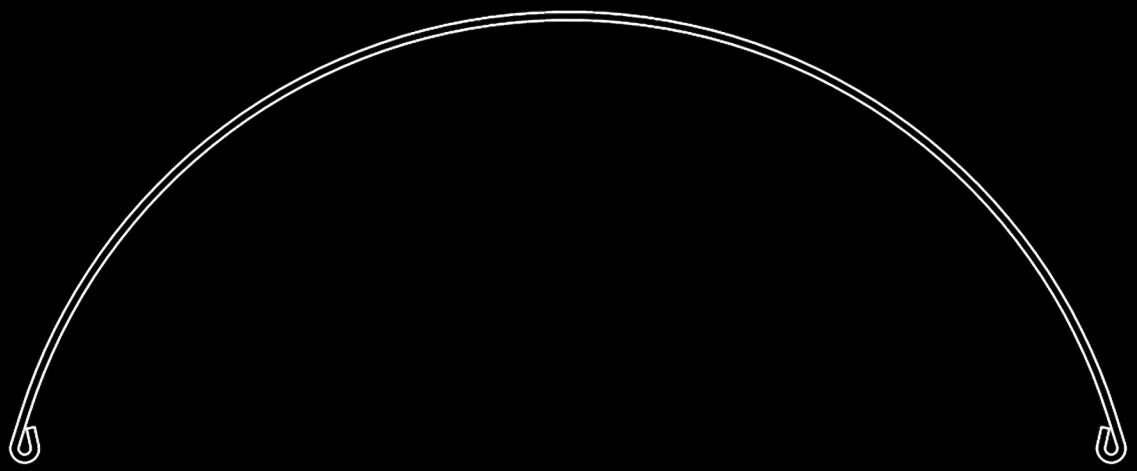

curled rod fixtures with CHIP ON BOARD LEDS

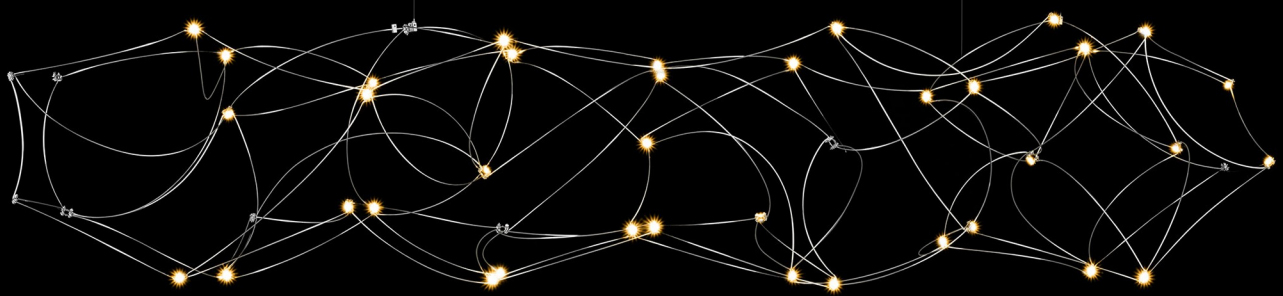

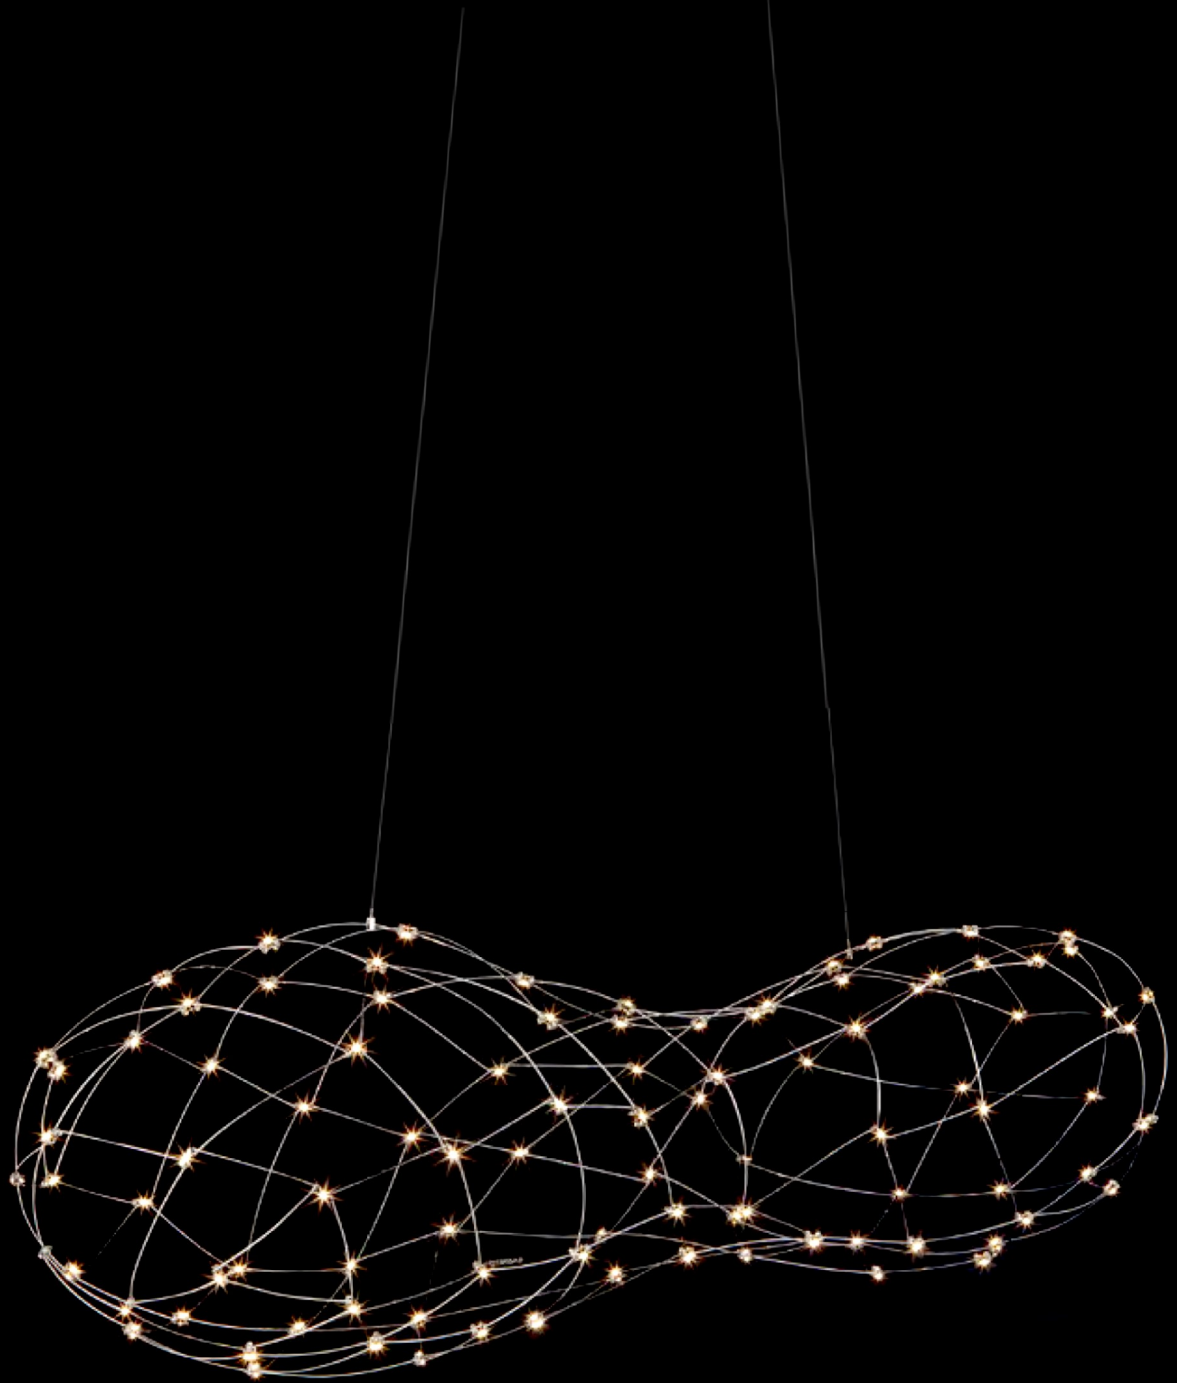



| **Unity - 1 Cube** | 14 cm / 20 cm |
|---|---|
| Power | 4 w |
| Lumen | 360 lm |
| CRI | 80 |
| Beam Angle | 34° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 12 v |
| IP | IP20 |
| Color | |
| Dimmable | On-Off |

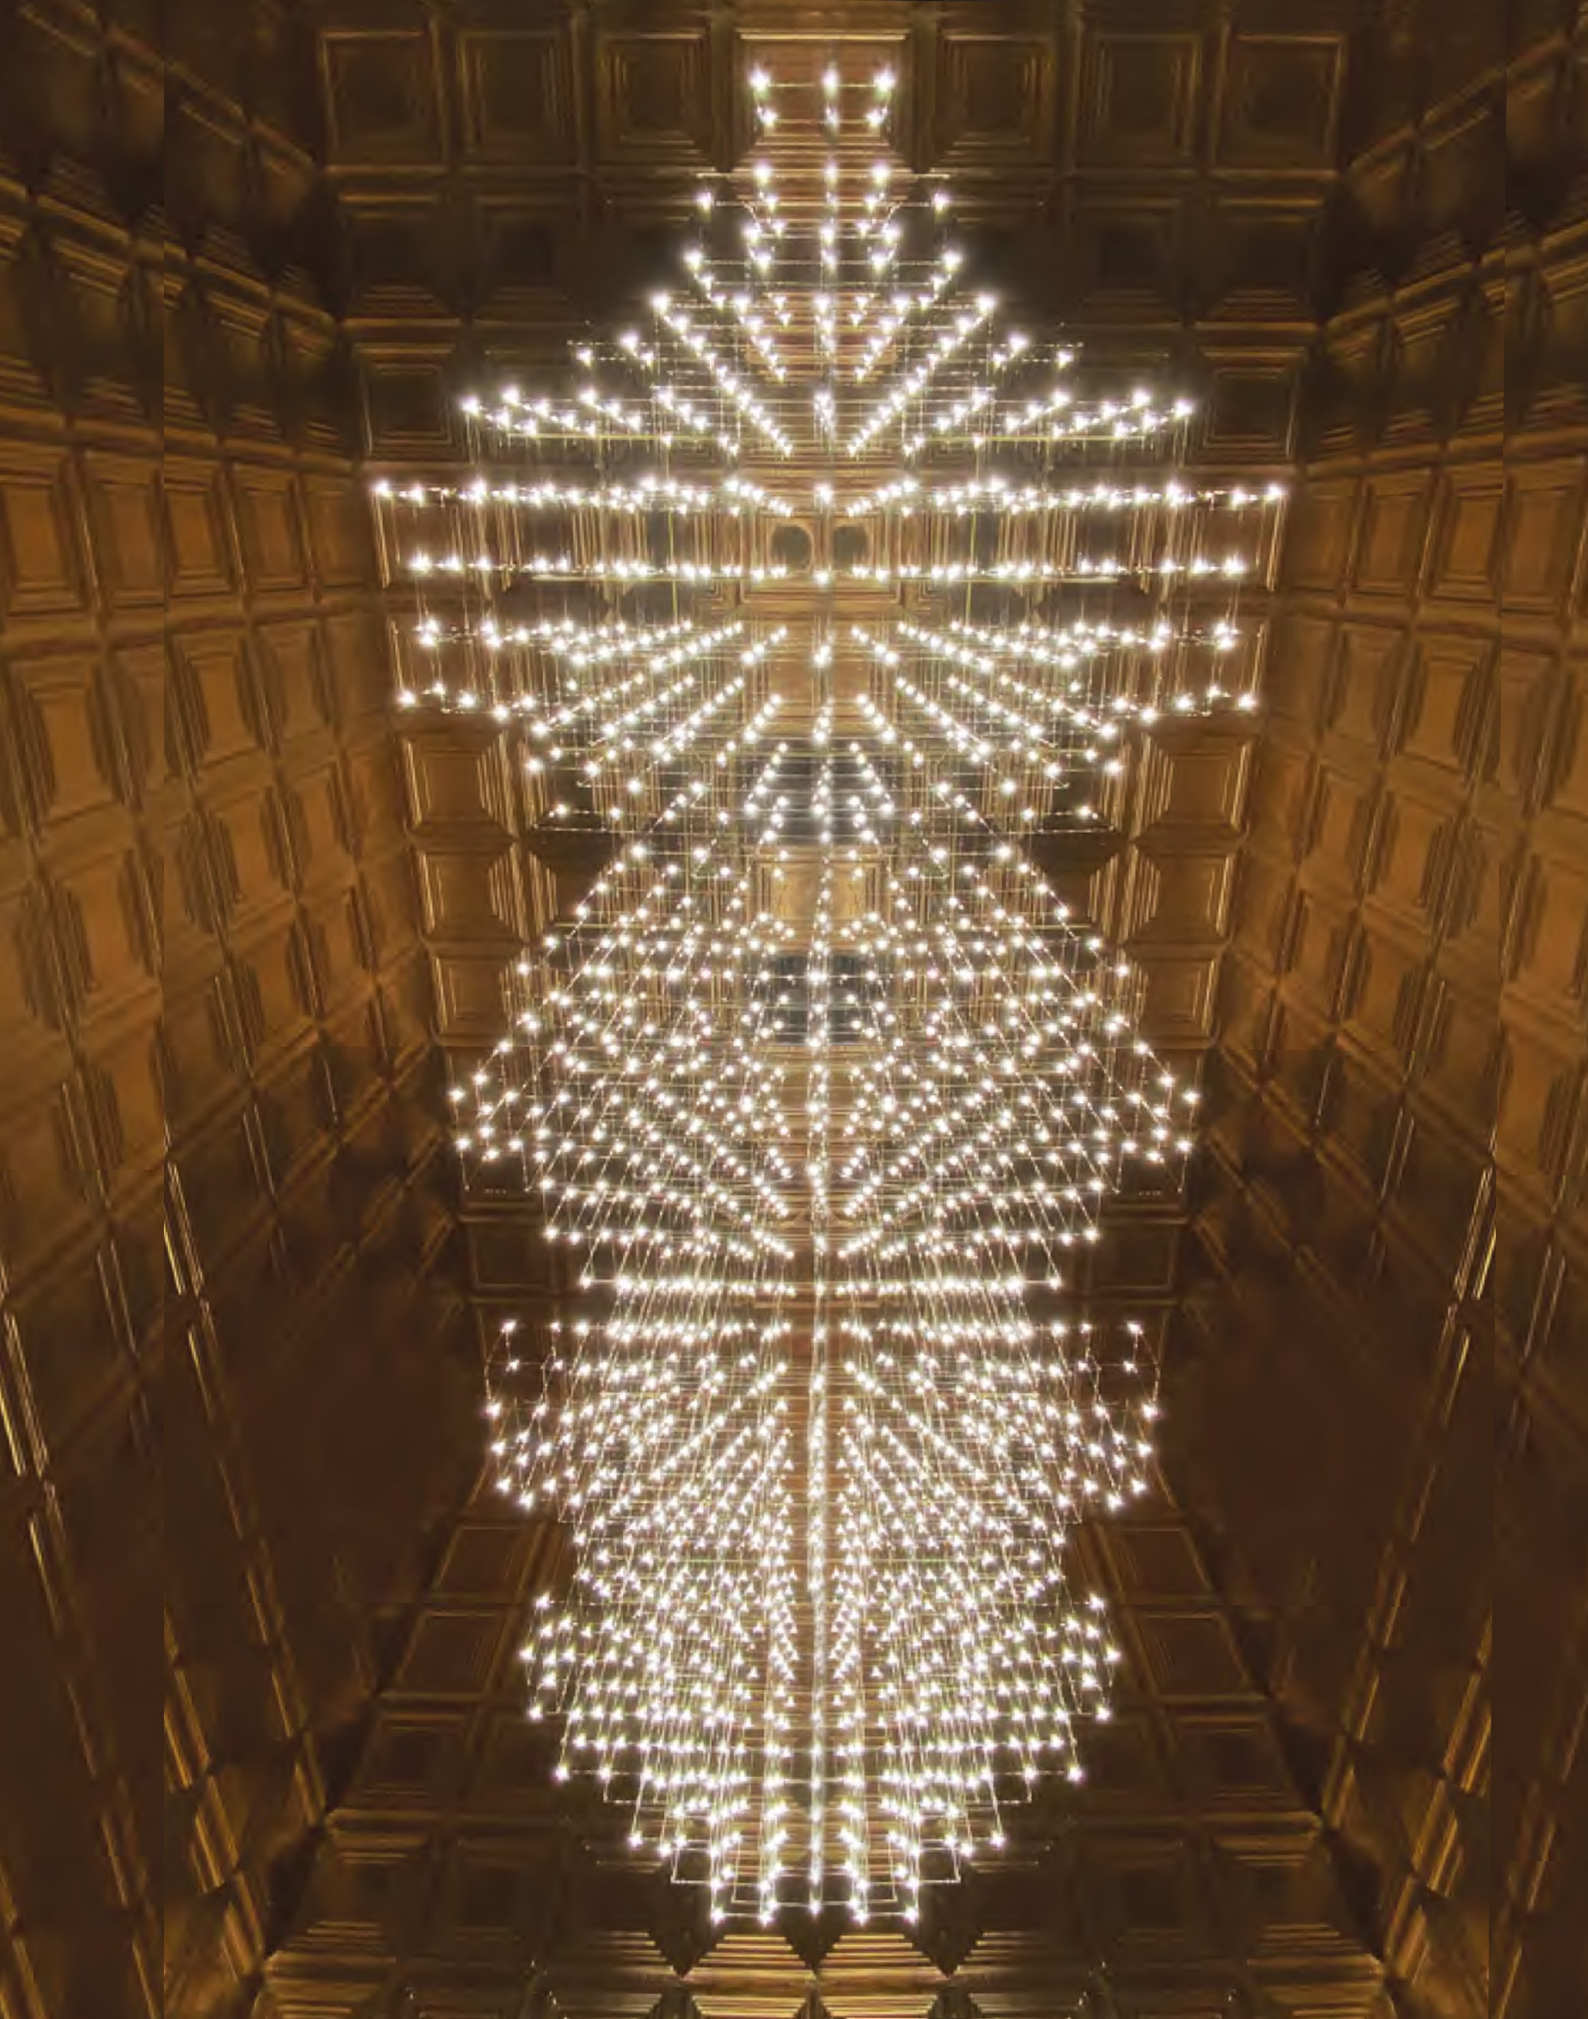

# Loop System / Flexible Neon Light

Alphabet of light is a lighting system composed of linear and circular elements that allows you to walk with light. Thanks to these modules it is possible to create infinite structures of light, from the most essential to the most complex, following the architecture and functionality of the environments. The modules are available in several sizes and versions: wall, ceiling or suspension.

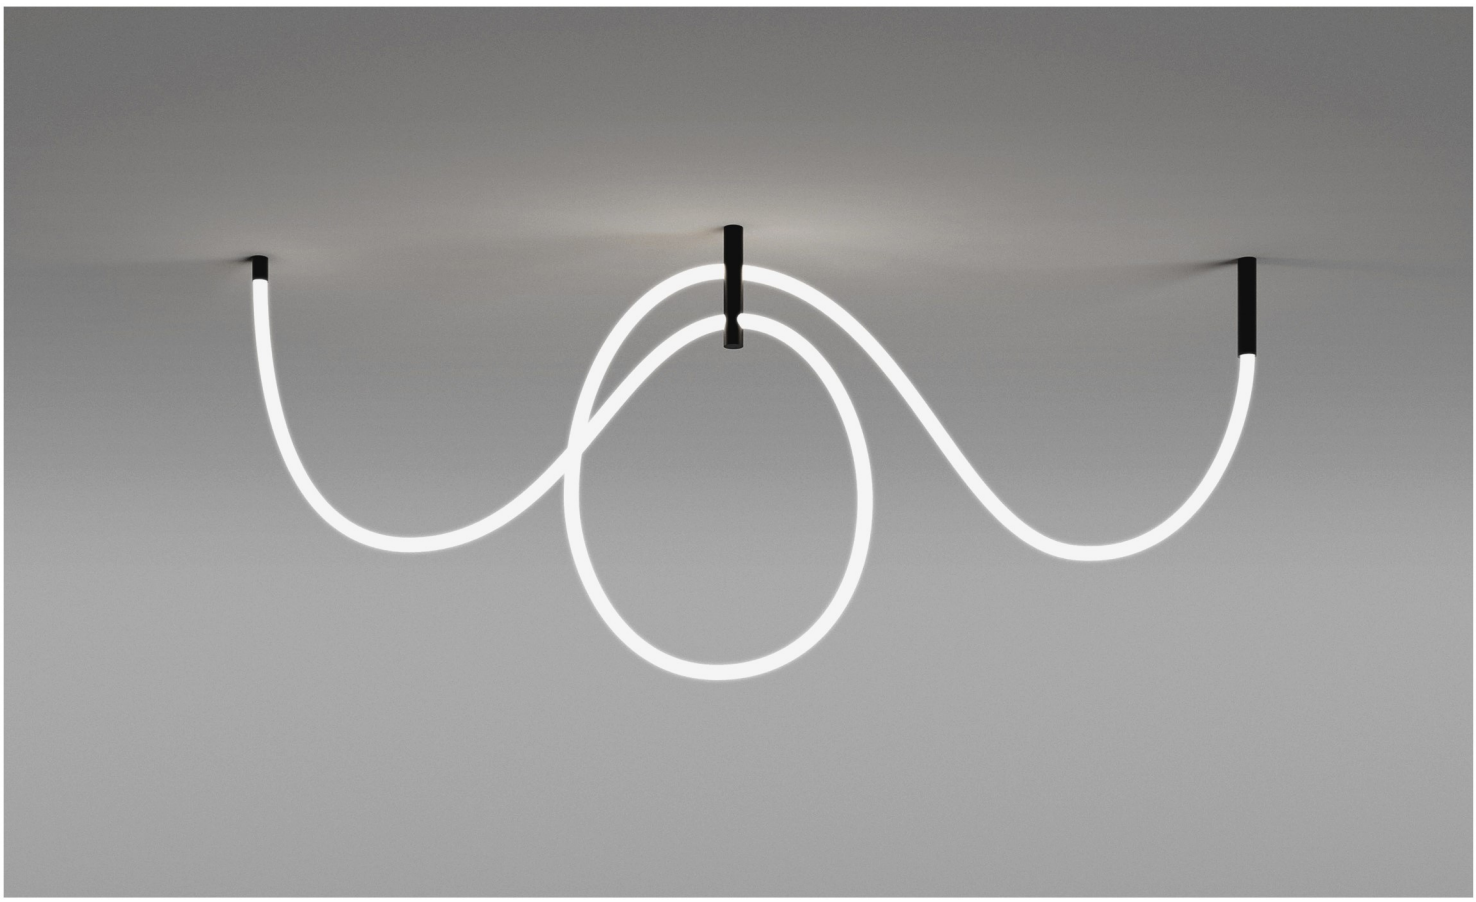

## Hook

Hooks are the perfect accessory for drawing curves or straight lines, horizontally or vertically. Choose the finish that best matches the style of your indoor space.

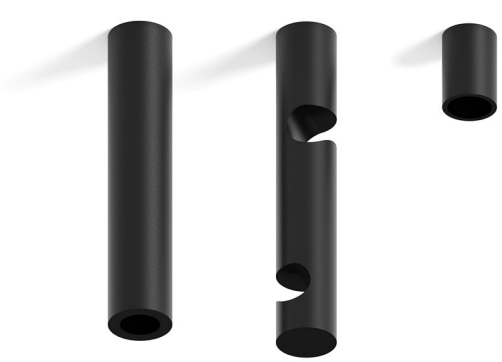

The Alphabet of Light system is a language of light that continues to grow with new curved elements, developing with increasing freedom in spaces. It is a fundamental principle that generates an open system through a few basic modules. proportions, these modules can be combined to construct infinite structures of light, whetheressential or more complex, linear or curvilinear.

| **Linear - Loop** | 3 Ø |
|---|---|
| Power | 10 w -18 w Per Meter |
| Lumen | 800 lm / 1440 lm |
| CRI | >80 |
| Beam Angle | 360° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 24 v |
| IP | IP20 |
| Color | ☐ |
| Dimmable | DALI / 0-10V |

# Giltter / Wire Linear Light

An ultra-thin strip of special stainless steel just 18 mm wide “cuts” the space to produce indirect light. Giltter can be adapted to various situations, stretched from wall to wall or ceiling to floor.

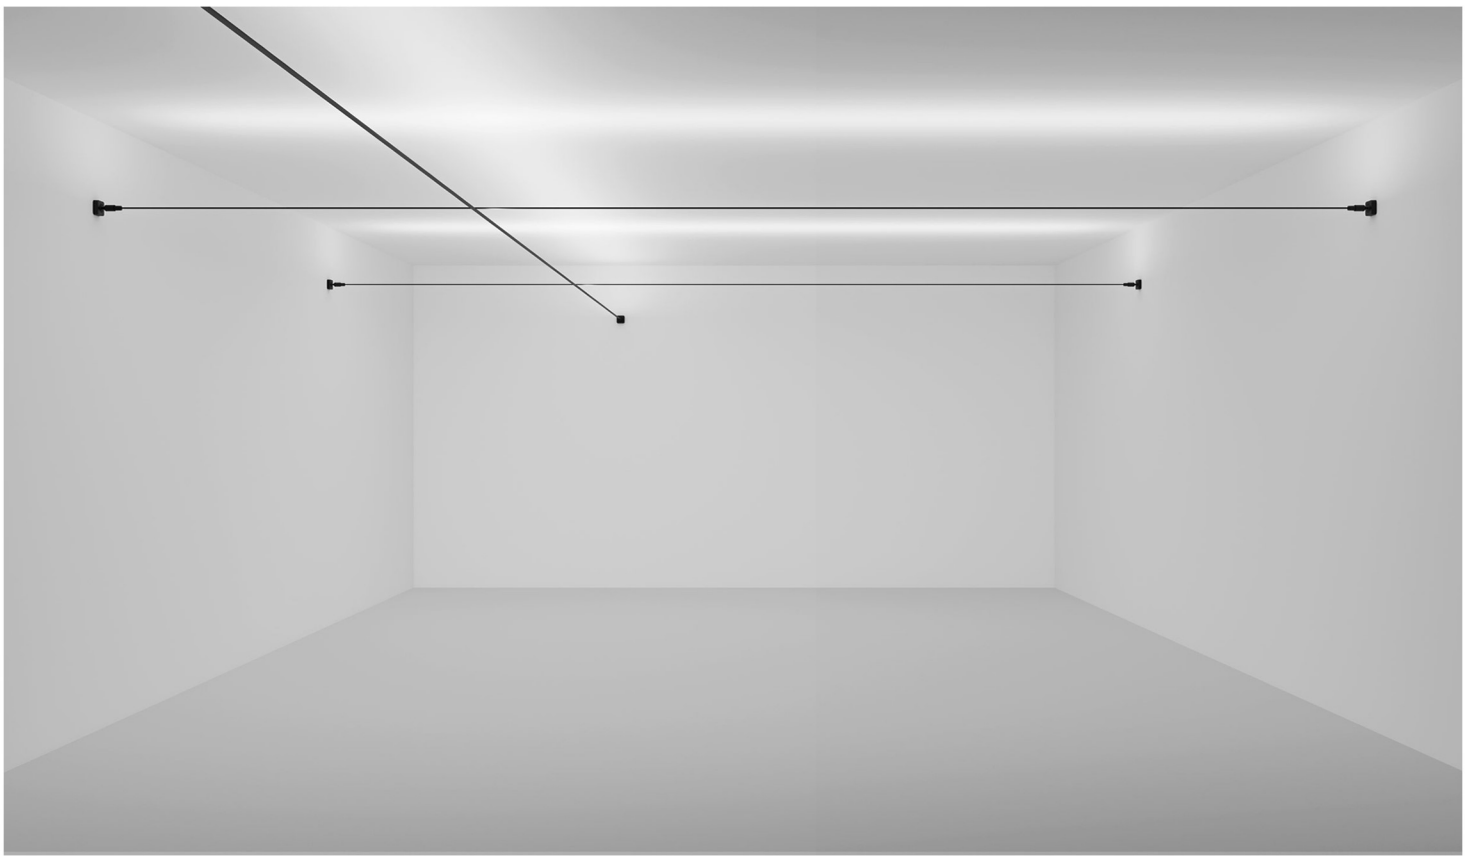

Glitter breaks down the luminaire, turning it into something else,
leaving only a trace, a line and then not even that, just light.
The graphic force of this system is surprising. It can be integrated
into space, but at the same time it becomes part of that space.
Infinito: essence and absence.

| **Giltter** | 300 cm / 600 cm / 900 cm |
|---|---|
| **Power** | 20 w / 40 w / 60 w |
| **Lumen** | 2200 lm / 4400 lm / 6600 lm |
| **CRI** | >90 |
| **Beam Angle** | 120° |
| **CCT** | 3000 k / 4000 k |
| **Input Voltage** | 48 v |
| **IP** | IP20 |
| **Color** | ■ |
| **Dimmable** | DALI / 0-10V / Zigbee |

# Dizzy / Pendant Decorative Light

There is always a boundary between seeing and hearing, and dizzy series is an attempt to remove this boundary. The architectural lights of dizzy are formed based on musical instruments to point to this border in every space that is placed, because the experience of space is not limited to seeing.

John Birks "Dizzy" Gillespie was an American jazz trumpeter, composer and singer. He was a trumpet virtuoso and improviser, building on the virtuosic style of Roy Eldridge but adding layers of harmonic and rhythmic complexity previously unheard in jazz.

Dizzy's series of lights does not stop
at appearance. The light sources and lenses used
in this product allow the addition of different filters.
Filters that are able to change the shape of
architectural light according to the expectations
and experiences that we want to create from
the space so that we are not limited
to the lighting defaults in creating the experience
of the space.

**Clarinet - Dizzy**

| | |
|---|---|
| Power | 5 w |
| Lumen | 600 lm |
| CRI | >90 |
| Beam Angle | 24° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 220 v |
| IP | IP42 |
| Color | |
| Dimmable | DALI |

**High Hat - Dizzy**

| | |
|---|---|
| Power | 5 w / 8 w |
| Lumen | 600 lm / 960 lm |
| CRI | >90 |
| Beam Angle | 80° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 220 v |
| IP | IP42 |
| Color | |
| Dimmable | DALI |

**Trumpet- Dizzy**

| | |
|---|---|
| Power | 5 w |
| Lumen | 600 lm |
| CRI | >90 |
| Beam Angle | 24° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 220 v |
| IP | IP42 |
| Color | |
| Dimmable | DALI |

**Cymbal - Dizzy**

| | |
|---|---|
| Power | 5 w / 8 w |
| Lumen | 600 lm / 960 lm |
| CRI | >90 |
| Beam Angle | 80° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 220 v |
| IP | IP42 |
| Color | |
| Dimmable | DALI |

**Trombone - Dizzy**

| | |
|---|---|
| Power | 5 w |
| Lumen | 600 lm |
| CRI | >90 |
| Beam Angle | 24° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 220 v |
| IP | IP42 |
| Color | |
| Dimmable | DALI |

# Ginger / Swivel Suspended Spotlight

Ginger is a ceiling mounted lamp powered by an earthed socket. The light fixture slides on the Wire tow, which is tensioned by a counterweight. It is an ideal spot light for reading. On request it is possible to add other light points to slide on the same Wire tow.

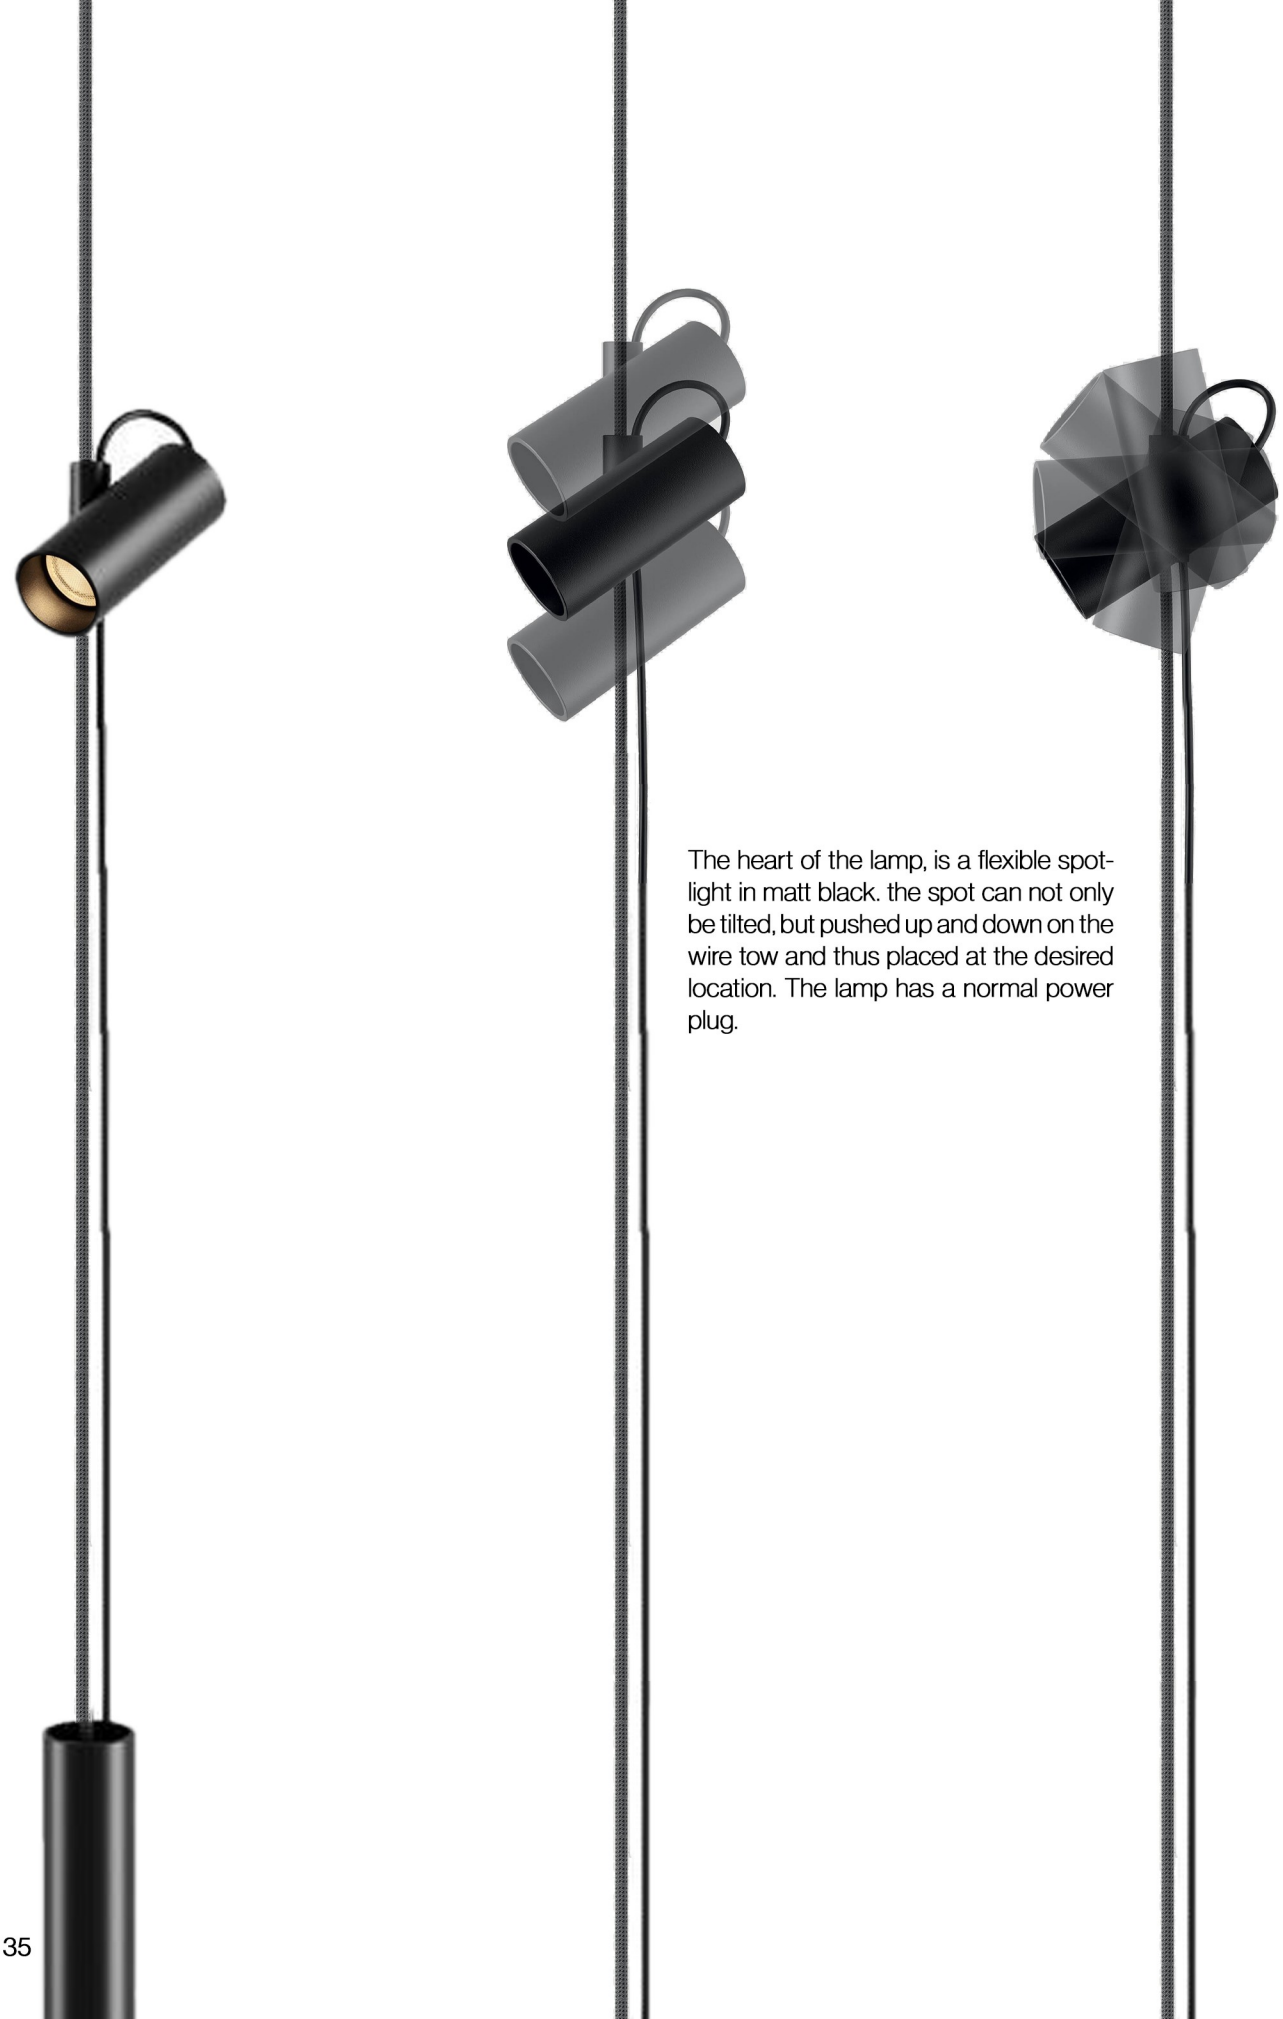

The heart of the lamp, is a flexible spot-light in matt black. the spot can not only be tilted, but pushed up and down on the wire tow and thus placed at the desired location. The lamp has a normal power plug.

Ginger is a “suspended” lamp characterised by a ceiling-to-floor
Wire tow, a sleek and highly functional design element.
A joint that holds the lamp body slides vertically along the Wire tow,
while the counterweight allows to manage any excess rope.
The simple cylindrical shapes and the black colour of these elements
highlight, vibrant accents to suit any interiors and décor mood.

| **Ginger - Suspension** | 4 Ø |
|---|---|
| Power | 7 w |
| Lumen | 700 lm |
| CRI | >80 |
| Beam Angle | 24° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 220 v |
| IP | IP42 |
| Color | ■□ |
| Dimmable | DALI / 0-10V / Zigbee |

# Lightsaber / Suspended Linear Light

Geometry teaches us that two points in space can be joined by an infinite number of lines that are one different from the other, and that the shortest path is a straight line. Hence, the extreme freedom of the lightsaber is pitched against the rational straight line, declined in the horizontal, the vertical, the inclined, the isolated or the combined, fixed or mobile suspension, balanced or placed.

JAZZ LIFE

The Lightsaber Vertical LED Pendant lights the room with a warm accent glow as it seemingly floats in the room while being suspended by a thin wire. Lightsaber collection includes floor and suspension lamps.

**Lightsaber - P** 150 cm / 250 cm

| | |
|---|---|
| Power | 15 w per meter |
| Lumen | 1500 lm |
| CRI | .>80 |
| Beam Angle | 120° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 220 v |
| IP | IP40 |
| Color | ■ □ |
| Dimmable | DALI / Zigbee |

**Lightsaber - F** 150 cm

| | |
|---|---|
| Power | 15 w per meter |
| Lumen | 1500 lm |
| CRI | >80 |
| Beam Angle | 120° |
| CCT | 3000 k / 4000 k / TW |
| Input Voltage | 220 v |
| IP | IP40 |
| Color | ■ □ |
| Dimmable | DALI / Zigbee |

# Fold / Pendant Decorative Light

This adjustable spotlight can rotate freely, so you'll be able to focus the light where you would like it most. This gorgeous track light with black finishes offers an industrial and modern look. It's flexible to focus the light on an image , picture gallery, kitchen, dining and lounge, closet, foyer, entryway, restaurant, and bar.

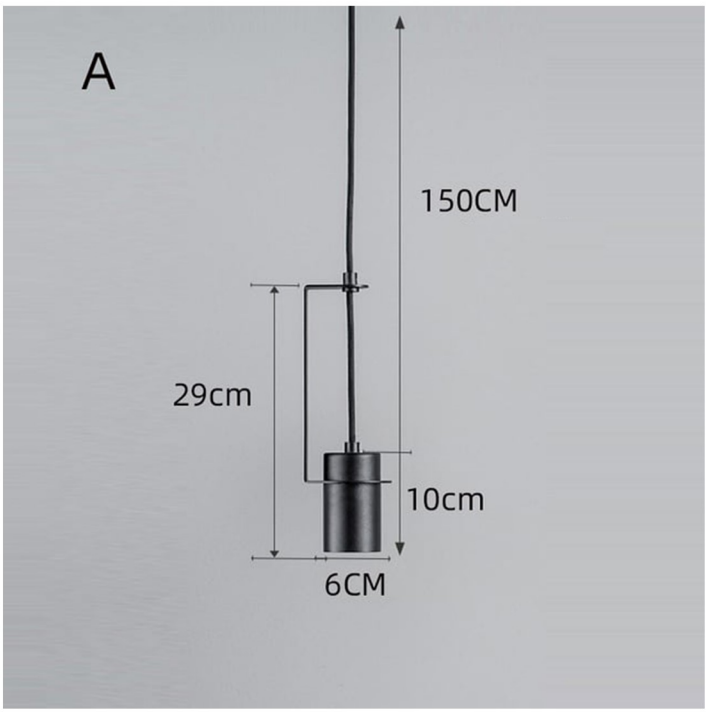


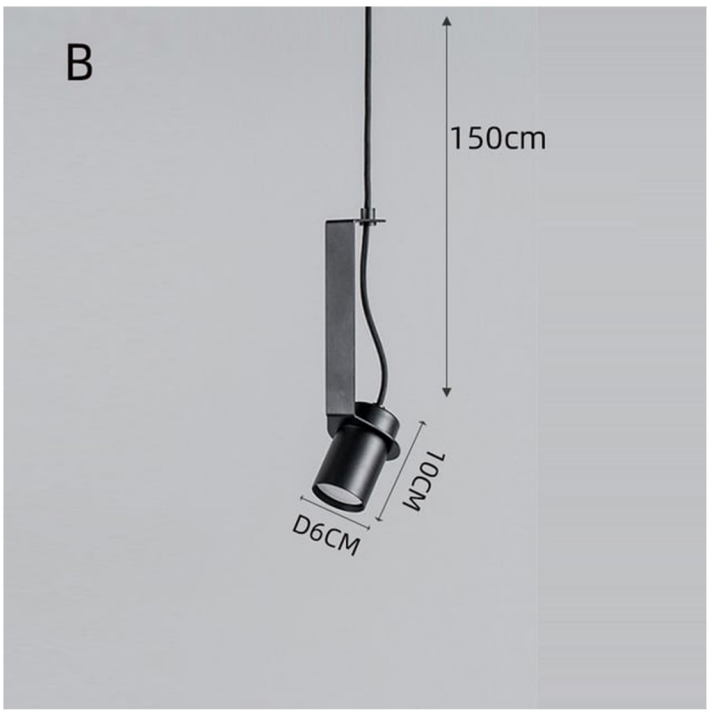


This chic spotlight lighting feature with a versatile head allows you to regulate it to the place where you would like to emphasize and target, providing more imagination for the decoration of your place.

Crafted to bring the natural and metal vibes with strong texture;
it is combination of vintage and modern style,and an everlasting design.

| **Fold - Type A** | 4 Ø / 6 Ø |
|---|---|
| Power | 12 w / 18 w |
| Lumen | 1200 lm / 1800 lm |
| CRI | >90 |
| Beam Angle | 24° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 220 v |
| IP | IP40 |
| Color | ■ |
| Dimmable | DALI |

| **Fold - Type B** | 4 Ø / 6 Ø |
|---|---|
| Power | 12 w / 18 w |
| Lumen | 1200 lm / 1800 lm |
| CRI | >90 |
| Beam Angle | 24° |
| CCT | 3000 k / 4000 k |
| Input Voltage | 220 v |
| IP | IP40 |
| Color | ■ |
| Dimmable | DALI |

and
it is still”