


JET-GUN LS-600E

High-Pressure Grease Gun — a new concept in grease guns.

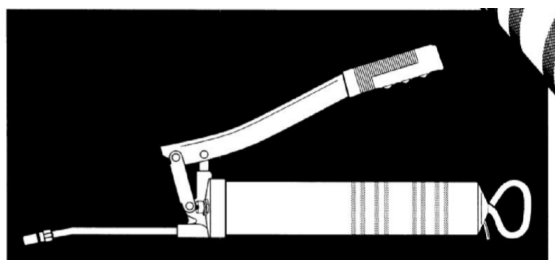

Features

- **Special-steel piston and cylinder.**
- **High pressure** — 4,500 psi.
- **High efficiency** — 1.75 cc per stroke.
- **Economical** — the low-wear special-steel piston draws grease out to the very last without leakage.
- **Air-button mechanism** — keeps working even when air accumulates during use.
- **Safety valve** — locking mechanism for mounting cartridge grease.
- A lightweight, compact body and numerous new mechanisms further improve working efficiency.

Applications

Machine tools, construction machinery, automobiles, vehicles of all kinds, agricultural machinery, aircraft, ships and more.

Loading a cartridge

1. Turn the barrel to remove it from the head.
2. Pull the rod handle all the way out and hook it in the locked position.
3. Remove the cartridge cap, insert the cartridge into the barrel (push it in from the arrow end), then push in and remove the pull-top.
4. Screw the barrel back onto the head.
5. Turn the rod handle to the left to release the lock and push the rod all the way back in.

Filling grease directly (without a cartridge)

1. Pull the rod out and lock it.
2. Fill with grease.
3. Fit the head.
4. Push the rod back in.

After use

1. Turn the barrel to remove it from the head.
2. Pull the rod, then release your hand; spring force pushes the empty grease case out so it can be removed. (Never point it at anyone.)

Recommended cartridge: GS-400LG — patented cartridge grease that can be used to the very last (ø55 × 236 mm, pull-top and plastic cap ends).

Options

Code	Product	Model	Overall length
1203	Jet Hose	No. 3	350 mm
1209	Jet Hose	No. 3	430 mm
1201	Hybrid Hose	HB-No. 3	350 mm
1205	Jet Nozzle	No. 4	180 mm

OILKEY CORPORATION

Head Office: 4-4-18 Makitsukadai, Minami-ku, Sakai, Osaka 590-0114, Japan Sakai Sales Office: 617 Taiheiji (2F), Nishi-ku, Sakai, Osaka 593-8314, Japan
 TEL +81-72-284-1711 FAX +81-72-298-7790 <http://www.oilkey.co.jp> English edition, translated from the original Japanese document.



Code	Product	Model	Overall length
1245	Jet Nozzle	No. 4	300 mm
1207	Jet Nozzle	No. 4	430 mm
1208	Jet Nozzle	No. 5	120 mm
1210	Jet Nozzle	No. 5	250 mm
1212	Jet Nozzle	No. 5	450 mm

OILKEY CORPORATION

Head Office: 4-4-18 Makitsukadai, Minami-ku, Sakai, Osaka 590-0114, Japan Sakai Sales Office: 617 Taiheiji (2F), Nishi-ku, Sakai, Osaka 593-8314, Japan
TEL +81-72-284-1711 FAX +81-72-298-7790 <http://www.oilkey.co.jp> *English edition, translated from the original Japanese document.*