Computer Networks

Amir Mahdi Sadeghzadeh, Ph.D.

The Internet: a "nuts and bolts" view

Billions of connected computing *devices*:

- *hosts = end systems*
- running *network apps* at Internet's "edge"



Packet switches: forward packets (chunks of data)

- *routers, switches*

Communication links

- fiber, copper, radio, satellite
- transmission rate: *bandwidth*

Networks

- collection of devices, routers, links: managed by an organization

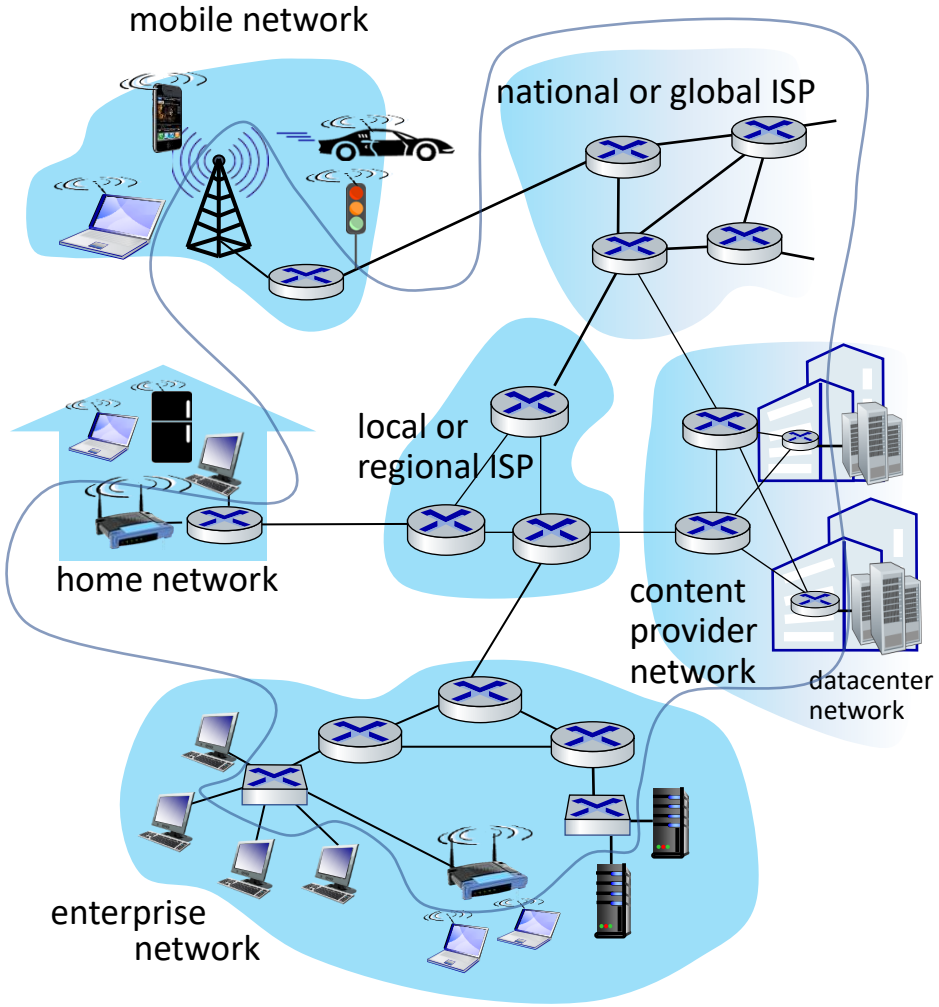

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models
- History

A closer look at Internet structure

Network edge:

- hosts: clients and servers
- servers often in data centers

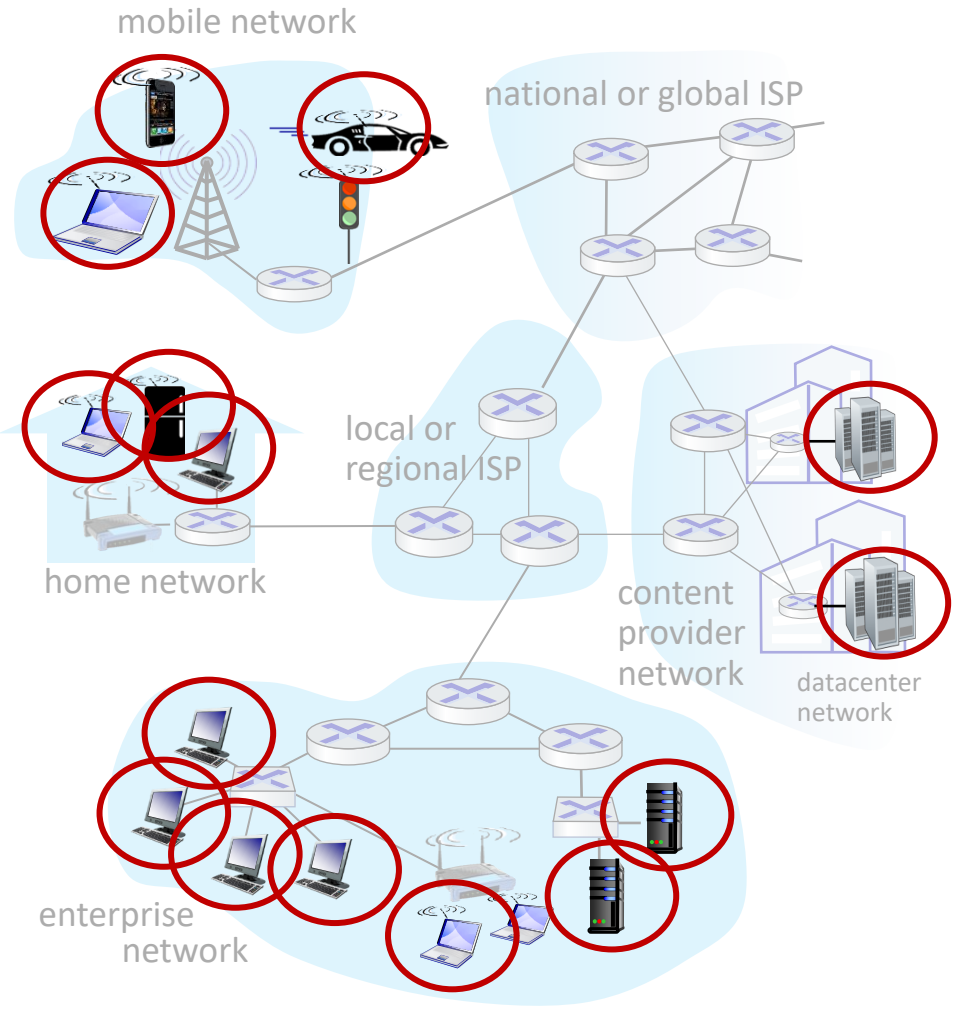

A closer look at Internet structure

Network edge:

- hosts: clients and servers
- servers often in data centers

Access networks, physical media:

- wired, wireless communication links

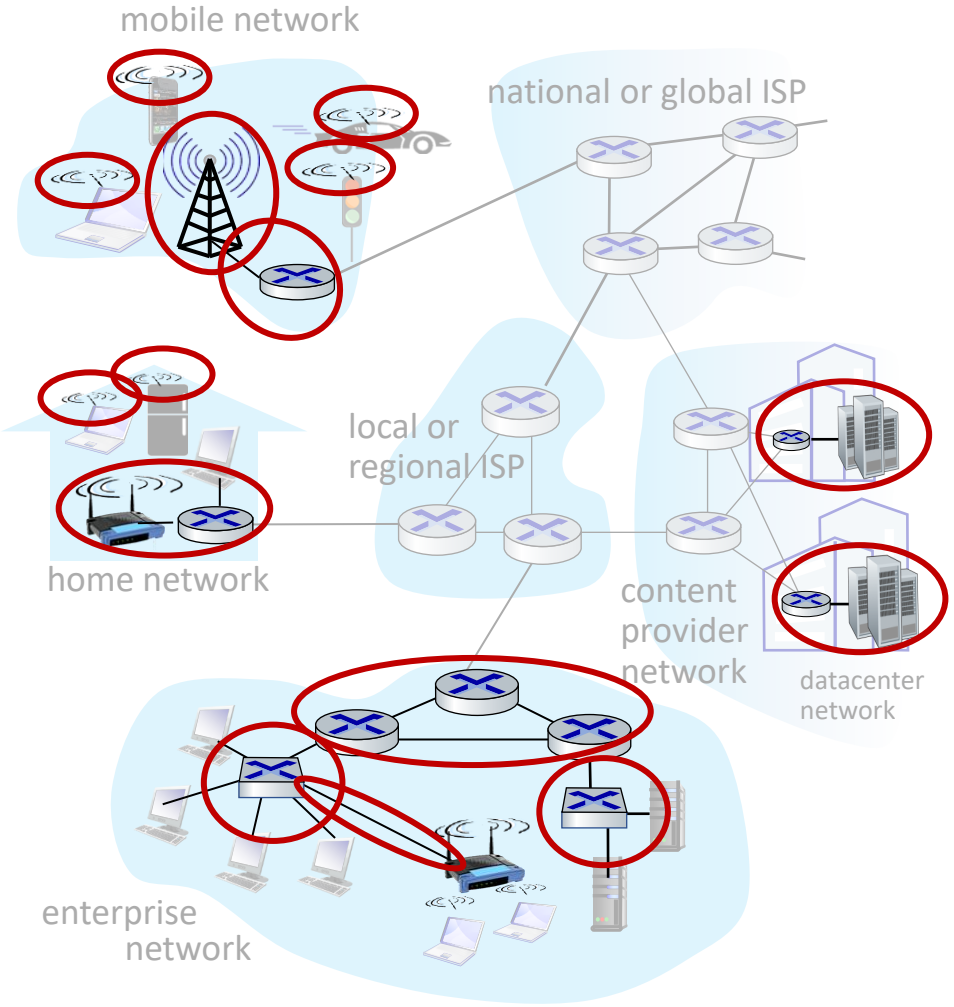

A closer look at Internet structure

Network edge:

- hosts: clients and servers
- servers often in data centers

Access networks, physical media:

- wired, wireless communication links

Network core:

- interconnected routers
- network of networks

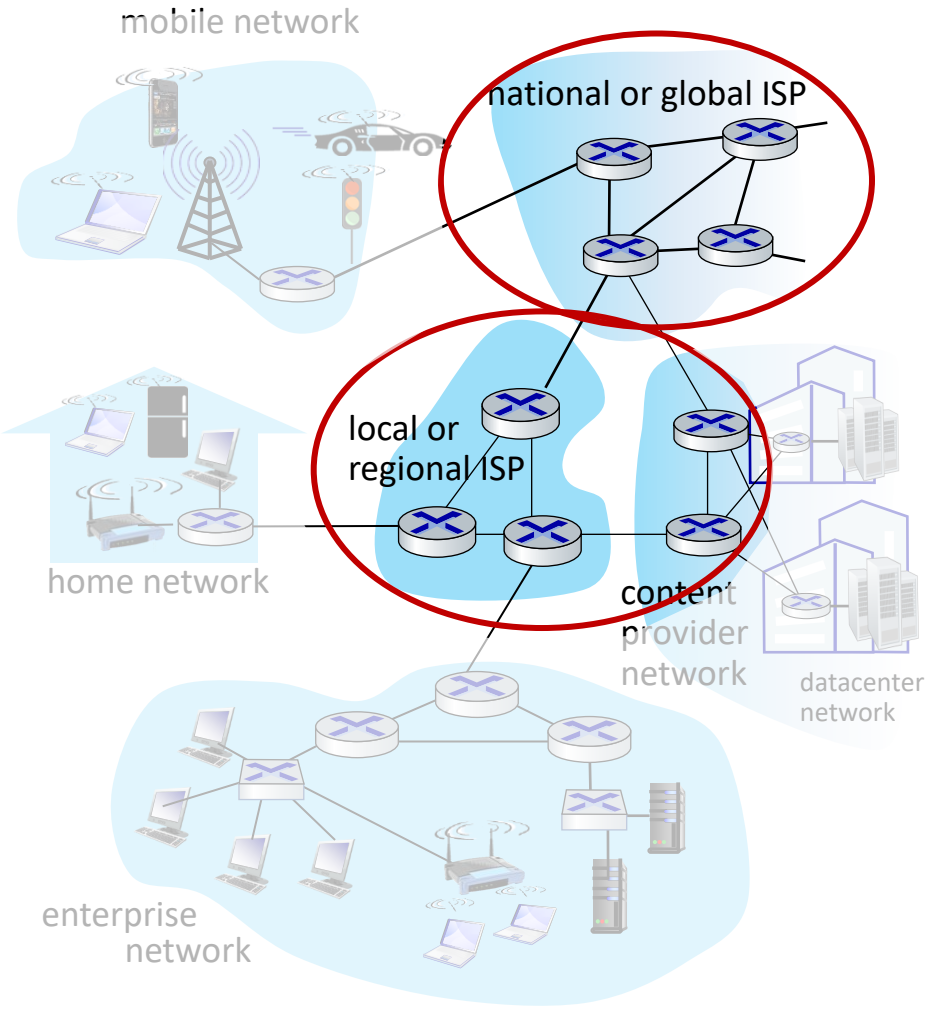

Access networks and physical media

Q: How to connect end systems to edge router?

- residential access nets
- institutional access networks (school, company)
- mobile access networks (WiFi, 4G/5G)

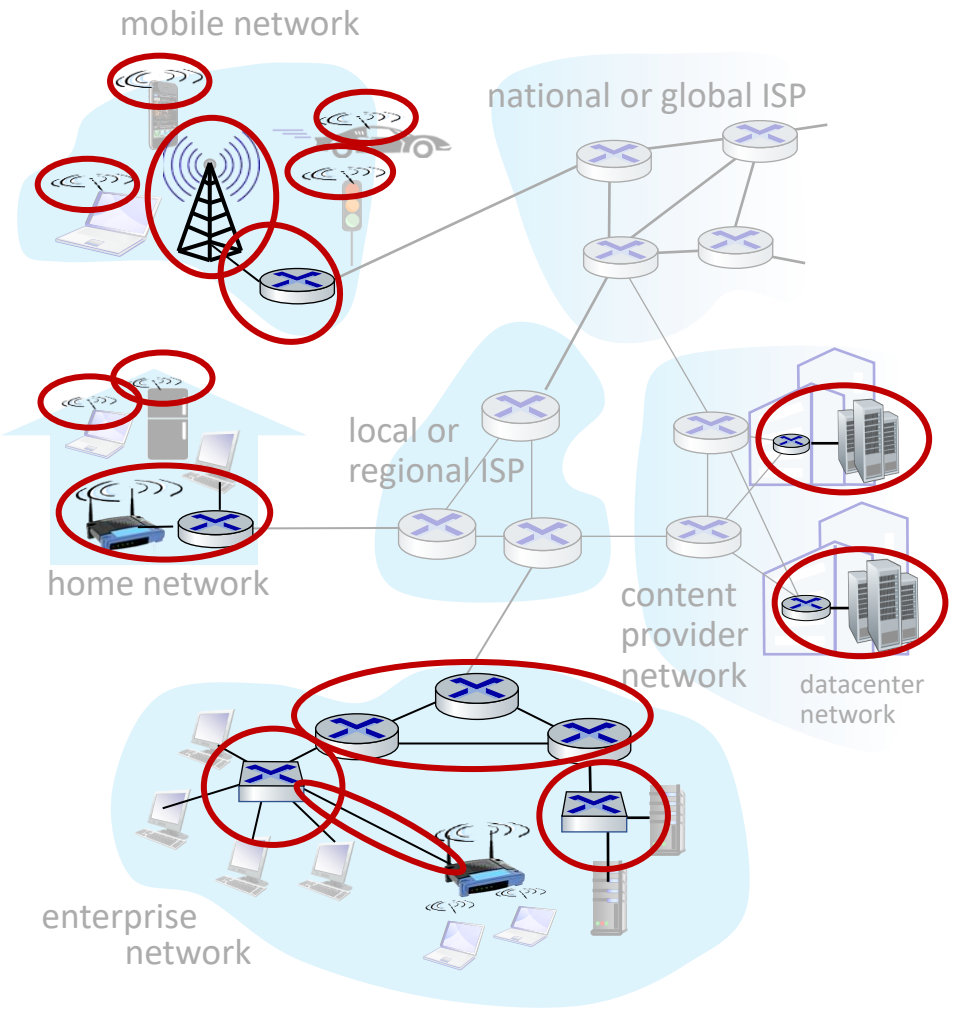

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- **Network core:** packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models
- History

The network core

- mesh of interconnected routers
- packet-switching: hosts break application-layer messages into *packets*
  - network forwards packets from one router to the next, across links on path from source to destination

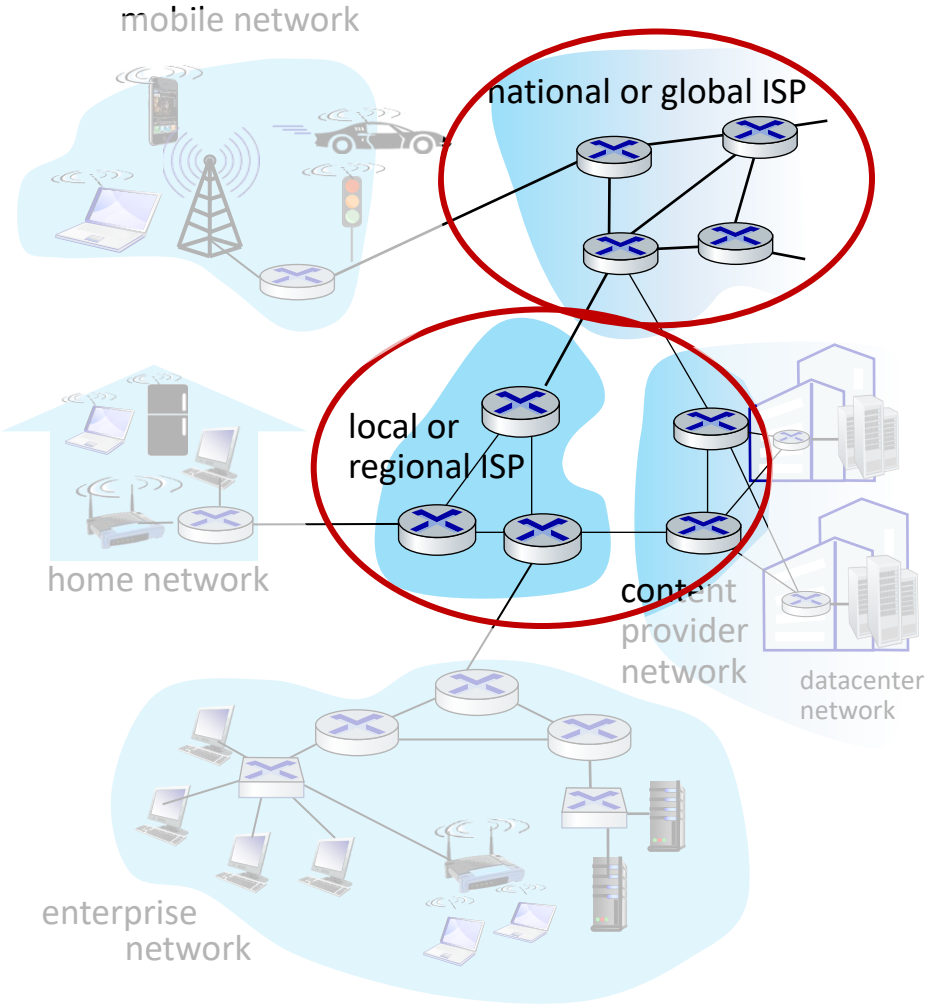

Two key network-core functions

Forwarding:

- aka "switching"
- *local* action: move arriving packets from router's input link to appropriate router output link

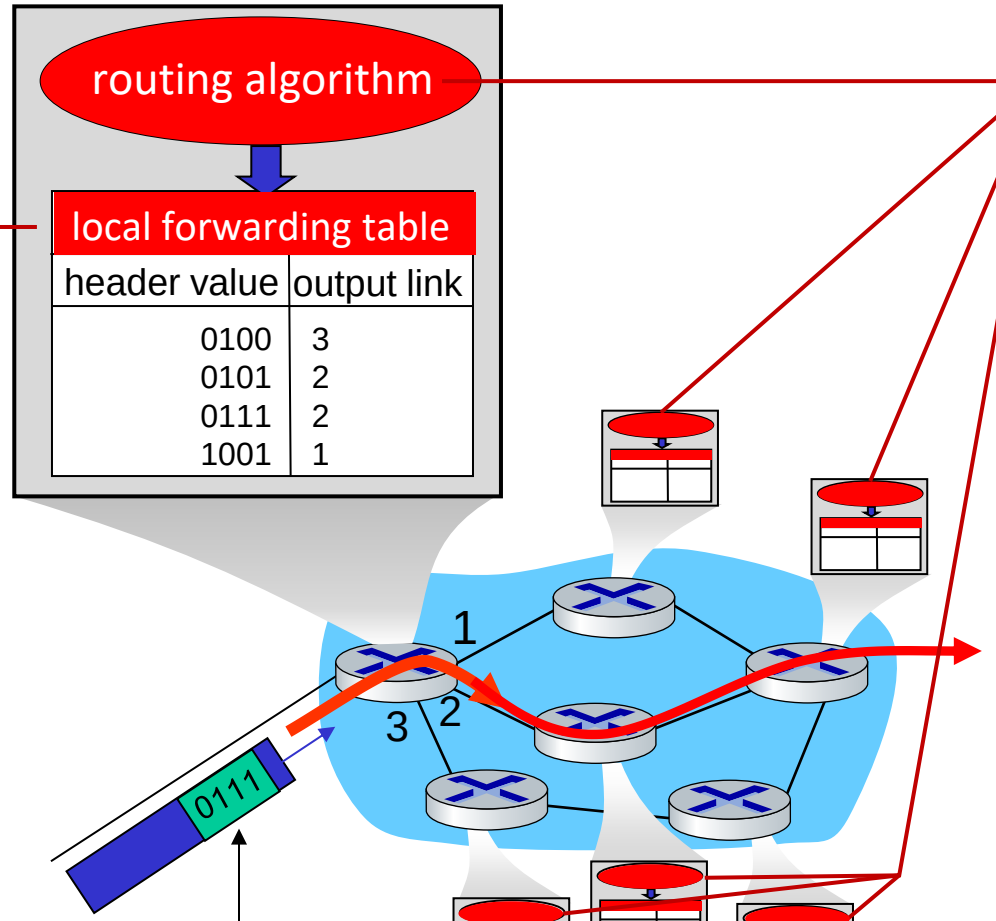

Routing:

- *global* action: determine source-destination paths taken by packets
- routing algorithms

Packet-switching: store-and-forward

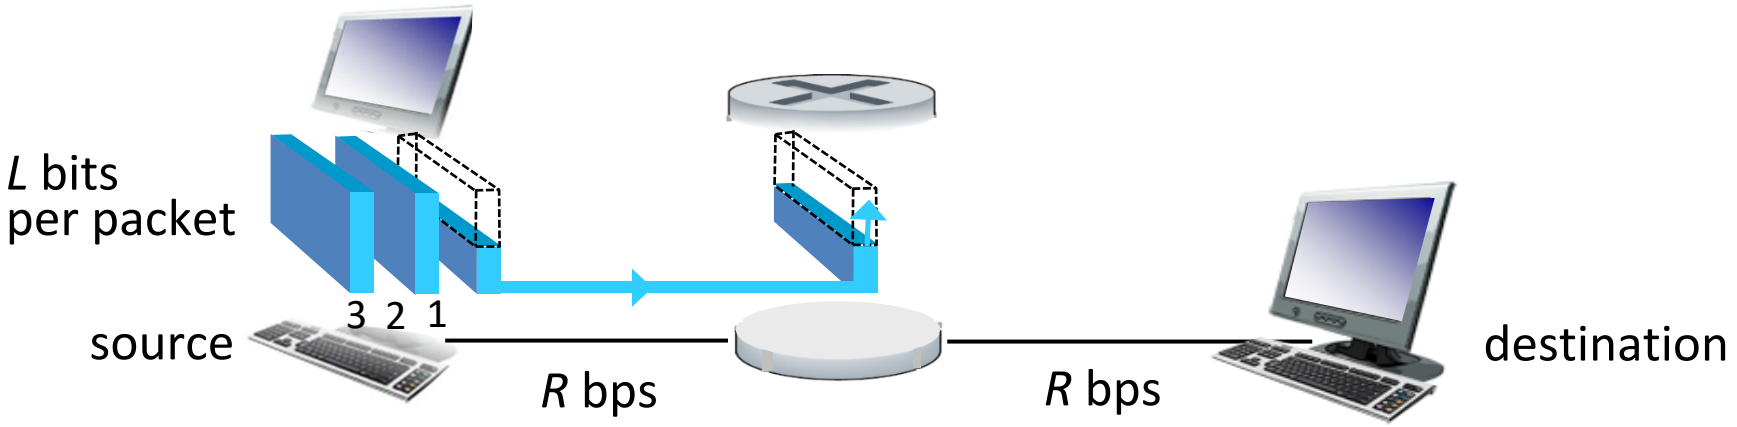

- packet transmission delay: takes L/R seconds to transmit (push out) L-bit packet into link at R bps
- *store and forward: entire* packet must arrive at router before it can be transmitted on next link

One-hop numerical example:

- L = 10 Kbits
- R = 100 Mbps
- one-hop transmission delay = 0.1 msec

Packet-switching: queueing

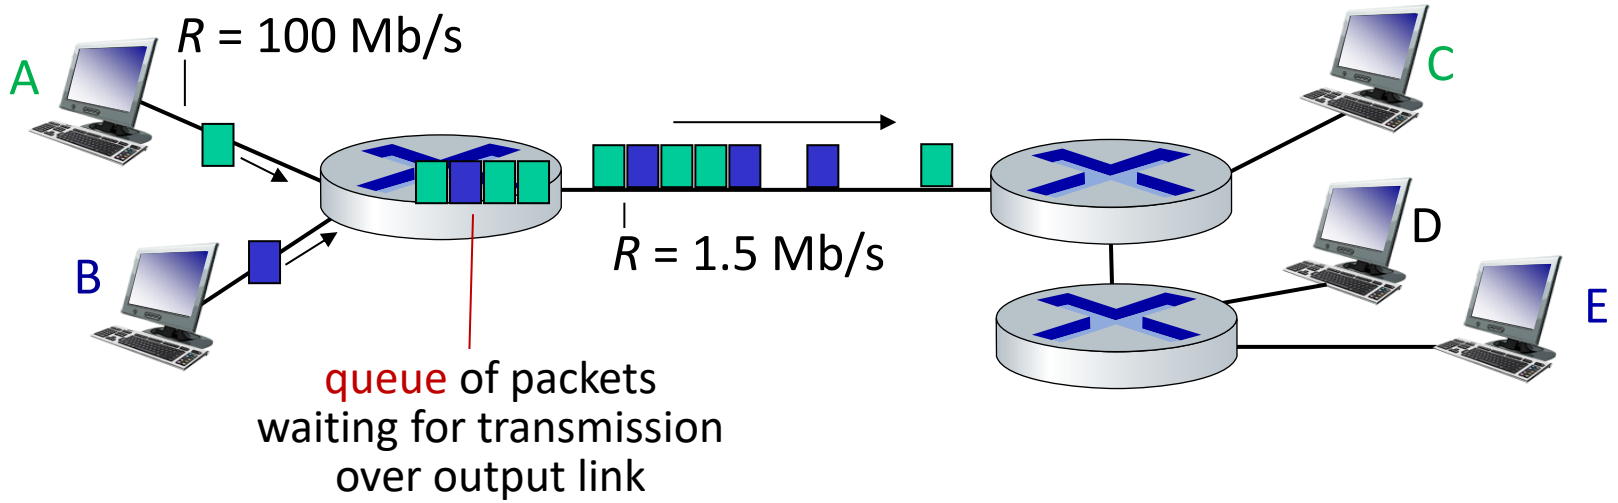

Queueing occurs when work arrives faster than it can be serviced:

Packet-switching: queueing

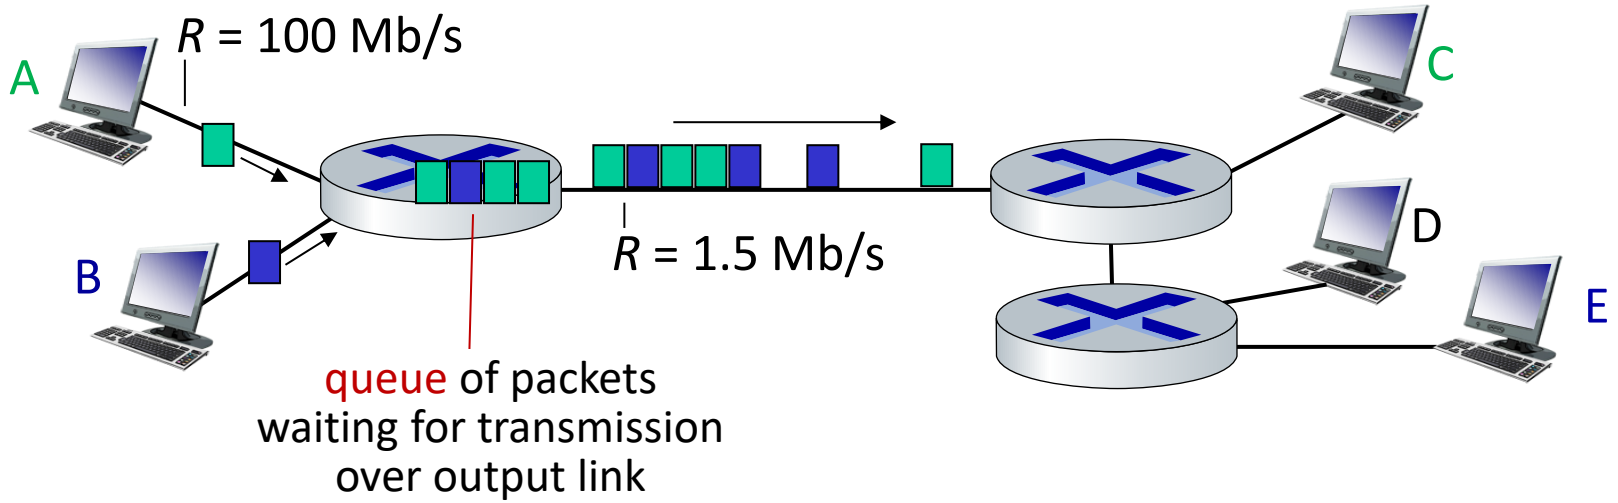

Packet queuing and loss: if arrival rate (in bps) to link exceeds transmission rate (bps) of link for some period of time:

- packets will queue, waiting to be transmitted on output link
- packets can be dropped (lost) if memory (buffer) in router fills up

Internet structure: a "network of networks"

… and regional networks may arise to connect access nets to ISPs

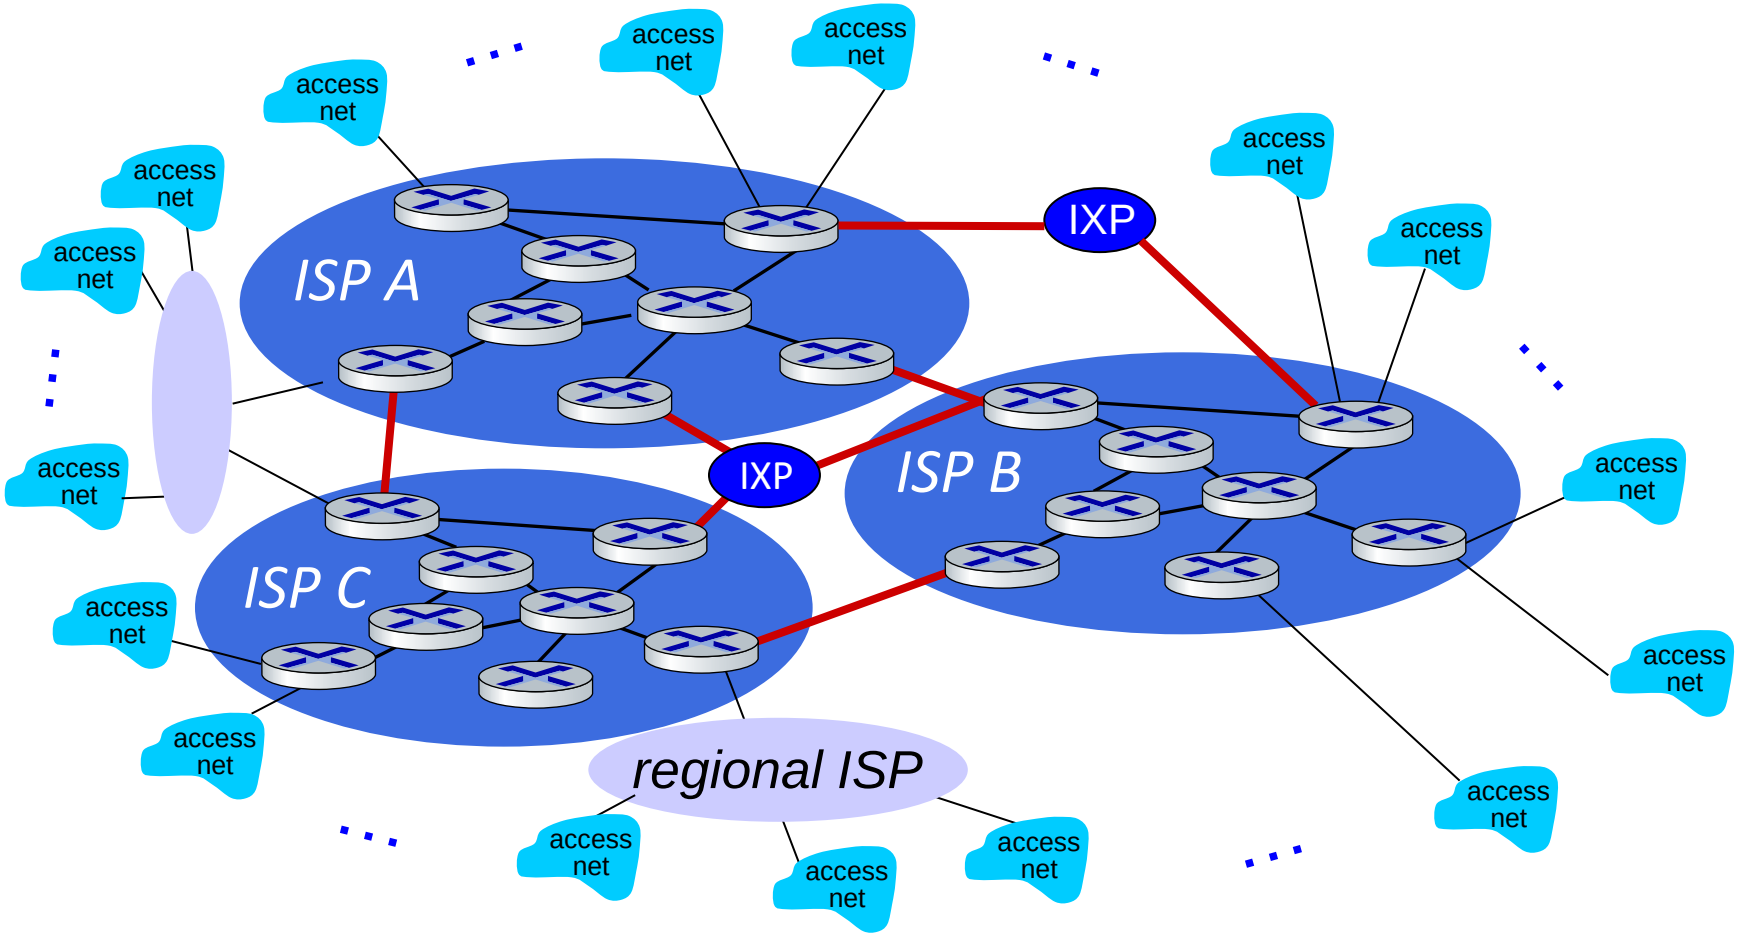

Internet structure: a “network of networks”

… and content provider networks (e.g., Google, Microsoft, Akamai) may run their own network, to bring services, content close to end users

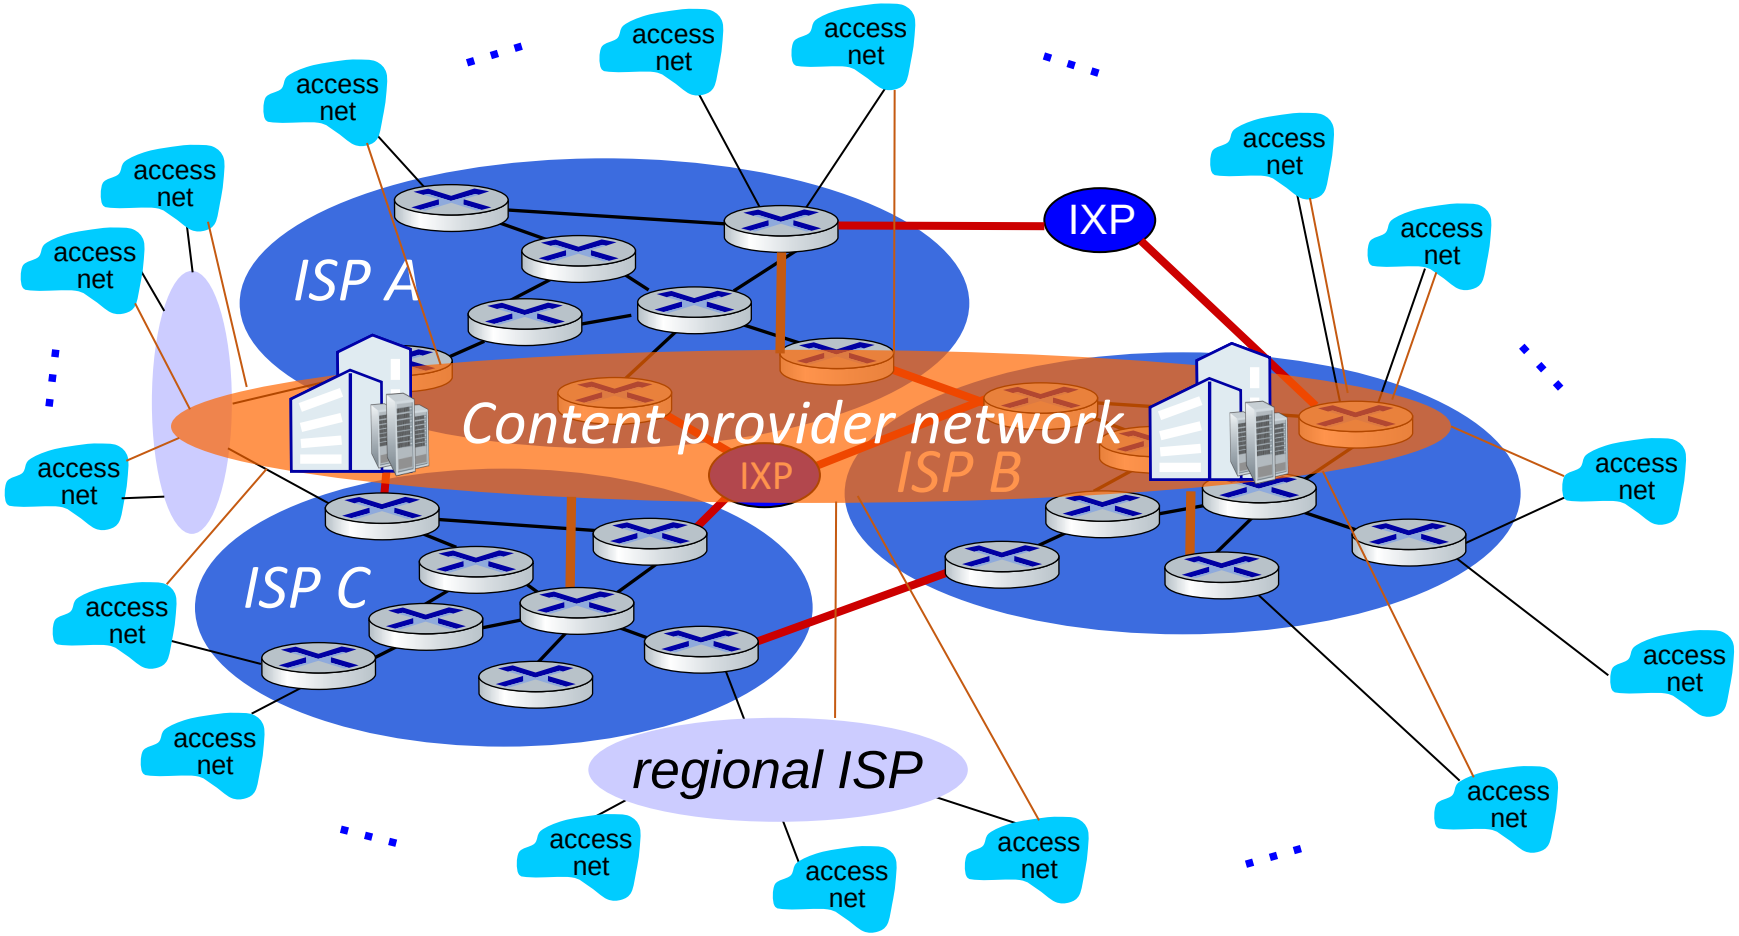

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models
- History

How do packet delay and loss occur?

- packets *queue* in router buffers, waiting for turn for transmission
  - queue length grows when arrival rate to link (temporarily) exceeds output link capacity
- packet *loss* occurs when memory to hold queued packets fills up

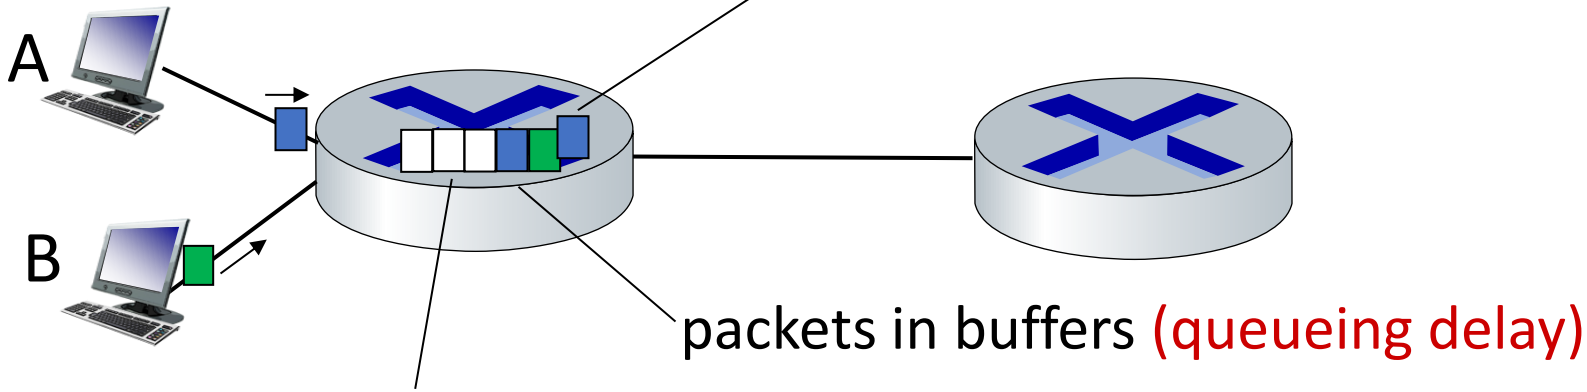

Packet delay: four sources

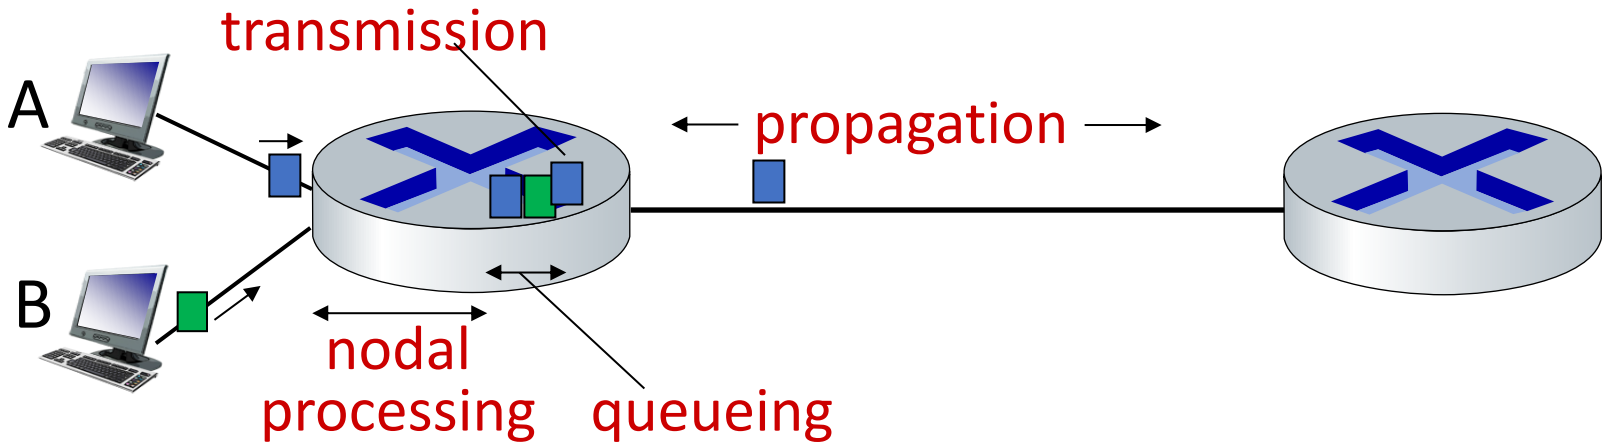

$$d_{nodal} = d_{proc} + d_{queue} + d_{trans} + d_{prop}$$

d_{proc}: nodal processing

- check bit errors
- determine output link
- typically < microsecs

d_{queue}: queueing delay

- time waiting at output link for transmission
- depends on congestion level of router

Packet delay: four sources

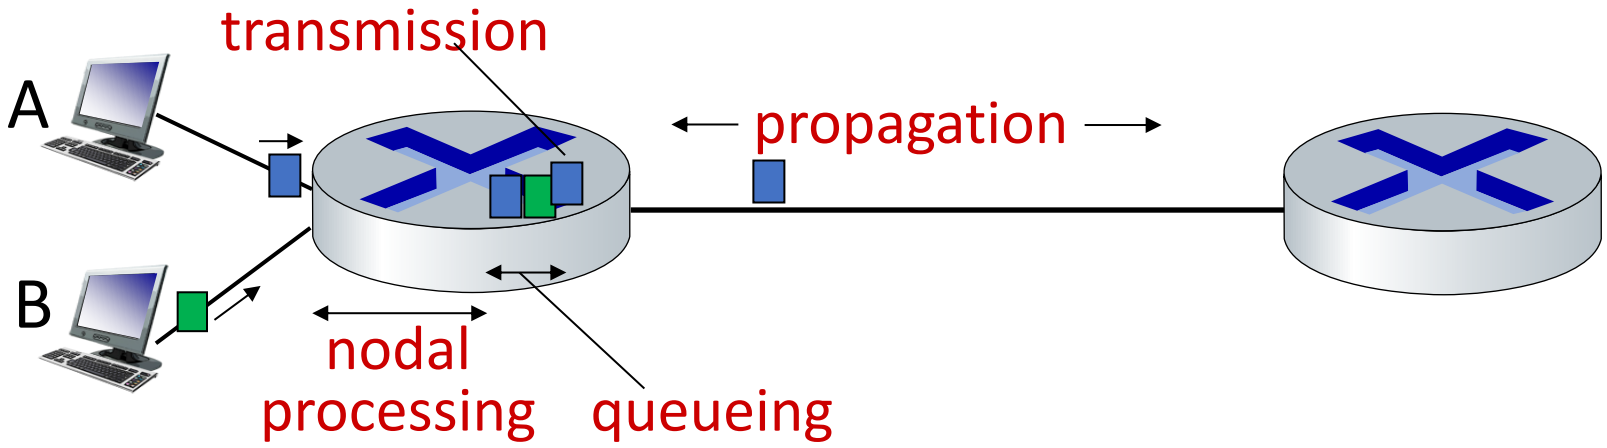

$$d_{nodal} = d_{proc} + d_{queue} + d_{trans} + d_{prop}$$

d_{trans}: transmission delay:

- L: packet length (bits)
- R: link *transmission rate (bps)*
- $d_{trans} = L/R$

d_{prop}: propagation delay:

- d: length of physical link
- s: propagation speed (~2×10^8 m/sec)
- $d_{prop} = d/s$

d_{trans} and d_{prop} *very* different

Caravan analogy

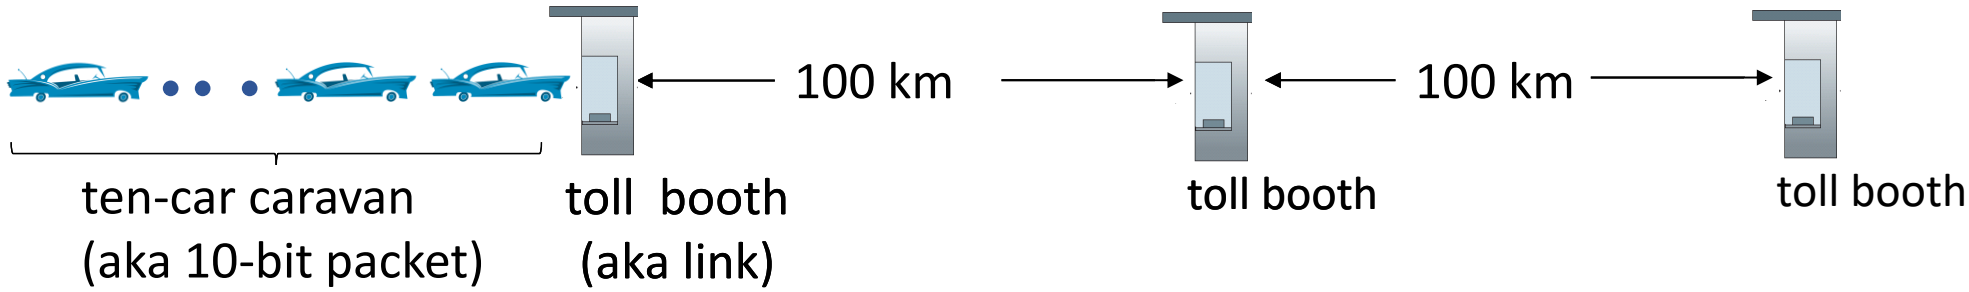

- car ~ bit; caravan ~ packet; toll service ~ link transmission
- toll booth takes 12 sec to service car (bit transmission time)
- "propagate" at 100 km/hr
- *Q:* How long until caravan is lined up before 2nd toll booth?

- time to "push" entire caravan through toll booth onto highway = 12*10 = 120 sec
- time for last car to propagate from 1st to 2nd toll both: 100km/(100km/hr) = 1 hr
- *A:* 62 minutes

Caravan analogy

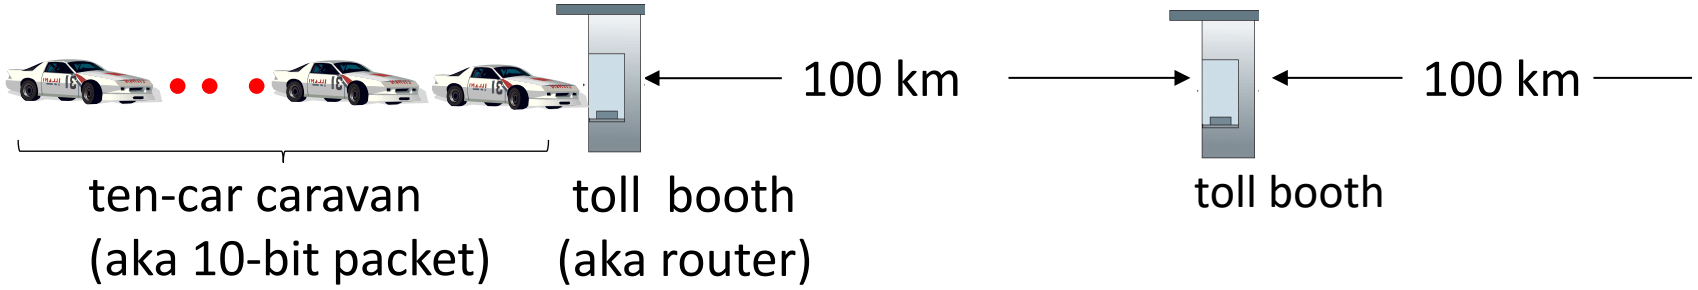

- suppose cars now "propagate" at 1000 km/hr
- and suppose toll booth now takes one min to service a car
- *Q:* Will cars arrive to 2nd booth before all cars serviced at first booth?

  A: Yes! after 7 min, first car arrives at second booth; three cars still at first booth

Packet queueing delay (revisited)

- *a:* average packet arrival rate
- *L:* packet length (bits)
- *R:* link bandwidth (bit transmission rate)

$$\frac{L \cdot a}{R} : \frac{\text{arrival rate of bits}}{\text{service rate of bits}}$$

"traffic intensity"

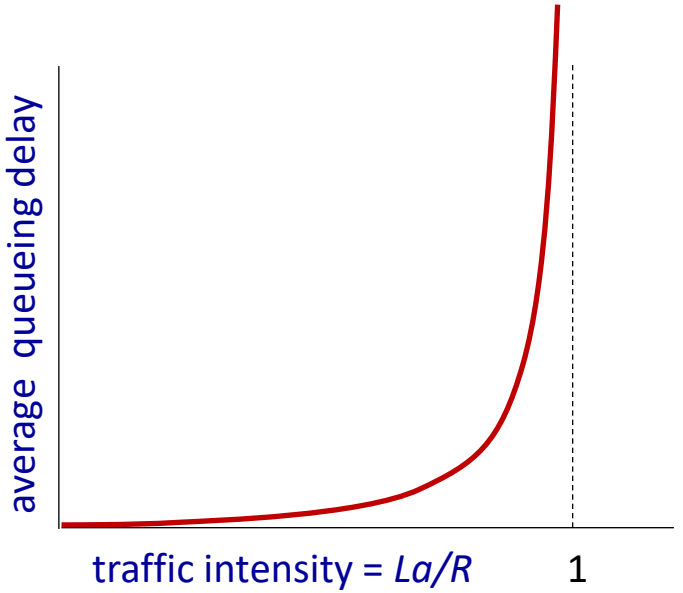

- *La/R* ~ 0: avg. queueing delay small
- *La/R* -> 1: avg. queueing delay large
- *La/R* > 1: more "work" arriving is more than can be serviced - average delay infinite!

La/R ~ 0

La/R -> 1

“Real” Internet delays and routes

- what do “real” Internet delay & loss look like?
- **traceroute** program: provides delay measurement from source to router along end-end Internet path towards destination. For all *i:*
  - sends three packets that will reach router *i* on path towards destination (with time-to-live field value of *i*)
  - router *i* will return packets to sender
  - sender measures time interval between transmission and reply

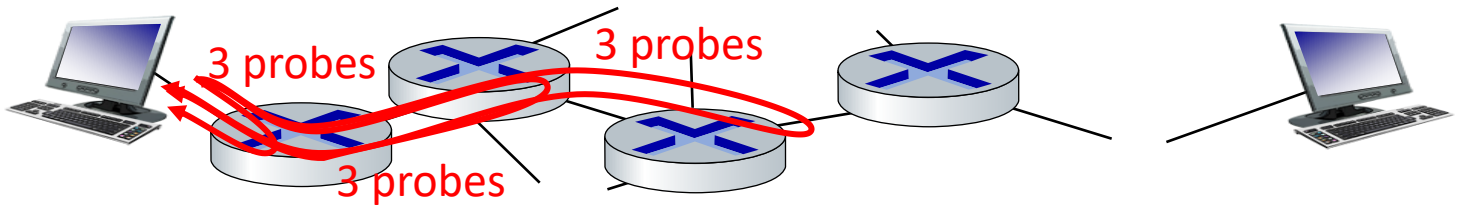

Real Internet delays and routes

traceroute: gaia.cs.umass.edu to www.eurecom.fr

3 delay measurements from gaia.cs.umass.edu to cs-gw.cs.umass.edu

```
1  cs-gw (128.119.240.254)  1 ms  1 ms  2 ms
2  border1-rt-fa5-1-0.gw.umass.edu (128.119.3.145)  1 ms  1 ms  2 ms
3  cht-vbns.gw.umass.edu (128.119.3.130)  6 ms 5 ms 5 ms
4  jn1-at1-0-0-19.wor.vbns.net (204.147.132.129)  16 ms 11 ms 13 ms
5  jn1-so7-0-0-0.wae.vbns.net (204.147.136.136)  21 ms 18 ms 18 ms
6  abilene-vbns.abilene.ucaid.edu (198.32.11.9)  22 ms  18 ms  22 ms
7  nycm-wash.abilene.ucaid.edu (198.32.8.46)  22 ms  22 ms  22 ms
8  62.40.103.253 (62.40.103.253)  104 ms 109 ms 106 ms
9  de2-1.de1.de.geant.net (62.40.96.129)  109 ms 102 ms 104 ms
10  de.fr1.fr.geant.net (62.40.96.50)  113 ms 121 ms 114 ms
11  renater-gw.fr1.fr.geant.net (62.40.103.54)  112 ms  114 ms  112 ms
12  nio-n2.cssi.renater.fr (193.51.206.13)  111 ms  114 ms  116 ms
13  nice.cssi.renater.fr (195.220.98.102)  123 ms  125 ms  124 ms
14  r3t2-nice.cssi.renater.fr (195.220.98.110)  126 ms  126 ms  124 ms
15  eurecom-valbonne.r3t2.ft.net (193.48.50.54)  135 ms  128 ms  133 ms
16  194.214.211.25 (194.214.211.25)  126 ms  128 ms  126 ms
17  * * *
18  * * *
19  fantasia.eurecom.fr (193.55.113.142)  132 ms  128 ms  136 ms
```

3 delay measurements to border1-rt-fa5-1-0.gw.umass.edu

trans-oceanic link

looks like delays *decrease*! Why?

* means no response (probe lost, router not replying)

* Do some traceroutes from exotic countries at www.traceroute.org

Packet loss

- queue (aka buffer) preceding link in buffer has finite capacity
- packet arriving to full queue dropped (aka lost)
- lost packet may be retransmitted by previous node, by source end system, or not at all

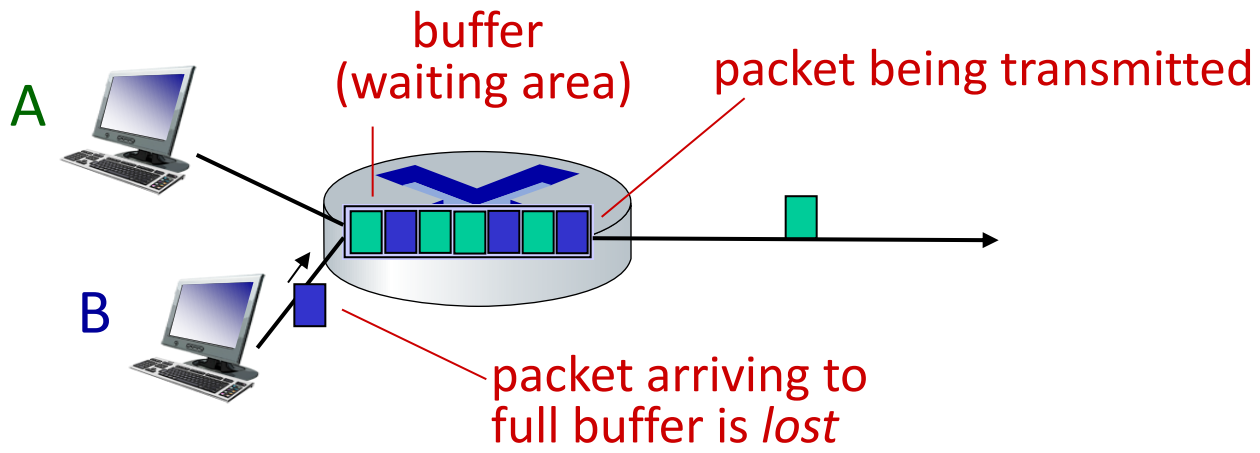

* Check out the Java applet for an interactive animation (on publisher's website) of queuing and loss

Throughput

- *throughput:* rate (bits/time unit) at which bits are being sent from sender to receiver
  - *instantaneous:* rate at given point in time
  - *average:* rate over longer period of time

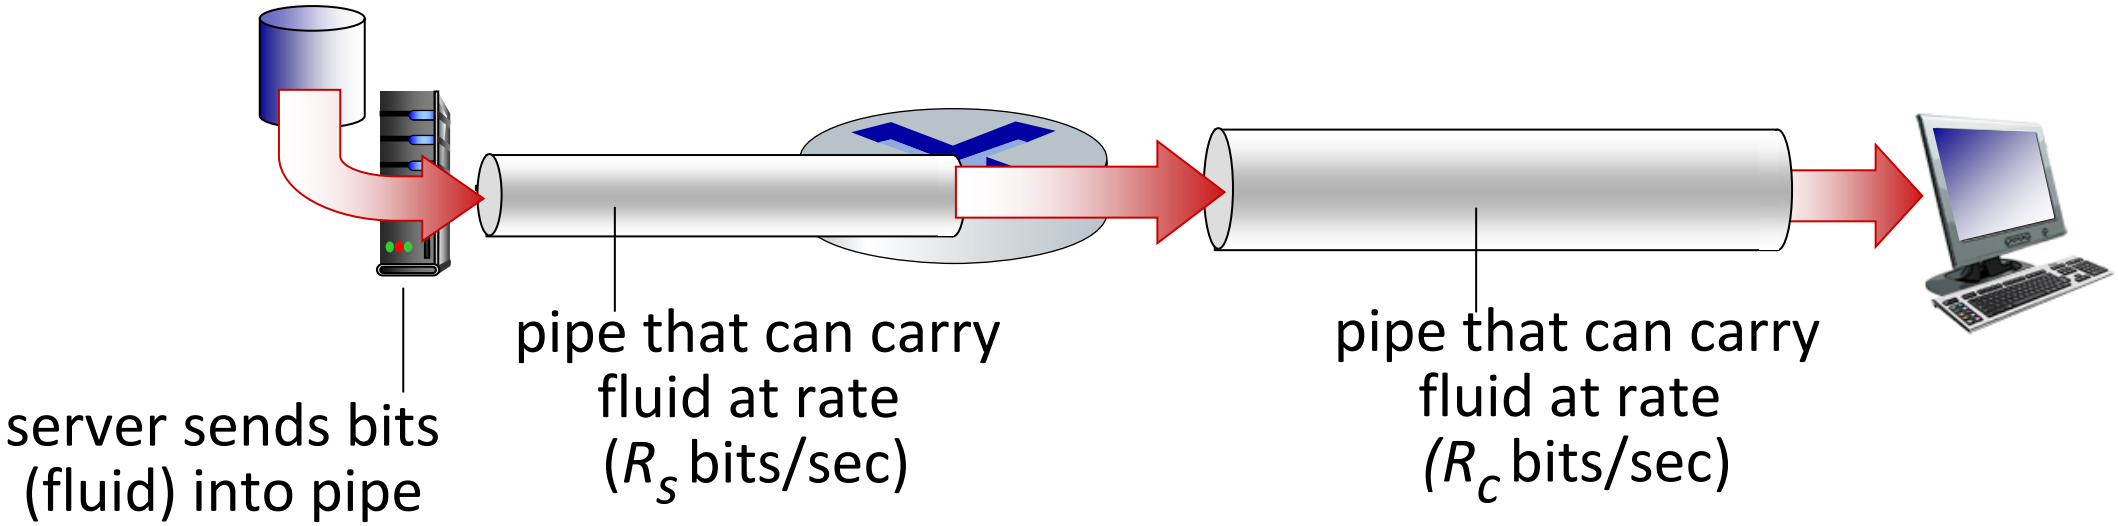

Throughput

$R_s < R_c$ What is average end-end throughput?

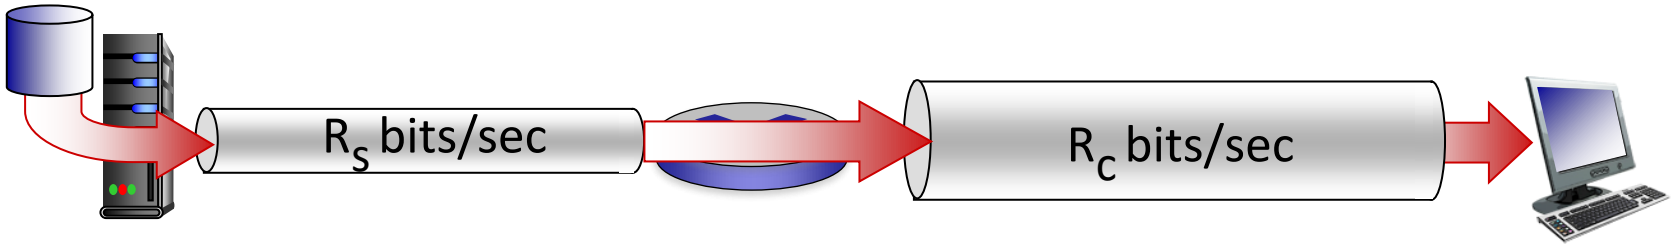

$R_s > R_c$ What is average end-end throughput?

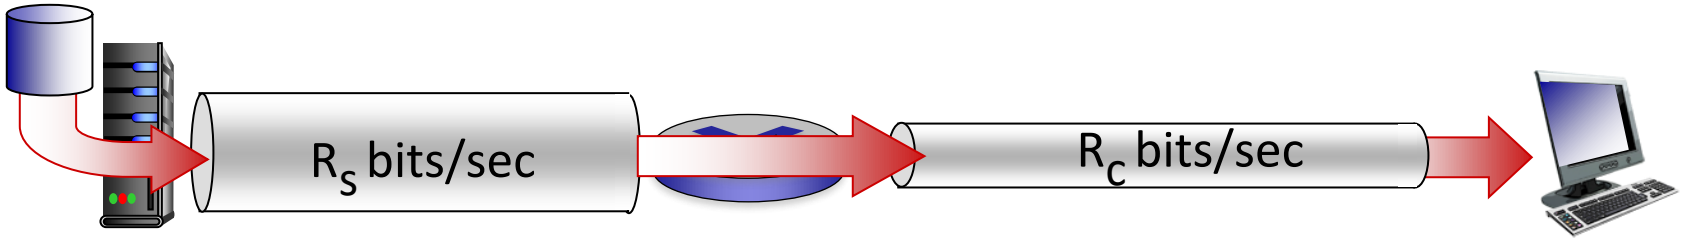

bottleneck link

link on end-end path that constrains end-end throughput

Throughput: network scenario

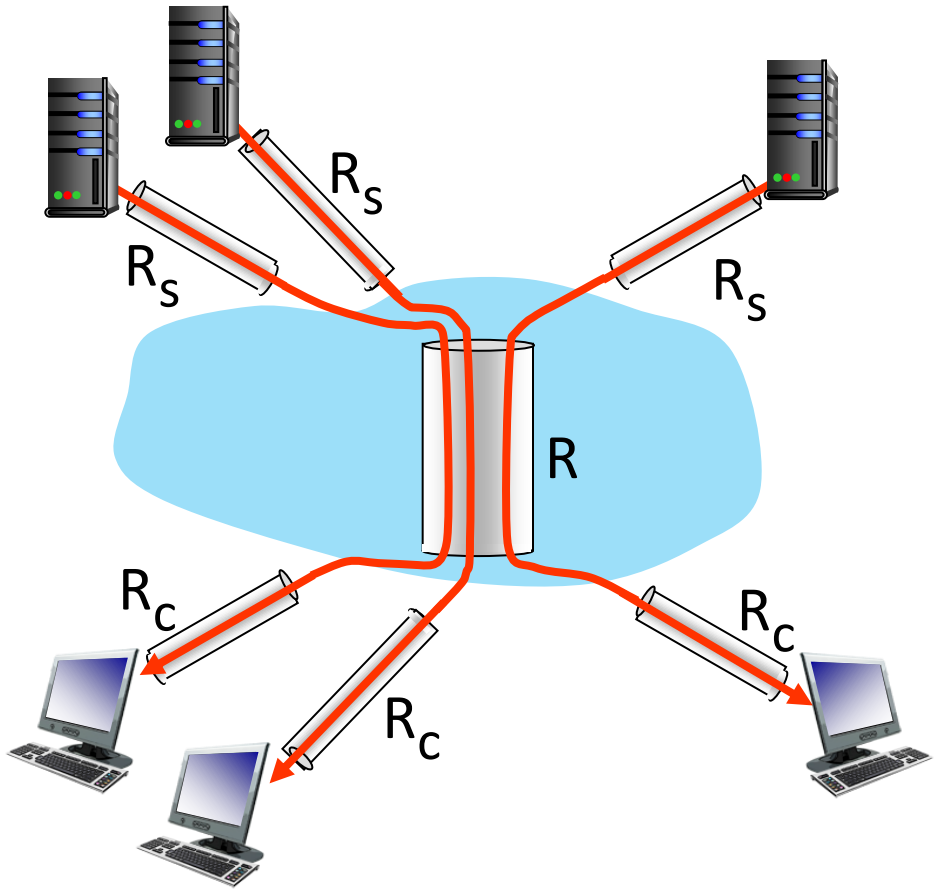

10 connections (fairly) share backbone bottleneck link *R* bits/sec

- per-connection end-end throughput: $min(R_c, R_s, R/10)$
- in practice: R_c or R_s is often bottleneck

* Check out the online interactive exercises for more examples: http://gaia.cs.umass.edu/kurose_ross/

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- **Security**
- Protocol layers, service models
- History

Network security

- Internet not originally designed with (much) security in mind
  - *original vision:* "a group of mutually trusting users attached to a transparent network" ☺
  - Internet protocol designers playing "catch-up"
  - security considerations in all layers!
- We now need to think about:
  - how bad guys can attack computer networks
  - how we can defend networks against attacks
  - how to design architectures that are immune to attacks

Network security

- Internet not originally designed with (much) security in mind
  - *original vision:* "a group of mutually trusting users attached to a transparent network" ☺
  - Internet protocol designers playing "catch-up"
  - security considerations in all layers!
- We now need to think about:
  - how bad guys can attack computer networks
  - how we can defend networks against attacks
  - how to design architectures that are immune to attacks

Bad guys: packet interception

packet "sniffing":

- broadcast media (shared Ethernet, wireless)
- promiscuous network interface reads/records all packets (e.g., including passwords!) passing by

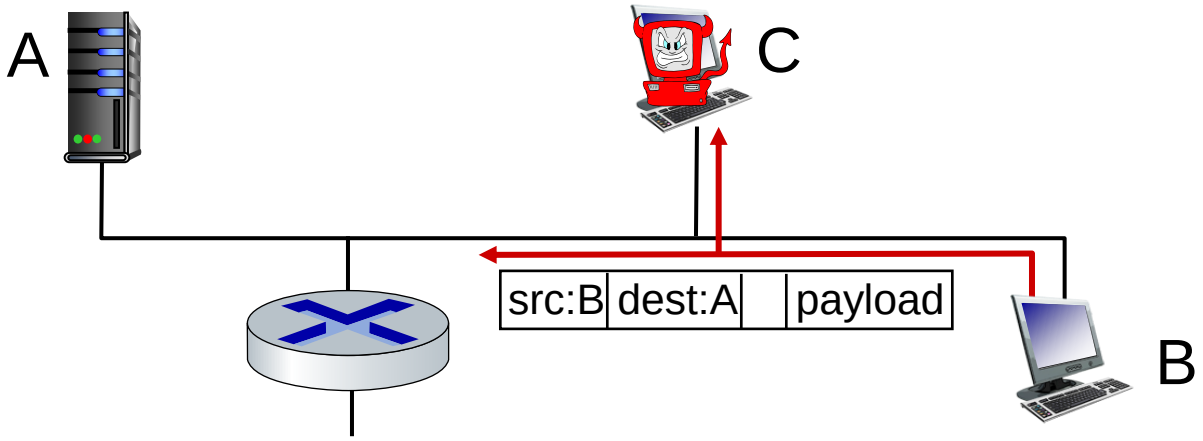

Wireshark software used for our end-of-chapter labs is a (free) packet-sniffer

Bad guys: fake identity

IP spoofing: injection of packet with false source address

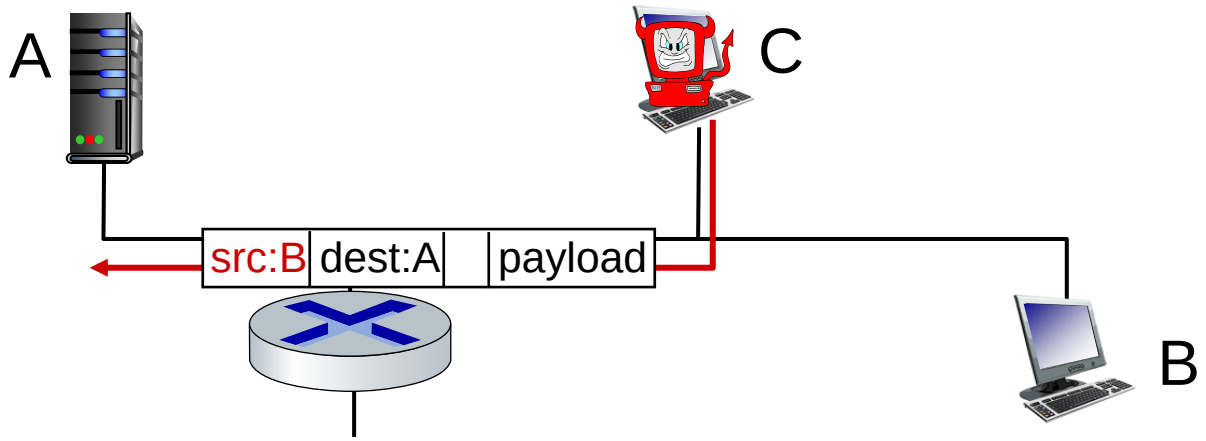

Bad guys: denial of service

Denial of Service (DoS): attackers make resources (server, bandwidth) unavailable to legitimate traffic by overwhelming resource with bogus traffic

1. select target
2. break into hosts around the network (see botnet)
3. send packets to target from compromised hosts

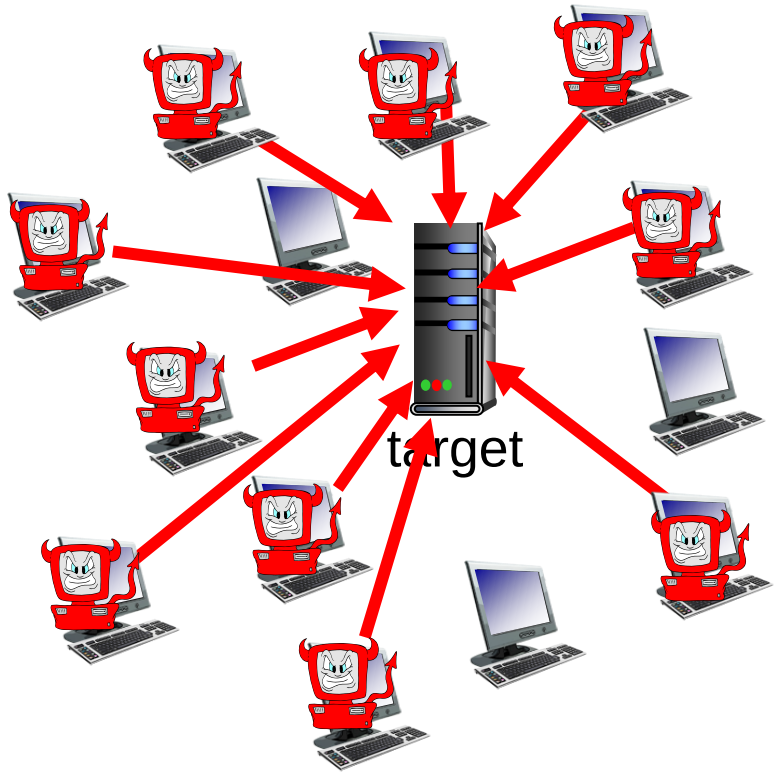

Lines of defense:

- authentication: proving you are who you say you are
  - cellular networks provides hardware identity via SIM card; no such hardware assist in traditional Internet
- confidentiality: via encryption
- integrity checks: digital signatures prevent/detect tampering
- access restrictions: password-protected VPNs
- firewalls: specialized "middleboxes" in access and core networks:
  - off-by-default: filter incoming packets to restrict senders, receivers, applications
  - detecting/reacting to DOS attacks

… lots more on security (throughout, Chapter 8)

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models
- History

Protocol “layers” and reference models

Networks are complex, with many “pieces”:

- hosts
- routers
- links of various media
- applications
- protocols
- hardware, software

Question: is there any hope of *organizing* structure of network?

- and/or our *discussion* of networks?

Example: organization of air travel



end-to-end transfer of person plus baggage

ticket (purchase)

baggage (check)

gates (load)

runway takeoff

airplane routing

ticket (complain)

baggage (claim)

gates (unload)

runway landing

airplane routing

airplane routing

How would you *define/discuss* the *system* of airline travel?

- a series of steps, involving many services

Example: organization of air travel

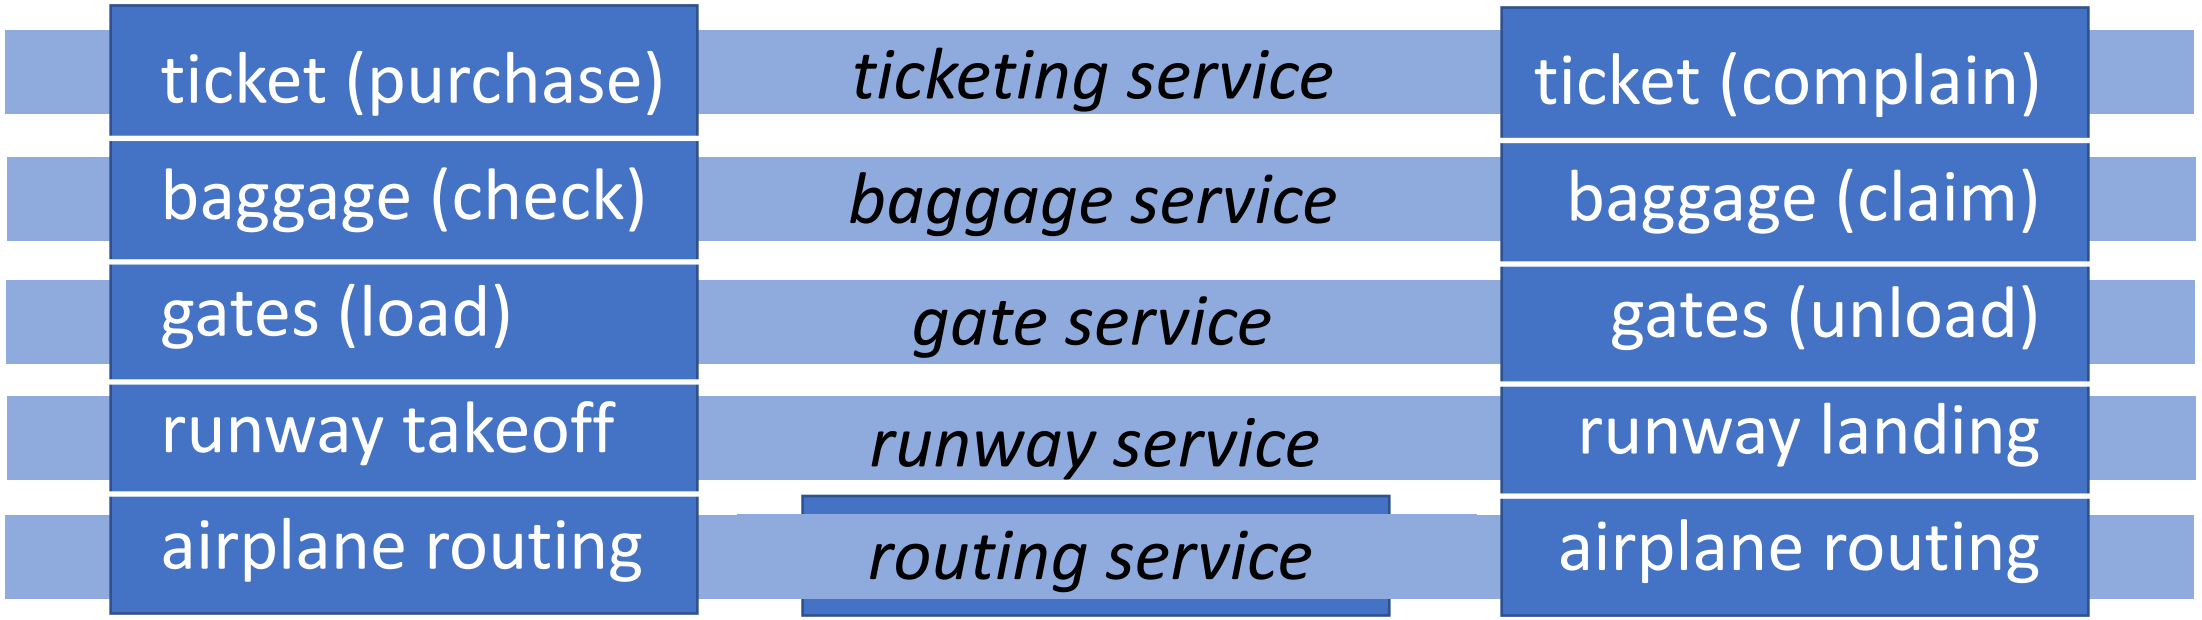

layers: each layer implements a service

- via its own internal-layer actions
- relying on services provided by layer below

Why layering?

Approach to designing/discussing complex systems:

- explicit structure allows identification, relationship of system's pieces
  - layered *reference model* for discussion
- modularization eases maintenance, updating of system
  - change in layer's service *implementation*: transparent to rest of system
  - e.g., change in gate procedure doesn't affect rest of system

Layered Internet protocol stack

- *application:* supporting network applications
  - HTTP, IMAP, SMTP, DNS
- *transport:* process-process data transfer
  - TCP, UDP
- *network:* routing of datagrams from source to destination
  - IP, routing protocols
- *link:* data transfer between neighboring network elements
  - Ethernet, 802.11 (WiFi), PPP
- *physical:* bits “on the wire”