



FLOW FORCE

Bulk Material Handling and Processing Equipment Specialists



COMPANY PROFILE

FLOW FORCE INDONESIA



ABOUT US

FLOW FORCE INDONESIA

With over 21 years of experience, we have supported numerous industrial clients in the Food, Pharmaceutical, Chemical, and Manufacturing sectors to optimize their production processes, implement world-class technologies, and achieve greater energy efficiency and productivity.

We offer a comprehensive range of products and services designed to meet diverse process requirements and deliver reliable performance across various industries.



Why Choose Us?

Flow Force Indonesia — Your trusted partner in bulk material handling and process solutions.

- ✓ Reliable equipment for dust collection, filtration, and conveying
- ✓ Proven expertise in industrial systems and components
- ✓ High-quality products — Rotary Valves, Blowers, Magnetic Separators, Pumps, Filters
- ✓ Committed to efficiency, performance, and customer support



Consultation
& Product Selection



Customized
Filtration Solutions



Installation Support
& Commissioning




After-Sales Support
& Technical Assistance

OUR MANUFACTURING FACILITIES

Located in Kawasan Industri Delta Silicon 5,
Jl. Kenari 1 Blok G1 No.23 D, Cikarang,
Bekasi 17550, Indonesia




 **FLOW FORCE**
Bulk Material Handling and Processing Equipment Specialists



HOW DO WE WORK?

We recognize the distinct challenges corporations encounter and are committed to guiding you with innovative and precise solutions.

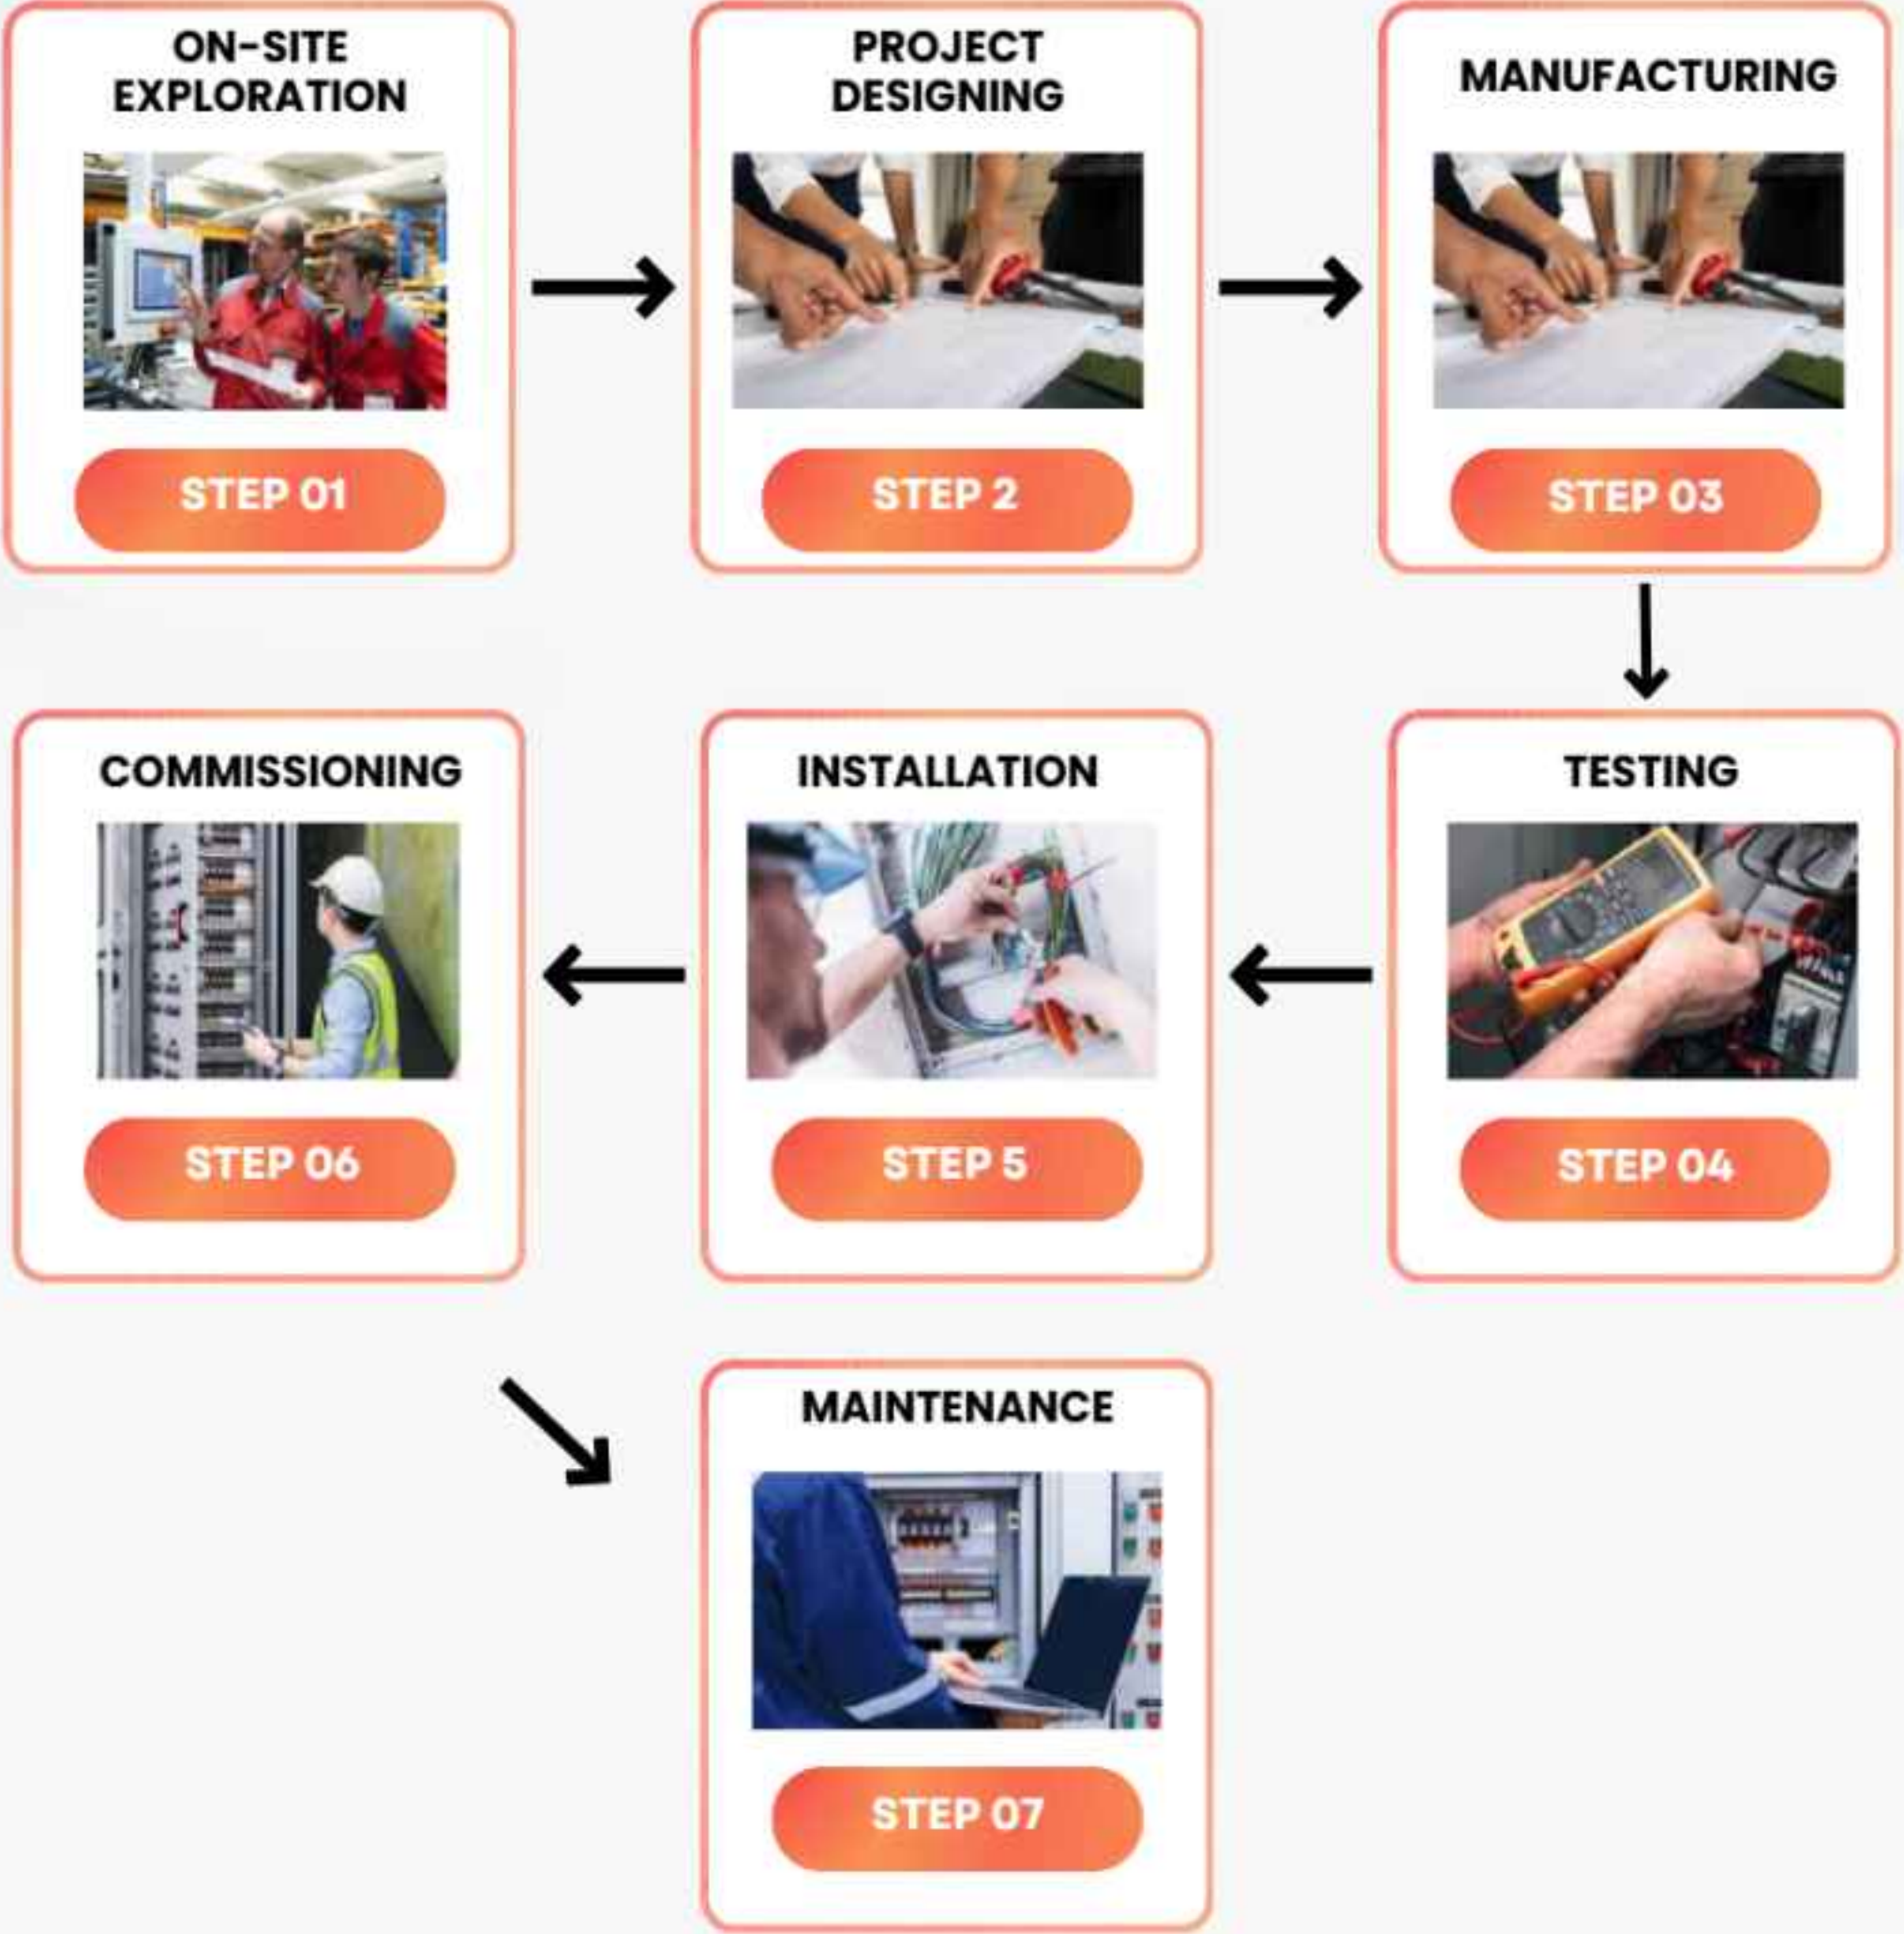

SOLIDS PROCESSING EQUIPMENT SYSTEM

SILOS AND SILO SYSTEMS

Our silo systems are engineered to safely and efficiently store **a wide range of dry, free-flowing bulk materials**, ensuring reliable performance and easy material discharge.

BENEFITS

- Less friction to the walls
- Less chance to bridge building
- Gentle material handling
- Complete discharging of products
- Efficient and simply designed
- Custom-built to suit individual requirements

OPTIONAL EXTRAS

- Stainless steel construction
- Aeration panels
- Activators in hopper



SILOS AND SILO SYSTEMS

CONVEYING

Economic conveying technology, designed to meet the specific requirements of feeding, discharging, collecting, storing, and loading processes.

Custom-made conveying systems are engineered according to customer needs and local site conditions, whether installed horizontally, on an incline, or in combination.

Flow Force Indonesia continuously strives to achieve optimal results in the handling of a wide range of granulated and powdered materials, ensuring efficient, reliable, and durable conveying performance.

TYPE OF CONVEYING

1. Bucket Elevator
2. Screw Conveyor
3. Z-Conveyor / Inclined Chain Conveyor
4. Chain Conveyor
5. Pneumatic Conveying

1. BUCKET ELEVATOR

Application

The bucket-elevator is designed for vertically handling a variety of dry, free flowing bulk materials efficiently and with high capacities.



BUCKET ELEVATOR

2. SCREW CONVEYOR

Application

The screw-conveyor is designed for handling a variety of dry, free flowing bulk materials either horizontally, on a incline or vertically. The screw-conveyer is extremely suitable as discharge conveyer for silo-unloading.



SCREW CONVEYOR

3. Z-CONVEYOR / INCLINED CHAIN CONVEYOR

Application

The Z-Conveyor or Inclined Chain Conveyor is designed for vertically handling a variety of dry, free flowing bulk materials efficiently and with high capacities.



**Z-CONVEYOR / INCLINED
CHAIN CONVEYOR**

4. CHAIN CONVEYOR

Application

The chain-conveyor is designed for handling a variety of dry, free flowing bulk materials either horizontally, on an incline or a combination of both. The chain conveyor is extremely suitable as distributor on silo blocks.



CHAIN CONVEYOR

5. PNEUMATIC CONVEYING

Application

Pneumatic conveying is the process of using air to move bulk materials from one point to another. We have the option of transporting via lean phase or dense phase.



PNEUMATIC CONVEYING

BIG-BAG HANDLING SOLUTIONS

Big Bags, also known as **FIBC (Flexible Intermediate Bulk Containers)**, are widely used for handling solid materials. We offer **a comprehensive range of solutions for safe and efficient big bag handling** across various industrial applications.

TYPE OF BIG-BAG:

1. BIG-BAG EMPTYING

The emptying of the big-bags can be done totally dustfree due to a special clamping device. A separate filter is not required.

OPTIONAL EXTRA'S

- Bag Pushers to active product which are extremely compacted.
- Cutting knife for Big-Bags without a spout without operator intervention.
- Frame suitable for crane with gantry.
- Frame suitable for forklift truck.
- FDA, EC1935/2004 certificate
- 3.1B material certificates.
- Weighing system (loss-in-weight)



BIG-BAG EMPTYING

2. BIG-BAG FILLING

The BBV is designed for (dustfree) filling of big-bags, filled with granular or pulverized products.

The spout is connected manually on the filling head. By means of a special clamping device the spout is connected completely dust-free. A control system takes care for all required steps e.g. coarse and fine dosing.

OPTIONAL EXTRA'S:

- | | |
|---------------------------------|---|
| • Nett or gross weighing system | • Empty pallet destacker |
| • Dosing system | • Dedusting system` |
| • Automatic height adjustment | • Sampling system |
| • Product compacting system | • Metal detector |
| • Rolling conveyors | • Automatic Big-Bag loop release |
| • Big-Bag inflation system | • Weighing system, suitable for legal calibration |



BIG-BAG FILLING

FILTRATION

DUST COLLECTOR

Air pollution has become a serious issue in the world. For example, in a quartz crushing plant, the quartz dust particles when mixed into the air, cause pollution and pose a danger for human health. **Dust Collector** are designed and used to handle high volume dust loads and improve the quality of air by removing dust and other impurities from air or gas. In a **Dust Collector System**, the dry dust is collected on the bag, a pulse (or pulses) of compressed air (6–7 bar) is used to hit or shock the bag and remove the dust.

CAPACITY RANGES

- Filtration Surface up to 7.000 m²
- Negative Pressure up to 3.500 mmWC
- Temperature up to 250°C

DESIGN OPTIONS

- Hopper Inlet, Pre-Separation Chamber
- Silo Top Type, Double Type
- Round Type For High Pressure

FILTER ELEMENTS

- Bag
- Cartridge
- Sinterlamel

CONSTRUCTION OPTIONS

- Welded
- Panel

PULSE SYSTEM

- On-Line
- Off-Line

MATERIAL OPTIONS

- Carbon Steel; St37/2, St52/3
- Stainless Steel; AISI304/316



TYPE OF DUST COLLECTOR



Exproof Type



Stainless Steel Type



Sinterlamel Type

WET SCRUBBER

A wet scrubber, the polluted gas stream is brought into contact with the scrubbing liquid, by spraying it with the liquid, by forcing it through a pool of liquid to remove the pollutants.

PERFORMANCE RANGES

- Flow Rate up to 50.000 m³/h
- Temperature up to 80°C

DESIGN OPTIONS

- Rectangular Type
- Round Type

MATERIAL OPTIONS

- Carbon Steel; St37/2, St52/3
- Stainless Steel; AISI304/316

APPLICATIONS

- Local Type Wet Scrubbers
- Central Type Wet Scrubbers
- Custom Designed Products

AUXILIARY EQUIPMENT

- Butterfly Valves
- Pumps



WET SCRUBBER SYSTEM



ODOUR CONTROL UNIT



**AQUA-CLONE
WET DUST COLLECTOR**

ROTARY VALVES & DIVERTER VALVES

ROTARY VALVES

Rotary Valves serve as crucial components in dry bulk handling systems, controlling material flow, maintaining system pressure, ensuring consistent feeding, and enables product metering.



AL/AXL Rotary Valve

All-round rotary valve for metering and conveying powders and granules.



AML Rotary Valve

All-round rotary valve with one round and one square flange.



USAL Rotary Valve

Drop-throughAll-round rotary valve with two square flanges.



MZC-I / MZC-II Rotary Valve

The standard in safety, hygiene and cleanability opens on **one side** in MZC-I and two sides for easy accessibility in MZC-II.



BL/BXL/BXXL Rotary Valve

Blow-throughPrecision metering and pneumatically conveying with a modular design.



MALD/MLD Rotary Valve

Ideal for vacuum conveying, bulk bag unloading, cyclone applications, and general-purpose use.



SAL Rotary Valve

Heavy-duty sanitary rotary valve.



GL Rotary Valve

The GL rotary valves are specially designed for gravity feeding and pneumatically conveying of granular products.



DL Rotary Valve

Dust lock rotary valve designed for filter application.

DIVERTER VALVES

Diverter Valves are designed to direct material flow, enabling system flexibility, supporting multiple production lines, and facilitating cleaning and maintenance procedures.



PTD plug diverter valve
Especially designed to route powders and pellets in pneumatic conveying systems with minimum degradation.



SPTD plug diverter valve
Universal diverter valve for diverting only.



SPTDS plug diverter valve
Plug-type Universal diverter valve for diverting only.



GPD plug diverter valve
Two-way, demountable gravity diverter valve ideal for system installations that require frequent cleaning with minimum downtime.



2-TDV Tube diverter valve
The 2-TDV is a compact diverter valve for pneumatically conveyed powders or pellets. It facilitates material transport to/from two locations.



3-TDV Tube diverter valve
The 3-TDV diverter valve expertly handles the pneumatic conveyance of powder or pellet materials to/from three destinations.



M-TDV Tube diverter valve
Space-saving multiport tube diverter valve with two-way flows to multiple destinations.



FDV flap diverter valve
Characterised by its compact form, simple construction and optimal sealing.



BTD ball diverter valve
Well-suited for high-pressure and high-temperature settings.

COMPONENTS



PRV
Pressure Relief Valve (PRV) Crucial safety device that prevents vessels like hoppers or silos from exploding or imploding.



COMPRESSION COUPLINGS
The original Morris compression coupling is designed to join pipe and tubing for pneumatic conveying systems.



DUC
Discharge Unit (DUC) Designed to prevent product bridging at the hopper outlet.

BUTTERFLY VALVES & KNIFE GATE VALVES

BUTTERFLY VALVES



TWO-PIECE
BUTTERFLY VALVES
- SOFT-SEATED



TWO-PIECE
BUTTERFLY VALVES -
PTFE-LINED



ONE-PIECE
BUTTERFLY VALVES -
SOFT-SEATED



DOUBLE FLANGE
BUTTERFLY VALVES



DOUBLE ECCENTRIC
BUTTERFLY VALVES



TRIPLE ECCENTRIC
BUTTERFLY VALVES



THROTTLE VALVES



GRANULATE AND
BULK MATERIAL
BUTTERFLY VALVE

KNIFE GATE VALVES



KNIFE GATE
VALVES C



DOMINO KNIFE
GATE VALVES



RECTANGULAR GATE
VALVE SD65 - AT650

SIEVING & FILTERING SOLUTIONS



CENTRIFUGAL SIEVING SIEVMASTER ROTA RANGE

- Uses a set of high-speed rotating paddles
- Offered in 3 sizes (from smallest to largest): 90-C single basket, 180-C single basket and 360-C twin basket variants



SIEVMASTER EASILIFT RANGE

- Features an effortless Powerlift sack tip hood, and a fully open hygienic support frame built around a powerful Slimline gravity sieve



GRADING SIEVMASTER MULTISCREEN RANGE

- Can be used for powders, liquids, ground or disintegrated products for the food & beverage, pharmaceutical, and chemical industries.



SIEVMASTER SEGREGATOR RANGE

- The Segregator Range works by using a pair of vibratory motors to move product along a large rectangular mesh screen in a linear direction. The larger surface area is especially useful for de-dusting, de-watering, and screening delicate product.



THE SIEVMASTER ULTRASONIC SYSTEM

- Applies high frequency, very low amplitude vibration to the mesh screen, helping to deblind and fluidise fine product so that it can be screened more easily



SIEVMASTER 700-ST SIEVE

- Can be used for highly efficient screening and grading of powders, liquids and ground products for the food, beverage, chemical, and pharmaceutical industries



SIEVMASTER SLIMLINE RANGE

- Circular sieves feature a powerful vibratory motor, and a single mesh screen housed in a hygienically sealed, easy to clean, stainless steel sieve body.



SIEVMASTER VACUUM & PRESSURE RANGE

- Utilises specially modified components to safely screen product whilst connected to a vacuum or positive pressure conveying system.



SIEVMASTER E-400 RANGE

- Comprised of a modular sieve stack built on a mobile frame; each stack is designed to be flexible enough to suit requirements such as grading and/or sack tipping.



THE SIEVMASTER 500-S

- The Sievmaster 500-S is a vibratory sieve designed with a 500mm diameter stainless steel hopper built on a wheeled, mobile frame.

INDUSTRIAL MIXING



FOUR RIBBON

- Batch size: from 80 to 35.000 liters (net)
- Through "U" shaped mixing chamber
- Mixing tools: four ribbon, opposed two by two
- Material of construction: carbon steel / Hardox 450 / AISI 304 / AISI 316 / AISI 316Ti



BATCH

- Technical features
- Batch size: from 65 to 28.000 liters (net)
- Cylindrical mixing chamber
- Mixing tools: ploughshare / ploughshare with toothed design / Mix Paddle / Mix Paddle with toothed design
- Material of construction: carbon steel / Hardox 450 / AISI 304 / AISI 316 / AISI 316Ti



EXTRACTASHAFT

- Batch size: from 65 to 28.000 liters (net)
- Cylindrical mixing chamber
- Mixing tools: ploughshare / ploughshare with toothed design / Mix Paddle / Mix Paddle with toothed design
- Material of construction: carbon steel / Hardox 450 / AISI 304 / AISI 316 / AISI 316Ti



REACTOR / DRYER

- Batch size: from 65 to 28.000 liters (net)
- Cylindrical mixing chamber
- Mixing tools: ploughshare / ploughshare with toothed design / Mix Paddle / Mix Paddle with toothed design



LABORATORY

- Batch size: 1,4 / 3 / 7 / 20 liters (net)
- Cylindrical mixing chamber
- Mixing tools: ploughshare / ploughshare with toothed design / Mix Paddle / Mix Paddle with toothed design
- Material of construction: AISI 304 / AISI 316 / AISI 316Ti




CONTINUOUS

- Hourly productivity: from 500 to 1.200.000 liters/h
- Cylindrical mixing chamber
- Mixing tools: ploughshare / ploughshare with toothed design / Mix Paddle / Mix Paddle with toothed design
- Material of construction: carbon steel / Hardox 450 / AISI 304 / AISI 316 / AISI 316Ti

EXPLOSION PROTECTION SYSTEMS

EXPLOSION VENTING DEVICES

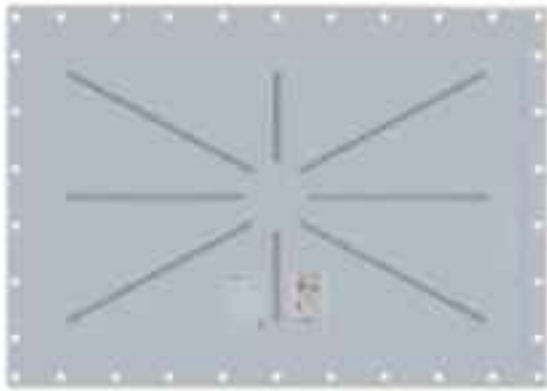

F - FLAT RECTANGULAR

- Suitable for applications with low operational pressure, For equipment with an operating temperature up to 100 °C, Installation without top flange, Stainless steel, Curved: radius on request, Certification according to EN 14797, 2014 /34/EU



D - DOMED RECTANGULAR

- Single-layer construction for devices with an operating temperature of up to 100 °C, Stainless steel, Certification according to EN 14797, 2014/34 /EU



SU - DOMED TRIPLE LAYER

- In a rectangular and round variant, Stainless steel with PTFE insulation, For use with devices with an operating temperature up to 240 °C, High vacuum resistance, Also suitable for equipment with pressure shocks, Certification according to EN 14797, 2014/34/EU



VENT PRO S RECTANGULAR DOMED VENTING DEVICES

- In a rectangular and round variant, Domed single-layer construction, For devices with operating temperatures up to 230°C, Integrated installation frame, Suitable for devices with pressure shocks, Suitable for food, pharmacy and chemical industry, Stainless steel, Certification according to EN 14797, 2014/34/EU

FLAMELESS EXPLOSION VENTING

The **FLEX flameless explosion venting device** is designed for safe indoor installation on industrial equipment. Unlike conventional systems that reach temperatures up to 1,500 °C, FLEX effectively cools flames and exhaust gases to safe levels, protecting both technology and personnel. It complies with the highest safety standards and is certified according to EN 16009.

ADVANTAGES:

- Efficient and Safe
- Industry Compatibility
- High Efficiency and Reliability
- Easy Installation & Maintenance-Free
- Certified & Versatile Application ((MIE, MIT)



EXPLOSION ISOLATION DEVICES



**EXPLOSION ISOLATION
VALVE VENTEX**

- Wide range of sizes from DN100 up to DN600
- Pressure resistant design
- Flame and pressure barrier
- Single-acting or Double-acting type
- Mild Steel, Stainless Steel AISI304 or AISI316 or Aluminium material
- Connecting Flange DIN or ANSI#150
- ATEX Certified



**EXPLOSION ISOLATION
SLIDE VALVE RSV**

- Wide range of sizes from DN80 up to DN150
- Pressure resistant design
- Flame and pressure barrier
- Double-acting type
- Mild Steel, Stainless Steel AISI304 or AISI316 or Aluminum material
- Connecting Flange DIN or ANSI#150
- ATEX Certified



**B-FLAP I - EXPLOSION
ISOLATION FLAP**

- Wide range of sizes from DN100 up to DN800
- Pressure resistant design
- Flame and pressure barrier
- Double-acting type
- Mild Steel and optional possibility to produce in a stainless steel version
- Connecting Flange DIN or ANSI#150
- ATEX Certified EN16447 and EN15089



**EXPLOSION ISOLATION
SLIDE VALVE**

- Wide range of sizes from DN80 up to DN150
- Pressure resistant design
- Flame and pressure barrier
- Double-acting type
- Mild Steel, Stainless Steel AISI304 or AISI316 or Aluminum material
- Connecting Flange DIN or ANSI#150 ATEX Certified

SPARK DETECTION SYSTEMS

Detection of sparks, embers and flames is the first step in preventing sparks and explosions. Our sturdy spark detectors register sparks and signal the central control unit, which begin combatting steps configured to the productions processes. The individual products of the Spark Detection system as listed below.



**SPARK
DETECTION**



**THE CONTROL UNIT,
DC1**



**AUTOMATIC
EXTINGUISHERS, SA1 – 4**



**BOOSTER
SYSTEM**

CHEMICAL SUPPRESSION SYSTEMS

The HRD system is a certified active explosion suppression system. Highly sensitive detectors can detect an explosion in a matter of milliseconds. The system then opens the valves of the HRD container unit and the pressure of the fire extinguisher pulls out special telescopic nozzles, which ensure efficient dispersion of the fire extinguisher into the entire protected area.



**EXPLOSION
DETECTOR**



**CONTROL
UNIT CONEX**



**HRD CONTAINER
UNIT**

CENTRAL VACUUM CLEANING SYSTEM



CENTRAL VACUUM SYSTEM - BC100IE

- Central vacuum cleaners for industrial use (for example industries, factories and companies).
- With the central vacuum cleaner BC100IE three operators are possible. That means that 3 people can clean the building at the same time connecting the flexible hose to different inlet valves.



CENTRAL VACUUM SYSTEM - D02

- For industrial use (industries, factories and companies).
- With this central vacuum (D02) equipped with inverter 4 people can clean simultaneously.
- Guarantees durability, constant high suction power and easy handling in the industrial sector.



CENTRAL VACUUM SYSTEM - H02

- The central vacuum cleaner H02 is one of the largest and most powerful central vacuums, allowing 8 simultaneous operators. Because of that it is ideal for the professional cleaning of large buildings and facilities.



- Picture of Central Vacuum Cleaner System Simulation

CENTRIFUGAL FANS



SY TYPE

- 16 fan models suitable for clean or slightly dusty air and gas
- Backward curved blades
- Capacity up to 190.000 m³/h
- Pressure up to 2000 mm c.a.
- Impeller diameter up to 2500 mm
- Max efficiency 84%
- Material of Construction Carbon steel/stainless steel AISI304, AISI316



SH TYPE

- 16 fan models suitable for clean or slightly dusty air and gas
- Backward curved blades
- Capacity up to 450.000 m³/h
- Pressure up to 700 mm c.a.
- Impeller diameter up to 2500 mm
- Max efficiency 86%
- Material of Construction Carbon steel/stainless steel AISI304, AISI316



GPA TYPE

- 18 fan models suitable for clean air and gas
- Backward airfoil blades
- Capacity up to 330.000 m³/h
- Pressure up to 480 mm c.a.
- Impeller diameter up to 2500 mm
- Max efficiency 90%
- Material of Construction Carbon steel/stainless steel AISI304, AISI316



SY 112

- 38 fan models suitable for clean or slightly dusty air and gas
- Backward flat blades
- Capacity up to 16.000 m³/h
- Pressure up to 2500 mm c.a.
- Impeller diameter up to 1250 mm
- Max efficiency 75%

AXIAL FANS, BLOWERS & ROTARY VACUUM PUMP



AT SERIES

- Impeller coupled with V-belt drive
- Special versions for high temperature (400C)
- Suitable for sucking of fumes, very aggressive or hot
- Special steels for impellers and drums
- Capacity up to 450.000 m³/h



BLOWERS

- Single Stage Side Channel Blower
- Single Stage Side Channel Blower



POSITIVE DISPLACEMENT BLOWERS

- Suitable for all those applications requiring considerably higher flow rate than that which can be achieved using side channel blowers and till 4200 m³ /h, and with discharge pressure till 1000 mbar g.
- Application: Air injection in the oxidation tanks of the wastewater treatment plants; Pneumatic conveying; Air injection in saturated soils



SLIDING VANE ROTARY VACUUM PUMPS

- Easy installation;
- Simple and economic maintenance;
- Low noise level;
- Unchangeable and high volumetric efficiency;
- Pulsation free sucked air flow;
- No vibration;

MAGNETIC SEPARATORS



MAGNETIC BAR / TUBE

- Round or Square shape
- Standard Size Ø25mm(Ø1 inch)
- Max length upto 2500 mm
- Construction material AISI304 or AISI316L
- Working temperature 800C to 3500C
- Magnetic strength upto 14,000 Gs



EASY – CLEANING MAGNETIC GRATE

- Standard sizes, or sizes made to order based on the customer request
- Construction material AISI304 or AISI316L
- Working temperature 800C to 3500C
- Magnetic strength upto 12,000 Gs
- Advantage Easy Cleaning



MAGNETIC GRATE – SQUARE / ROUND SHAPE

- Standard sizes, or sizes made to order based on the customer request
- Construction material AISI304 or AISI316L
- Working temperature 800C to 3500C
- Magnetic strength upto 14,000 Gs
- Easy Cleaning, grate with angle baffles or rod are available



MAGNETIC LIQUID TRAP

- Sizes from Ø1 inch upto Ø8 inch
- Construction material AISI304 or AISI316L
- Working temperature 800C to 3500C
- Magnetic strength upto 14,000 Gs
- Type of connection Flange or Tri-clove fittings



ROTARY GRATE – MAGNETIC SEPARATOR

- Quick detachable design
- Standard sizes, or sizes made to order based on the customer request
- Construction material AISI304 or AISI316L
- Working temperature 800C to 3500C
- Magnetic strength upto 12,000 Gs



DRAWER MAGNET

- Designed to remove ferrous metal contamination from powders, granules, and other dry materials.
- Made of stainless steel housing with high-intensity neodymium magnets (up to 12,000 Gauss) arranged in multiple layers for maximum separation efficiency.
- Easy to clean and available in various sizes for food, chemical, and plastic industries

**FLEXIBLE CONNECTORS, MORRIS COUPLING
& LEVEL SENSORS**

FLEXIBLE CONNECTORS



MORRIS COUPLINGS



COMPRESSION
COUPLINGS



GRIPPER COUPLERS



LIGHT-DUTY (LD)
COUPLING



IN-LINE SIGHT
GLASSES



SIDE-BAND
COUPLINGS



GASKET

LEVEL SENSORS



VIBRATING FORK LEVEL
SWITCH FOR SOLIDS



CAPACITIVE LEVEL
SENSOR



ROTATING PADDLE
LEVEL SENSOR FOR SOLIDS

AIRSWEEP



AirSweep eliminates bridging, ratholes and material handling build-up. Each nozzle emits a high-pressure, high-volume, 360-degree burst of compressed air to lift and sweep stalled material back into the flow stream – clearing the way for higher factory and material handling efficiency.



AIRSWEEP – MODEL VA-06

- System is mounted on the outside of the vessel for easy cleaning and maintenance. Mount to metal, concrete, fiberglass or wood



AIRSWEEP – MODEL VA-12

- Activates 4-6 feet diameter of material
- Ideal for medium to large bins, silos, hoppers, chutes, mixers, and other vessels and equipment



AIRSWEEP – MODEL VA-51

- Activates 6-8 feet diameter of material
- Ideal for large bins, silos, hoppers, chutes, mixers, and other vessels and equipment



AIRSWEEP – MODEL VA-51-MAX

- Faster material flow
- Working pressure between 4.1 and 6.9 bar



AIRSWEEP – MODEL VA-12-MAX

- Increase air flow by up to 27%
- Can be installed on metal, concrete, fiberglass or wood containers.

USDA ACCEPTED AIRSWEEP

- Ideal for applications requiring sanitary equipment or frequent cleaning.
- Eliminates ratholes, bridging & material buildup

COMPANY PROFILE

With over 21 years of experience, we have supported numerous industrial clients in the Food, Pharmaceutical, Chemical, and Manufacturing sectors to optimize their production processes, implement world-class technologies, and achieve greater energy efficiency and productivity.

We offer a comprehensive range of products and services designed to meet diverse process requirements and deliver reliable performance across various industries.

Our Services



**Consultation
& Product Selection**



**Customized
Filtration Solutions**



**Installation Support
& Commissioning**



**After-Sales Support
& Technical Assistance**

Why Choose Us?

Flow Force Indonesia — Your trusted partner in bulk material handling and process solutions.

- ✓ Reliable equipment for dust collection, filtration, and conveying
- ✓ Proven expertise in industrial systems and components
- ✓ High-quality products — Rotary Valves, Blowers, Magnetic Separators, Pumps, Filters
- ✓ Committed to efficiency, performance, and customer support

Contact



www.flow-force.com



info@flow-force.com



+62 811-1779-7810



Kawasan Industri Delta Silicon 5,
Jl. Kenari 1 Blok G1 No.23 D,
Cikarang Bekasi 17550, Indonesia