

Ping from HR pc(50.0.0.10) to SALES pc(60.0.0.2)

Step 1 : check connectivity HR pc to Router Interface e0/0 and Sales pc to int e0/1

QEMU (Win1)

```
C:\WINDOWS\system32\cmd.exe
C:\Documents and Settings\User>route print

Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 fe 9e 09 4f 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet Scheduler Miniport

Active Routes:
Network Destination Netmask Gateway Interface Metric
127.0.0.0 255.0.0.0 127.0.0.1 127.0.0.1 1
169.254.0.0 255.255.0.0 169.254.90.139 169.254.90.139 10
169.254.90.139 255.255.255.255 127.0.0.1 127.0.0.1 10
169.254.255.255 255.255.255.255 169.254.90.139 169.254.90.139 10
224.0.0.0 240.0.0.0 169.254.90.139 169.254.90.139 10
255.255.255.255 255.255.255.255 169.254.90.139 169.254.90.139 1

Persistent Routes:
None

C:\Documents and Settings\User>ncpa.cpl

C:\Documents and Settings\User>route print

Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 fe 9e 09 4f 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet Scheduler Miniport

Active Routes:
Network Destination Netmask Gateway Interface Metric
50.0.0.0 255.0.0.0 50.0.0.10 50.0.0.10 10
50.255.255.255 255.255.255.255 50.0.0.10 50.0.0.10 10
127.0.0.0 255.0.0.0 127.0.0.1 127.0.0.1 1
224.0.0.0 240.0.0.0 50.0.0.10 50.0.0.10 10
255.255.255.255 255.255.255.255 50.0.0.10 50.0.0.10 1

Persistent Routes:
None

C:\Documents and Settings\User>
```

QEMU (Win2)

```
C:\WINDOWS\system32\cmd.exe
C:\Documents and Settings\User>route print

Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 86 5f 09 50 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet Scheduler Miniport

Active Routes:
Network Destination Netmask Gateway Interface Metric
127.0.0.0 255.0.0.0 127.0.0.1 127.0.0.1 1
169.254.0.0 255.255.0.0 169.254.173.75 169.254.173.75 10
169.254.173.75 255.255.255.255 127.0.0.1 127.0.0.1 10
169.254.255.255 255.255.255.255 169.254.173.75 169.254.173.75 10
224.0.0.0 240.0.0.0 169.254.173.75 169.254.173.75 10
255.255.255.255 255.255.255.255 169.254.173.75 169.254.173.75 1

Persistent Routes:
None

C:\Documents and Settings\User>ncpa.cpl

C:\Documents and Settings\User>route print

Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 86 5f 09 50 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet Scheduler Miniport

Active Routes:
Network Destination Netmask Gateway Interface Metric
60.0.0.0 255.0.0.0 60.0.0.10 60.0.0.10 10
60.0.0.10 255.255.255.255 127.0.0.1 127.0.0.1 10
60.255.255.255 255.255.255.255 60.0.0.10 60.0.0.10 10
127.0.0.0 255.0.0.0 127.0.0.1 127.0.0.1 1
224.0.0.0 240.0.0.0 60.0.0.10 60.0.0.10 10
255.255.255.255 255.255.255.255 60.0.0.10 60.0.0.10 1

Persistent Routes:
None

C:\Documents and Settings\User>
```

C:\Documents and Settings\User>ping 50.0.0.1

Pinging 50.0.0.1 with 32 bytes of data:
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255
Ping statistics for 50.0.0.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Documents and Settings\User>ping 60.0.0.1

Pinging 60.0.0.1 with 32 bytes of data:
Reply from 60.0.0.1: bytes=32 time=5ms TTL=255
Reply from 60.0.0.1: bytes=32 time=1ms TTL=255
Reply from 60.0.0.1: bytes=32 time=1ms TTL=255
Reply from 60.0.0.1: bytes=32 time=1ms TTL=255
Ping statistics for 60.0.0.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 5ms, Average = 1ms

Step 2 : check connectivity HR pc to Router Interface e0/1 and Sales pc to int e0/0

C:\Documents and Settings\User>ping 60.0.0.1

Pinging 60.0.0.1 with 32 bytes of data:
Destination host unreachable.
Destination host unreachable.
Destination host unreachable.
Destination host unreachable.
Ping statistics for 60.0.0.1:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Documents and Settings\User>ping 50.0.0.1

Pinging 50.0.0.1 with 32 bytes of data:
Destination host unreachable.
Destination host unreachable.
Destination host unreachable.
Destination host unreachable.
Ping statistics for 50.0.0.1:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

Fix this problem : Method 1

C:\Documents and Settings\User>route add 60.0.0.0 mask 255.0.0.0 50.0.0.1

C:\Documents and Settings\User>route print

Interface List
0x1 MS TCP Loopback interface
0x2 ...50 fe 9e 09 4f 00 Intel(R) PRO/1000 MT Network Connection - Packet Scheduler Miniport

Active Routes:
Network Destination Netmask Gateway Interface Metric
50.0.0.0 255.0.0.0 50.0.0.10 50.0.0.10 10
50.0.0.10 255.255.255.255 50.0.0.10 50.0.0.10 10
50.255.255.255 255.255.255.255 50.0.0.10 50.0.0.10 10
60.0.0.0 255.0.0.0 50.0.0.1 50.0.0.1 1
60.0.0.10 255.255.255.255 127.0.0.1 127.0.0.1 10
127.0.0.0 255.0.0.0 127.0.0.1 127.0.0.1 1
224.0.0.0 240.0.0.0 50.0.0.10 50.0.0.10 10
255.255.255.255 255.255.255.255 50.0.0.10 50.0.0.10 1

Persistent Routes:
None

C:\Documents and Settings\User>ping 60.0.0.1

Pinging 60.0.0.1 with 32 bytes of data:
Reply from 60.0.0.1: bytes=32 time=1ms TTL=255
Reply from 60.0.0.1: bytes=32 time=1ms TTL=255
Reply from 60.0.0.1: bytes=32 time=1ms TTL=255
Reply from 60.0.0.1: bytes=32 time=1ms TTL=255
Ping statistics for 60.0.0.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Documents and Settings\User>route add 50.0.0.0 mask 255.0.0.0 60.0.0.1

C:\Documents and Settings\User>route print

Interface List
0x1 MS TCP Loopback interface
0x2 ...50 86 5f 09 50 00 Intel(R) PRO/1000 MT Network Connection - Packet Scheduler Miniport


Active Routes:
Network Destination Netmask Gateway Interface Metric
50.0.0.0 255.0.0.0 60.0.0.1 60.0.0.1 10
50.0.0.10 255.255.255.255 127.0.0.1 127.0.0.1 10
60.255.255.255 255.255.255.255 60.0.0.10 60.0.0.10 10
127.0.0.0 255.0.0.0 127.0.0.1 127.0.0.1 1
224.0.0.0 240.0.0.0 60.0.0.10 60.0.0.10 10
255.255.255.255 255.255.255.255 60.0.0.10 60.0.0.10 1

Persistent Routes:
None

C:\Documents and Settings\User>ping 50.0.0.1

Pinging 50.0.0.1 with 32 bytes of data:
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255
Ping statistics for 50.0.0.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 1ms, Average = 1ms

Fix this problem : Method 2

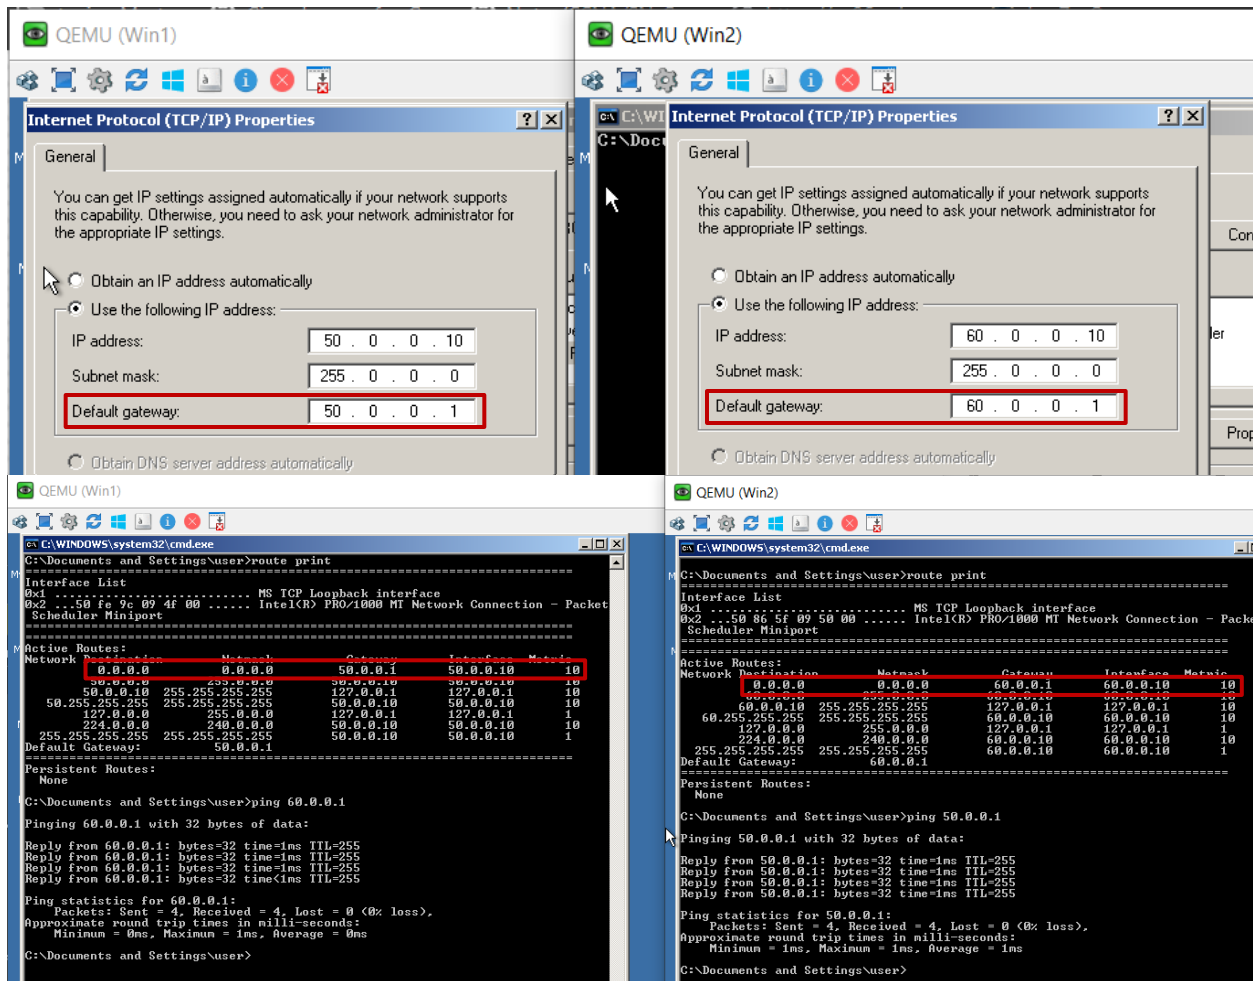

Ping from HR pc(50.0.0.10) to SALES pc(60.0.0.2)- Success

