




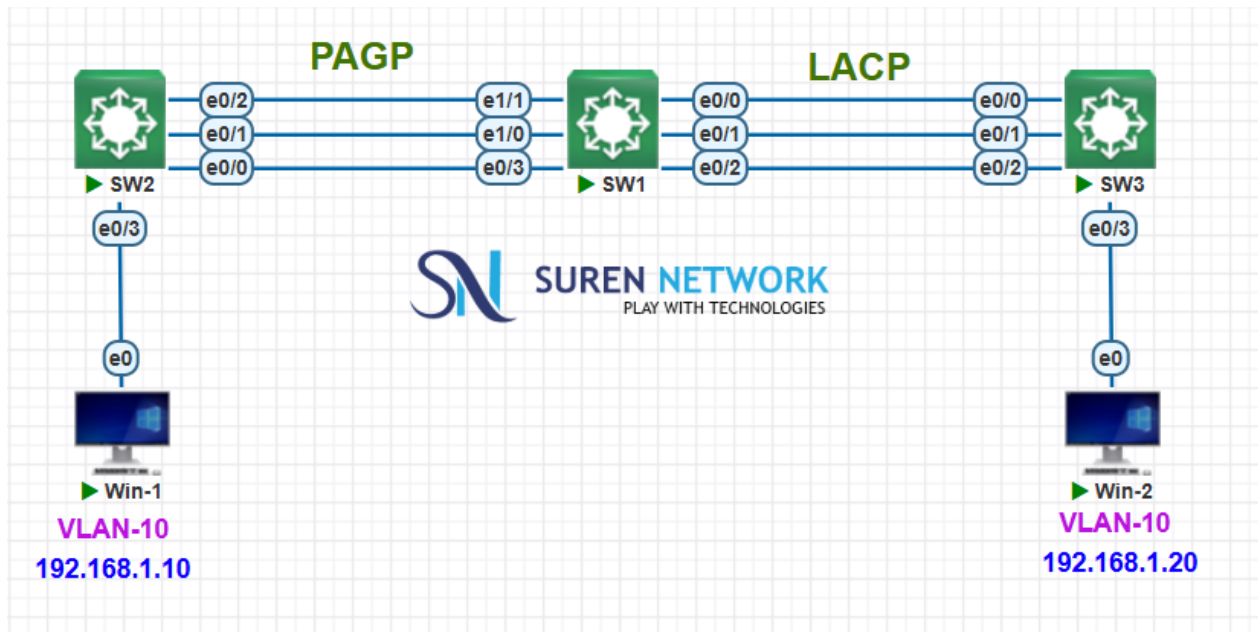


Create Etherchannel on switch-1 to switch-2 with protocol PagP

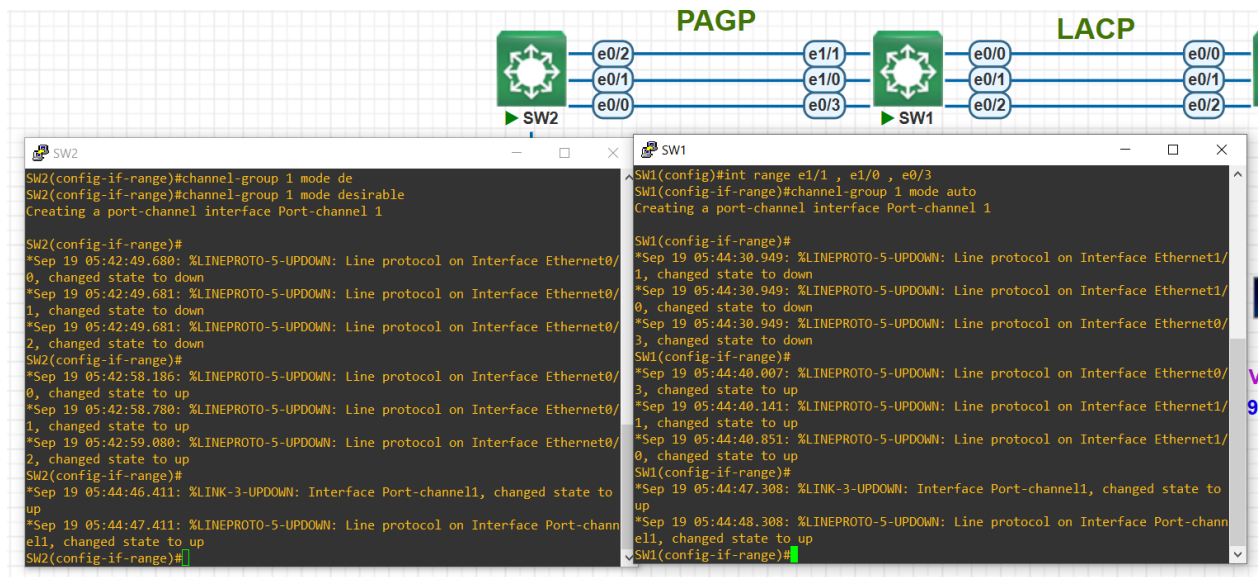


Create etherchannel on switch-1 to switch-3 with protocole LACP

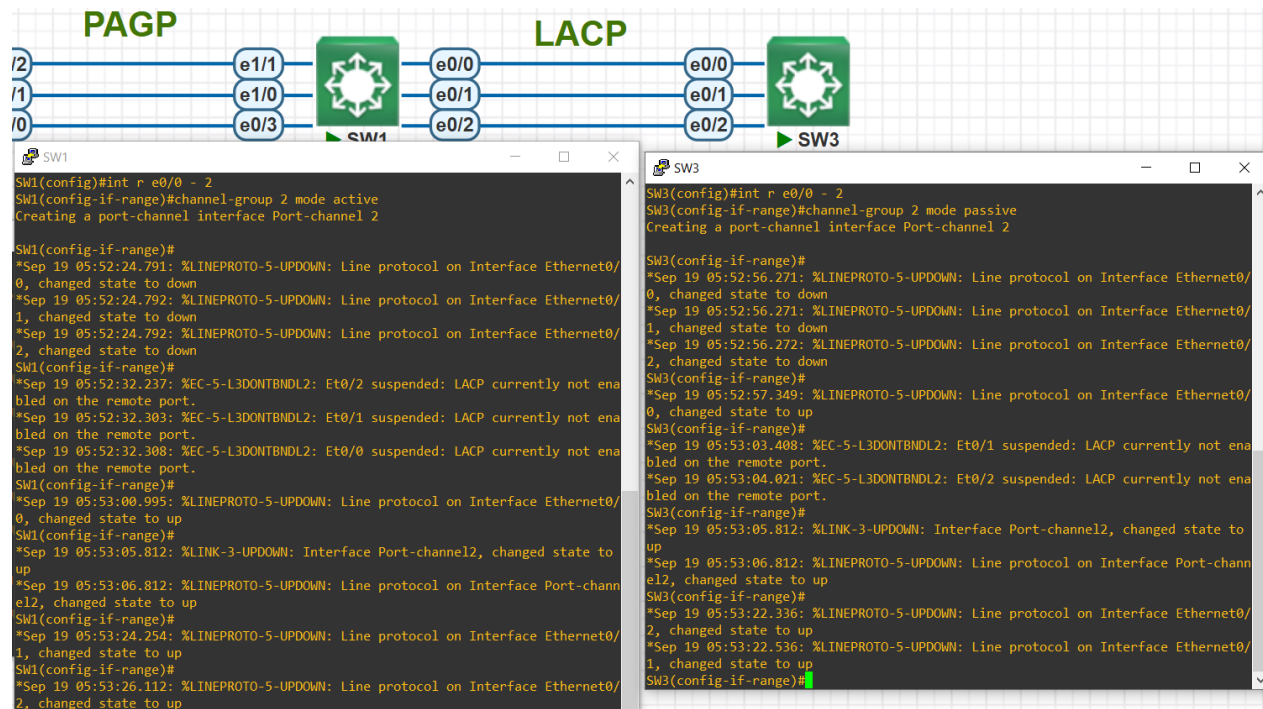

Check etherchannel status

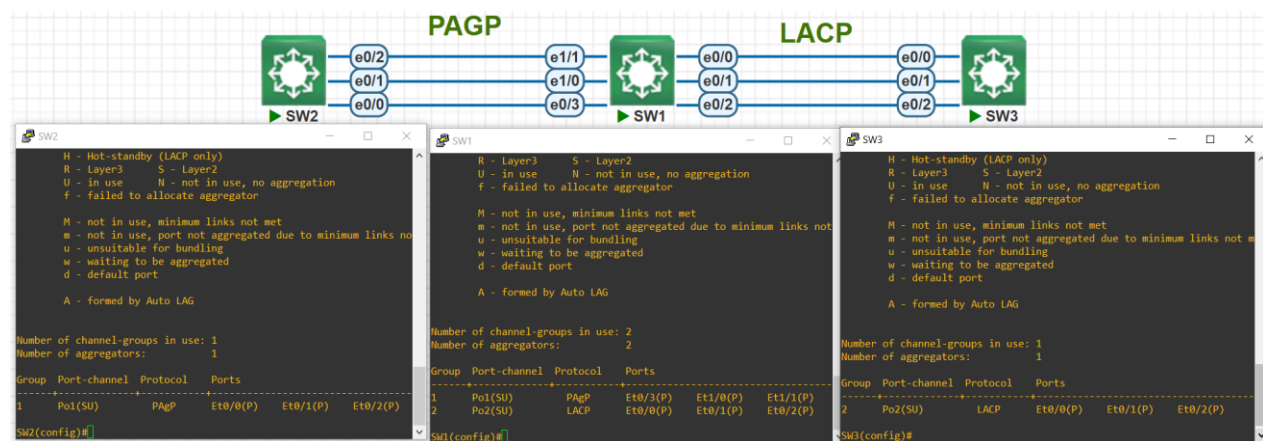

Connectivity check

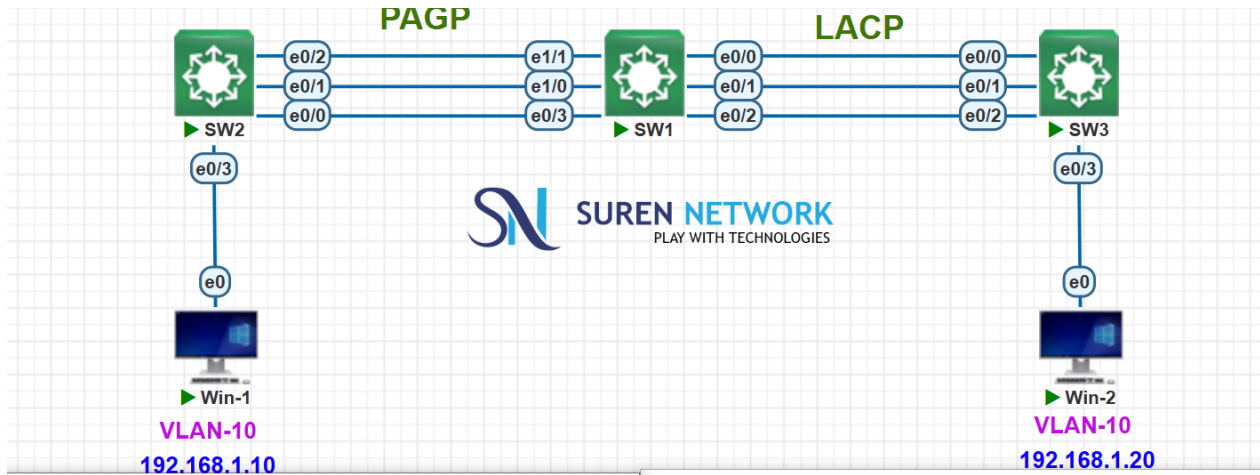

```
C:\WINDOWS\system32\cmd.exe
C:\Documents and Settings\User>ping 192.168.1.20
Pinging 192.168.1.20 with 32 bytes of data:
Reply from 192.168.1.20: bytes=32 time=4ms TTL=128
Reply from 192.168.1.20: bytes=32 time=2ms TTL=128
Reply from 192.168.1.20: bytes=32 time=1ms TTL=128
Reply from 192.168.1.20: bytes=32 time=2ms TTL=128
Ping statistics for 192.168.1.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 4ms, Average = 2ms
C:\Documents and Settings\User>
```

```
C:\WINDOWS\system32\cmd.exe
C:\Documents and Settings\User>ping 192.168.1.10
Pinging 192.168.1.10 with 32 bytes of data:
Reply from 192.168.1.10: bytes=32 time=3ms TTL=128
Reply from 192.168.1.10: bytes=32 time=1ms TTL=128
Reply from 192.168.1.10: bytes=32 time=2ms TTL=128
Reply from 192.168.1.10: bytes=32 time=2ms TTL=128
Ping statistics for 192.168.1.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 3ms, Average = 2ms
C:\Documents and Settings\User>
```