


Mohamed Elsayed Emam Abouelfotoh

Task (basic configuration switch and telnet protocol)

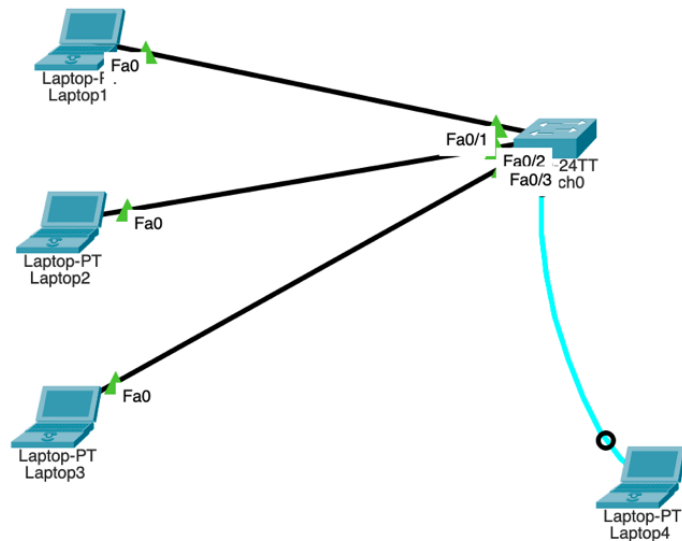

Basic Configuration Switch:

```
Switch>
Switch>
Switch>enable
Switch#config ter
Switch#config terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#hostname SW1
SW1(config)#enable secret 12345
SW1(config)#line console 0
SW1(config-line)#password 1234
SW1(config-line)#login
SW1(config-line)#exit
SW1(config)#
```

Switched Virtual Interface (SVI):

```
SW1(config)#interface vlan 1
SW1(config-if)#ip address 192.168.1.1 255.255.255.0
SW1(config-if)#no shutdown

SW1(config-if)#
%LINK-3-UPDOWN: Interface Vlan1, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed
state to up
```

Telnet:

```
SW1(config)#line vty 0 4
SW1(config-line)#password 1234
SW1(config-line)#login
SW1(config-line)#
SW1(config-line)#exit
SW1(config)#exit
SW1#
%SYS-5-CONFIG_I: Configured from console by console

SW1#wr
Building configuration...
[OK]
SW1#|
```

IP For Laptop

Laptop1

PhysicalConfigDesktopProgrammingAttributes

IP ConfigurationX

InterfaceFastEthernet0

IP Configuration

DHCPStatic

This address is already used in the network.

IPv4 Address192.168.1.10

Subnet Mask255.255.255.0

Default Gateway192.168.1.1

DNS Server0.0.0.0

IPv6 Configuration

AutomaticStatic

IPv6 Address

Link Local AddressFE80::210:11FF:FE16:3448

Default Gateway

DNS Server

Laptop2

PhysicalConfigDesktopProgrammingAttributes

IP ConfigurationX

InterfaceFastEthernet0

IP Configuration

DHCPStatic

IPv4 Address192.168.1.11

Subnet Mask255.255.255.0

Default Gateway192.168.1.1

DNS Server0.0.0.0

IPv6 Configuration

AutomaticStatic

IPv6 Address

Link Local AddressFE80::260:70FF:FED4:B2

Default Gateway

DNS Server

Laptop3

Physical

Config

Desktop

Programming

Attributes

IP Configuration

X

Interface

FastEthernet0

IP Configuration

DHCP

Static

IPv4 Address

192.168.1.12

Subnet Mask

255.255.255.0

Default Gateway

192.168.1.1

DNS Server

0.0.0.0

IPv6 Configuration

Automatic

Static

IPv6 Address /

Link Local Address

FE80::2D0:BCFF:FED7:B367

Default Gateway

DNS Server

Laptop4

Physical

Config

Desktop

Programming

Attributes

IP Configuration

X

Interface

FastEthernet0

IP Configuration

DHCP

Static

IPv4 Address

192.168.1.13

Subnet Mask

255.255.255.0

Default Gateway

192.168.1.1

DNS Server

0.0.0.0

IPv6 Configuration

Automatic

Static

IPv6 Address /


Link Local Address

FE80::201:97FF:FE01:C013

Default Gateway

DNS Server

Telnet

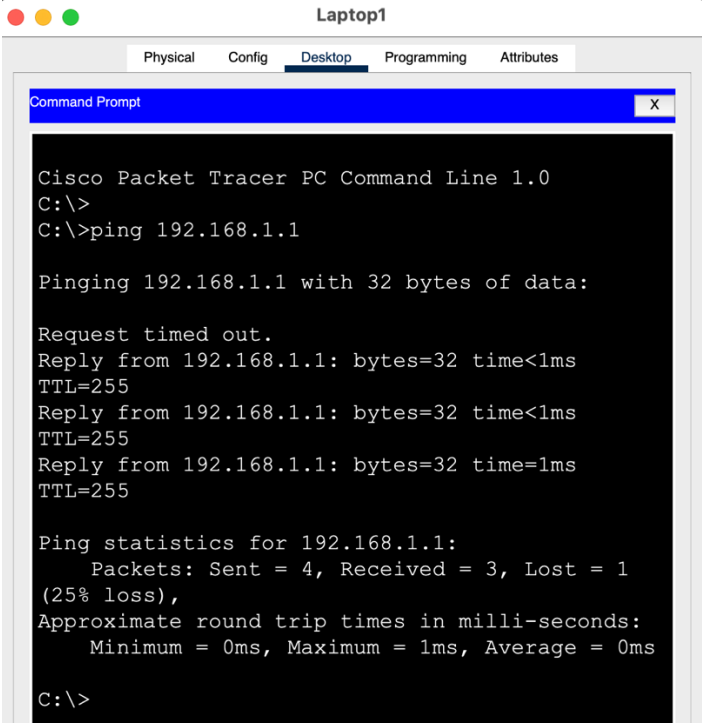

The screenshot shows a 'Laptop1' window with tabs for Physical, Config, Desktop, Programming, and Attributes. The 'Desktop' tab is active, displaying a 'Command Prompt' window. The command prompt shows the execution of a ping command to 192.168.1.1. The output indicates that the ping failed due to a 'Request timed out'.


```
Cisco Packet Tracer PC Command Line 1.0
C:\>
C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Request timed out.
Reply from 192.168.1.1: bytes=32 time<1ms
TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms
TTL=255
Reply from 192.168.1.1: bytes=32 time=1ms
TTL=255

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 3, Lost = 1
    (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

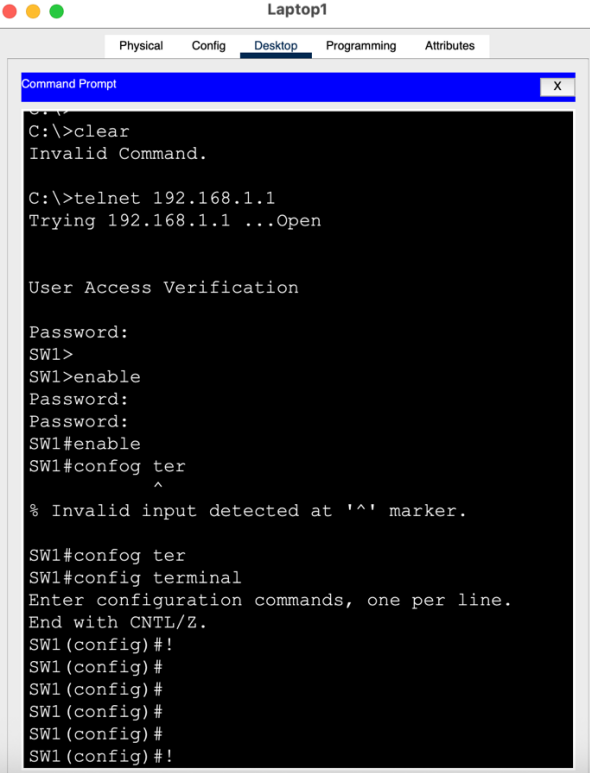

The screenshot shows the same 'Laptop1' window. The 'Command Prompt' now shows the execution of a telnet command to 192.168.1.1. The output shows the connection attempt, user access verification, and the user entering 'enable' and 'confog ter' (which is corrected to 'config terminal'). The prompt changes to 'SW1(config)#'.

```
C:\>
C:\>clear
Invalid Command.

C:\>telnet 192.168.1.1
Trying 192.168.1.1 ...Open

User Access Verification

Password:
SW1>
SW1>enable
Password:
Password:
SW1#enable
SW1#confog ter
      ^
% Invalid input detected at '^' marker.

SW1#confog ter
SW1#config terminal
Enter configuration commands, one per line.
End with CNTL/Z.
SW1(config)#!
SW1(config)#
SW1(config)#
SW1(config)#
SW1(config)#
SW1(config)#
SW1(config)#!
```

