Mohamed Sameh Elkholy
RHSA2 - Lab 2

1. Display your MAC address by 2 different ways.

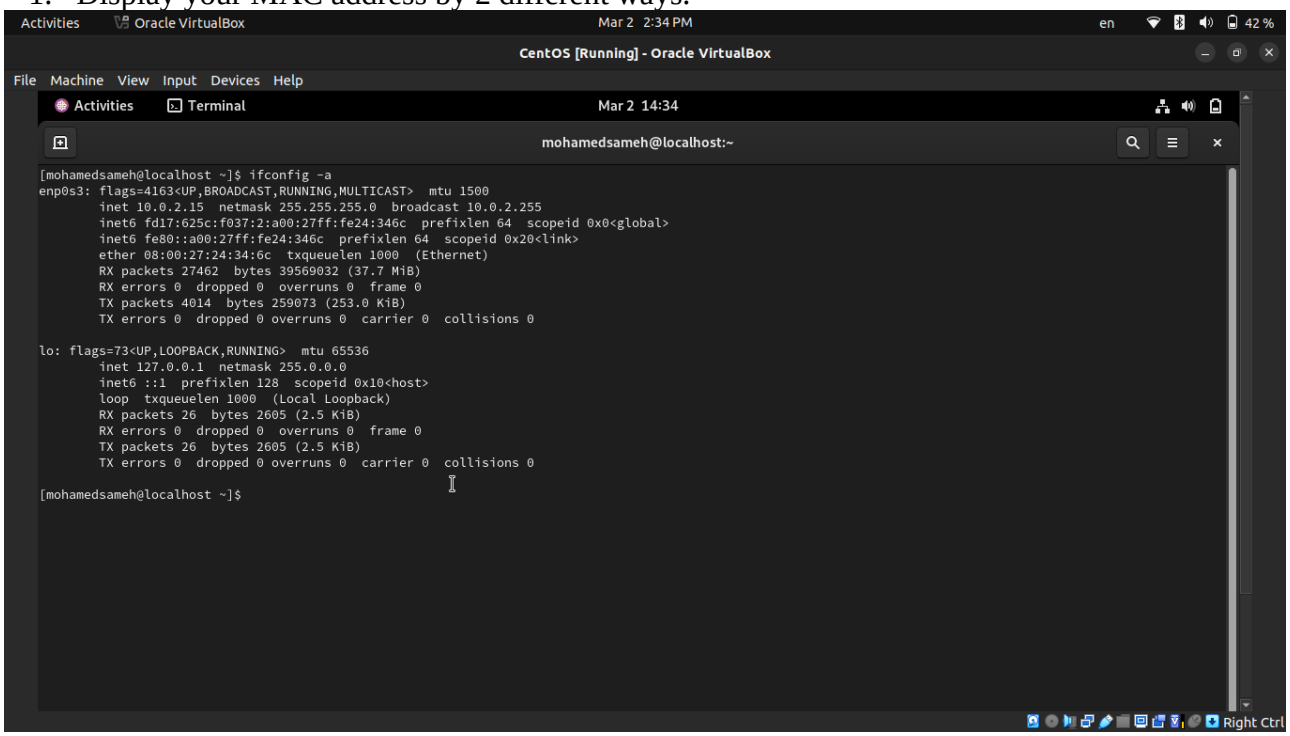

2. Display the network settings of all active interfaces.

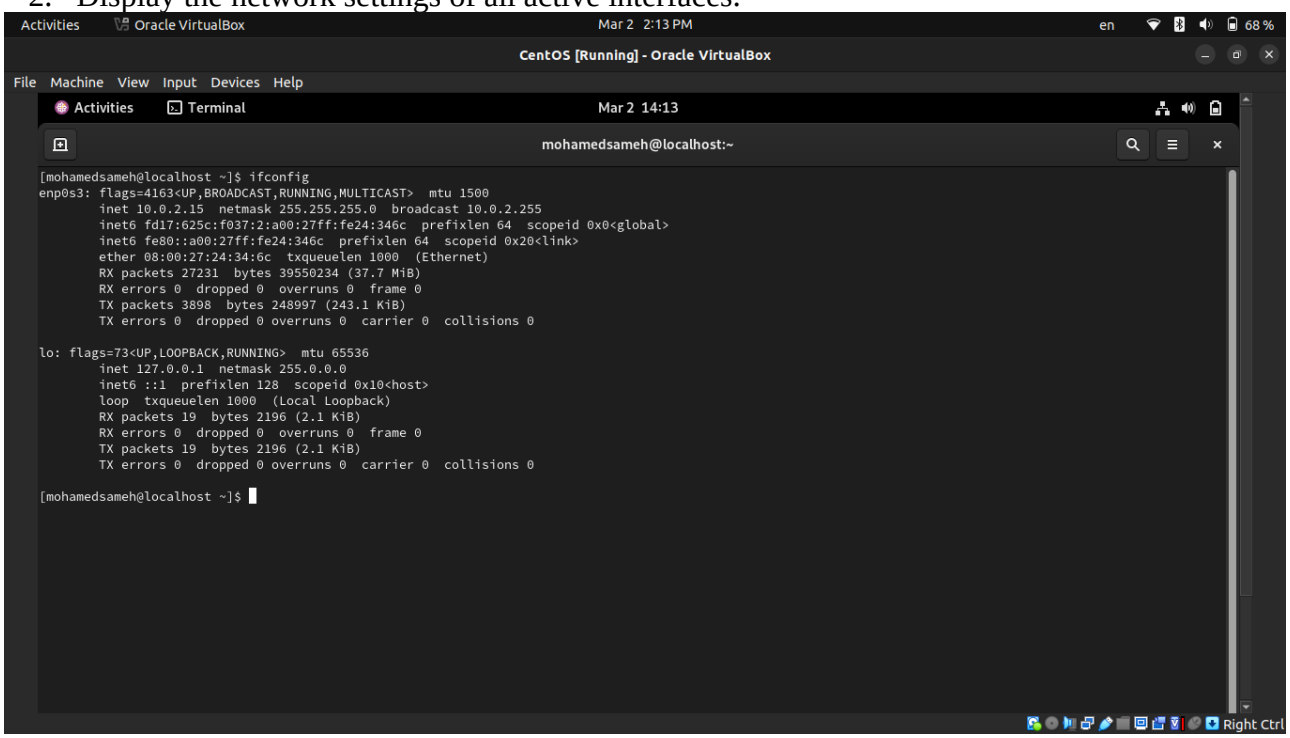

3. Display the network setting of all interfaces both active inactive.

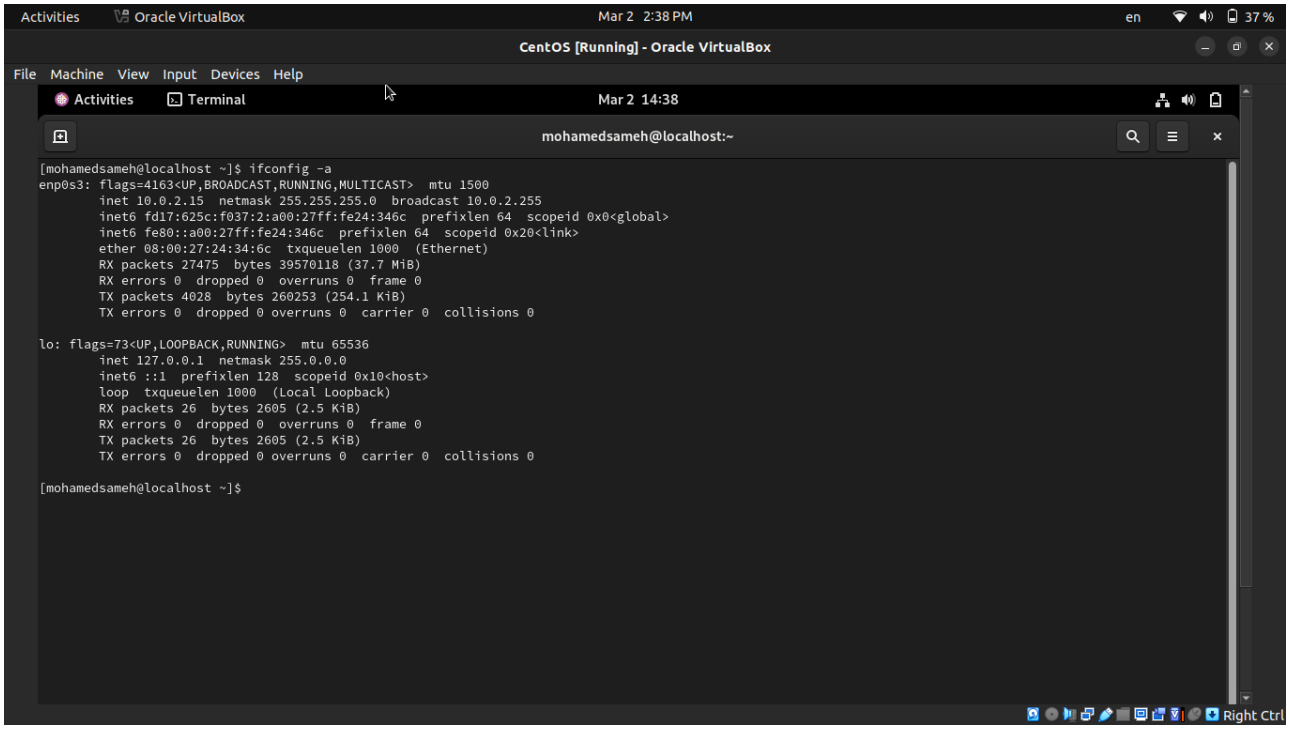

4. Bring your interface down.

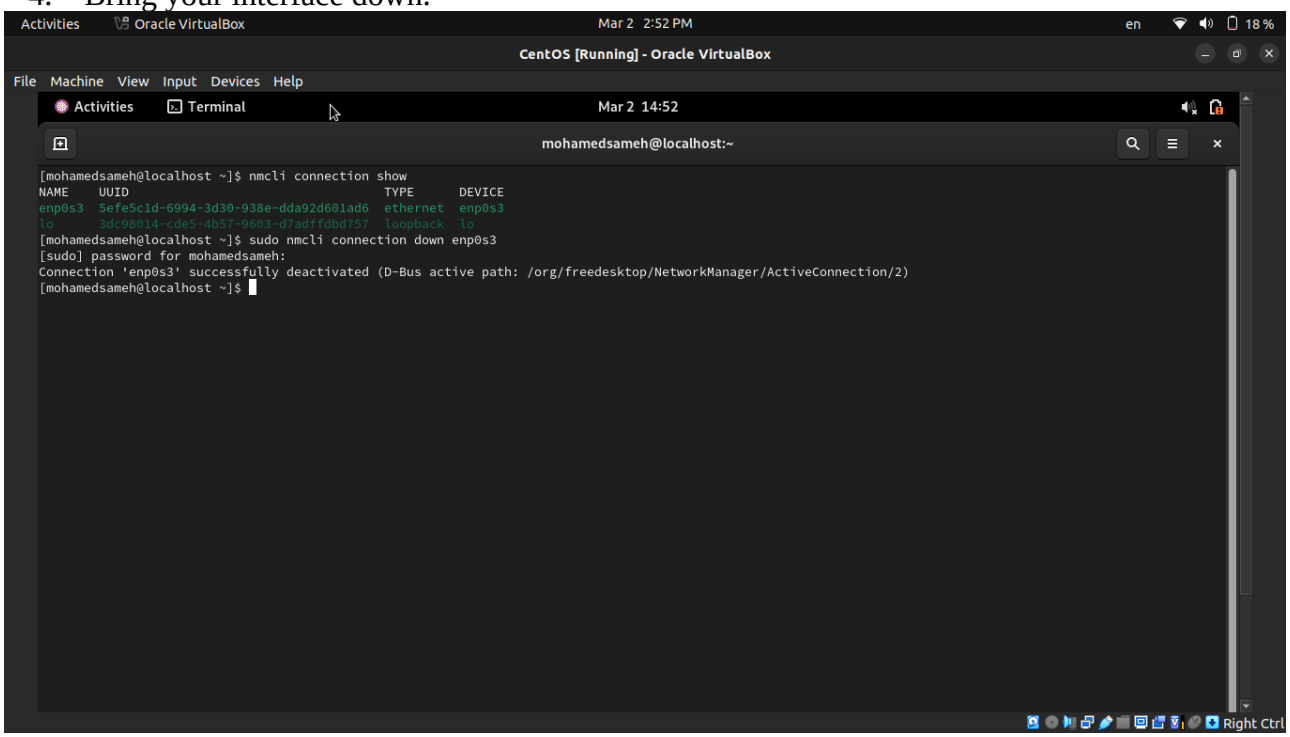

5. Configure your network card to have static IP.

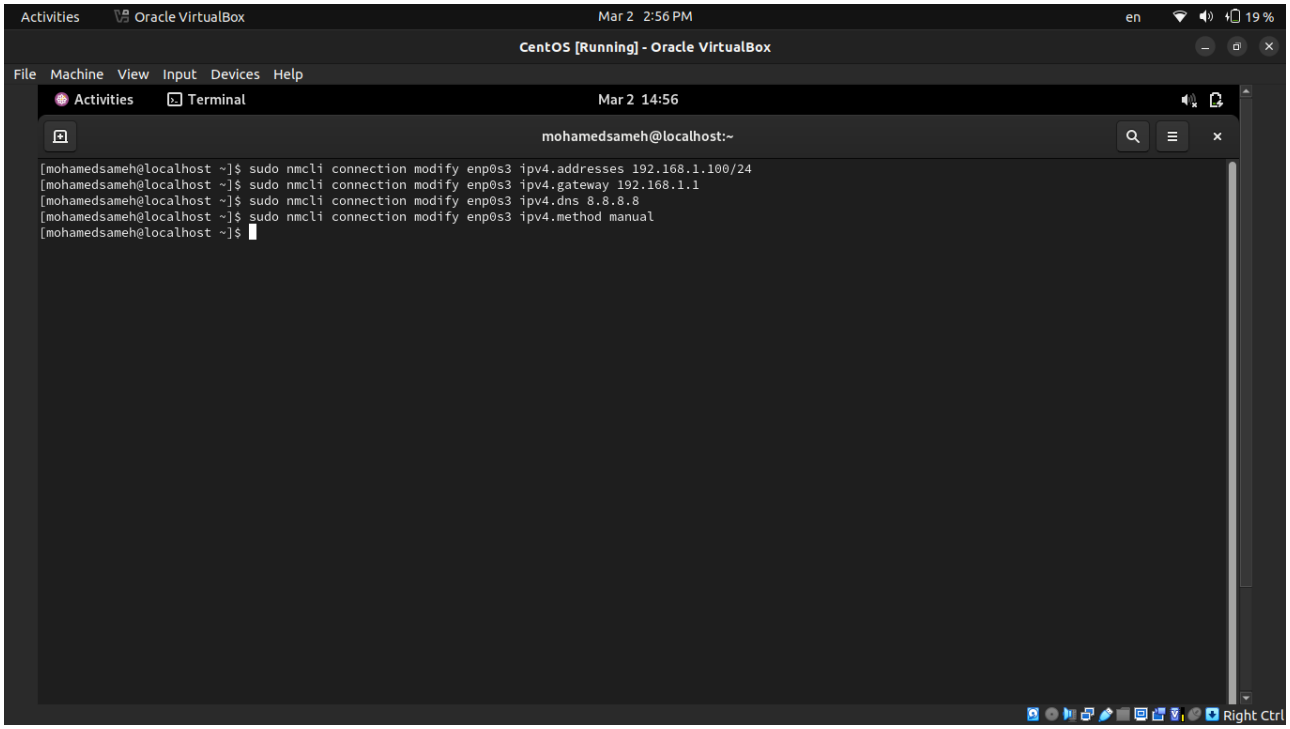

6. Bring your interface up.

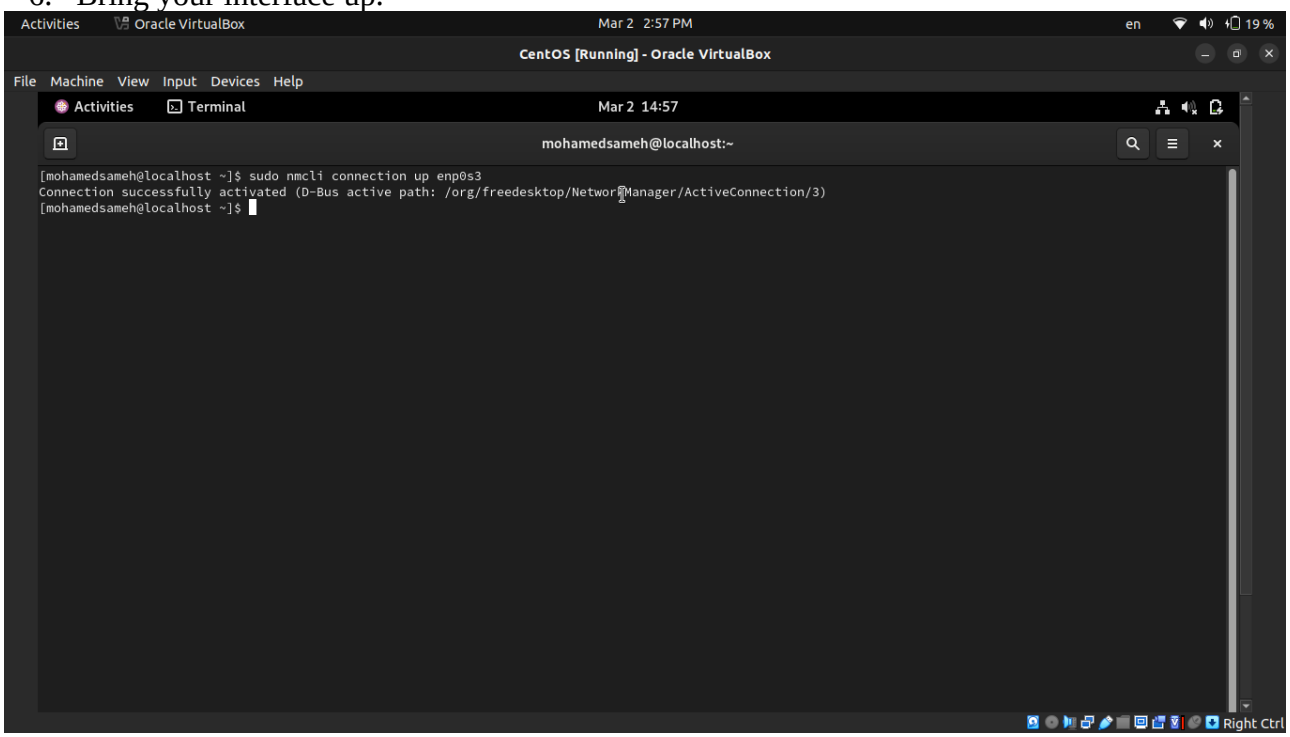

7. Verify your network setting using ifconfig command

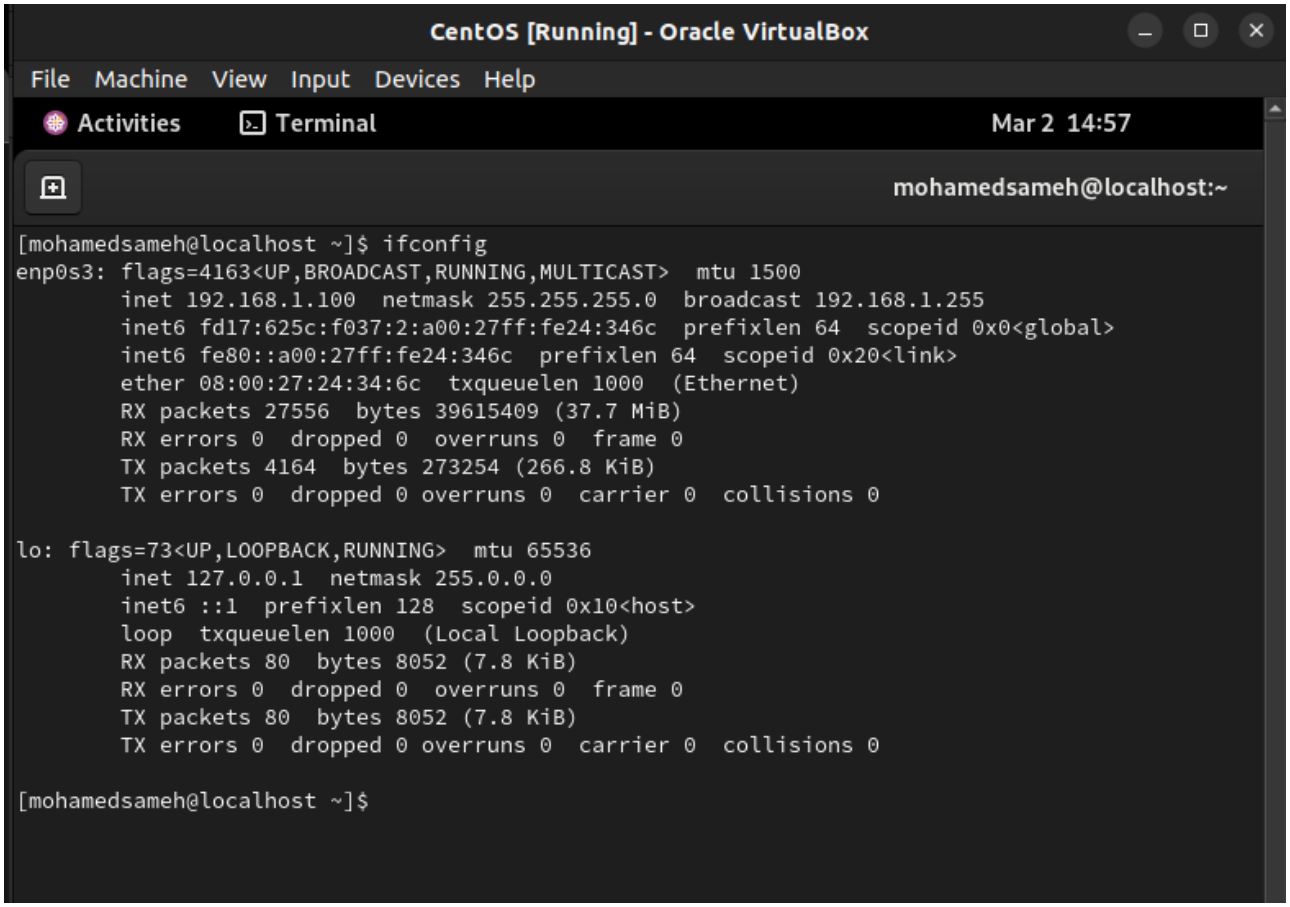

8. Configure your network card to have dynamic IP using network manager command.

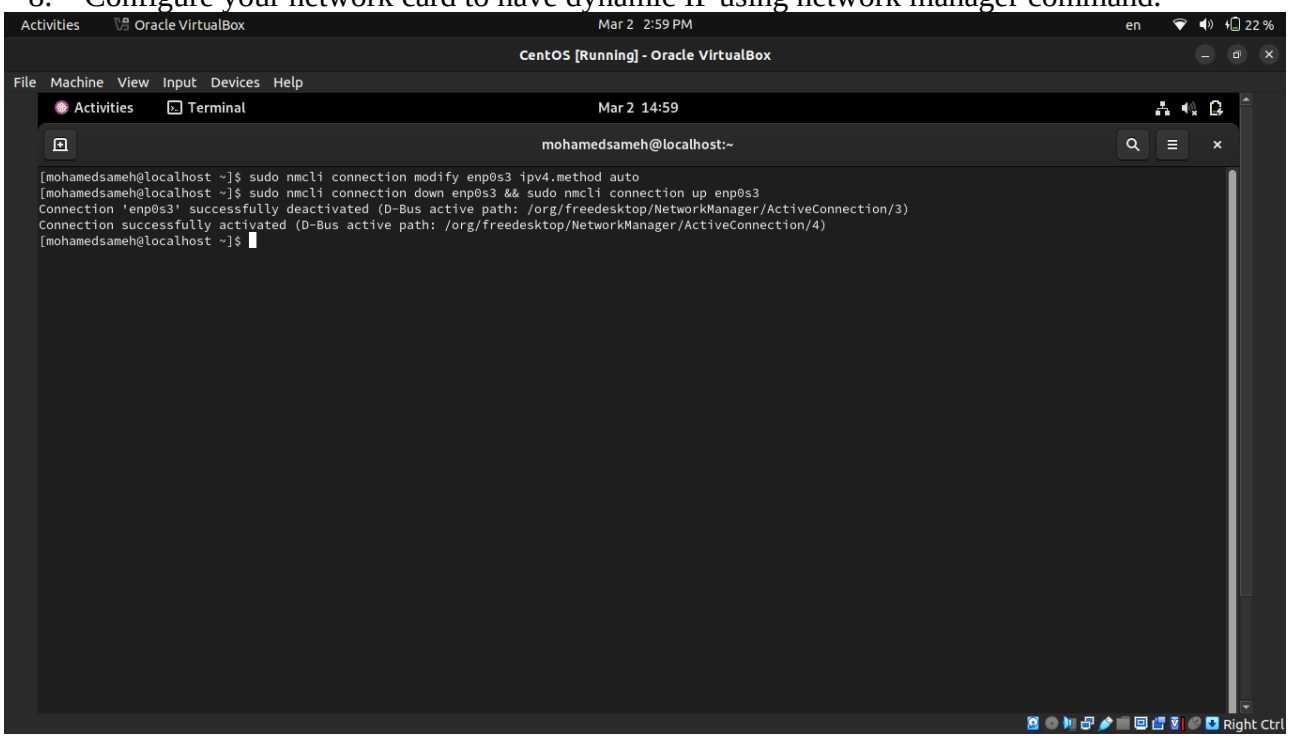

9. Check using ifconfig then check its configuration file.

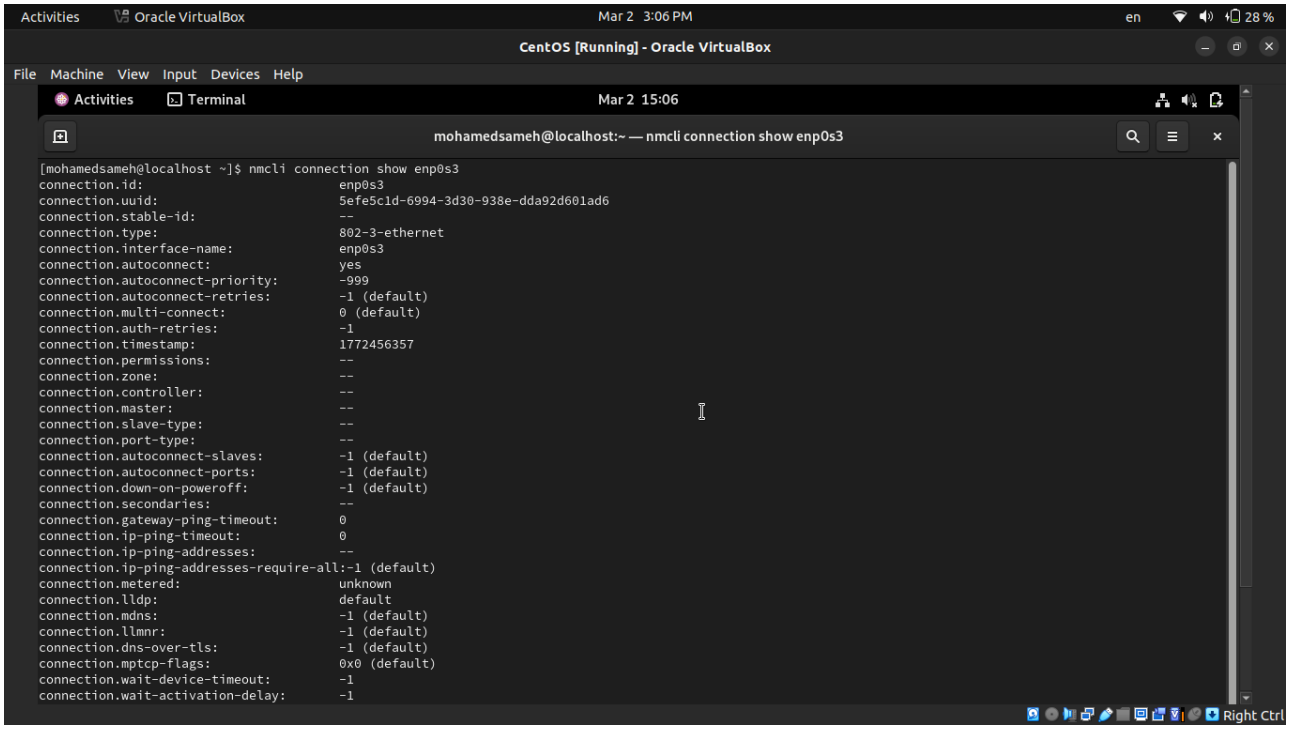

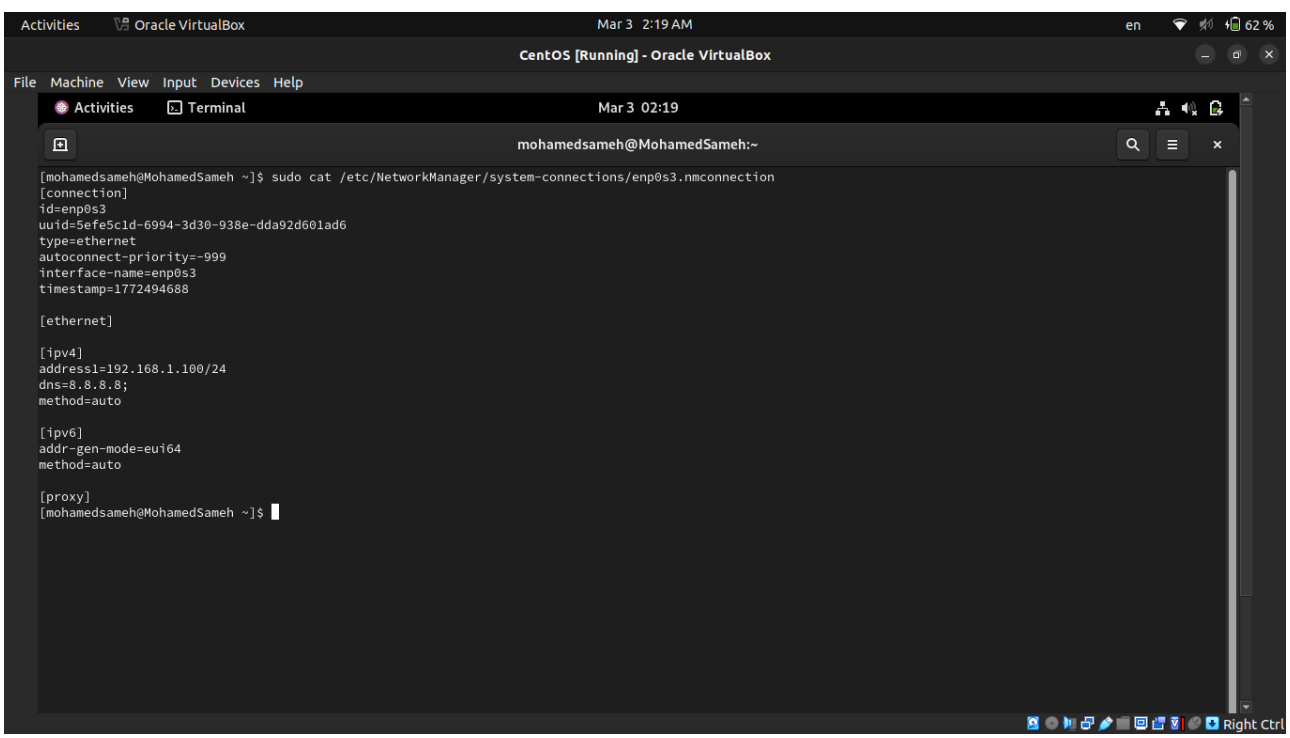

10. Reconfigure your network card using system-config-network utility to have static IP.

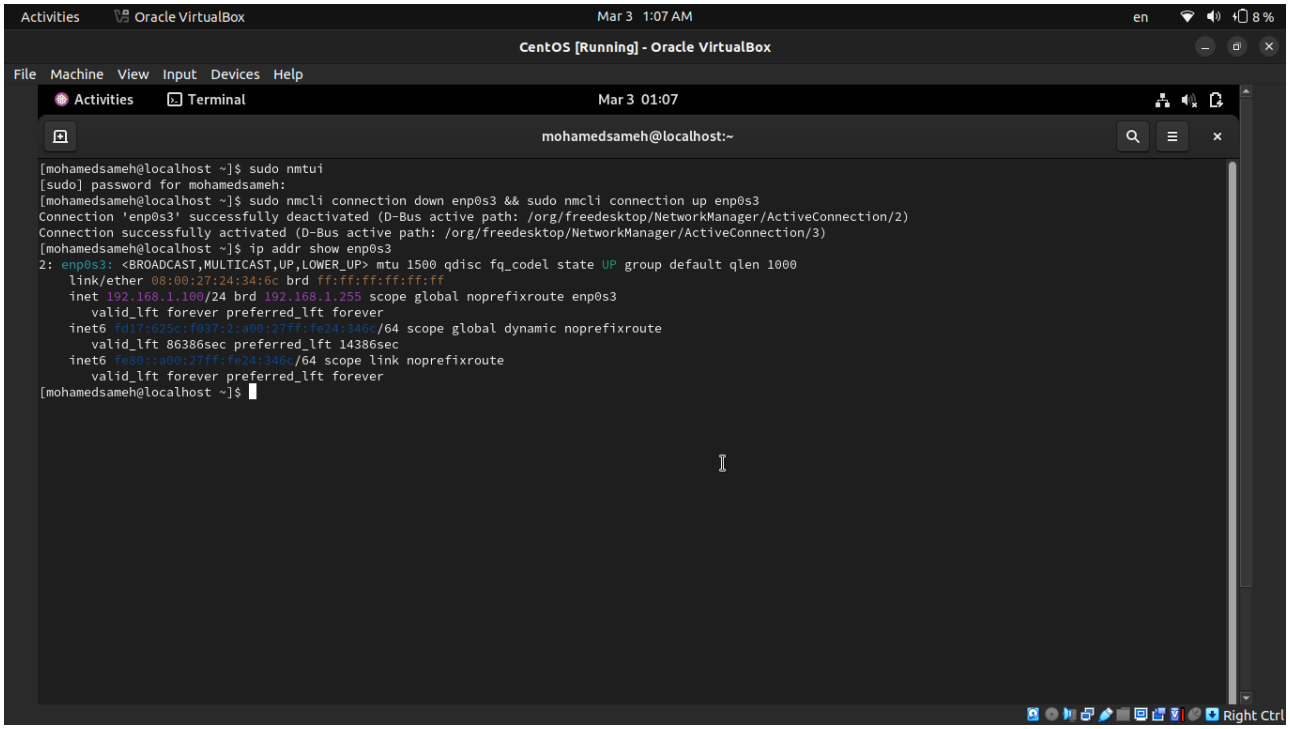

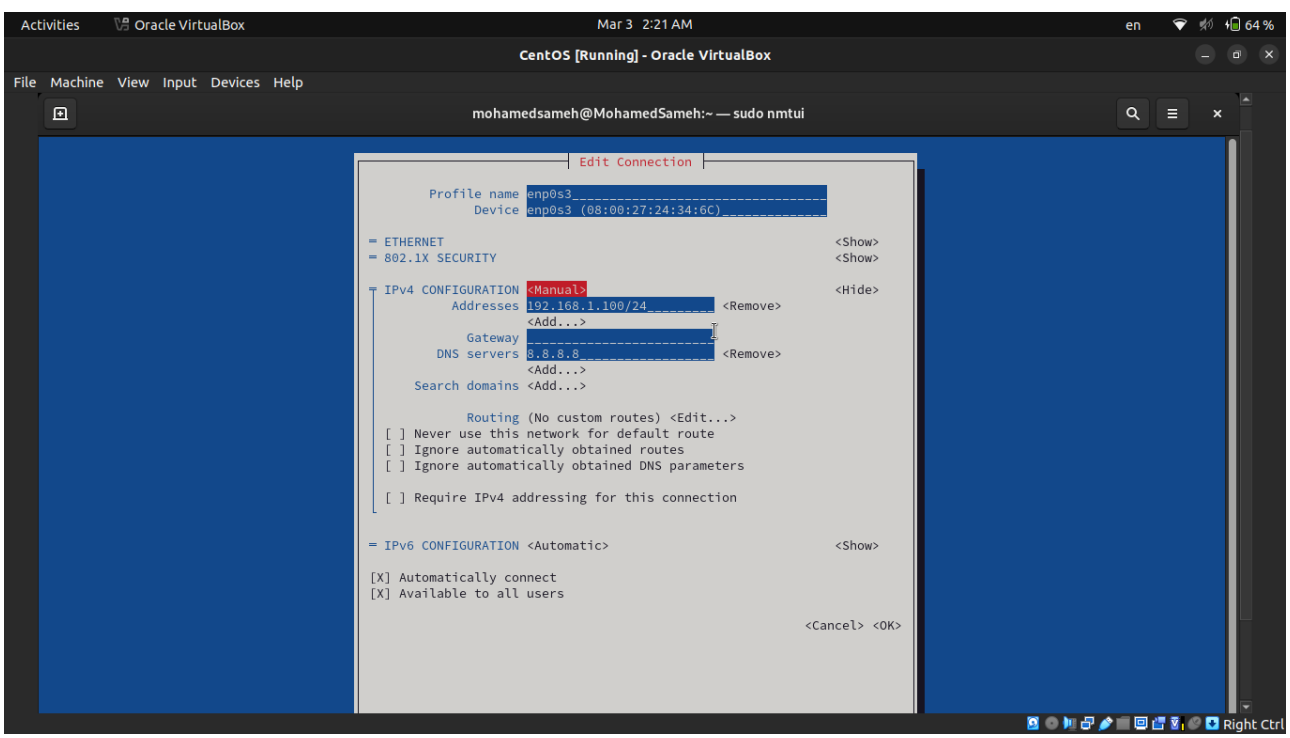

11. Configure your network card to have 3 IPs and check that they are all working using ifconfig command.

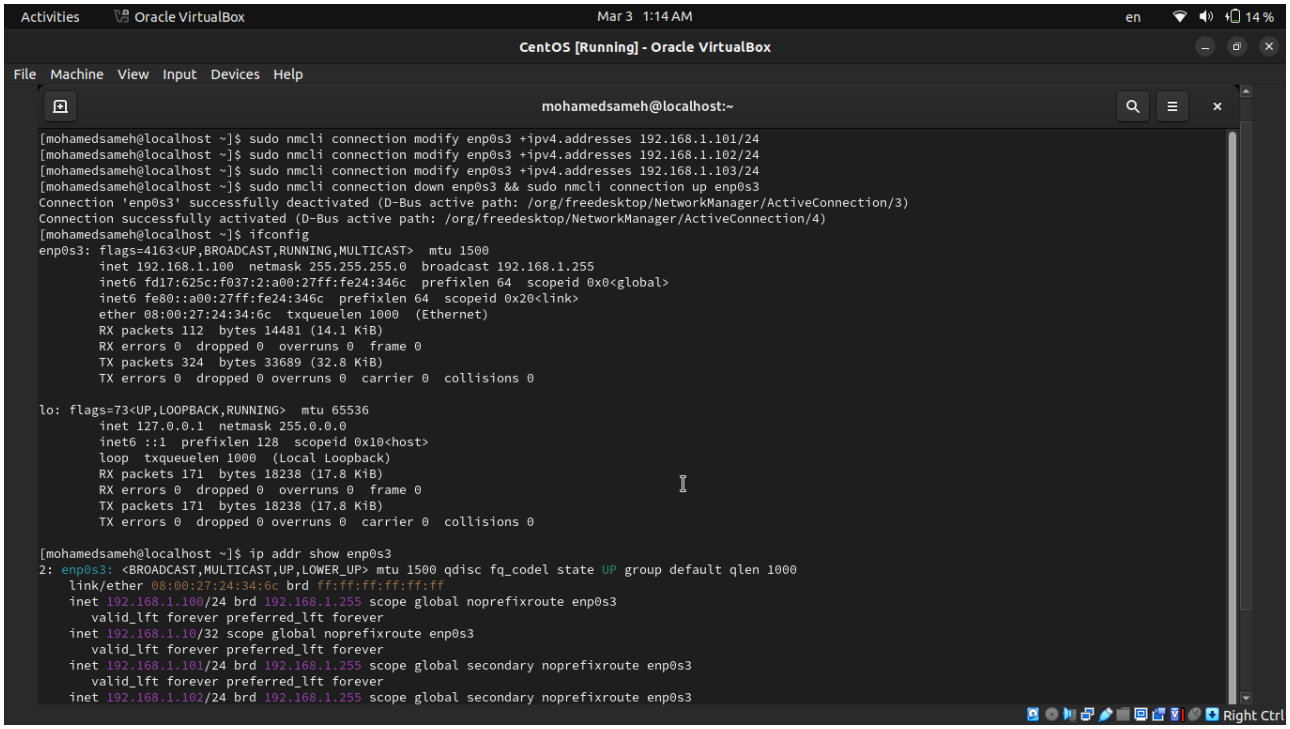

12. Change your host name in your global network file.

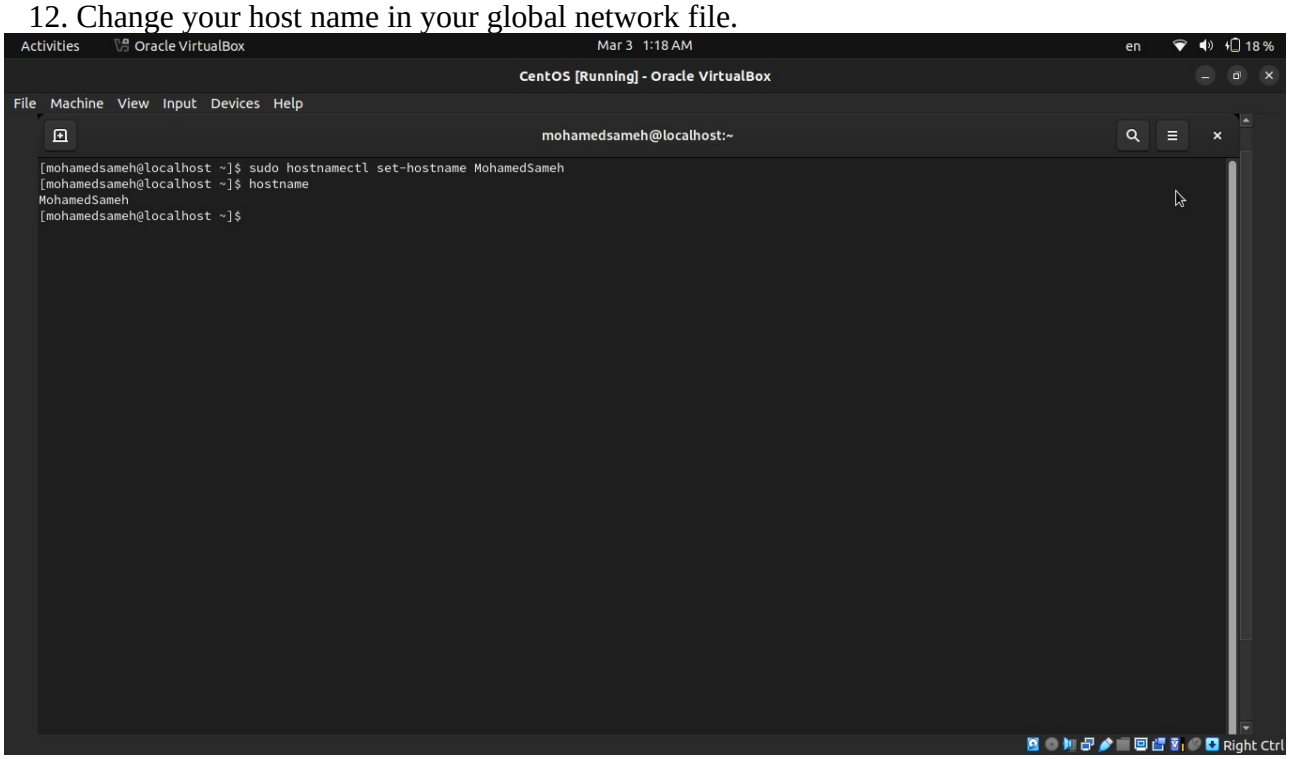

Your boss thinks it's a great idea to have one central logging server. Satisfy his requirements ☺
Hint:
Set up rsyslogd on the "logging server" machine to accept logging messages from other machines.
On the your "workstation", set up rsyslogd to send messages to the "logging server
Test the new setup by using the logger command on the "workstation" to generate a log message

Does the message appear in the "logging server's" /var/log/messages file? Yes, it does
Why does this message also appear in the "workstation's" /var/log/messages file? Because rsyslog logs everything locally by default, even when forwarding to a remote server
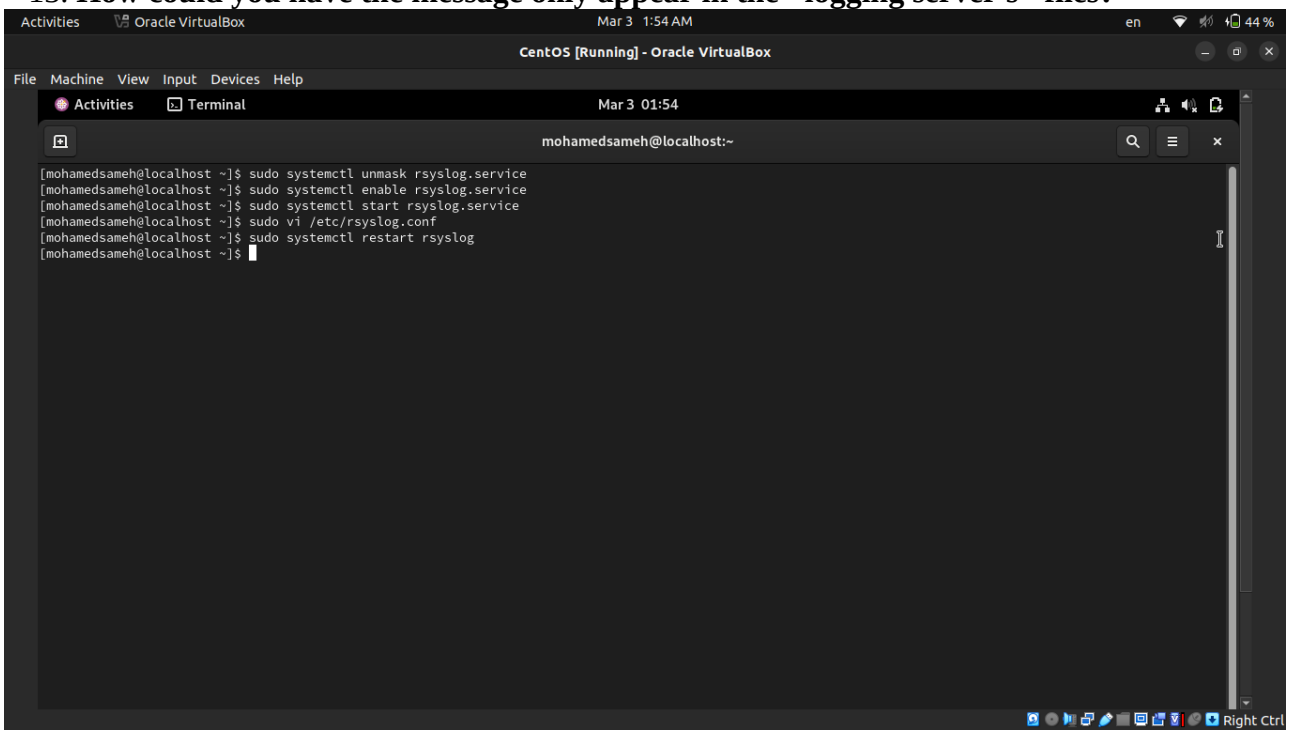
13. **How could you have the message only appear in the "logging server's" files?**