



Project 0

Preliminary remarks

Content

Cover page	1
Preliminary remarks	2
Content	3
Description	4
Luminaire list	5

Product data sheets

Philips - BRP102 T25 1 xLED72/730 DM (1x LED72/730)	6
---	---

Street 1 · Alternative 1

Description	8
Summary (according to EN 13201:2015)	9
Sidewalk 1 (P4)	12
Roadway 1 (M4)	16
Sidewalk 2 (P4)	31

Glossary	35
----------------	----



Description

Luminaire list

 Φ_{total}

96912 lm

 P_{total}

896.0 W

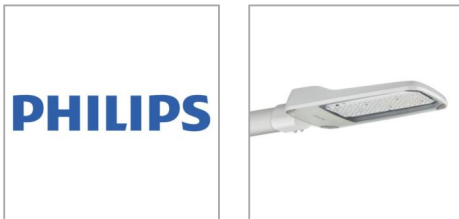
Luminous efficacy

108.2 lm/W

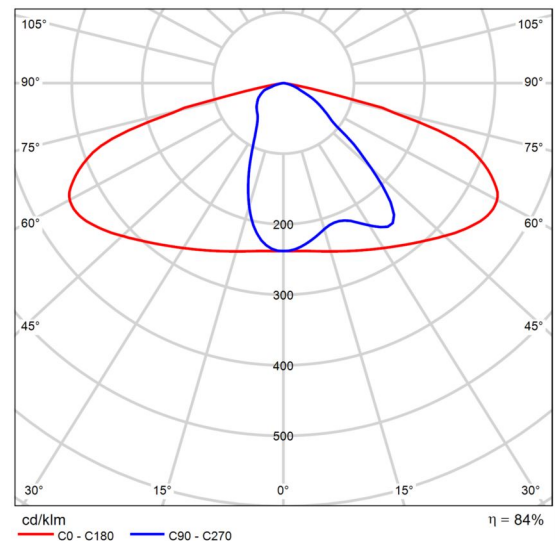
pcs.	Manufacturer	Article No.	Article name	P	Φ	Luminous efficacy
16	Philips		BRP102 T25 1 xLED72/730 DM	56.0 W	6057 lm	108.2 lm/W

Product data sheet

Philips - BRP102 T25 1 xLED72/730 DM



P	56.0 W
Φ_{Lamp}	7200 lm
$\Phi_{\text{Luminaire}}$	6057 lm
η	84.13 %
Luminous efficacy	108.2 lm/W
CCT	3000 K
CRI	70



Polar LDC

CoreLine Malaga LED: Simply Efficient The CoreLine Malaga LED family consists of two sizes and uses a Philips standardized design LED engine as light source and a Philips Xitanium fixed output outdoor driver. Quality you can rely on.

At the same time, the investment in a CoreLine Malaga LED luminaire is in many cases on the same level as an old SON-T luminaire including the first lamp. As the LED light engine in CoreLine Malaga LED will last the lifetime of the luminaire, just by saving the multiple lamp replacements needed with SON-T will already return the investment in it.

Ease of installation is obtained through the extended gland feature; the luminaire does not need to be opened to connect the power cable. At the same time, the flat glass cover can be removed to allow access to the driver for maintenance if required.

Adding up the functions and features truly make the choice for CoreLine Malaga LED an easy decision. As a member of the CoreLine family, Malaga LED is easy and quick available thru Philips Partners near you.

CoreLine Malaga LED has been designed as efficient as possible, with the same performance as the SON-T 50, 70, 100 and 150W luminaires it replaces; provide the right amount of light in the right place. The medium beam (DM) optic delivers an efficient distribution onto the road. The combination results in interesting energy savings which reduce operating costs significantly. 50%

Product data sheet

Philips - BRP102 T25 1 xLED72/730 DM

energy reduction is realistically possible.

Special versions with several options are available. As these are specials, and manufactured to order received only, these specials do have a longer delivery time. Options available are:

Wide beam (DW) optic

Added surge protection device 10kV (SRG10)

Marine Salt Protection (MSP) paint finish

Micro Mini Pro photocell 35 Lux

Build in (glass) fuse 6A

3 meters external flying lead cable (H07RN-F)

Not all these options can always be combined with each other.

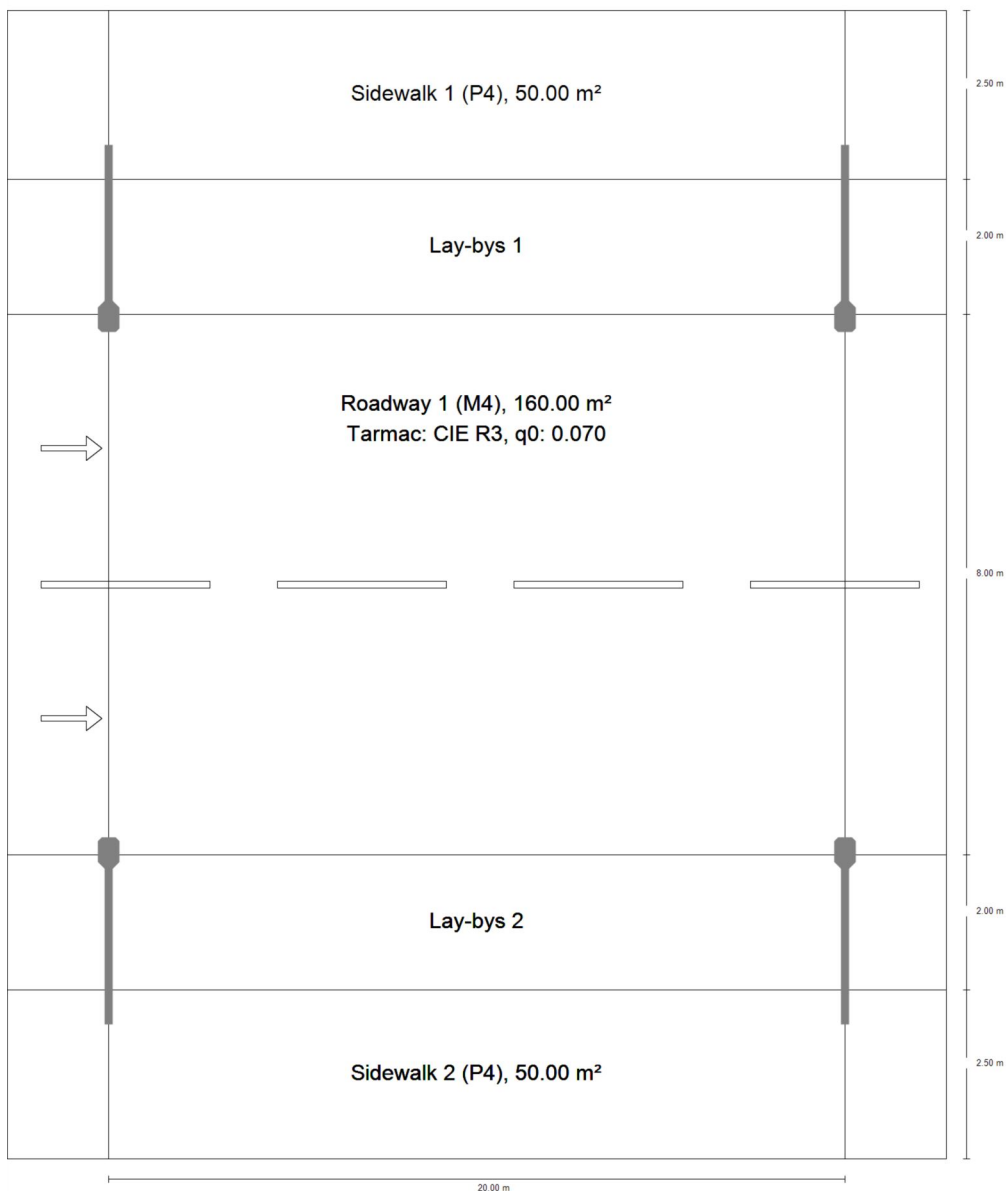
Please consult your Philips partner for details in case of interest or doubt.



Street 1

Description

Street 1

Summary (according to EN 13201:2015)

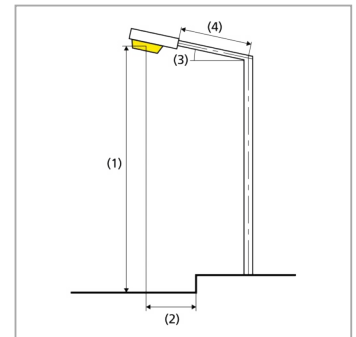
Street 1

Summary (according to EN 13201:2015)

Manufacturer	Philips	P	56.0 W
Article name	BRP102 T25 1 xLED72/730 DM	Φ_{Lamp}	7200 lm
Fitting	1x LED72/730	$\Phi_{\text{Luminaire}}$	6057 lm
		η	84.13 %

BRP102 T25 1 xLED72/730 DM (both sides opposite)

Pole distance	20.000 m
(1) Light spot height	8.000 m
(2) Light point overhang	0.000 m
(3) Boom inclination	15.0°
(4) Boom length	2.571 m
Annual operating hours	4000 h: 100.0 %, 56.0 W
Consumption	5600.0 W/km
ULR / ULOR	0.00 / 0.00
Max. luminous intensities	≥ 70°: 643 cd/klm
Any direction forming the specified angle from the downward vertical, with the luminaire installed for use.	≥ 80°: 369 cd/klm ≥ 90°: 15.2 cd/klm
Luminous intensity class	-
The luminous intensity values in [cd/klm] for calculation of the luminous intensity class refer to the luminaire luminous flux according to EN 13201:2015.	
Glare index class	D.5



Street 1

Summary (according to EN 13201:2015)

Results for valuation fields

	Symbol	Calculated	Target	Check
Sidewalk 1 (P4)	E_{min}	7.75 lx	≥ 1.00 lx	✓
	$E_{av}^{(1)}$	10.12 lx	-	-
Roadway 1 (M4)	L_{av}	1.65 cd/m ²	≥ 0.75 cd/m ²	✓
	U_o	0.89	≥ 0.40	✓
	U_l	0.95	≥ 0.60	✓
	TI	8 %	≤ 15 %	✓
	R_{EI}	0.56	≥ 0.30	✓
Sidewalk 2 (P4)	E_{min}	7.75 lx	≥ 1.00 lx	✓
	$E_{av}^{(1)}$	10.12 lx	-	-

(1) Informative, not part of the valuation

A maintenance factor of 0.67 was used for calculating for the installation.

Results for energy efficiency indicators

	Symbol	Calculated	Consumption
Street 1	D_p	0.022 W/lx*m ²	-
BRP102 T25 1 xLED72/730 DM (both sides opposite)	D_e	1.7 kWh/m ² yr,	448.0 kWh/yr

Street 1

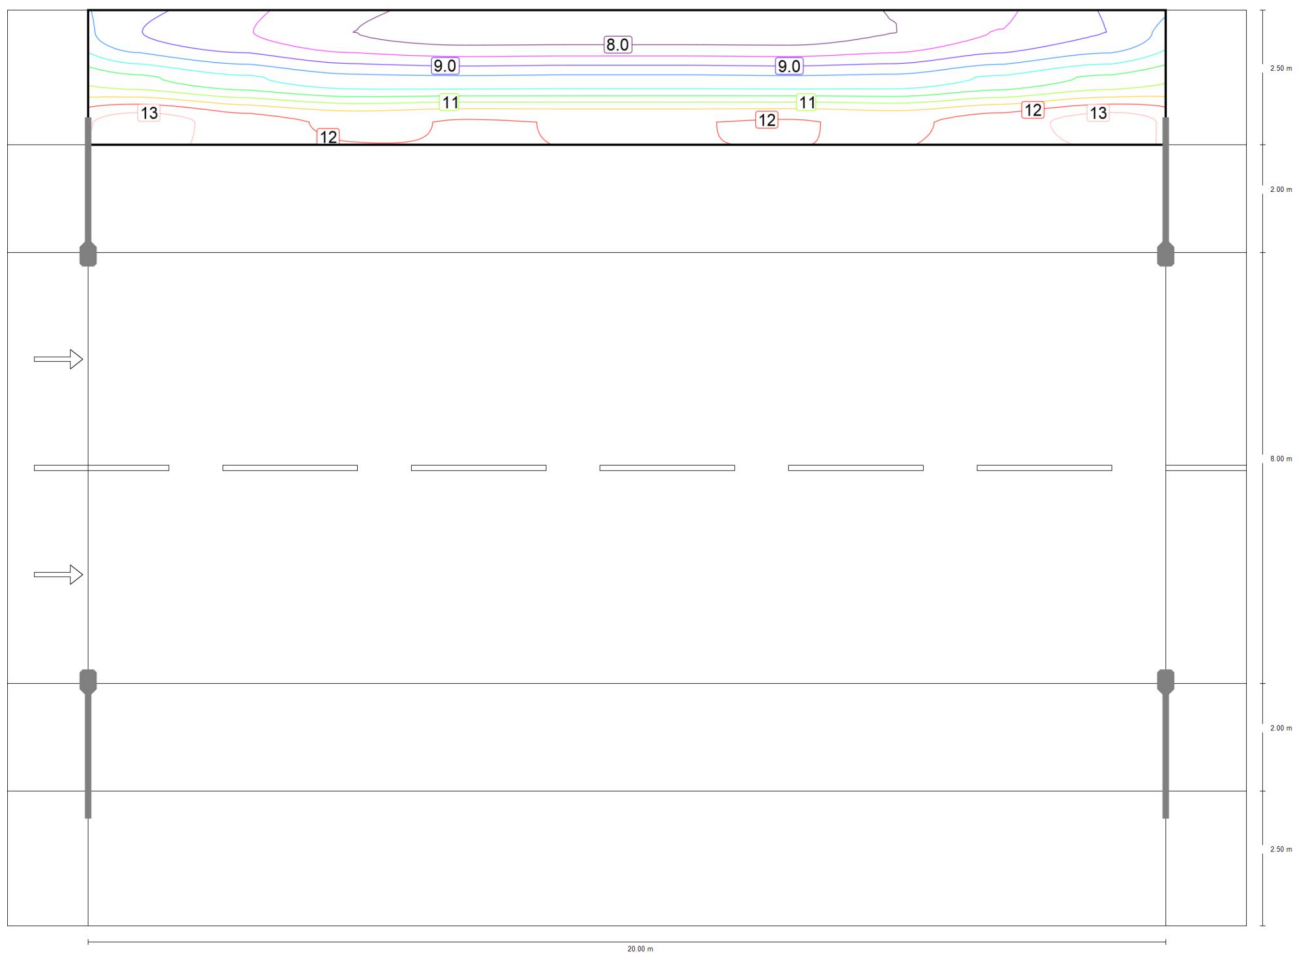
Sidewalk 1 (P4)

Results for valuation field

	Symbol	Calculated	Target	Check
Sidewalk 1 (P4)	E_{min}	7.75 lx	≥ 1.00 lx	✓
	$E_{av}^{(1)}$	10.12 lx	-	-

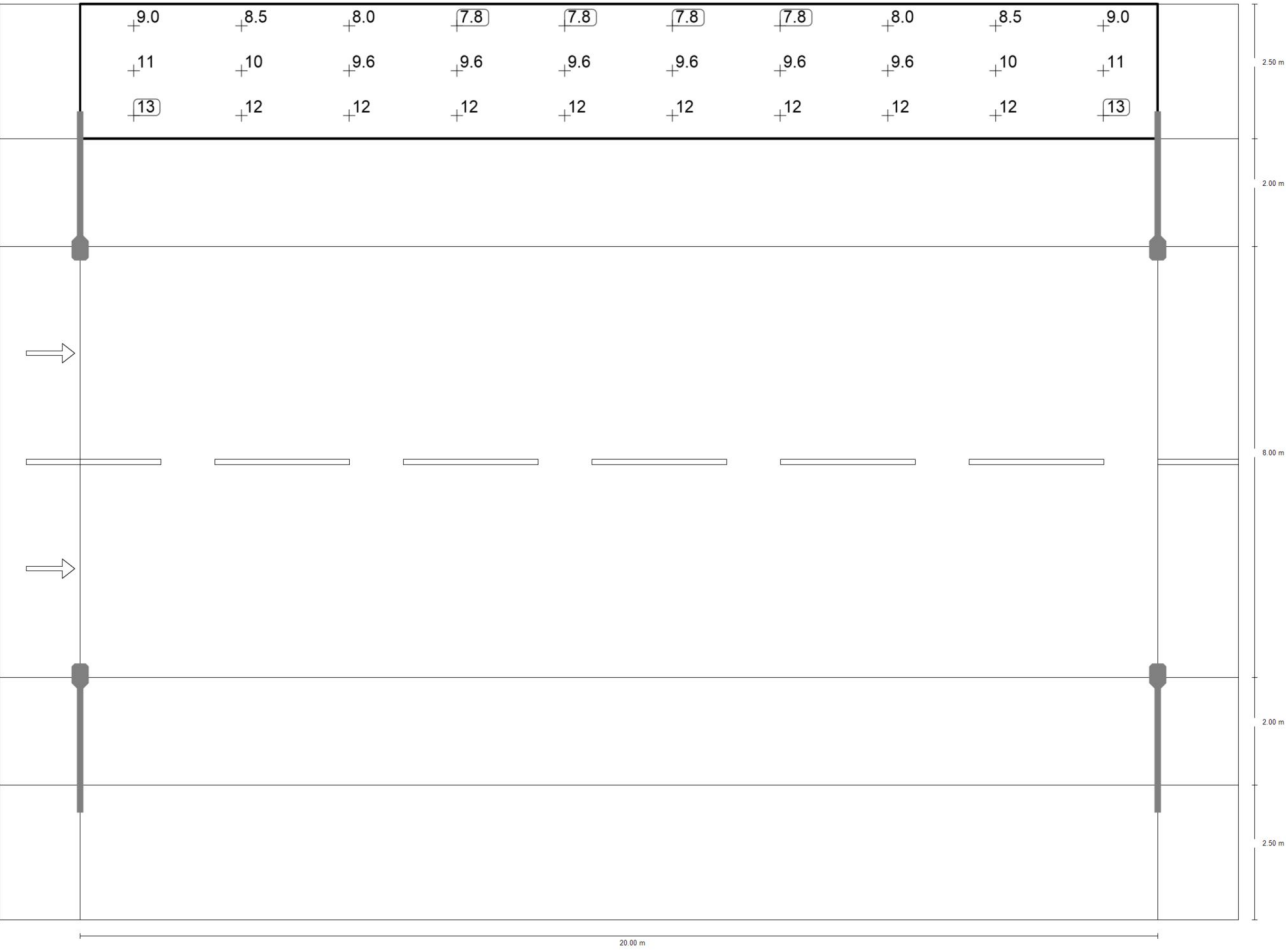
(1) Informative, not part of the valuation

Street 1

Sidewalk 1 (P4)

Maintenance value, horizontal illuminance [lx] (Iso-illuminance curves)

Street 1
Sidewalk 1 (P4)



Maintenance value, horizontal illuminance [lx] (Value grid)

Street 1

Sidewalk 1 (P4)

m	1.000	3.000	5.000	7.000	9.000	11.000	13.000	15.000	17.000	19.000
16.583	9.02	8.53	8.00	7.75	7.77	7.77	7.75	8.00	8.53	9.02
15.750	10.62	10.09	9.64	9.59	9.63	9.63	9.59	9.64	10.09	10.62
14.917	12.79	12.28	11.94	12.06	12.03	12.03	12.06	11.94	12.28	12.79

Maintenance value, horizontal illuminance [lx] (Value chart)

	E_{av}	E_{min}	E_{max}	g_1	g_2
Maintenance value, horizontal illuminance	10.1 lx	7.75 lx	12.8 lx	0.77	0.61

Street 1

Roadway 1 (M4)

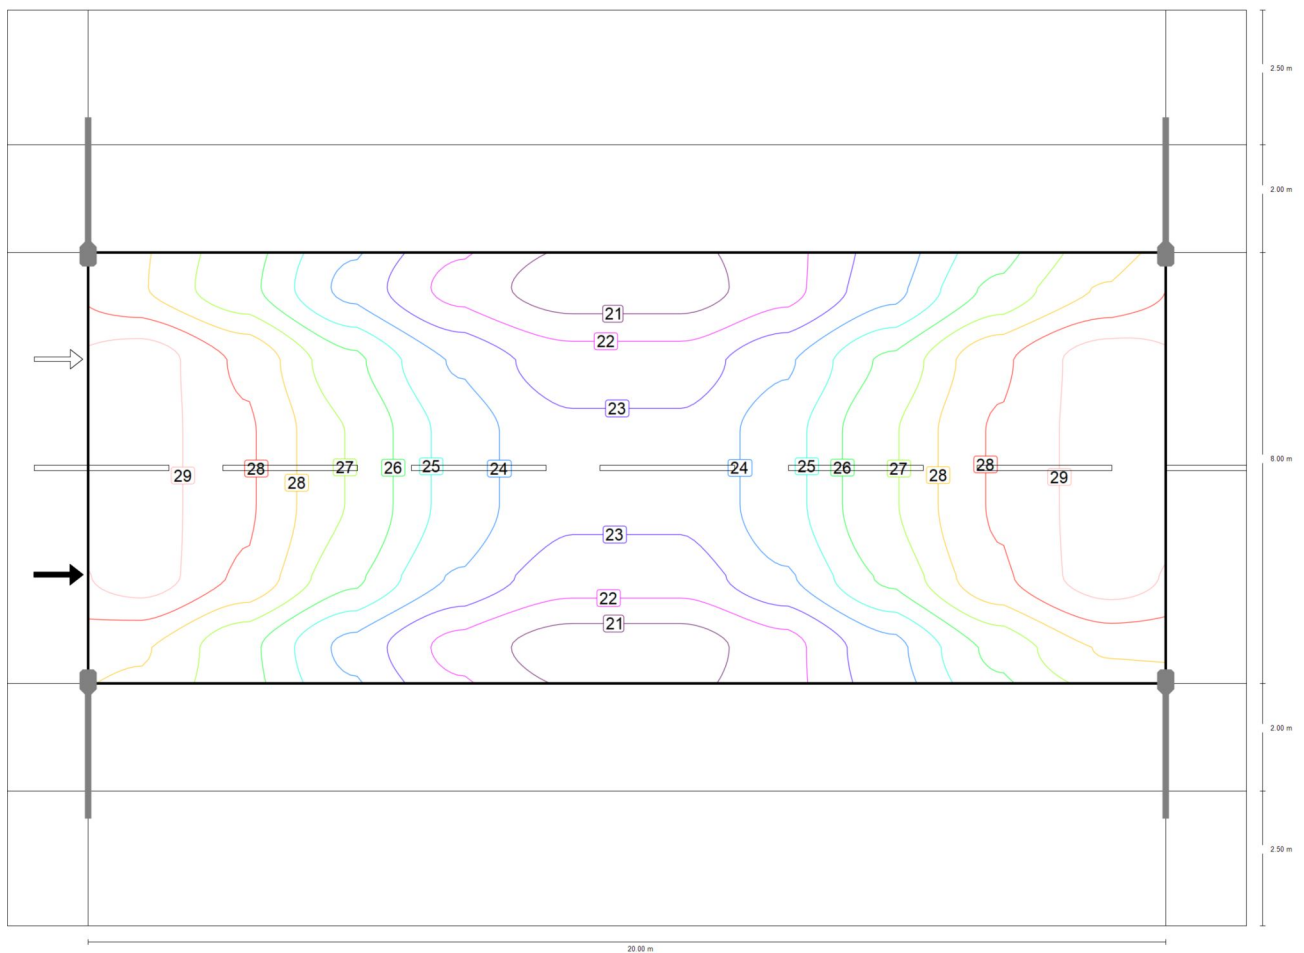
Results for valuation field

	Symbol	Calculated	Target	Check
Roadway 1 (M4)	L_{av}	1.65 cd/m ²	≥ 0.75 cd/m ²	✓
	U_o	0.89	≥ 0.40	✓
	U_l	0.95	≥ 0.60	✓
	TI	8 %	≤ 15 %	✓
	R_{EI}	0.56	≥ 0.30	✓

Results for observer

	Symbol	Calculated	Target	Check
Observer 1 Position: -60.000 m, 6.500 m, 1.500 m	L_{av}	1.65 cd/m ²	≥ 0.75 cd/m ²	✓
	U_o	0.89	≥ 0.40	✓
	U_l	0.95	≥ 0.60	✓
	TI	8 %	≤ 15 %	✓
Observer 2 Position: -60.000 m, 10.500 m, 1.500 m	L_{av}	1.65 cd/m ²	≥ 0.75 cd/m ²	✓
	U_o	0.89	≥ 0.40	✓
	U_l	0.95	≥ 0.60	✓
	TI	8 %	≤ 15 %	✓

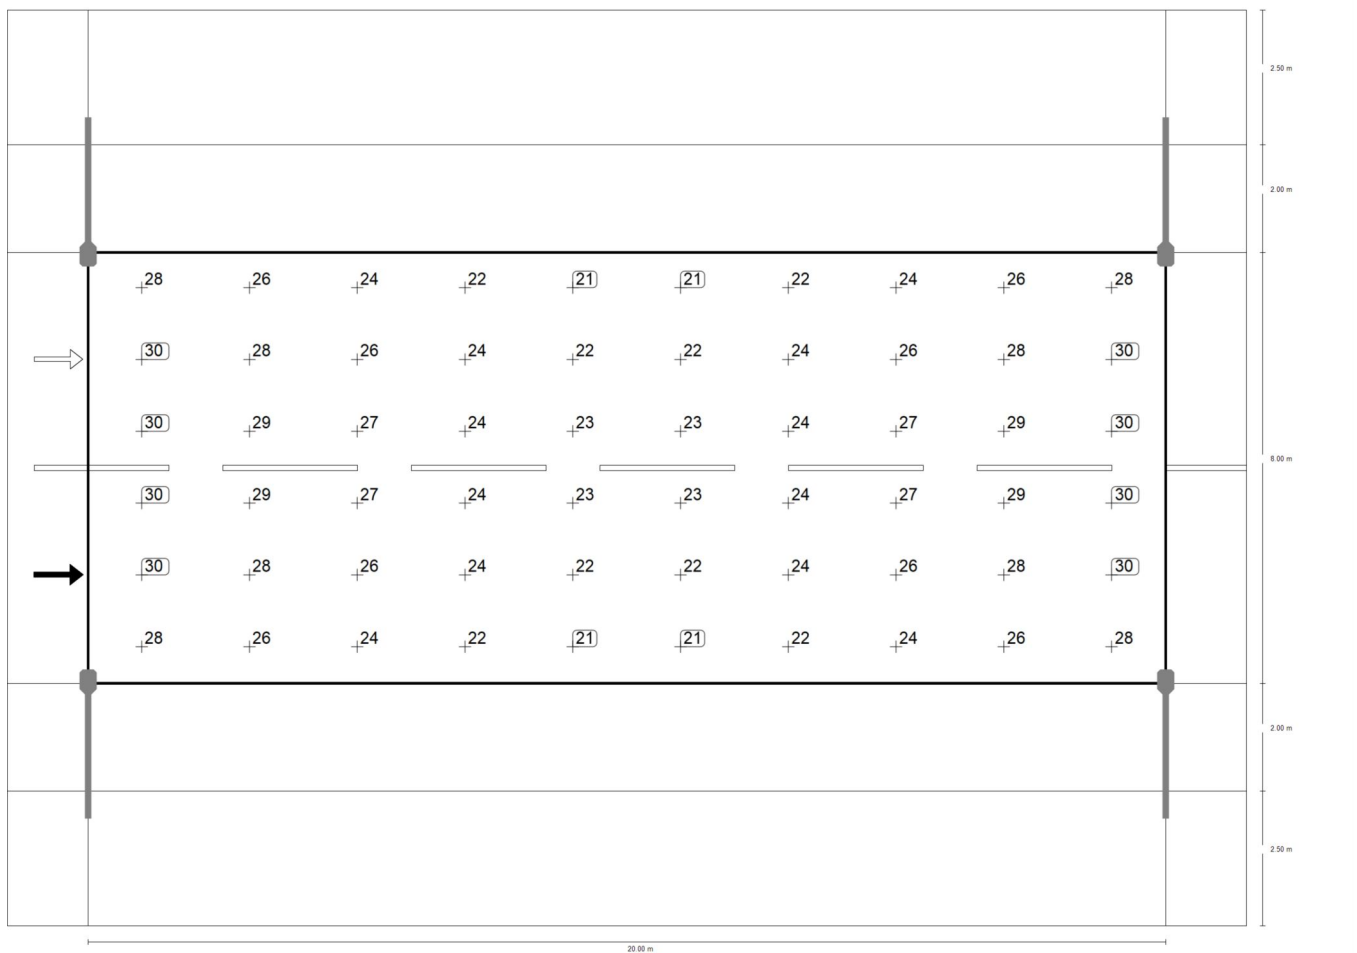
Street 1

Roadway 1 (M4)

Maintenance value, horizontal illuminance [lx] (Iso-illuminance curves)

Street 1

Roadway 1 (M4)



Maintenance value, horizontal illuminance [lx] (Value grid)

m	1.000	3.000	5.000	7.000	9.000	11.000	13.000	15.000	17.000	19.000
11.833	27.65	25.96	23.61	21.73	20.65	20.65	21.73	23.61	25.96	27.65
10.500	29.86	28.30	25.91	23.75	22.46	22.46	23.75	25.91	28.30	29.86
9.167	29.79	28.58	26.58	24.43	23.11	23.11	24.43	26.58	28.58	29.79
7.833	29.79	28.58	26.58	24.43	23.11	23.11	24.43	26.58	28.58	29.79

Street 1

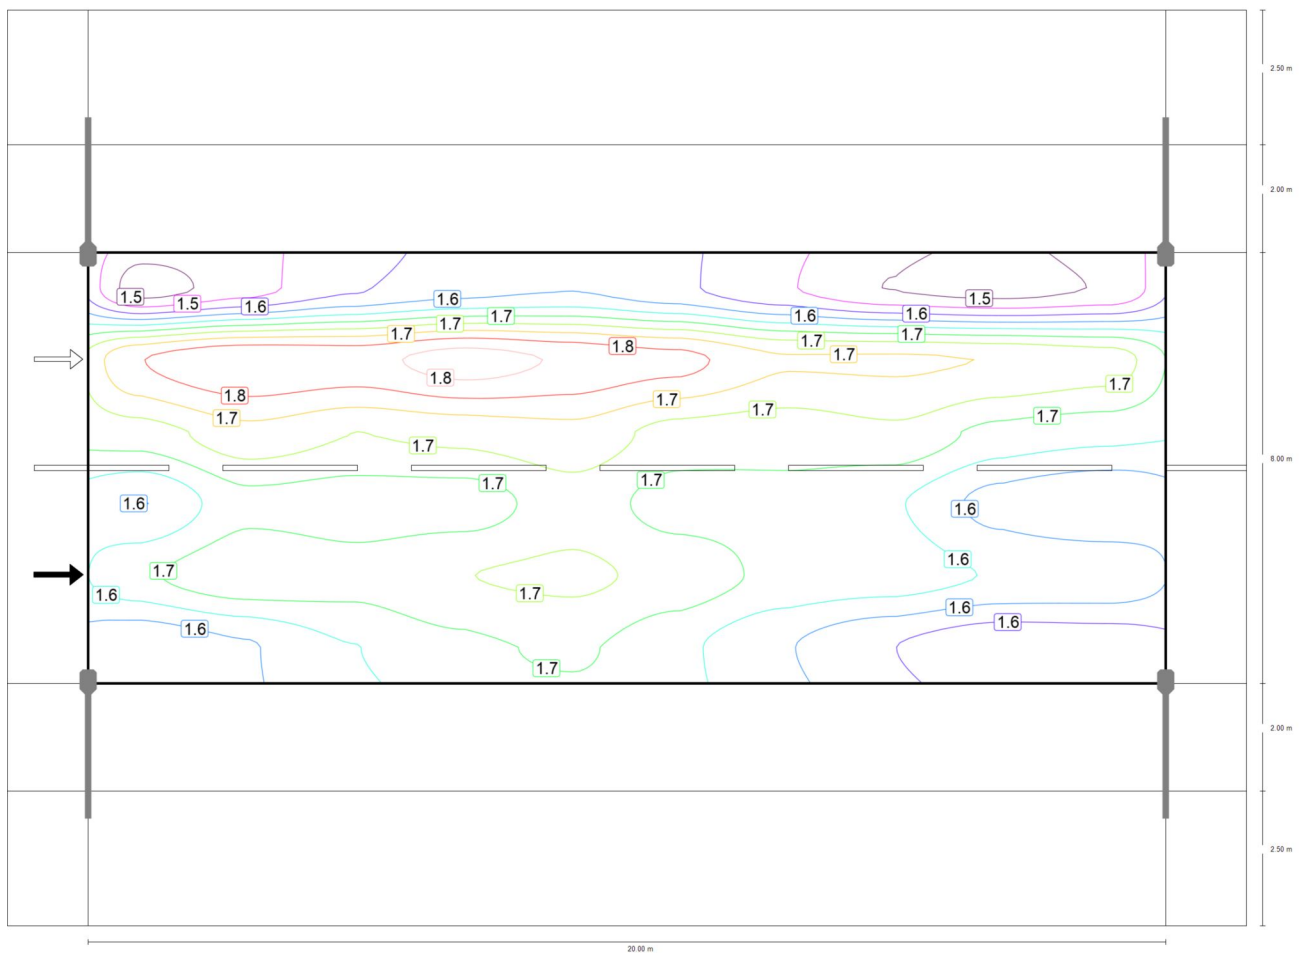
Roadway 1 (M4)

m	1.000	3.000	5.000	7.000	9.000	11.000	13.000	15.000	17.000	19.000
6.500	29.86	28.30	25.91	23.75	22.46	22.46	23.75	25.91	28.30	29.86
5.167	27.65	25.96	23.61	21.73	20.65	20.65	21.73	23.61	25.96	27.65

Maintenance value, horizontal illuminance [lx] (Value chart)

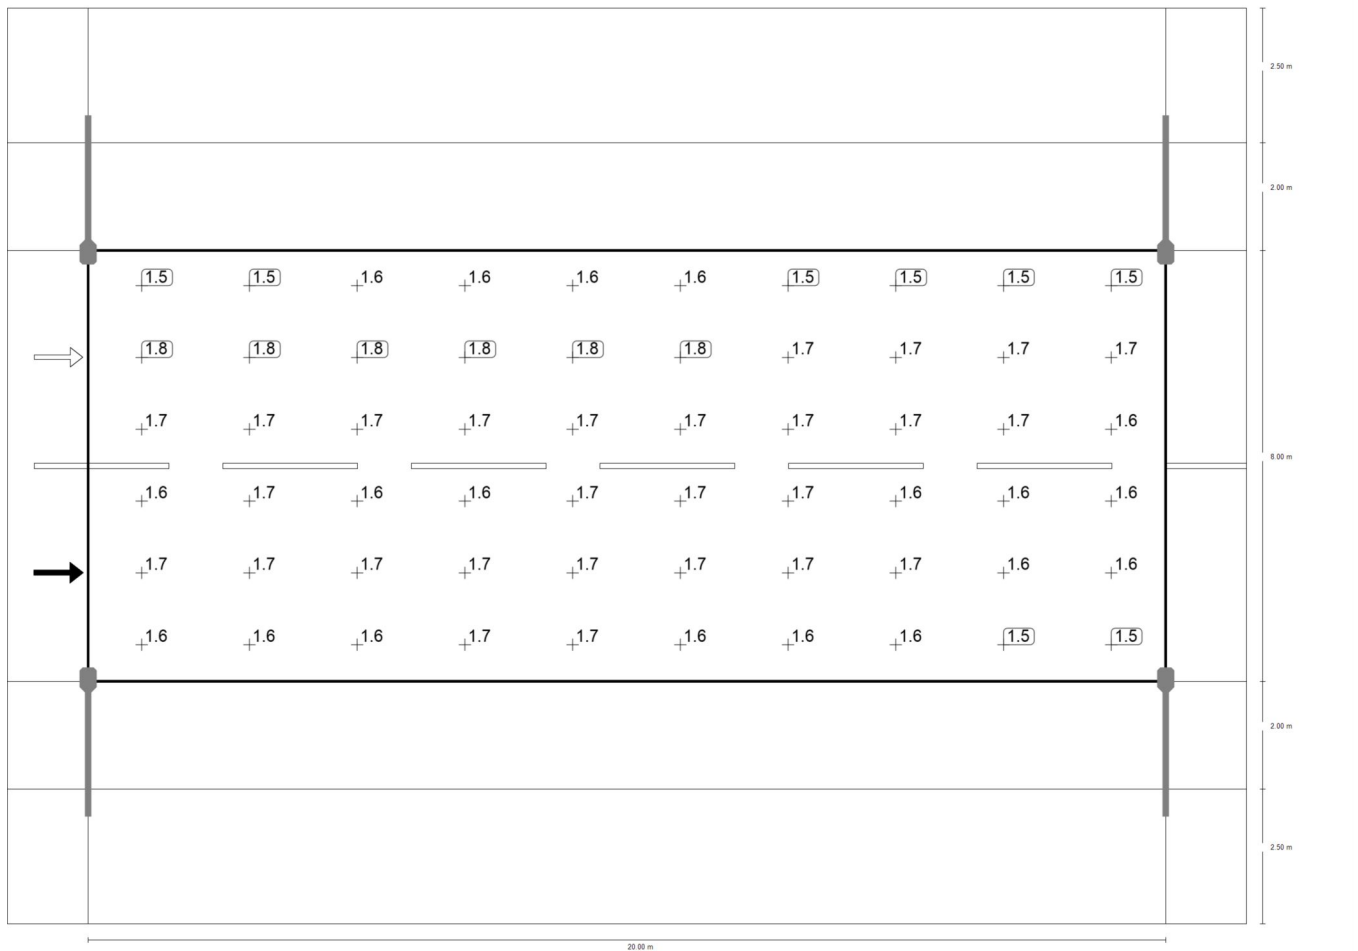
	E_{av}	E_{min}	E_{max}	g_1	g_2
Maintenance value, horizontal illuminance	25.5 lx	20.6 lx	29.9 lx	0.81	0.69

Street 1

Roadway 1 (M4)

Observer 1: Maintenance value, luminance with dry roadway [cd/m^2] (Iso-illuminance curves)

Street 1

Roadway 1 (M4)Observer 1: Maintenance value, luminance with dry roadway [cd/m^2] (Value grid)

m	1.000	3.000	5.000	7.000	9.000	11.000	13.000	15.000	17.000	19.000
11.833	1.47	1.51	1.55	1.58	1.59	1.57	1.53	1.49	1.47	1.49
10.500	1.77	1.81	1.80	1.83	1.81	1.79	1.74	1.74	1.74	1.72
9.167	1.68	1.73	1.70	1.71	1.73	1.69	1.68	1.69	1.65	1.64
7.833	1.59	1.66	1.65	1.65	1.69	1.65	1.66	1.64	1.58	1.56

Street 1

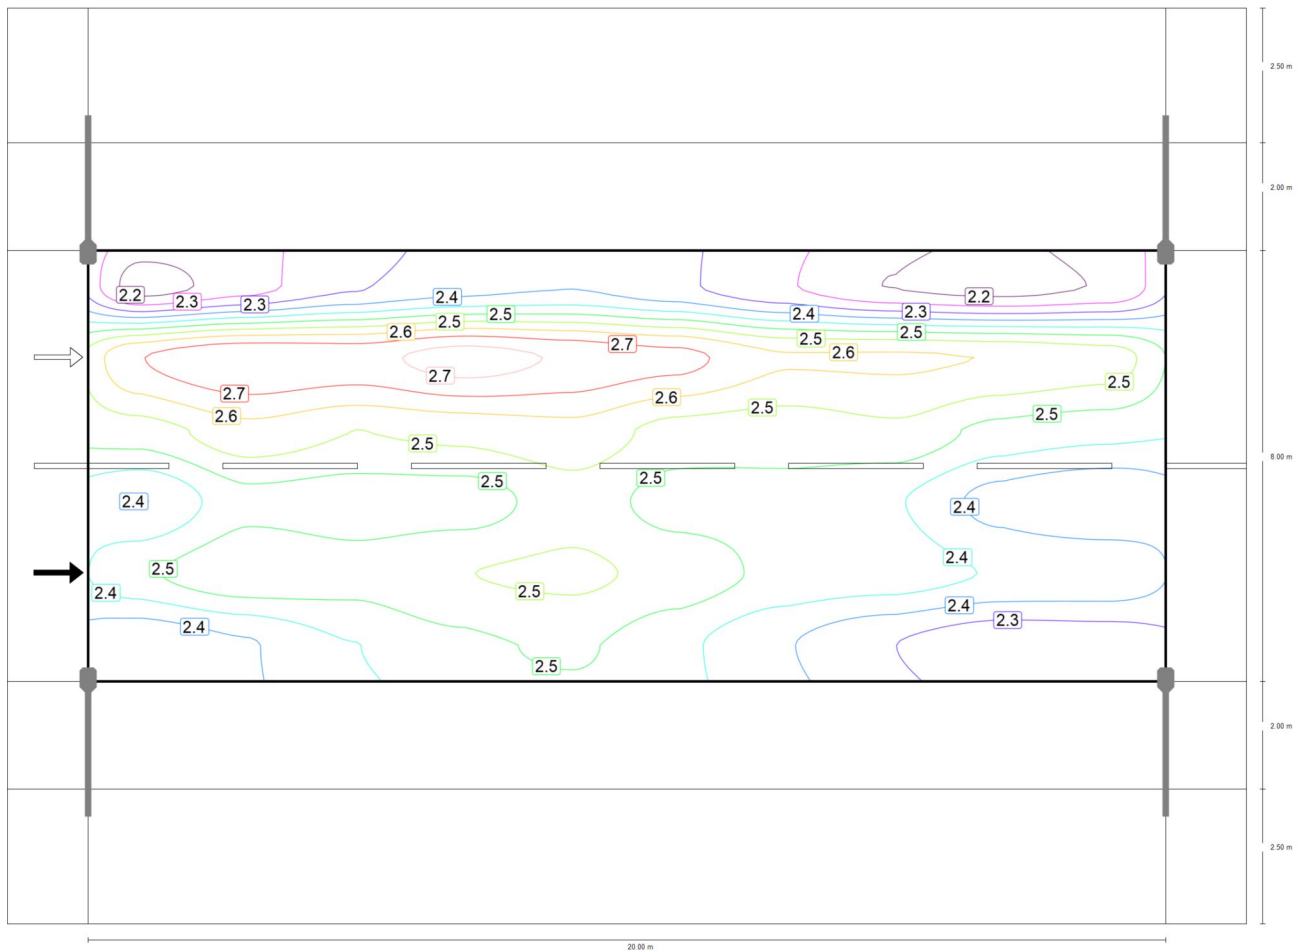
Roadway 1 (M4)

m	1.000	3.000	5.000	7.000	9.000	11.000	13.000	15.000	17.000	19.000
6.500	1.66	1.69	1.68	1.70	1.71	1.69	1.66	1.65	1.63	1.63
5.167	1.57	1.59	1.63	1.66	1.67	1.64	1.60	1.56	1.53	1.54

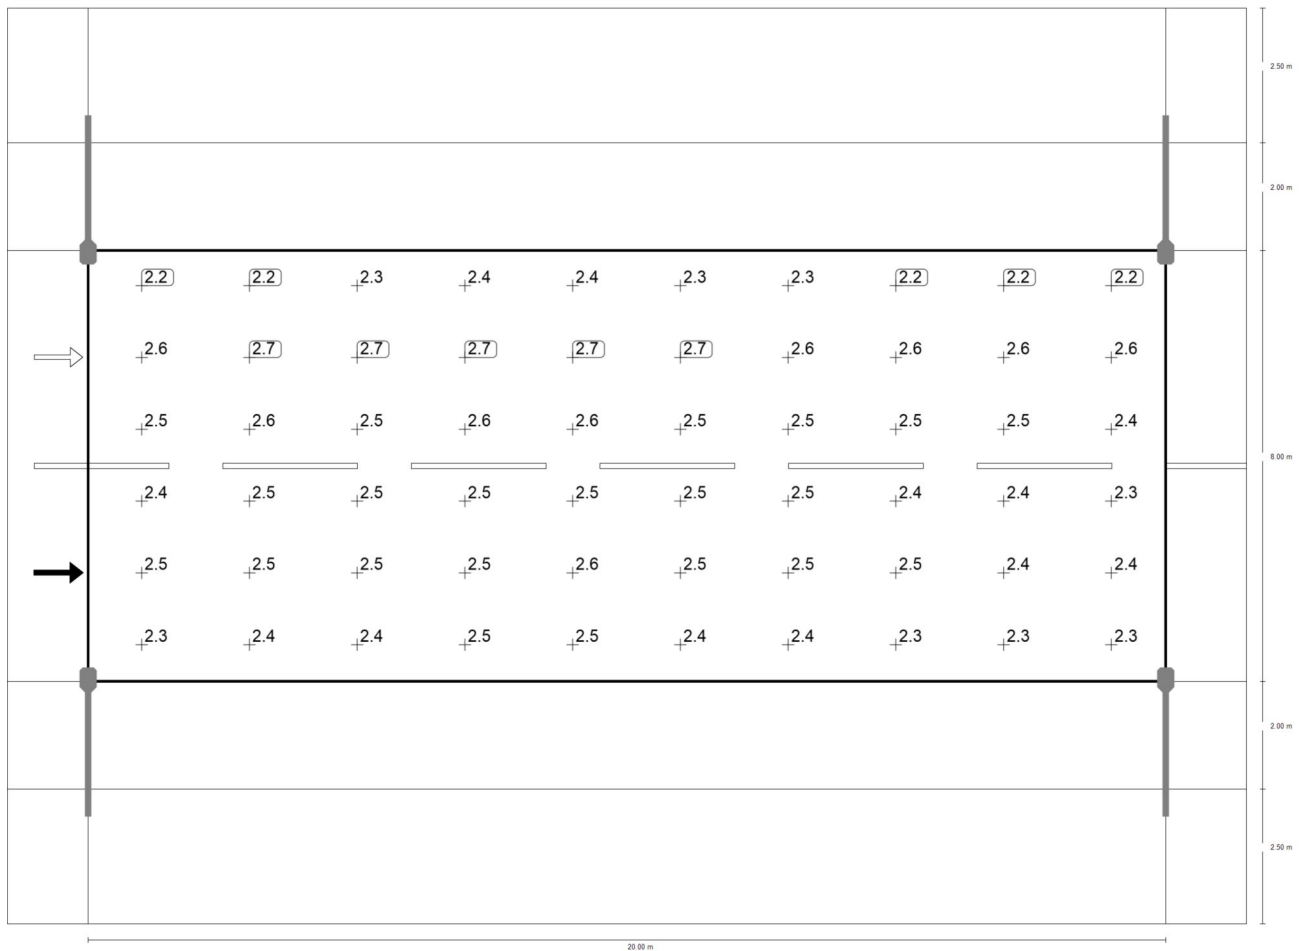
Observer 1: Maintenance value, luminance with dry roadway [cd/m^2] (Value chart)

	L_{av}	L_{min}	L_{max}	g_1	g_2
Observer 1: Maintenance value, luminance with dry roadway	1.65 cd/m^2	1.47 cd/m^2	1.83 cd/m^2	0.89	0.80

Street 1

Roadway 1 (M4)Observer 1: Luminance with new installation [cd/m^2] (Iso-illuminance curves)

Street 1

Roadway 1 (M4)

Observer 1: Luminance with new installation [cd/m²] (Value grid)

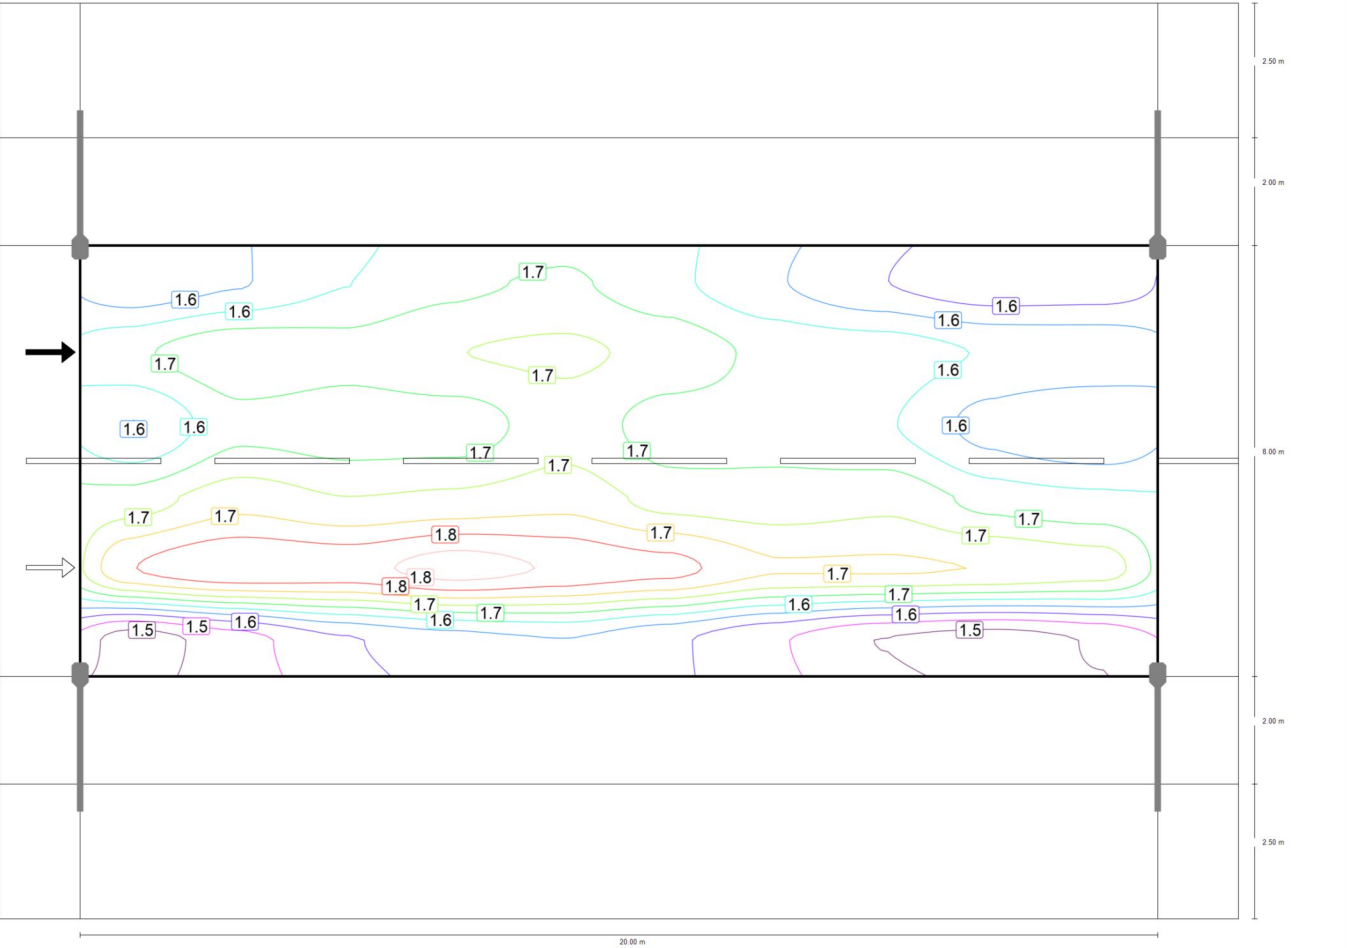
m	1.000	3.000	5.000	7.000	9.000	11.000	13.000	15.000	17.000	19.000
11.833	2.19	2.25	2.32	2.36	2.38	2.34	2.28	2.22	2.20	2.22
10.500	2.65	2.70	2.69	2.73	2.70	2.67	2.60	2.60	2.59	2.57
9.167	2.51	2.58	2.54	2.56	2.58	2.52	2.51	2.53	2.47	2.45
7.833	2.38	2.47	2.46	2.46	2.52	2.46	2.47	2.44	2.36	2.33

Street 1
Roadway 1 (M4)

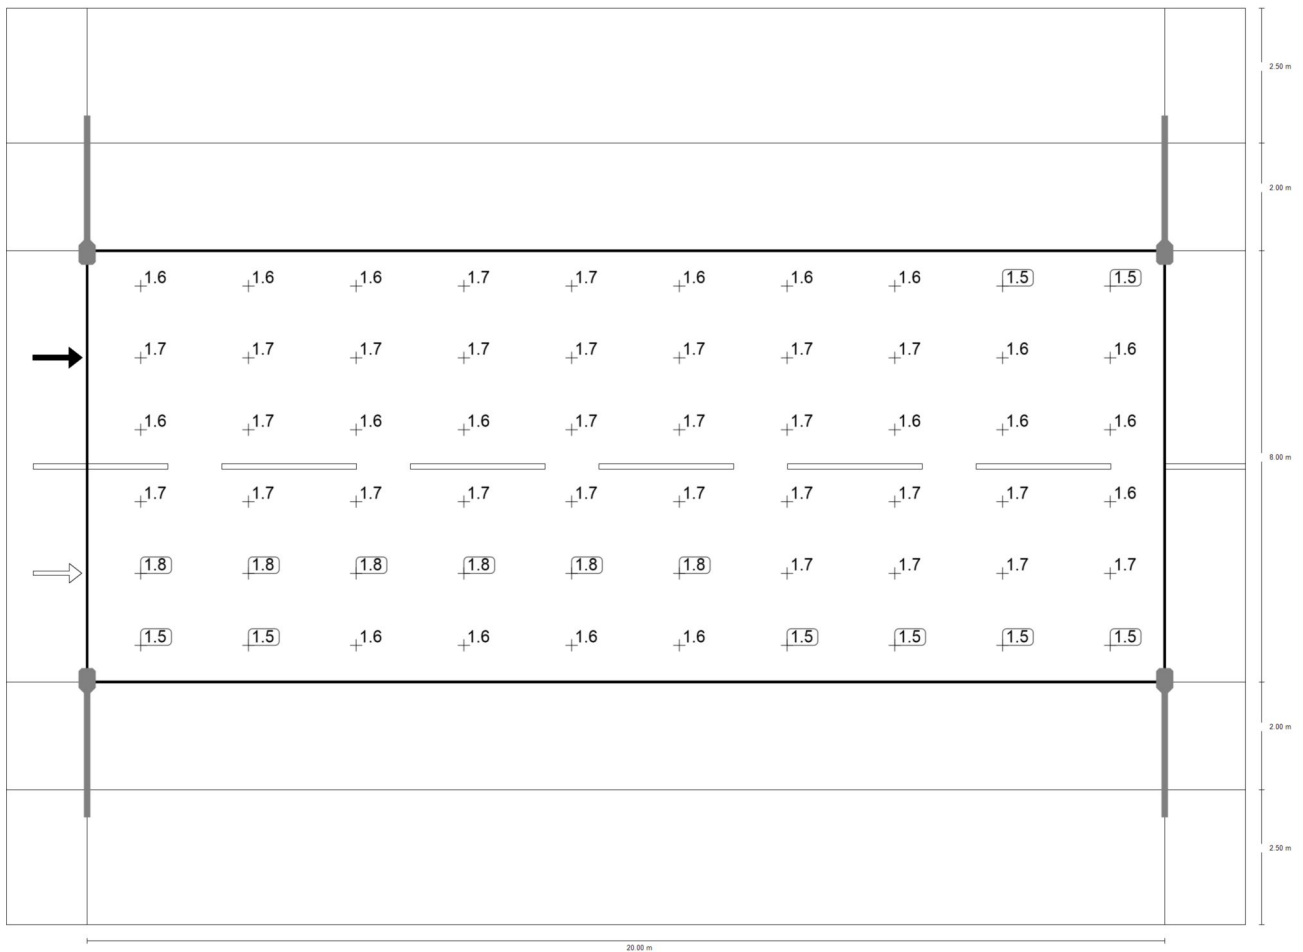
m	1.000	3.000	5.000	7.000	9.000	11.000	13.000	15.000	17.000	19.000
6.500	2.48	2.53	2.51	2.54	2.55	2.53	2.47	2.46	2.43	2.43
5.167	2.34	2.38	2.43	2.47	2.50	2.45	2.39	2.33	2.29	2.29

Observer 1: Luminance with new installation [cd/m²] (Value chart)

	L _{av}	L _{min}	L _{max}	g ₁	g ₂
Observer 1: Luminance with new installation	2.46 cd/m²	2.19 cd/m²	2.73 cd/m²	0.89	0.80



Street 1

Roadway 1 (M4)Observer 2: Maintenance value, luminance with dry roadway [cd/m^2] (Iso-illuminance curves)Observer 2: Maintenance value, luminance with dry roadway [cd/m^2] (Value grid)

m	1.000	3.000	5.000	7.000	9.000	11.000	13.000	15.000	17.000	19.000
11.833	1.57	1.59	1.63	1.66	1.67	1.64	1.60	1.56	1.53	1.54
10.500	1.66	1.69	1.68	1.70	1.71	1.69	1.66	1.65	1.63	1.63
9.167	1.59	1.66	1.65	1.65	1.69	1.65	1.66	1.64	1.58	1.56

Street 1

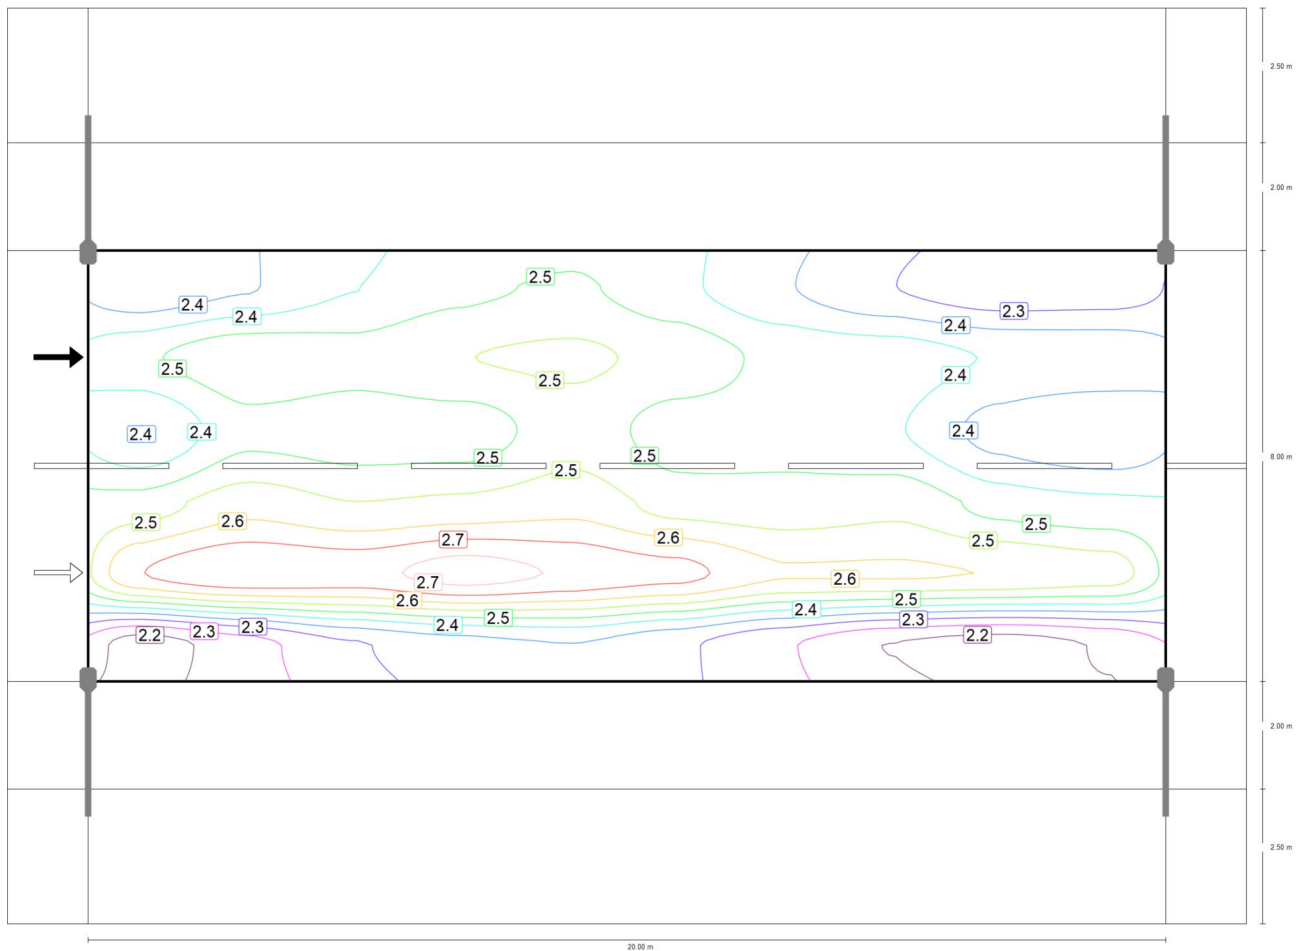
Roadway 1 (M4)

m	1.000	3.000	5.000	7.000	9.000	11.000	13.000	15.000	17.000	19.000
7.833	1.68	1.73	1.70	1.71	1.73	1.69	1.68	1.69	1.65	1.64
6.500	1.77	1.81	1.80	1.83	1.81	1.79	1.74	1.74	1.74	1.72
5.167	1.47	1.51	1.55	1.58	1.59	1.57	1.53	1.49	1.47	1.49

Observer 2: Maintenance value, luminance with dry roadway [cd/m^2] (Value chart)

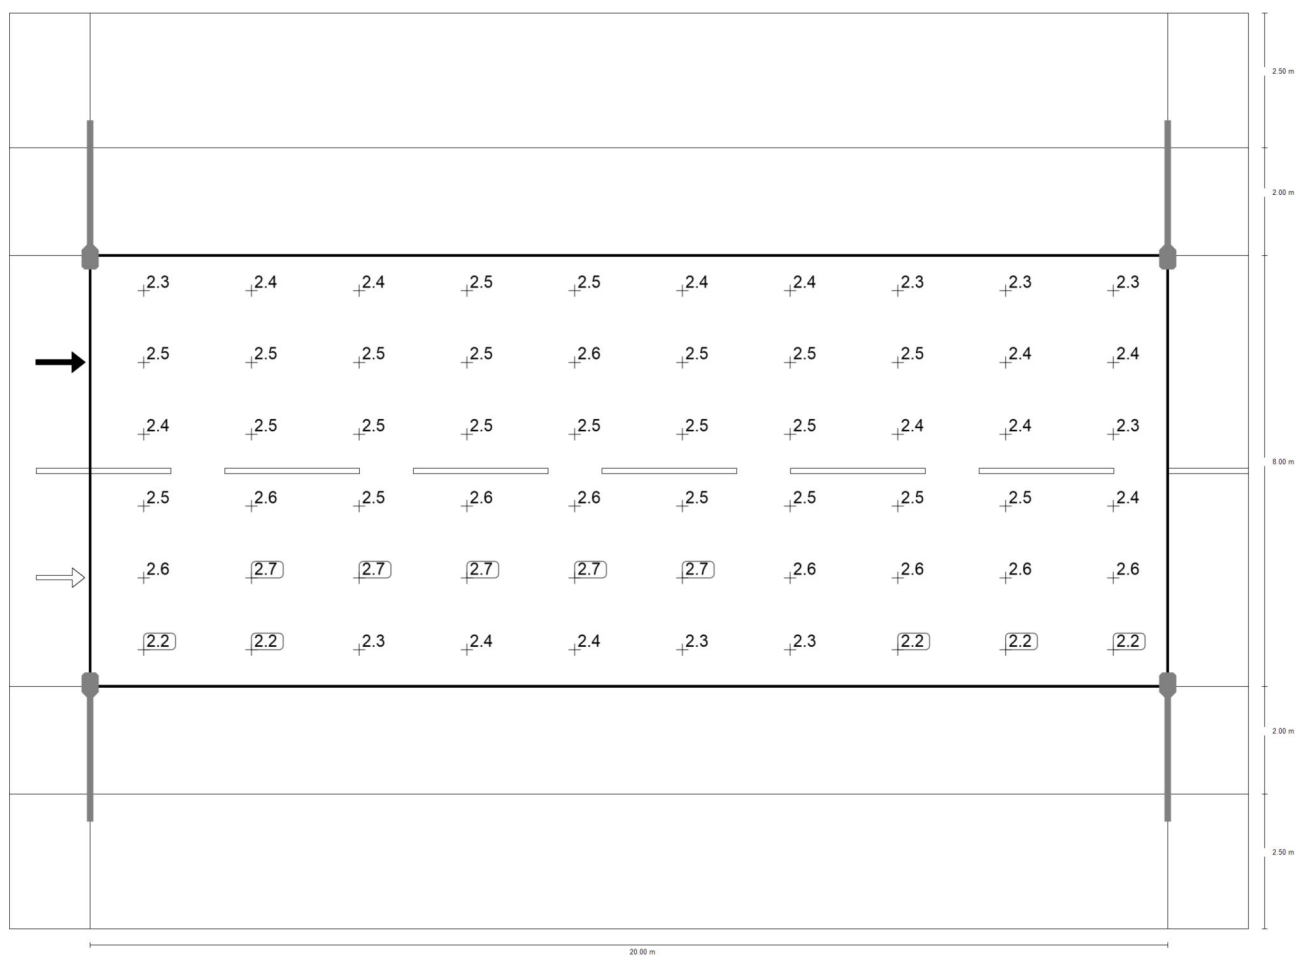
	L_{av}	L_{min}	L_{max}	g_1	g_2
Observer 2: Maintenance value, luminance with dry roadway	1.65 cd/m^2	1.47 cd/m^2	1.83 cd/m^2	0.89	0.80

Street 1

Roadway 1 (M4)

Observer 2: Luminance with new installation [cd/m²] (Iso-illuminance curves)

Street 1

Roadway 1 (M4)

Observer 2: Luminance with new installation [cd/m²] (Value grid)

m	1.000	3.000	5.000	7.000	9.000	11.000	13.000	15.000	17.000	19.000
11.833	2.34	2.38	2.43	2.47	2.50	2.45	2.39	2.33	2.29	2.29
10.500	2.48	2.53	2.51	2.54	2.55	2.53	2.47	2.46	2.43	2.43
9.167	2.38	2.47	2.46	2.46	2.52	2.46	2.47	2.44	2.36	2.33
7.833	2.51	2.58	2.54	2.56	2.58	2.52	2.51	2.53	2.47	2.45

Street 1

Roadway 1 (M4)

m	1.000	3.000	5.000	7.000	9.000	11.000	13.000	15.000	17.000	19.000
6.500	2.65	2.70	2.69	2.73	2.70	2.67	2.60	2.60	2.59	2.57
5.167	2.19	2.25	2.32	2.36	2.38	2.34	2.28	2.22	2.20	2.22

Observer 2: Luminance with new installation [cd/m²] (Value chart)

	L _{av}	L _{min}	L _{max}	g ₁	g ₂
Observer 2: Luminance with new installation	2.46 cd/m ²	2.19 cd/m ²	2.73 cd/m ²	0.89	0.80

Street 1

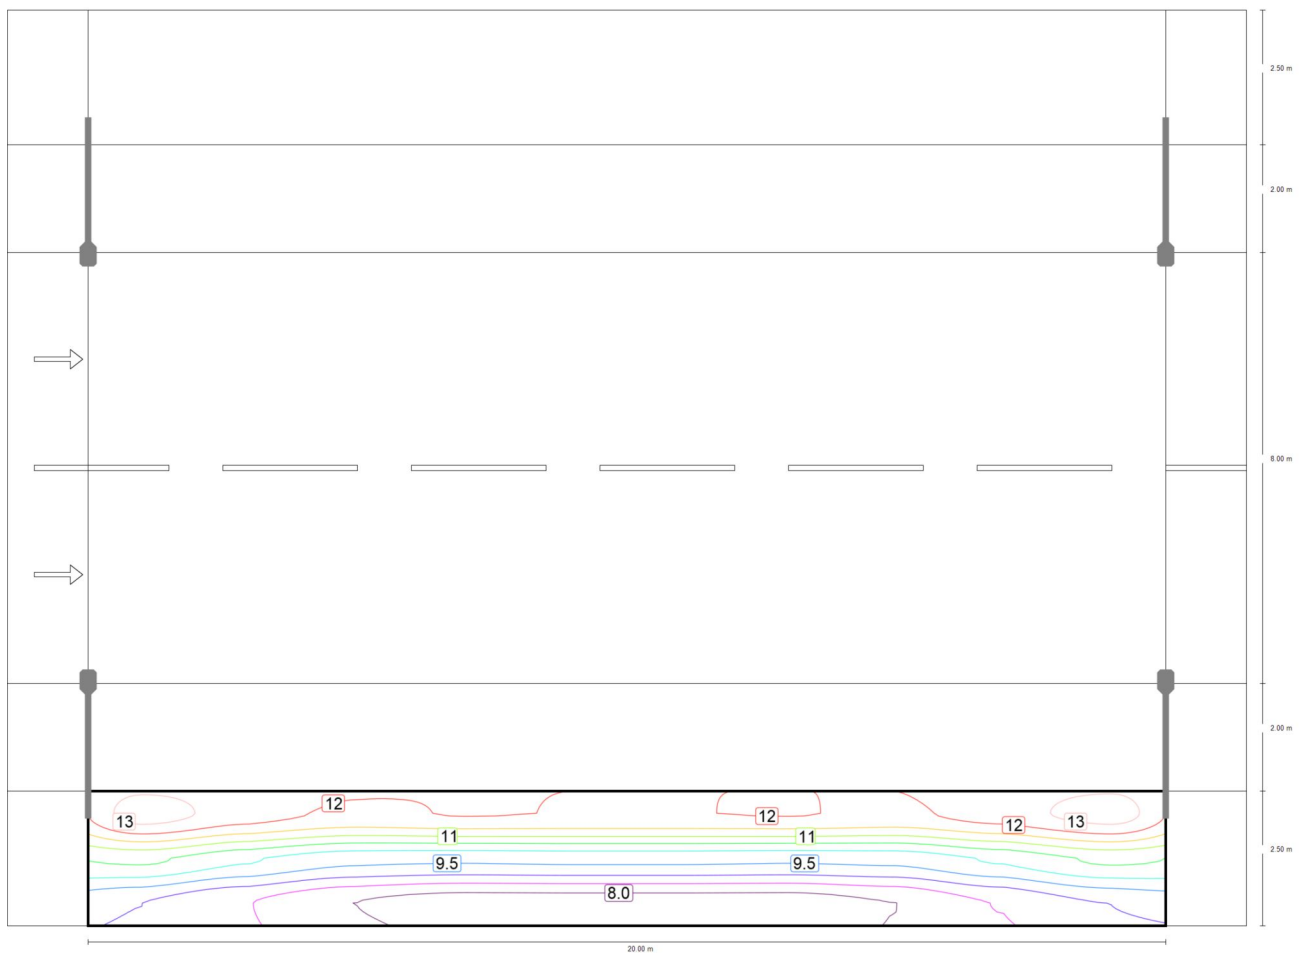
Sidewalk 2 (P4)

Results for valuation field

	Symbol	Calculated	Target	Check
Sidewalk 2 (P4)	E_{min}	7.75 lx	≥ 1.00 lx	✓
	$E_{av}^{(1)}$	10.12 lx	-	-

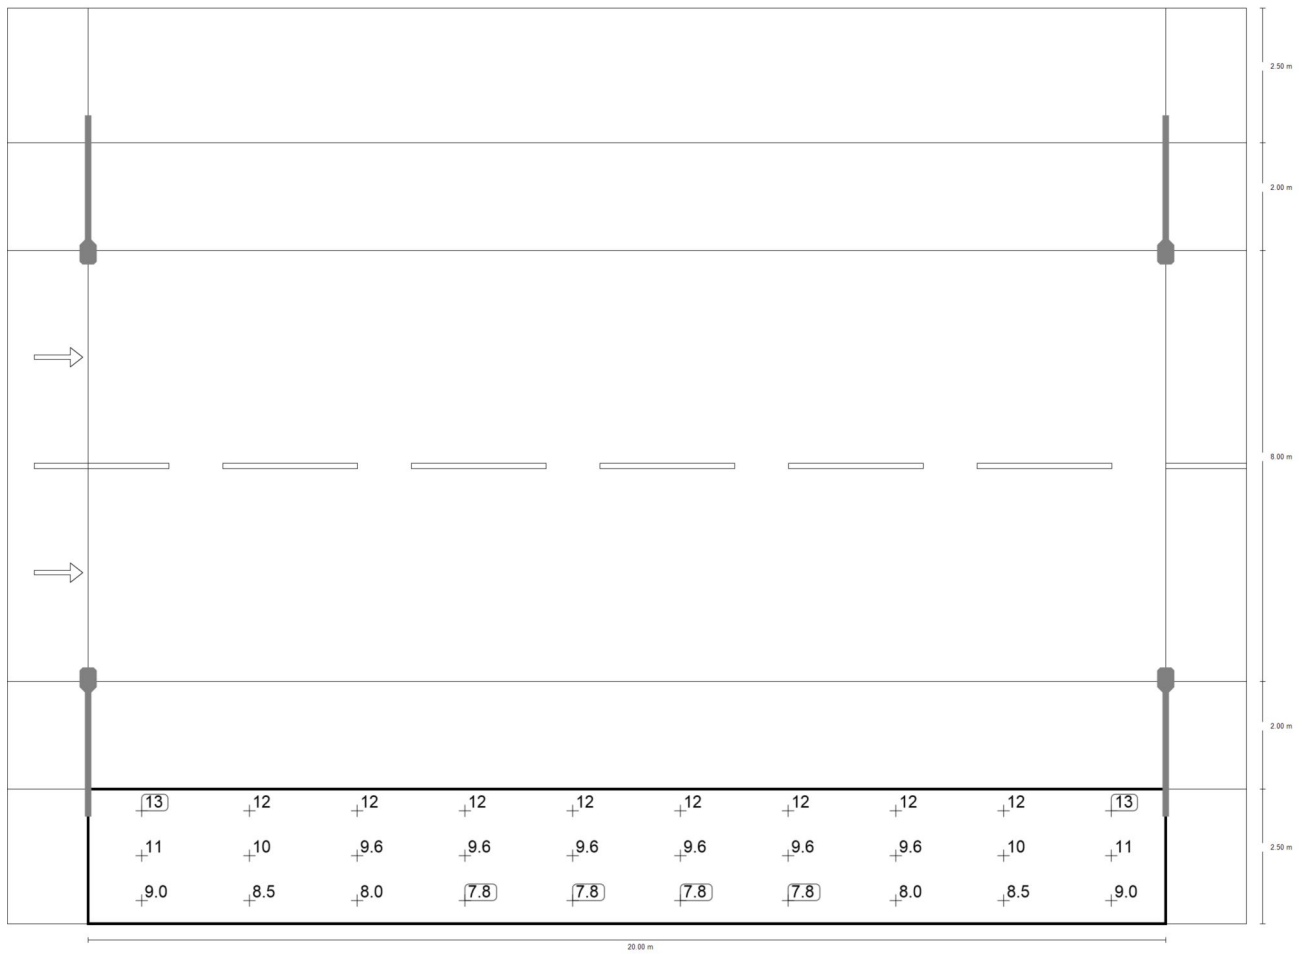
(1) Informative, not part of the valuation

Street 1

Sidewalk 2 (P4)

Maintenance value, horizontal illuminance [lx] (Iso-illuminance curves)

Street 1

Sidewalk 2 (P4)

Maintenance value, horizontal illuminance [lx] (Value grid)

Street 1

Sidewalk 2 (P4)

m	1.000	3.000	5.000	7.000	9.000	11.000	13.000	15.000	17.000	19.000
2.083	12.79	12.28	11.94	12.06	12.03	12.03	12.06	11.94	12.28	12.79
1.250	10.62	10.09	9.64	9.59	9.63	9.63	9.59	9.64	10.09	10.62
0.417	9.02	8.53	8.00	7.75	7.77	7.77	7.75	8.00	8.53	9.02

Maintenance value, horizontal illuminance [lx] (Value chart)

	E_{av}	E_{min}	E_{max}	g_1	g_2
Maintenance value, horizontal illuminance	10.1 lx	7.75 lx	12.8 lx	0.77	0.61

Glossary

A

A	Formula symbol for a surface in the geometry
---	--

B

Background area	The background area borders the direct ambient area according to DIN EN 12464-1 and reaches up to the borders of the room. In larger rooms, the background area is at least 3 m wide. It is located horizontally at floor level.
-----------------	--

C

CCT	<p>(correlated color temperature)</p> <p>Body temperature of a thermal radiator that serves to describe its light color. Unit: Kelvin [K]. The lesser the numerical value the redder; the greater the numerical value the bluer the light color. The color temperature of gas-discharge lamps and semi-conductors are termed "correlated color temperature" in contrast to the color temperature of thermal radiators.</p> <p>Allocation of the light colors to the color temperature ranges acc. to EN 12464-1:</p> <p>Light color - color temperature [K] warm white (ww) < 3,300 K neutral white (nw) ≥ 3,300 – 5,300 K daylight white (dw) > 5,300 K</p>
-----	---

Clearance height	The designation for the distance between upper edge of the floor and bottom edge of the ceiling (in the completely furnished status of room).
------------------	---

CRI	<p>(color rendering index)</p> <p>Designation for the color rendering index of a luminaire or a lamp acc. to DIN 6169: 1976 or CIE 13.3: 1995.</p> <p>The general color rendering index Ra (or CRI) is a dimensionless figure that describes the quality of a white light source in regards to its similarity with the remission spectra of defined 8 test colors (see DIN 6169 or CIE 1974) to a reference light source.</p>
-----	---

D

Daylight factor	<p>Ratio of the illuminance achieved solely by daylight incidence at a point in the inside to the horizontal illuminance in the outer area under an unobstructed sky.</p> <p>Formula symbol: D (daylight factor) Unit: %</p>
-----------------	---

Glossary

Daylight quotient effective area	A calculation surface within which the daylight quotient is calculated.
E	
Eta (η)	<p>(light output ratio)</p> <p>The light output ratio describes what percentage of the luminous flux of a free radiating lamp (or LED module) is emitted by the luminaire when installed.</p> <p>Unit: %</p>
G	
g_1	<p>Often also U_o (overall uniformity)</p> <p>Designates the overall uniformity of the illuminance on a surface. It is the quotient from E_{min} to \bar{E} and is required, for instance, in standards for illumination of workstations.</p>
g_2	<p>Actually it designates the "non-uniformity" of the illuminance on a surface. It is the quotient of E_{min} to E_{max} and is generally only relevant for certifying the emergency lighting acc. to EN 1838.</p>
I	
Illuminance	<p>Describes the ratio of the luminous flux that strikes a certain surface to the size of this surface ($lm/m^2 = lx$). The illuminance is not tied to an object surface. It can be determined anywhere in space (inside or outside). The illuminance is not a product feature because it is a recipient value. Luxometers are used for measuring.</p> <p>Unit: Lux</p> <p>Abbreviation: lx</p> <p>Formula symbol: E</p>
Illuminance, adaptive	<p>For the determining of the middle adaptive illuminance on a surface, this is rastered "adaptively". In the area of large illuminance differences within the surface, the raster is subdivided finer; within lesser differences, a rougher classification is made.</p>
Illuminance, horizontal	<p>Illuminance that is calculated or measured on a horizontal (level) surface (this can be for example a table top or the floor). The horizontal illuminance is usually identified by the formula letter E_h.</p>
Illuminance, perpendicular	<p>Illuminance that is calculated or measured plumb-vertical to a surface. This needs to be taken into account for tilted surfaces. If the surface is horizontal or vertical, then there is no difference between the perpendicular and the horizontal or vertical illuminance.</p>

Glossary

Illuminance, vertical	<p>Illuminance that is calculated or measured on a vertical surface (this can be for example the front of some shelves). The vertical illuminance is usually identified by the formula letter E_v.</p>
<hr/>	
L	
LENI	<p>(lighting energy numeric indicator) Lighting energy numeric indicator acc. to EN 15193</p> <p>Unit: kWh/m² year</p>
<hr/>	
Light loss factor	See MF
<hr/>	
LLMF	<p>(lamp lumen maintenance factor)/acc. to CIE 97: 2005 Lamp flux maintenance factor that takes the luminous flux reduction into account of a luminaire or an LED module in the course of the operating time. The lamp flux maintenance factor is specified as a decimal digit and can have a maximum value of 1 (no luminous flux reduction existing).</p>
<hr/>	
LMF	<p>(luminaire maintenance factor)/acc. to CIE 97: 2005 Luminaire maintenance factor that takes the soiling into account of the luminaire in the course of the operating time. The luminaire maintenance factor is specified as a decimal digit and can have a maximum value of 1 (no soiling existing).</p>
<hr/>	
LSF	<p>(lamp survival factor)/acc. to CIE 97: 2005 Lamp survival factor that takes the total failure into account of a luminaire in the course of the operating time. The lamp survival factor is specified as a decimal digit and can have a maximum value of 1 (no failures existing within the time concerned or prompt replacement after the failure).</p>
<hr/>	
Luminance	<p>Dimension for the "brightness impression" that the human eye has of a surface. The surface itself can emit light thereby or light striking it can be reflected (emitter value). It is the only photometric value that the human eye can perceive.</p> <p>Unit: Candela per square meter Abbreviation: cd/m² Formula symbol: L</p>
<hr/>	
Luminous efficacy	<p>Ratio of the emitted luminous flux Φ [lm] to the absorbed electrical power P [W] Unit: lm/W.</p> <p>This ratio can be formed for the lamp or LED module (lamp or module light output), the lamp or module with control gear (system light output) and the complete luminaire (luminaire light output).</p>
<hr/>	

Glossary

Luminous flux	<p>Dimension for the total light output that is emitted from one light source in all directions. It is thus an "emitter value" that specifies the entire emitting output. The luminous flux of a light source can only be determined in a laboratory. A difference is made between the lamp or LED module luminous flux and the luminaire luminous flux.</p> <p>Unit: Lumen Abbreviation: lm Formula symbol: Φ</p>
Luminous intensity	<p>Describes the intensity of the light in a certain direction (emitter value). The luminous intensity is a matter of the luminous flux Φ that is emitted in a certain spherical angle Ω. The radiation characteristics of a light source are presented graphically in a light distribution curve (LDC). The luminous intensity is an SI base unit.</p> <p>Unit: Candela Abbreviation: cd Formula symbol: I</p>
M	
MF	<p>(maintenance factor)/acc. to CIE 97: 2005 Maintenance factor as decimal number between 0 and 1 that describes the ratio of the new value of a photometric planning parameter (e.g. of the illuminance) to a maintenance value after a certain time. The maintenance factor takes into account the soiling of luminaires and rooms as well as the luminous flux reduction and the failure of light sources. The maintenance factor is taken into account either overall or determined in detail acc. to CIE 97: 2005 by the formula $RMF \times LMF \times LLMF \times LSF$.</p>
P	
P	<p>(power) Electric power consumption</p> <p>Unit: watt Abbreviation: W</p>
R	
Reflection factor	<p>The reflection factor of a surface describes how much of the striking light is reflected back. The reflection factor is defined by the color of the surface.</p>

Glossary

RMF	(room maintenance factor)/acc. to CIE 97: 2005 Room maintenance factor that takes the soiling into account of the space encompassing surfaces in the course of the operating time. The room maintenance factor is specified as a decimal digit and can have a maximum value of 1 (no soiling existing).
<hr/>	
S	
Surrounding area	The ambient area directly borders the area of the visual task and should be planned with a width of at least 0.5 m according to DIN EN 12464-1. It is at the same height as the area of the visual task.
<hr/>	
U	
UGR (max)	(unified glare rating) Measure for the psychological glare effect in interiors. In addition to luminaire luminance, the UGR value also depends on the position of the observer, the viewing direction and the ambient luminance. Among other things, EN 12464-1 specifies maximum permissible UGR values for various indoor workplaces.
<hr/>	
UGR observer	Calculation point in the room, for the DIALux the UGR value is determined. The location and height of the calculation point should correspond to the typical observer position (position and eye level of the user).
<hr/>	
V	
Visual task area	The area that is needed for carrying out the visual task in accordance with DIN EN 12464-1. The height corresponds with the height at which the visual task is executed.
<hr/>	
W	
Wall zone	Circumferential area between working plane and walls that is not taken into account for the calculation.
<hr/>	
Working plane	Virtual measuring or calculation surface at the height of the visual task that generally follows the room geometry. The working plane may also feature a wall zone.
<hr/>	