

Win-1
192.50.20.100

Net

.1

R1

12.1

e0/1


12.1

e0/0

12.1

e0/1

Win-2
223.0.50.10

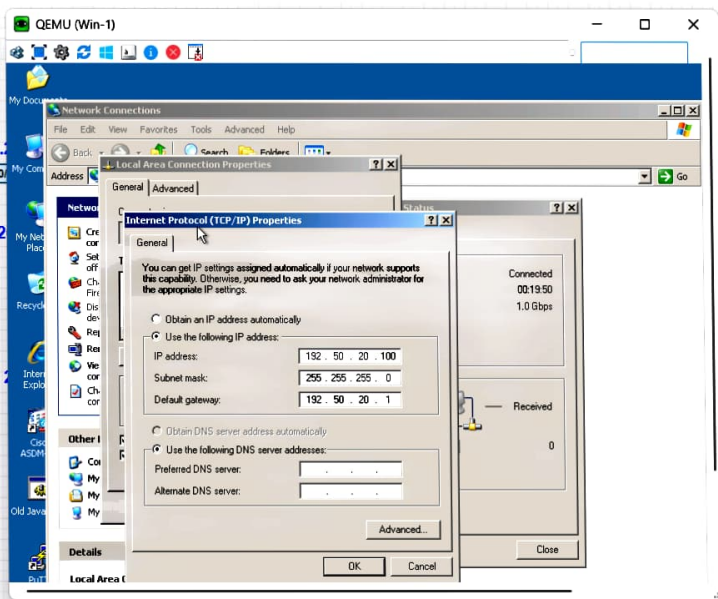


Net



Win-3


172.36.0.10

10,000 RS

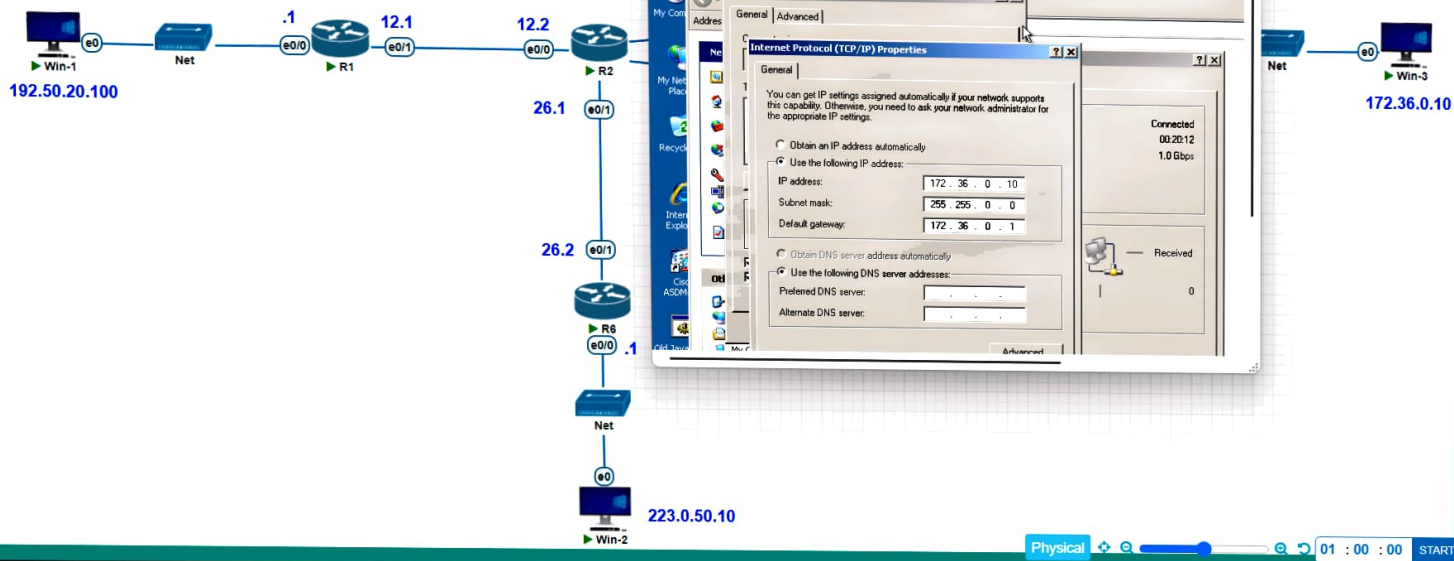


10,000 RS

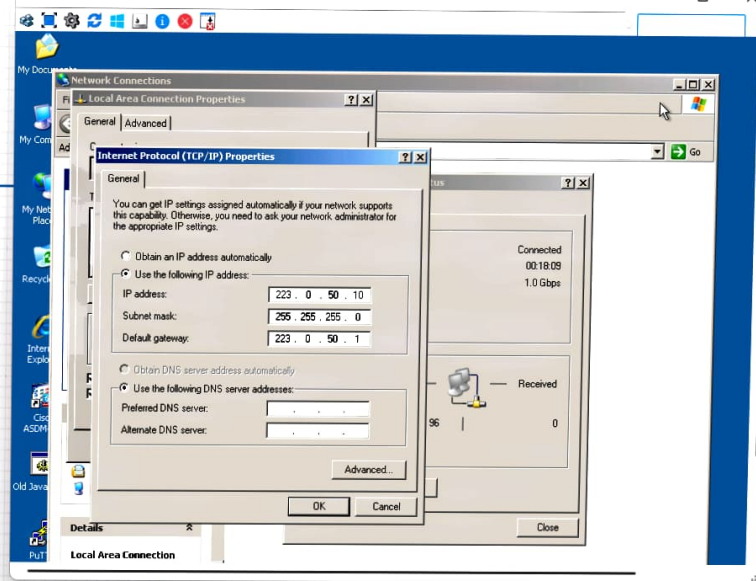

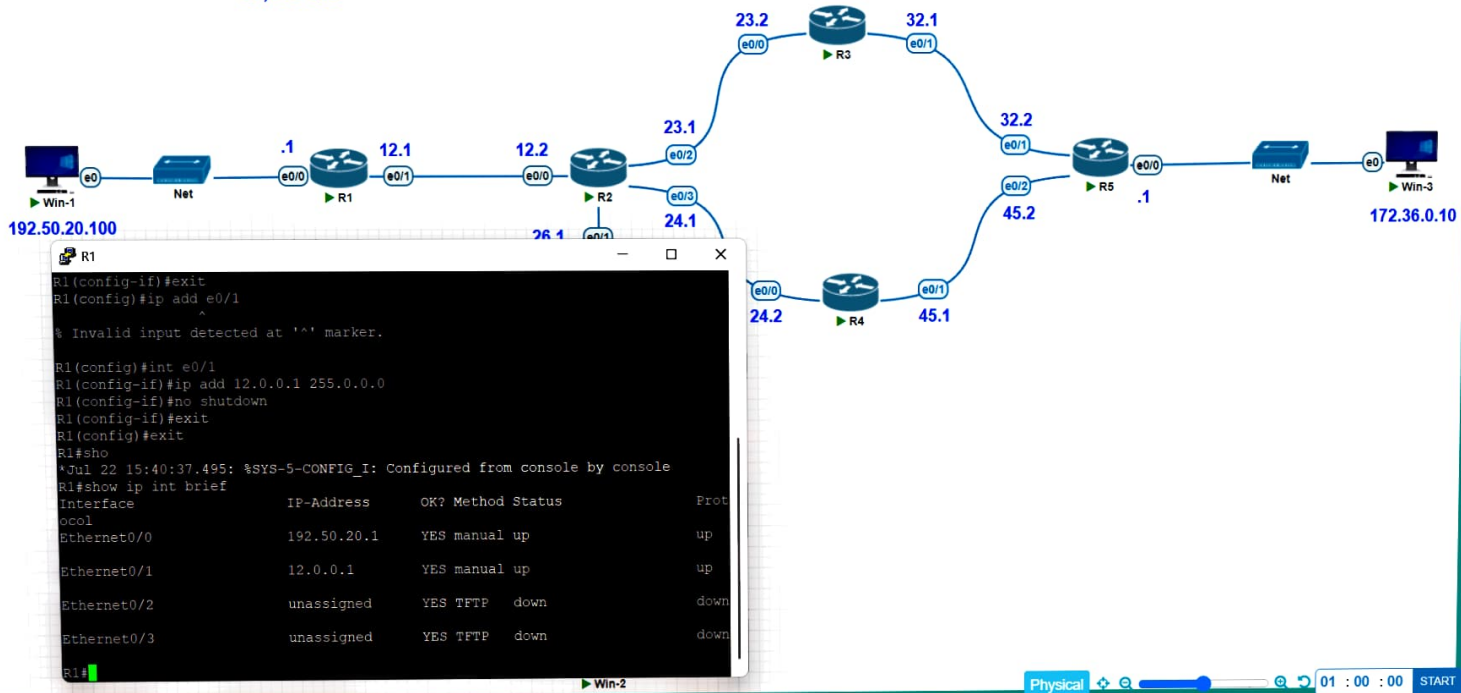


```
R1
R1(config-if)#exit
R1(config)#ip add e0/1
^
% Invalid input detected at '^' marker.

R1(config)#int e0/1
R1(config-if)#ip add 12.0.0.1 255.0.0.0
R1(config-if)#no shutdown
R1(config-if)#exit
R1(config)#exit
R1#sho
'Jul 22 15:40:37.495: %SYS-5-CONFIG_I: Configured from console by console
R1#show ip int brief
Interface IP-Address OK? Method Status Prot
ocol
Ethernet0/0 192.50.20.1 YES manual up
Ethernet0/1 12.0.0.1 YES manual up
Ethernet0/2 unassigned YES TFTP down
Ethernet0/3 unassigned YES TFTP down
R1#
```

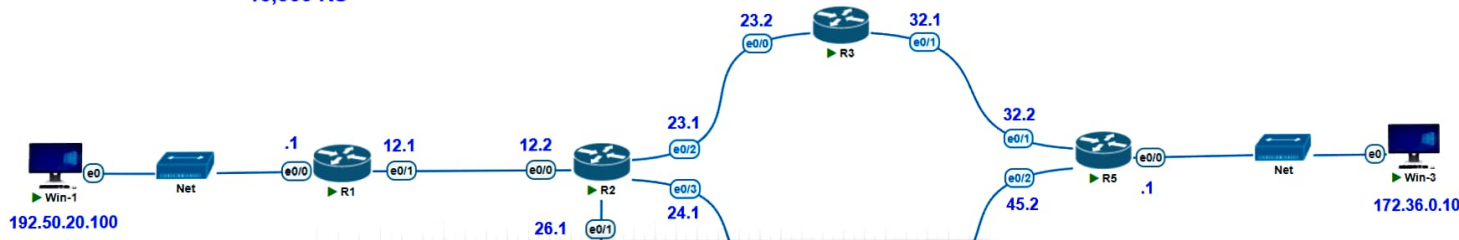



```
R2
Ethernet0/3          24.0.0.1      YES manual up      up
R2#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R2(config)#int e0/2
R2(config-if)#ip add 23.0.0.1 255.0.0.0
R2(config-if)#no shutdown
R2(config-if)#exit
R2(config)#exit
R2#show
*Jul 22 16:00:22.899: %SYS-5-CONFIG_I: Configured from console by console
R2#show ip int brief
Interface            IP-Address      OK? Method Status      Prot
ocol
Ethernet0/0          12.0.0.2        YES manual up        up
Ethernet0/1          26.0.0.1        YES manual up        up
Ethernet0/2          23.0.0.1        YES manual up        up
Ethernet0/3          24.0.0.1        YES manual up        up
R2#
```

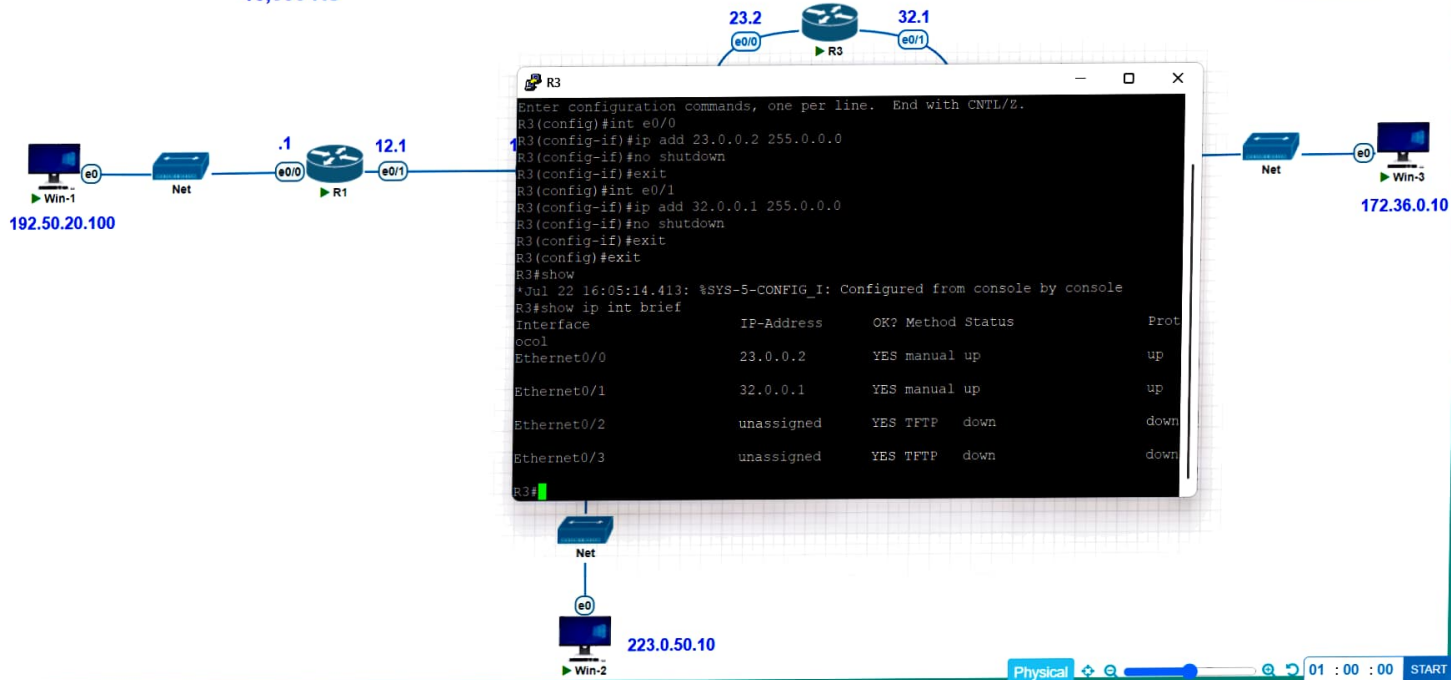


```


R4(config-if)#no shutdown
R4(config-if)#exit
R4(config)#int e0/1
R4(config-if)#ip add 45.0.0.1 255.0.0.0
R4(config-if)#no shutdown
R4(config-if)#exit
R4(config)#exit
R4#
*Jul 22 16:03:46.902: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R4#sho
*Jul 22 16:03:48.084: %SYS-5-CONFIG_I: Configured from console by console
R4#show ip int brief
Interface                IP-Address      OK? Method Status      Prot
ocol
Ethernet0/0               24.0.0.2        YES manual up          up
Ethernet0/1               45.0.0.1        YES manual up          up
Ethernet0/2               unassigned      YES TFTP  down        down
Ethernet0/3               unassigned      YES TFTP  down        down
R4#

```

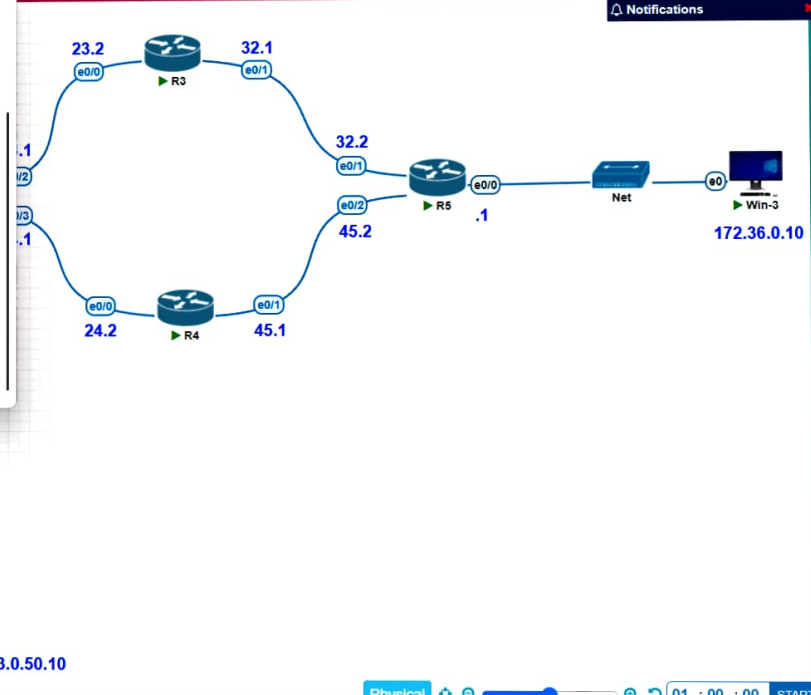

10,000 R3



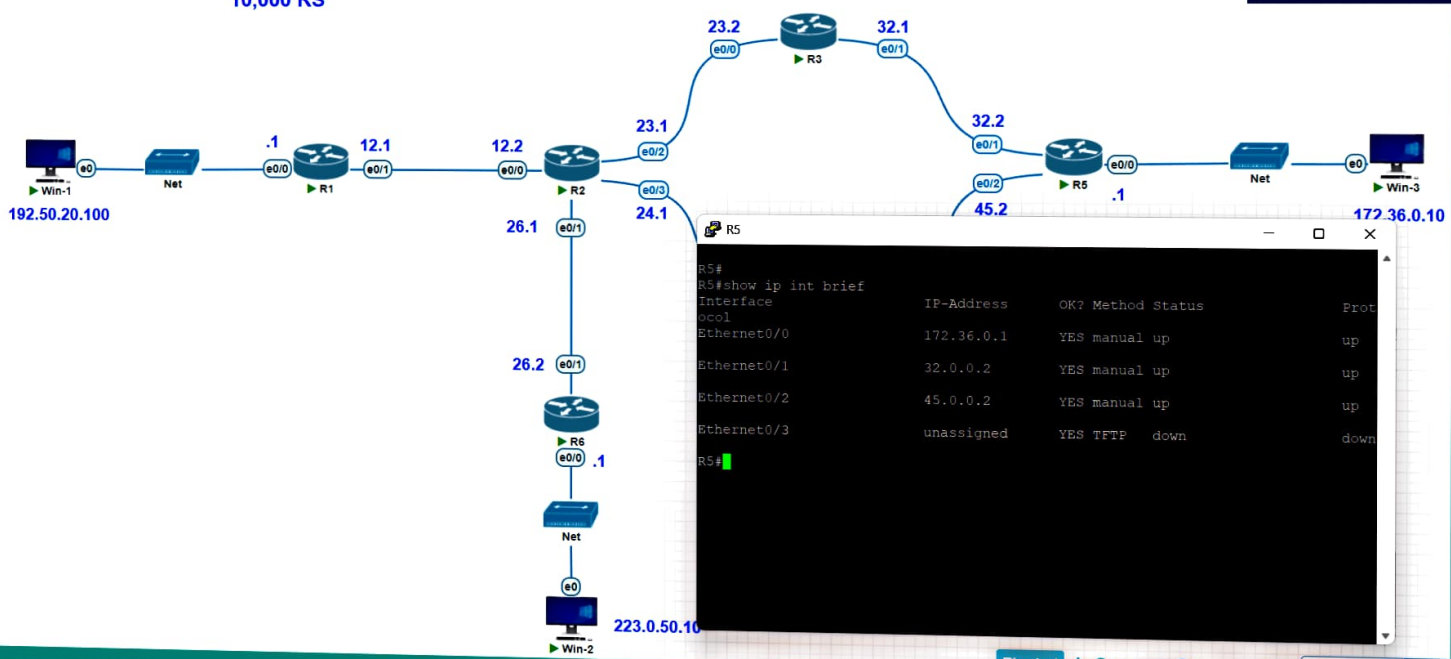


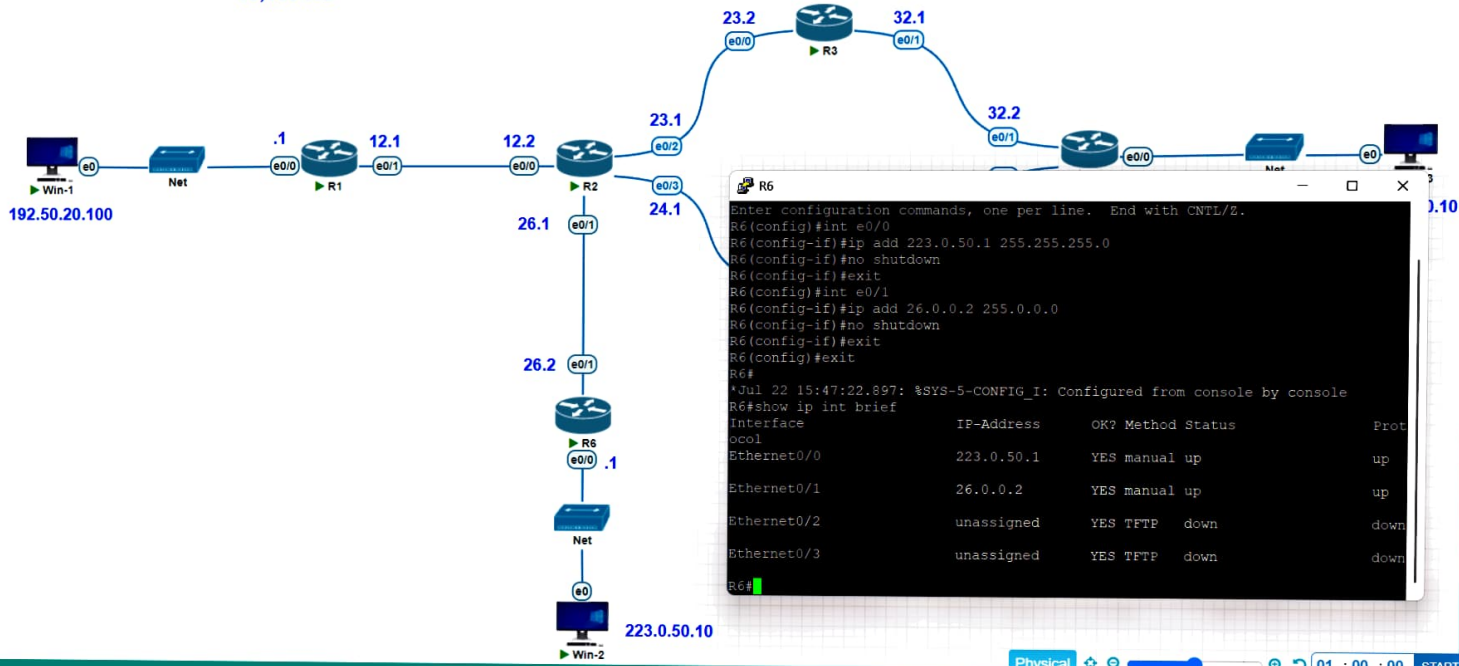


```
*Jul 22 16:39:06.404: %SYS-5-CONFIG_I: Configured from console by console
R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    12.0.0.0/8 is directly connected, Ethernet0/1
L    12.0.0.1/32 is directly connected, Ethernet0/1
S    172.36.0.0/16 [1/0] via 12.0.0.2
S    192.50.20.0/24 is variably subnetted, 2 subnets, 2 masks
C    192.50.20.0/24 is directly connected, Ethernet0/0
L    192.50.20.1/32 is directly connected, Ethernet0/0
S    223.0.50.0/24 [1/0] via 12.0.0.2
R1#
```



10,000 RS

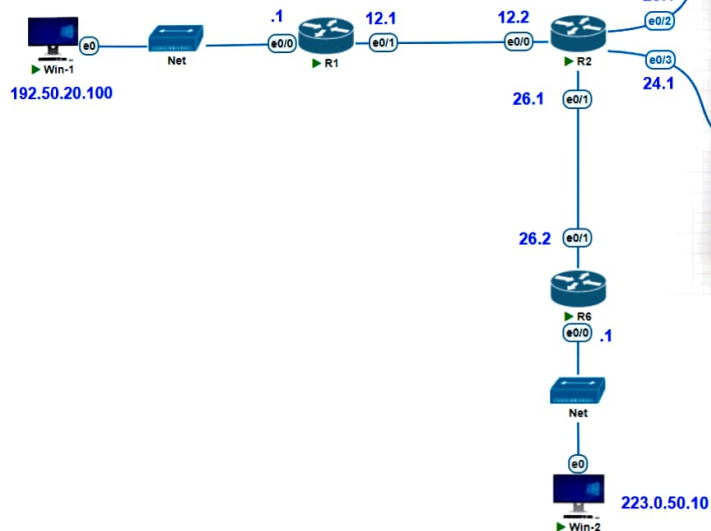


R2#show ip route


Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
 D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
 N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
 E1 - OSPF external type 1, E2 - OSPF external type 2
 i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
 ia - IS-IS inter area, * - candidate default, U - per-user static route
 o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
 a - application route
 + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

```

12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    12.0.0.0/8 is directly connected, Ethernet0/0
L    12.0.0.2/32 is directly connected, Ethernet0/0
C    23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L    23.0.0.0/8 is directly connected, Ethernet0/2
L    23.0.0.1/32 is directly connected, Ethernet0/2
C    24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L    24.0.0.0/8 is directly connected, Ethernet0/3
L    24.0.0.1/32 is directly connected, Ethernet0/3
C    26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
--More--
  
```

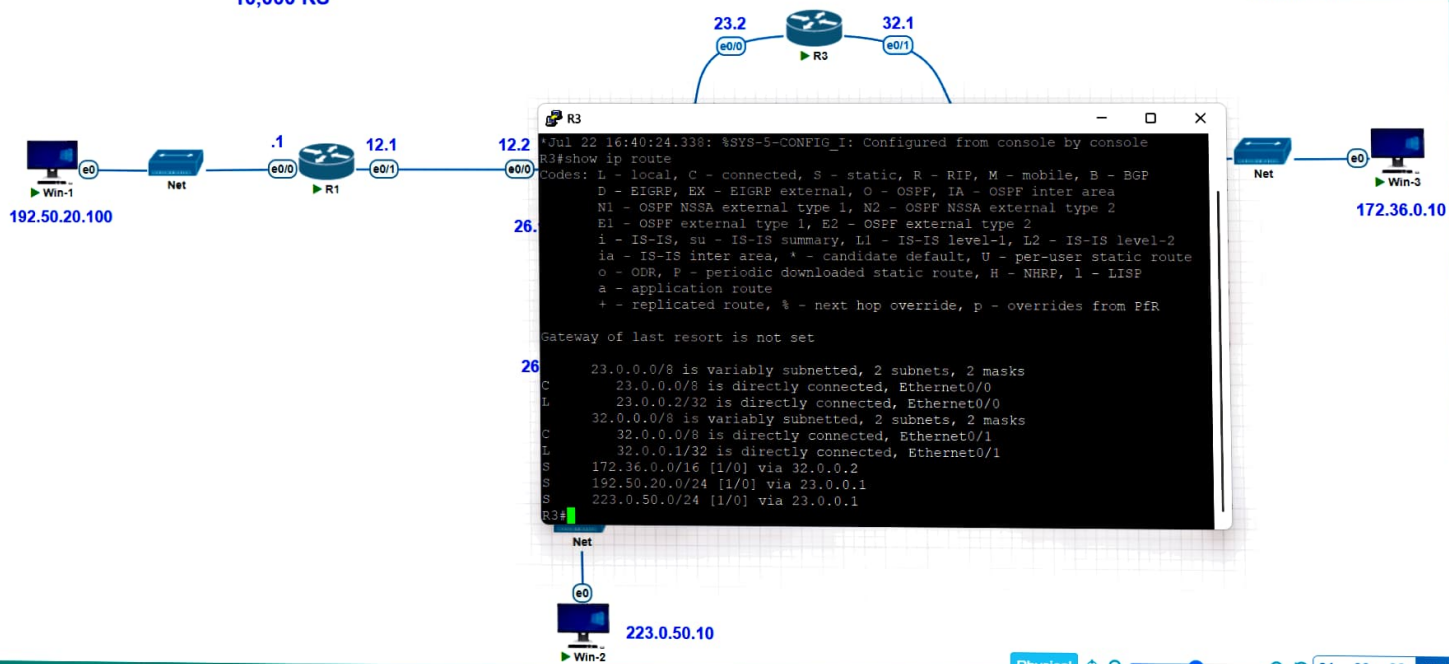

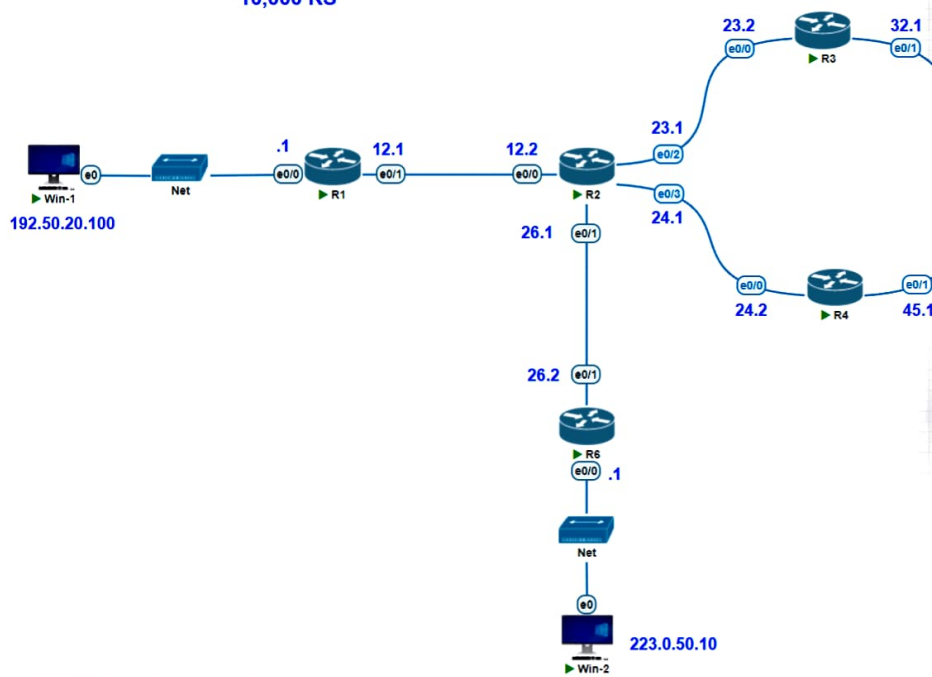

```
R4
Jul 22 16:41:14.438: %SYS-5-CONFIG_I: Configured from console by admin
R4#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, N - next hop override
+ - replicated route, % - next hop override, p - overrides a default route


Gateway of last resort is not set

24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    24.0.0.0/8 is directly connected, Ethernet0/0
L
C    24.0.0.2/32 is directly connected, Ethernet0/0
L
C    45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    45.0.0.0/8 is directly connected, Ethernet0/1
L
C    45.0.0.1/32 is directly connected, Ethernet0/1
L
S    172.36.0.0/16 [1/0] via 45.0.0.2
S    192.50.20.0/24 [1/0] via 24.0.0.1
S    223.0.50.0/24 [1/0] via 24.0.0.1
R4#
```

Physical

01 : 00 : 00 START








```
R5#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    32.0.0.0/8 is directly connected, Ethernet0/1
L    32.0.0.2/32 is directly connected, Ethernet0/1
45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    45.0.0.0/8 is directly connected, Ethernet0/2
L    45.0.0.2/32 is directly connected, Ethernet0/2
172.36.0.0/16 is variably subnetted, 2 subnets, 2 masks
C    172.36.0.0/16 is directly connected, Ethernet0/0
L    172.36.0.1/32 is directly connected, Ethernet0/0
S    192.50.20.0/24 [1/0] via 45.0.0.1
--More--
```

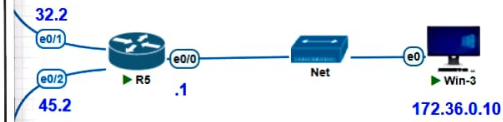

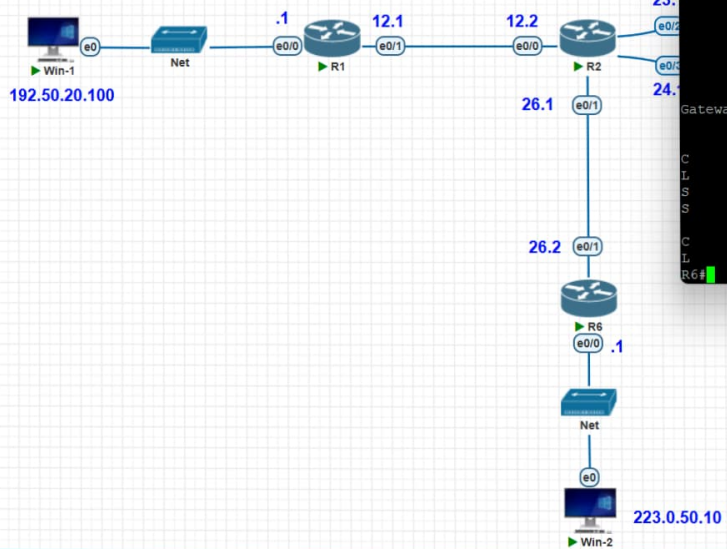


```


R6#show
*Jul 22 16:43:16.318: %SYS-5-CONFIG_I: Configured from console by console
R6#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    26.0.0.0/8 is directly connected, Ethernet0/1
L    26.0.0.2/32 is directly connected, Ethernet0/1
S    172.36.0.0/16 [1/0] via 26.0.0.1
S    192.50.20.0/24 [1/0] via 26.0.0.1
S    223.0.50.0/24 is variably subnetted, 2 subnets, 2 masks
C    223.0.50.0/24 is directly connected, Ethernet0/0
L    223.0.50.1/32 is directly connected, Ethernet0/0
R6#

```

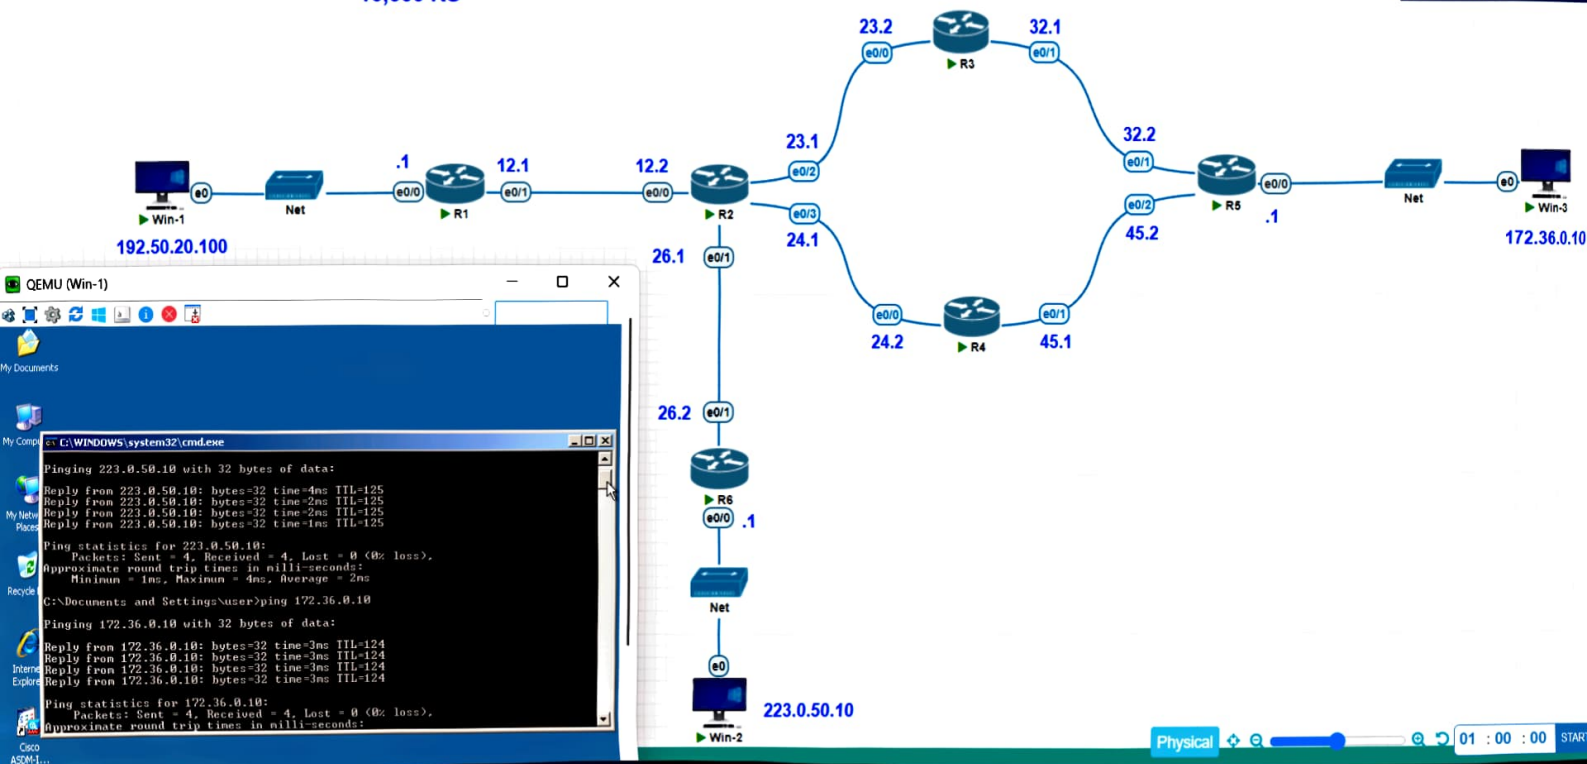

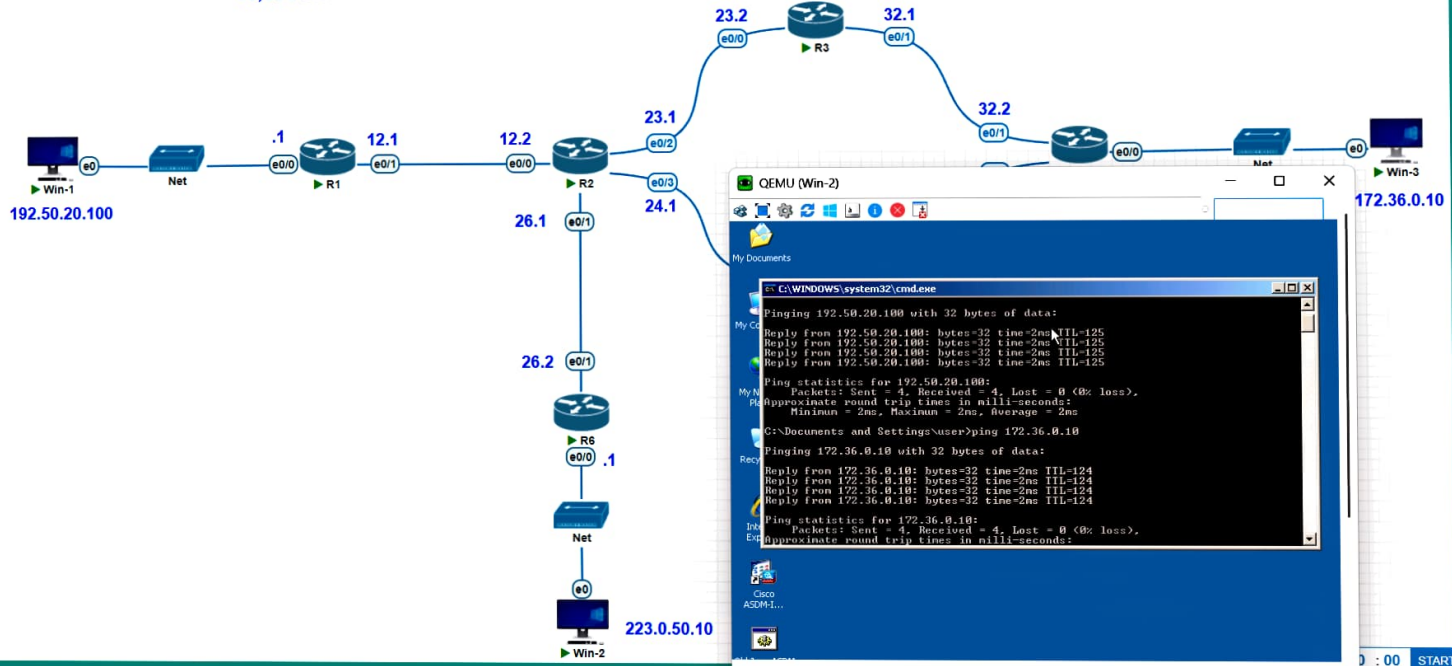

10,000 RS

192.50.20.100
Win-1



.1



12.1



12.2



26.1



26.2



223.0.50.10
Win-2



223.0.50.10



223.0.50.10



223.0.50.10



223.0.50.10



223.0.50.10



223.0.50.10



223.0.50.10





223.0.50.10



223.0.50.10



223.0.50.10

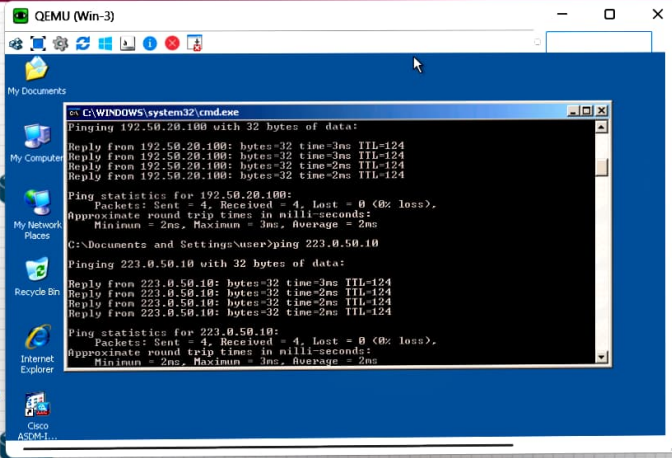

Physical

01 : 00 : 00 START