


Coursework Portfolio 2

Sandbox Application

Mohamed Abisheik Mohamed Ali

Student ID: A00037677

1. NETWORK DIAGRAM

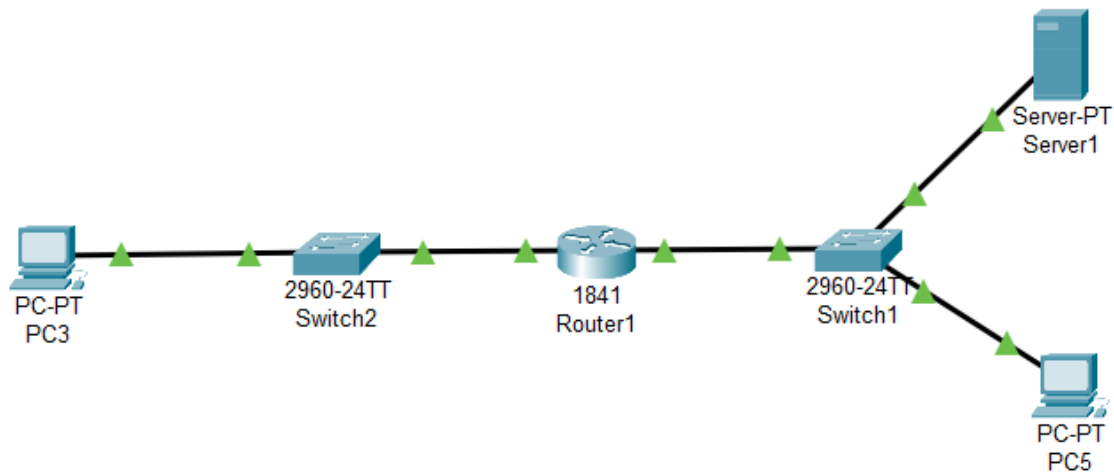

Note: I use Additional PC for check an application server from web browser and I added a switch for future adding PC and Services.

Steps:

Gateway Router:

- Router1> enable
- Router1# configure terminal
- Router1(config)# interface fastethernet 0/0
- Router1(config-if)# ip address 192.168.22.1 255.255.255.0
- Router1(config-if)# no shutdown
- Router1(config-if)# exit

- Router1(config)# interface fastethernet 0/1
- Router1(config-if)# ip address 192.168.122.1 255.255.255.0
- Router1(config-if)# no shutdown
- Router1(config-if)# exit

Desktop (PC):

- Click the pc and open it go to the desktop >IP Configuration >change to static >Set IP address.

IP Configuration	
<input type="radio"/> DHCP	<input checked="" type="radio"/> Static
IPv4 Address	192.168.22.2
Subnet Mask	255.255.255.0
Default Gateway	192.168.22.1
DNS Server	0.0.0.0

- Set all PC for this.
- And ping 192.168.22.1

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.22.1

Pinging 192.168.22.1 with 32 bytes of data:

Reply from 192.168.22.1: bytes=32 time=13ms TTL=255
Reply from 192.168.22.1: bytes=32 time<1ms TTL=255
Reply from 192.168.22.1: bytes=32 time<1ms TTL=255
Reply from 192.168.22.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.22.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 13ms, Average = 3ms

C:\>|
```


Screenshot For ping PC to Gateway

Application Server:

- Click the Application Server and open it go to the desktop >IP Configuration >change to static >Set IP address.

IP Configuration	
<input type="radio"/> DHCP	<input checked="" type="radio"/> Static
IPv4 Address	192.168.122.2
Subnet Mask	255.255.255.0
Default Gateway	192.168.122.1
DNS Server	0.0.0.0

- Click the Application Server and open it go to the service> Click HTTP> Turn ON HTTP and HTTPS> add HTML page in Application Server.
- Click the Application Server and open it go to the desktop >Web Browser >Type the IP address 192.168.122.2.

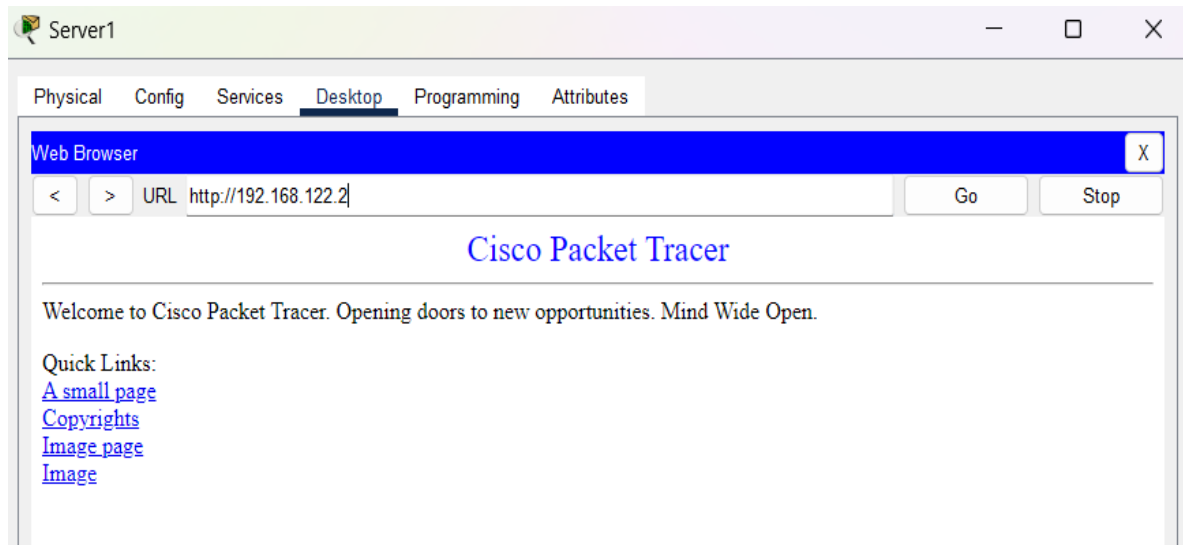

Screenshot for web server showing a web site in web browser.

2. IP ADDRESS TABLE

Device	Role	IP Address	Subnet Mask
Desktop VM (Ubuntu Desktop)	Management	192.168.22.2	255.255.255.0
Gateway Router VM (enp0s3) (Ubuntu Server)	Internet Access	10.0.0.16	255.255.255.0
Gateway Router VM (enp0s8) (Ubuntu Server)	Subnet 01 - Internal Network	192.168.22.1	255.255.255.0
Gateway Router VM (enp0s9) (Ubuntu Server)	Subnet 02 - Internal Network	192.168.122.1	255.255.255.0
Application Server VM (Bitname)	Server	192.168.122.2	255.255.255.0

3. Git Pages Lab Report

Github Link - <https://github.com/MohamedAbisheik2506/SandBoxApplication.github.io.git>

Project link - <https://mohamedabisheik2506.github.io/SandBoxApplication.github.io/>

Configuration Steps:

You need to create three VM Machine's for this Project.

- Download the Virtual Box (VM) and install in your PC.
- Download the three OS for project.
 - Ubuntu Desktop (.iso format) or our Desktop OS like (Kali Linux, Windows, etc...).
 - Ubuntu Server OS (.iso format).
 - Application Server in Bitnami WordPress (.ova format).
- Add three OS in Virtual Box.

Ubuntu Server OS Configuration Steps:

Step 1: Create a New Virtual Machine (VM) for Ubuntu Server

- ✓ Open VirtualBox.
- ✓ Click on new to create a new virtual machine.
- ✓ Name the VM (e.g., Ubuntu Server).
- ✓ Select the type as Linux and the version as Ubuntu (64-bit).
- ✓ Allocate memory (RAM) for the VM (e.g., 2048 MB or higher based on your system's capacity).
- ✓ Choose to create a virtual hard disk now and set a sufficient disk size (e.g., 10 GB).
- ✓ Click Create.

Step 2: Configure the Network Interfaces

You need two network interfaces on the Ubuntu Server VM to act as a router between the two subnets.

- ✓ Go to Settings of your new VM.
- ✓ Select Network.
- ✓ **Adapter 1:** Set to Internal Network (name it differently, e.g., intnet). This will be for Subnet 1. Click the Advanced tab and set the adapter type to PCnet-FAST III or another supported type. Note: Within the ubuntu server terminal, this card will typically have a network adapter name of enp0s8.
- ✓ **Adapter 2:** Enable this adapter and set it to another Internal Network (name it differently, e.g., intnet1). This will be for Subnet 2. Within the ubuntu server terminal, this card will typically have a network adapter name of enp0s9.
- ✓ **Adapter 3:** Set to NAT. Note: Within the ubuntu server terminal, this card will typically have a network adapter name of enp0s3. Its IP address will be assigned via DHCP. It will be used to provide access to the internet via the host computer.

Step 3: Install Ubuntu Server

- ✓ Start the VM and select the Ubuntu Server ISO as the boot disk.
- ✓ Go through the installation process:
- ✓ Set your time zone, keyboard layout, etc.
- ✓ Create a user account and set a strong password.
- ✓ When asked, select the option to install OpenSSH Server (to enable remote access later if needed).
- ✓ Complete the installation, then reboot the VM.

Step 4: Configure Static IPs on the Network Interfaces

After installation, you'll need to assign static IP addresses to both network interfaces (each in different subnets).

- ✓ Log in to the Ubuntu Server VM.
- ✓ Edit the network configuration file:

- ❖ `sudo nano /etc/netplan/00-installer-config.yaml`

- ✓ Type this code.

```
network:
  ethernets:

    enp0s3:
      addresses: [192.168.22.1/24]
      dhcp4: false

    enp0s8:
      addresses: [192.168.122.1/24]
      dhcp4: false
    enp0s9:
      dhcp4: true

  version: 2
```

- ✓ Save it (CTRL + X) type (yes) and enter.

- ✓ Apply the network changes

- ❖ `sudo netplan apply`

- ❖ `ip a`

Step 5: Enable IP Forwarding

To allow routing between the two subnets, you need to enable IP forwarding.

- ✓ Open the sysctl configuration file:

- ❖ `sudo nano /etc/sysctl.conf`

- ✓ Uncomment the line (or add it if not present):

- ❖ `net.ipv4.ip_forward=1`

- ✓ Apply the changes:

- ❖ `sudo sysctl -p`

Step 6: Set Up IPTables for Routing

You may also want to configure iptables to ensure packets are forwarded between the subnets.

- ✓ Configure iptables to allow forwarding:

- ❖ `sudo iptables -A FORWARD -i enp0s3 -o enp0s8 -j ACCEPT`

- ❖ `sudo iptables -A FORWARD -i enp0s8 -o enp0s3 -j ACCEPT`

- ✓ To make the changes permanent, you can save the iptables rules:

- ❖ `sudo apt install iptables-persistent`

- ❖ sudo netfilter-persistent save
- ❖ sudo netfilter-persistent reload

Ubuntu OS Configuration Steps:

Step: Installing Ubuntu Desktop in VM

To create a virtual machine and install a GUI-based OS from an ISO file

- ✓ Launch VirtualBox
- ✓ Click “New” to create a new machine
- ✓ Fill in the details as requested so that the new machine is:
 - ❖ Named “Ubuntu Desktop”
 - ❖ The ISO named “ubuntu-24.04.1-desktop-amd64.iso” is selected
 - ❖ The checkbox for “Skip Unattended Installation” is checked
- ✓ Click “Next”. Now ensure the machine has:
 - ❖ 2048mb of Base Memory
 - ❖ Two processors
- ✓ Click “Next”. Create a Virtual Hard Disk for the machine. This will need to be a minimum of 25GB.
- ✓ Click “Next”. Verify your settings are as above and click “Finish”.
- ✓ Click “Start” to boot your virtual machine
- ✓ Select “Try or Install Ubuntu”
- ✓ Click “Install Ubuntu”
- ✓ You need to create an Ubuntu account and click a Restart Now.

Step 2: Configure the Network Interfaces

You need one network interfaces on the Ubuntu Desktop VM.

- ✓ Go to Settings of your new VM.
- ✓ Select Network.
- ✓ **Adapter 1:** Set to Internal Network (name it differently, e.g., intnet).
- ✓ Open Ubuntu desktop in VM and login.
- ✓ Go to the settings > Network> enp0s3 setting> IPV4 > IPV4 Method change to (Manual)> Add address =192.168.22.2, Add netmask =255.255.255.0 or 24, Add gateway =192.168.22.1
- ✓ Apply
- ✓ Disconnect the Network and connect.

Bitnami Web Application Configuration Step:

To create a Bitnami virtual machine using VirtualBox

Step 1: Install Bitnami Application in VM.

- ✓ Click “File” then “Import appliance”.
- ✓ Navigate to the file named “bitnami-wordpress-6.3.1-r0-debian-11-amd64.ova”.
- ✓ Click “Open”.
- ✓ Click “Next”.
- ✓ Click “Finish”.
- ✓ Click “Start” to launch the machine.
- ✓ The first-time log in details is displayed on-screen. You will be required to reset the password on your first log in.
- ✓ Close the Bitnami.

Step 2: Configure the Network Interfaces

- ✓ Go to Settings of your new VM.
- ✓ Select Network.
- ✓ Adapter 1: Set to Internal Network (name it differently, e.g., intnet1).
- ✓ Open Bitnami Application in VM and login.
- ✓ Type the code
 - ❖ `sudo nano /etc/network/interfaces`
 - ❖ `auto enp0s3`
 - ❖ `iface enp0s3 inet static`
 - ❖ `address 192.168.122.2`
 - ❖ `netmask 255.255.255.0`
 - ❖ `gateway 192.168.122.1`
 - ❖ Save it (CTRL + X) type (yes) and enter.
 - ❖ `sudo ifdown enp0s3 && sudo ifup enp0s3`
 - ❖ `sudo systemctl restart networking`
 - ❖ `ip a`

4. Functional Test Results

Evidence that all VMs can communicate as per the design (e.g., ping results, screenshots of application access).

Screenshots for Functional Test Results:

Ubuntu Server OS:

- ✓ Network IP configuration For Ubuntu Server.

```
mohamed@cyber:~$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UNKNOWN group default qlen 1000
    link/ether 08:00:27:42:67:42 brd ff:ff:ff:ff:ff:ff
    inet 192.168.22.1/24 brd 192.168.22.255 scope global enp0s3
        valid_lft forever preferred_lft forever
    inet6 fe80::a00:27ff:fe42:6742/64 scope link
        valid_lft forever preferred_lft forever
3: enp0s8: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
    link/ether 08:00:27:9a:c0:2f brd ff:ff:ff:ff:ff:ff
    inet 192.168.122.1/24 brd 192.168.122.255 scope global enp0s8
        valid_lft forever preferred_lft forever
    inet6 fe80::a00:27ff:fe9a:c02f/64 scope link
        valid_lft forever preferred_lft forever
4: enp0s9: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
    link/ether 08:00:27:eb:04:03 brd ff:ff:ff:ff:ff:ff
    inet 10.0.4.15/24 metric 100 brd 10.0.4.255 scope global dynamic enp0s9
        valid_lft 85230sec preferred_lft 85230sec
    inet6 fe80::a00:27ff:feeb:403/64 scope link
        valid_lft forever preferred_lft forever
mohamed@cyber:~$
```

- ✓ Ping Ubuntu Server to Ubuntu Desktop Using IP address 192.168.22.2.


```
mohamed@cyber:~$ ping 192.168.22.2
PING 192.168.22.2 (192.168.22.2) 56(84) bytes of data.
64 bytes from 192.168.22.2: icmp_seq=1 ttl=64 time=0.503 ms
64 bytes from 192.168.22.2: icmp_seq=2 ttl=64 time=0.315 ms
64 bytes from 192.168.22.2: icmp_seq=3 ttl=64 time=0.307 ms
64 bytes from 192.168.22.2: icmp_seq=4 ttl=64 time=0.271 ms
64 bytes from 192.168.22.2: icmp_seq=5 ttl=64 time=0.887 ms
^C
--- 192.168.22.2 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4894ms
rtt min/avg/max/mdev = 0.271/0.456/0.887/0.229 ms
mohamed@cyber:~$
```

- ✓ Ping Ubuntu Server to Bitnami Application Server Using IP address 192.168.122.2.

```
mohamed@cyber:~$ ping 192.168.122.2
PING 192.168.122.2 (192.168.122.2) 56(84) bytes of data.
64 bytes from 192.168.122.2: icmp_seq=1 ttl=64 time=0.377 ms
64 bytes from 192.168.122.2: icmp_seq=2 ttl=64 time=0.271 ms
64 bytes from 192.168.122.2: icmp_seq=3 ttl=64 time=0.327 ms
64 bytes from 192.168.122.2: icmp_seq=4 ttl=64 time=0.322 ms
64 bytes from 192.168.122.2: icmp_seq=5 ttl=64 time=0.288 ms
64 bytes from 192.168.122.2: icmp_seq=6 ttl=64 time=1.00 ms
^C
--- 192.168.122.2 ping statistics ---
6 packets transmitted, 6 received, 0% packet loss, time 5514ms
rtt min/avg/max/mdev = 0.271/0.431/1.002/0.257 ms
mohamed@cyber:~$
```

Ubuntu Desktop OS:

- ✓ Network IP configuration For Ubuntu Desktop.

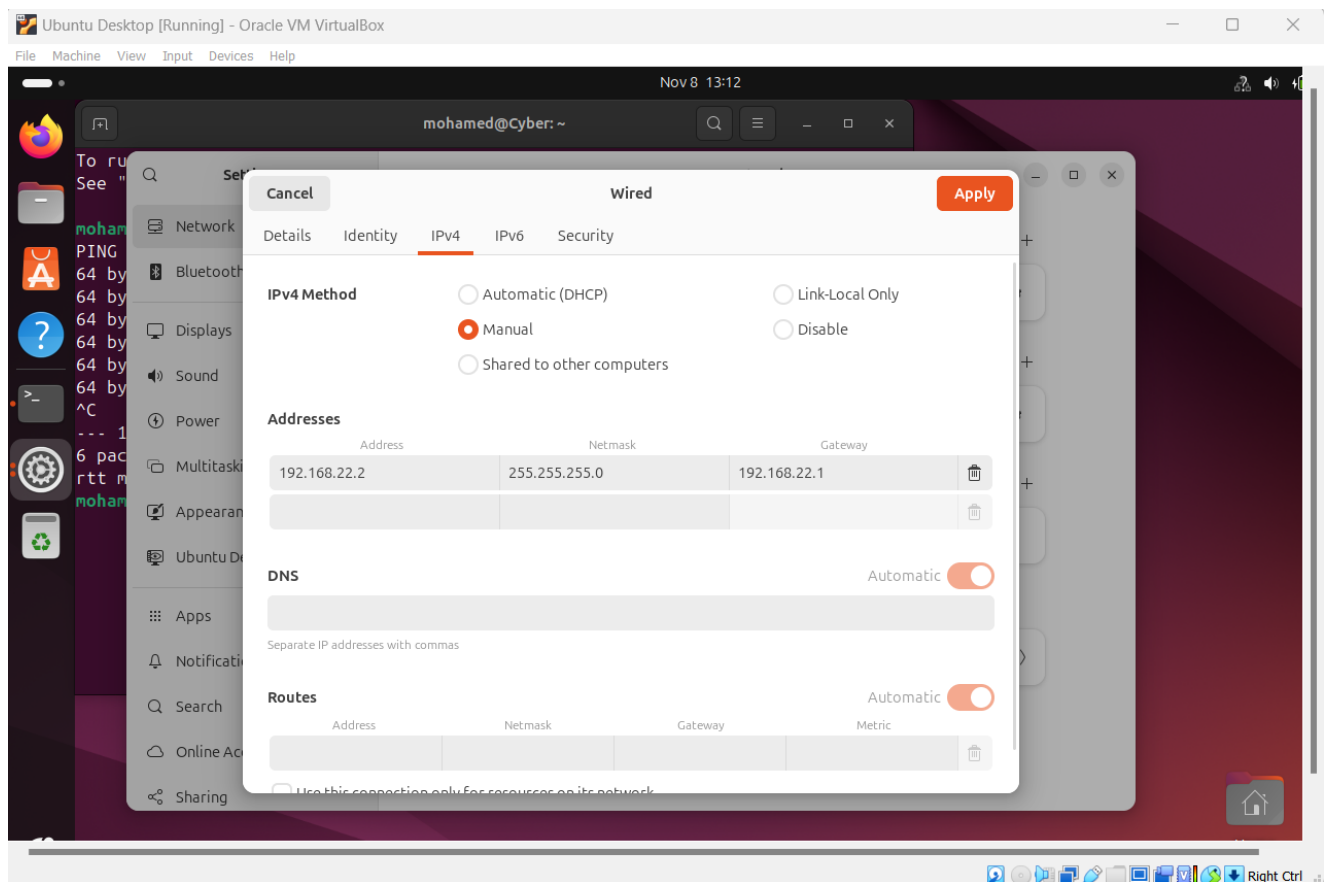

- ✓ Ping Ubuntu Desktop to Ubuntu Server Using IP address 192.168.22.1.

```
mohamed@Cyber:~$ ping 192.168.22.1
PING 192.168.22.1 (192.168.22.1) 56(84) bytes of data.
64 bytes from 192.168.22.1: icmp_seq=1 ttl=64 time=0.430 ms
64 bytes from 192.168.22.1: icmp_seq=2 ttl=64 time=0.240 ms
64 bytes from 192.168.22.1: icmp_seq=3 ttl=64 time=0.358 ms
64 bytes from 192.168.22.1: icmp_seq=4 ttl=64 time=0.298 ms
64 bytes from 192.168.22.1: icmp_seq=5 ttl=64 time=0.327 ms
64 bytes from 192.168.22.1: icmp_seq=6 ttl=64 time=0.451 ms
^C
--- 192.168.22.1 ping statistics ---
6 packets transmitted, 6 received, 0% packet loss, time 5128ms
rtt min/avg/max/mdev = 0.240/0.350/0.451/0.073 ms
```

Bitnami Application Server:

- ✓ Network IP configuration For Bitnami Application Server.

```
bitnami@debian:~$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 08:00:27:1e:b3:ad brd ff:ff:ff:ff:ff:ff
    inet 10.0.2.15/24 brd 10.0.2.255 scope global dynamic enp0s3
        valid_lft 83428sec preferred_lft 83428sec
    inet6 fe80::a00:27ff:fe1e:b3ad/64 scope link
        valid_lft forever preferred_lft forever
3: enp0s8: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 08:00:27:bb:09:5b brd ff:ff:ff:ff:ff:ff
    inet 192.168.122.2/24 brd 192.168.122.255 scope global enp0s8
        valid_lft forever preferred_lft forever
    inet6 fe80::a00:27ff:febb:95b/64 scope link
        valid_lft forever preferred_lft forever
bitnami@debian:~$ _
```


- ✓ Ping Bitnami Application Server to Ubuntu Server Using IP address 192.168.122.1.

```

bitnami@debian:~$ ping 192.168.122.1
PING 192.168.122.1 (192.168.122.1) 56(84) bytes of data.
64 bytes from 192.168.122.1: icmp_seq=1 ttl=64 time=10.2 ms
64 bytes from 192.168.122.1: icmp_seq=2 ttl=64 time=0.404 ms
64 bytes from 192.168.122.1: icmp_seq=3 ttl=64 time=0.511 ms
64 bytes from 192.168.122.1: icmp_seq=4 ttl=64 time=0.306 ms
^C
--- 192.168.122.1 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3018ms
rtt min/avg/max/mdev = 0.306/2.843/10.152/4.220 ms
bitnami@debian:~$ _

```

Screen Recording:

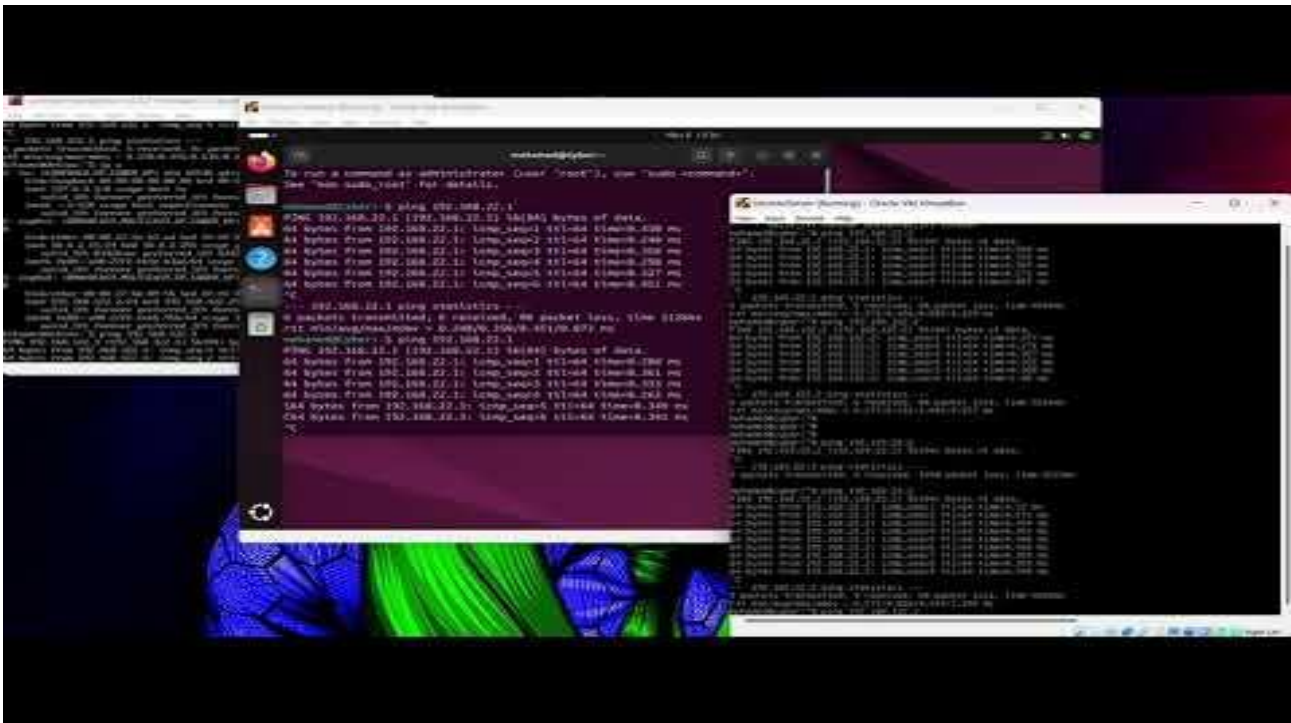

This is My YouTube Video For screen recording.

Link: <https://youtu.be/GzSqXAzXNz4>

