



VLAN :

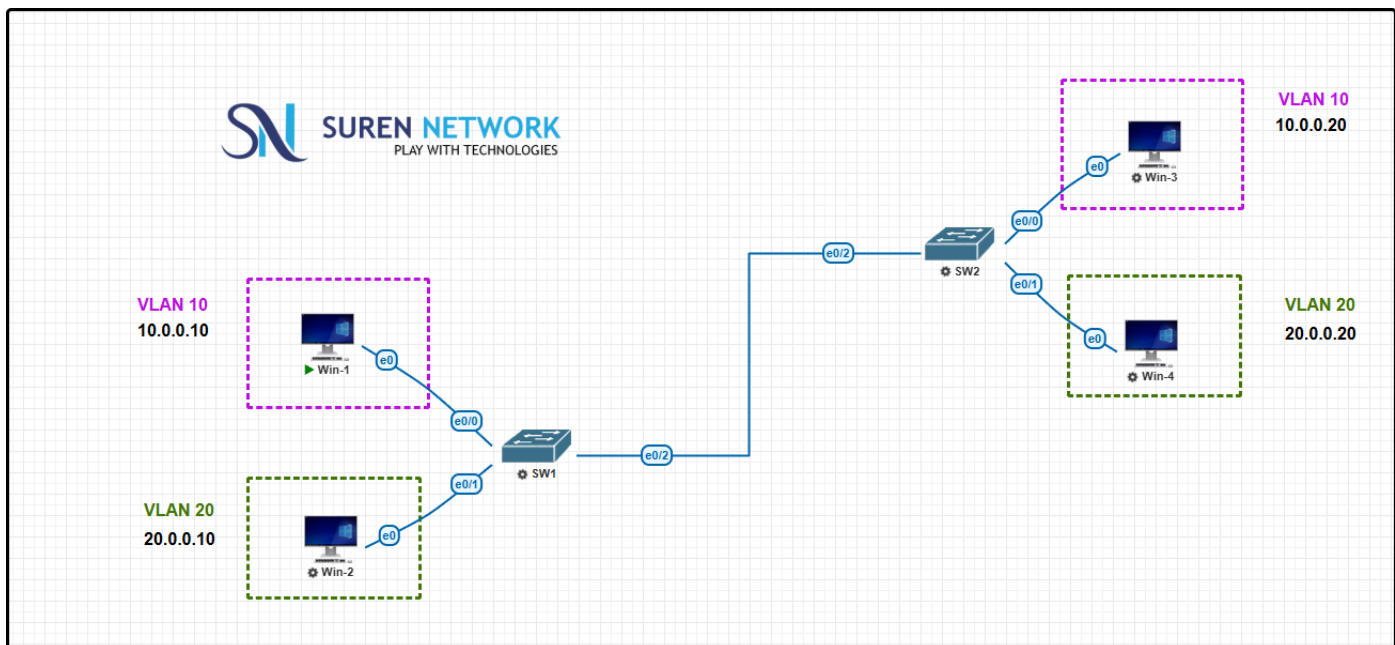



```
SW1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
SW1(config)#
SW1(config)#vlan 10
SW1(config-vlan)#name HR
SW1(config-vlan)#exit
SW1(config)#
SW1(config)#vlan 20
SW1(config-vlan)#name SALES
SW1(config-vlan)#exit
SW1(config)#
SW1(config)#int e0/0
SW1(config-if)#switchport access vlan 10
SW1(config-if)#exit
SW1(config)#
SW1(config)#int e0/1
SW1(config-if)#switchport access vlan 20
SW1(config-if)#exit
SW1(config)#int e0/2
SW1(config-if)#switchport trunk encapsulation dot1q
SW1(config-if)#switchport mode trunk
SW1(config-if)#exit
SW1#sh int trunk

Port      Mode      Encapsulation  Status      Native vlan
Et0/2     on        802.1q         trunking    1

Port      Vlans allowed on trunk
Et0/2     1-4094

Port      Vlans allowed and active in management domain
Et0/2     1,10,20

Port      Vlans in spanning tree forwarding state and not pruned
Et0/2     1,10,20
SW1#
```

 SW2

```
SW2#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
SW2(config)#vlan 10
SW2(config-vlan)#name HR
SW2(config-vlan)#ex
SW2(config)#
SW2(config)#vlan 20
SW2(config-vlan)#name SALES
SW2(config-vlan)#ex
SW2(config)#
SW2(config)#int e0/0
SW2(config-if)#switchport access vlan 10
SW2(config-if)#exit
SW2(config)#
SW2(config)#int e0/1
SW2(config-if)#switchport access vlan 20
SW2(config-if)#exit
SW2(config)#
SW2(config)#int e0/2
SW2(config-if)#switchport trunk encapsulation dot1q
SW2(config-if)#switchport mode trunk
SW2(config-if)#ex
SW2#sh int trunk

Port          Mode          Encapsulation  Status        Native vlan
Et0/2         on            802.1q         trunking      1

Port          Vlans allowed on trunk
Et0/2         1-4094

Port          Vlans allowed and active in management domain
Et0/2         1,10,20

Port          Vlans in spanning tree forwarding state and not pruned
Et0/2         1,10,20
SW2#1
```

```
QEMU (Win-1)
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 10.0.0.10
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 

C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>ping 10.0.0.20

Pinging 10.0.0.20 with 32 bytes of data:

Reply from 10.0.0.20: bytes=32 time=1ms TTL=128
Reply from 10.0.0.20: bytes=32 time=2ms TTL=128
Reply from 10.0.0.20: bytes=32 time=3ms TTL=128
Reply from 10.0.0.20: bytes=32 time=1ms TTL=128

Ping statistics for 10.0.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 3ms, Average = 1ms

C:\Documents and Settings\user>
```

```
QEMU (Win-2)
C:\WINDOWS\system32\cmd.exe
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 20.0.0.10
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 

C:\Documents and Settings\user>
C:\Documents and Settings\user>ping 20.0.0.20

Pinging 20.0.0.20 with 32 bytes of data:

Reply from 20.0.0.20: bytes=32 time=3ms TTL=128
Reply from 20.0.0.20: bytes=32 time=1ms TTL=128
Reply from 20.0.0.20: bytes=32 time=2ms TTL=128
Reply from 20.0.0.20: bytes=32 time=2ms TTL=128

Ping statistics for 20.0.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>
```