



ACL (Access Control List)

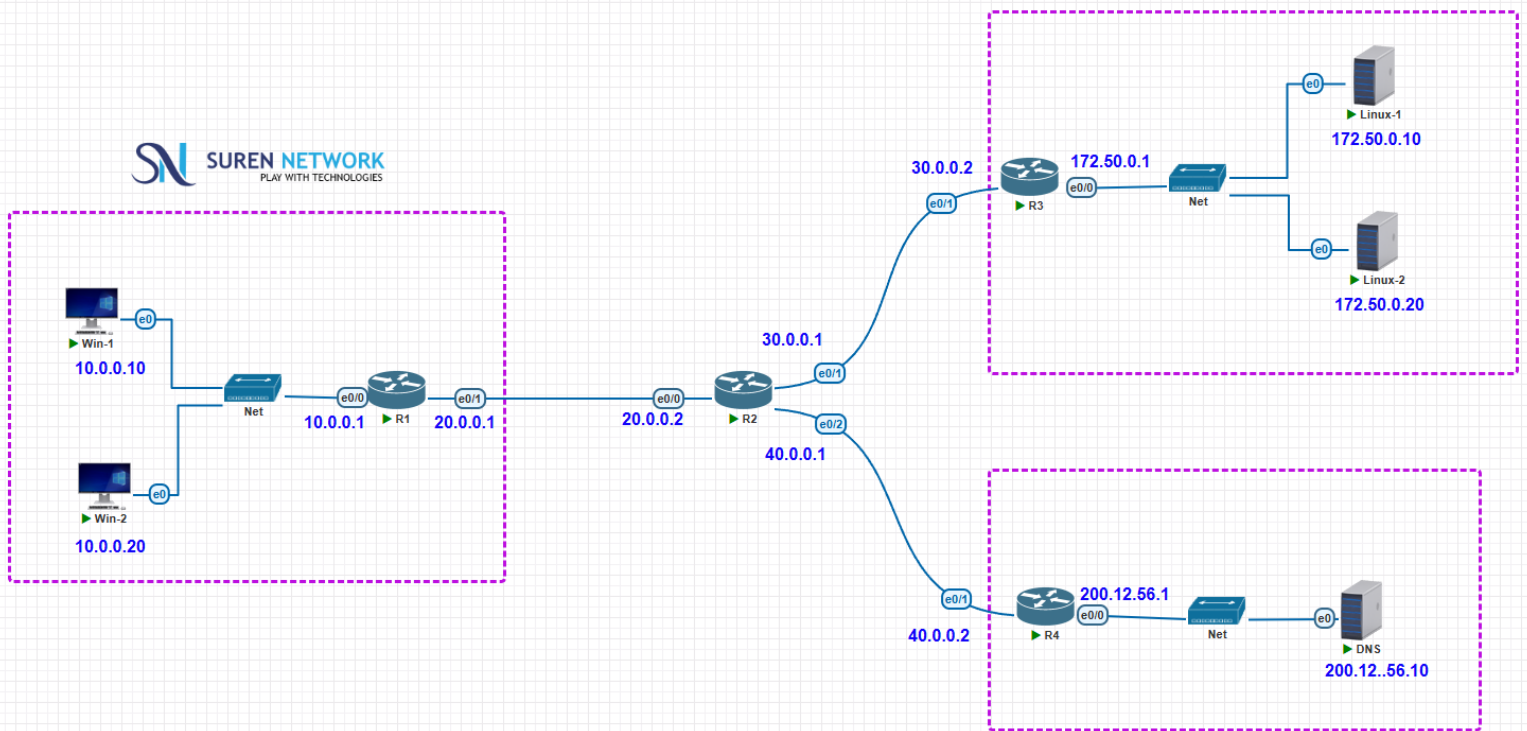


Step 1 : Assign ip address in two linux server :

QEMU (Linux-1)	QEMU (Linux-2)
<code>ENABLE=yes</code>	<code>ENABLE=yes</code>
<code>NAME=Ethernet</code>	<code>NAME=Ethernet</code>
<code>IPADDRESS=172.50.0.10</code>	<code>IPADDRESS=172.50.0.20</code>
<code>CIDRLEN=16</code>	<code>CIDRLEN=16</code>
<code>NETWORK=172.50.0.0</code>	<code>NETWORK=172.50.0.0</code>
<code>NETMASK=255.255.0.0</code>	<code>NETMASK=255.255.0.0</code>
<code>GATEWAY=172.50.0.1</code>	<code>GATEWAY=172.50.0.1</code>
<code>BROADCAST=172.50.255.255</code>	<code>BROADCAST=172.50.255.255</code>
<code>DHCP=no</code>	<code>DHCP=no</code>

Step 2: Access linux webserver from pc-1 & pc-2 :

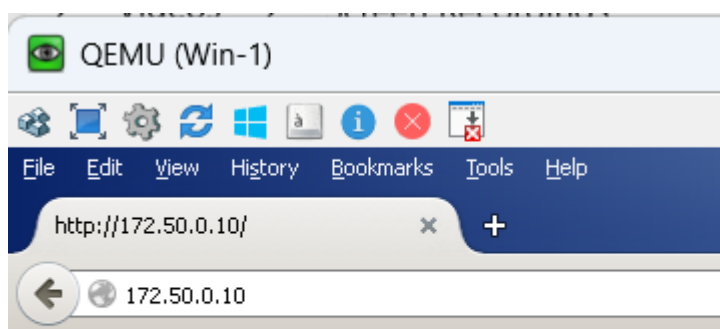


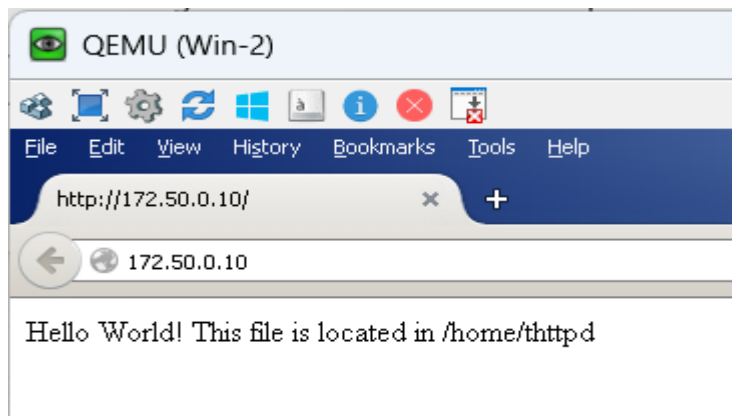

Step 3 : Create a standard ACL for 10.0.0.10 in R1 :

```
R1(config)#access-list 10
*Sep 20 15:36:25.640: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R1(config)#access-list 10 permit 10.0.0.10 0.0.0.0
R1(config)#
R1(config)#interface e0/0
R1(config-if)#ip access-group 10 in
R1(config-if)#
R1(config-if)#do show access-list
Standard IP access list 10
 10 permit 10.0.0.10
```

Step 4 : Now access linux webserver 1 from pc-2 :

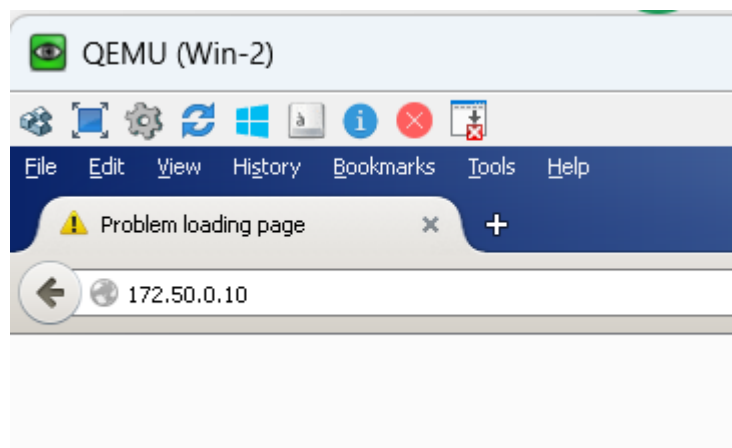

Step 5 : Now Create a ACL for 10.0.0.20 :

```
R1(config)# access-list 10 permit 10.0.0.20 0.0.0.0
R1(config)#
R1(config)#
```

Step 6 : Before going to next scenario delete all the ACL file we created :

```
R1(config)#
R1(config)#
R1(config)#no access-list 10
R1(config)#int e0/0
R1(config-if)#exit
```

Scenario - 2 :


Step 1:

Allow acl for 10.0.0.10 to 172.50.0.10 for port 80


Allow acl for 10.0.0.20 to 172.50.0.20 for port 80

```
R1(config)#  
R1(config)# 100 permit tcp 10.0.0.10 0.0.0.0 172.50.0.10 0.0.0.0 eq 80  
R1(config)#  
R1(config)# 100 permit tcp 10.0.0.20 0.0.0.0 172.50.0.20 0.0.0.0 eq 80  
R1(config)#  
R1(config)#interface e0/0  
R1(config-if)#ip access-group 10 in  
R1(config-if)#
```

Step 2 : Access webserver-2 from 10.0.0.10 pc :

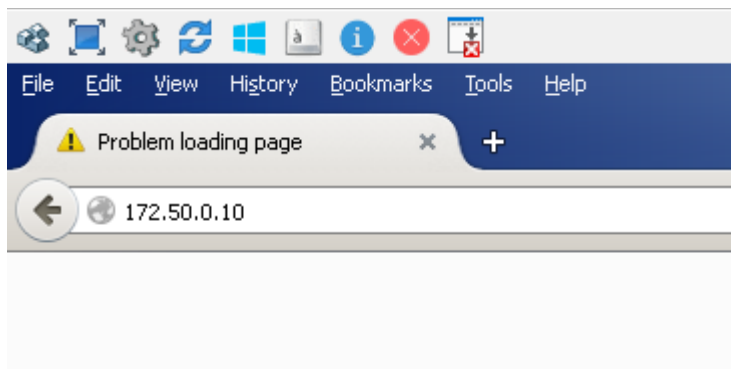


Step 3 : Access webserver-1 from 10.0.0.20 pc :

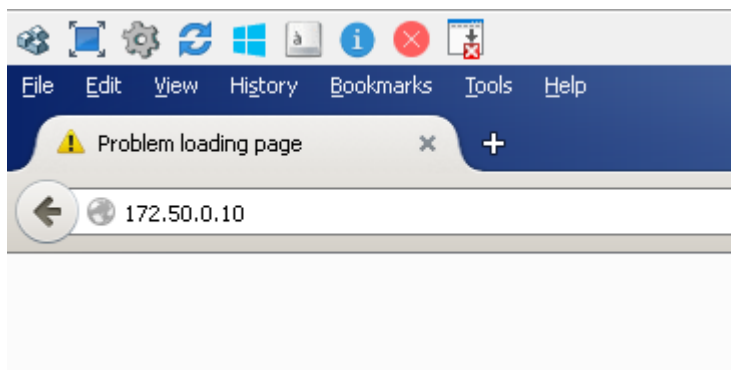

Step 4 : Register URL name in dns server for two webserver :

www.webserver1.com 172.50.0.10


www.webserver2.com 172.50.0.20

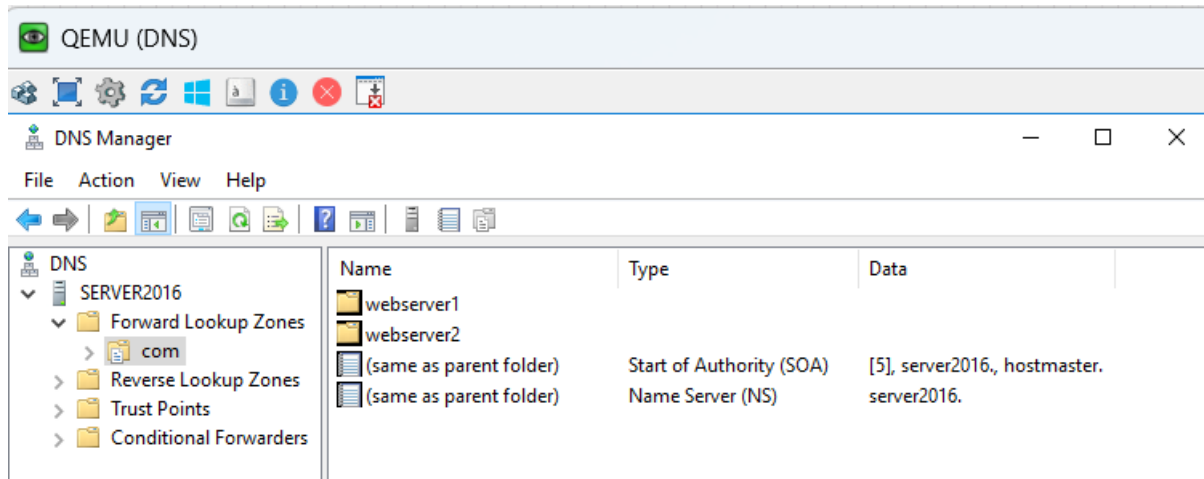

Step 5 : Allow dns communication for 10.0.0.0 using extended acl :


```
R1(config-if)#ex
R1(config)#$ 100 permit udp 10.0.0.0 0.255.255.255 200.12.56.0 10.0.0.0 eq 53
R1(config)#
```

Step 6 : Access webserver-1 from 10.0.0.10 pc using dns url :

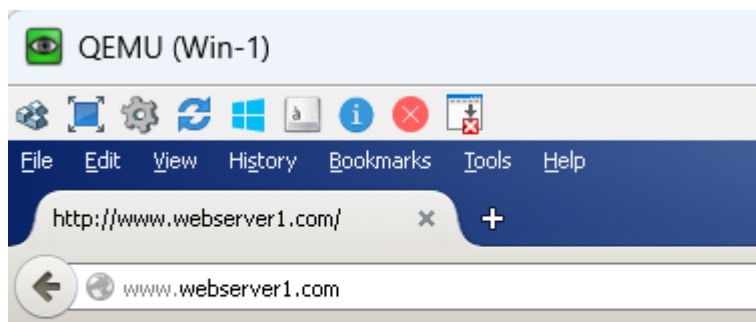

Hello World! This file is located in /home/tthtpd

Step 7 : Access webserver-2 from 10.0.0.20 pc using dns url :

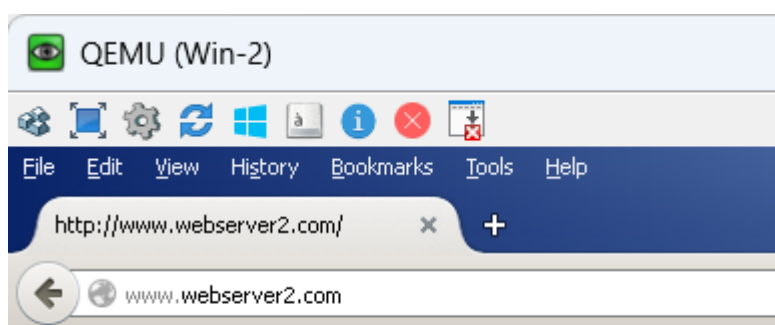

Hello World! This file is located in /home/tthtpd

